

## H LX 20125025A03


### Features

1. Surface Mounted Devices with a small dimension of  $2.0 \times 1.25 \times 0.25 \text{ mm}^3$  meet future miniaturization trend.
2. Embedded and (Low Temperature Co-fired Ceramic) technology is able to future integrate with system design as well as beautifying the housing of final product.
3. High Stability in Temperature / Humidity Change


### Applications

1. Bluetooth
2. Wireless LAN
3. HornRF
4. ISM band 2.4GHz wireless applications


Dimensions (Unit: mm)

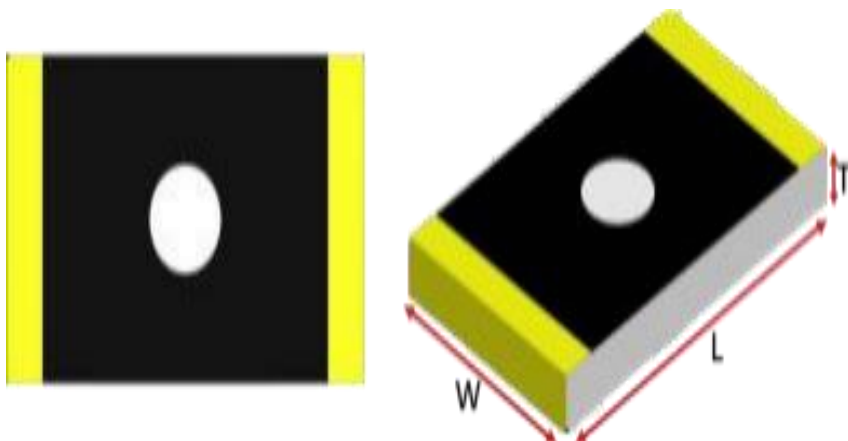


|          | Dimension (mm)  |
|----------|-----------------|
| <b>L</b> | $2.0 \pm 0.20$  |
| <b>W</b> | $1.2 \pm 0.20$  |
| <b>T</b> | $0.25 \pm 0.05$ |

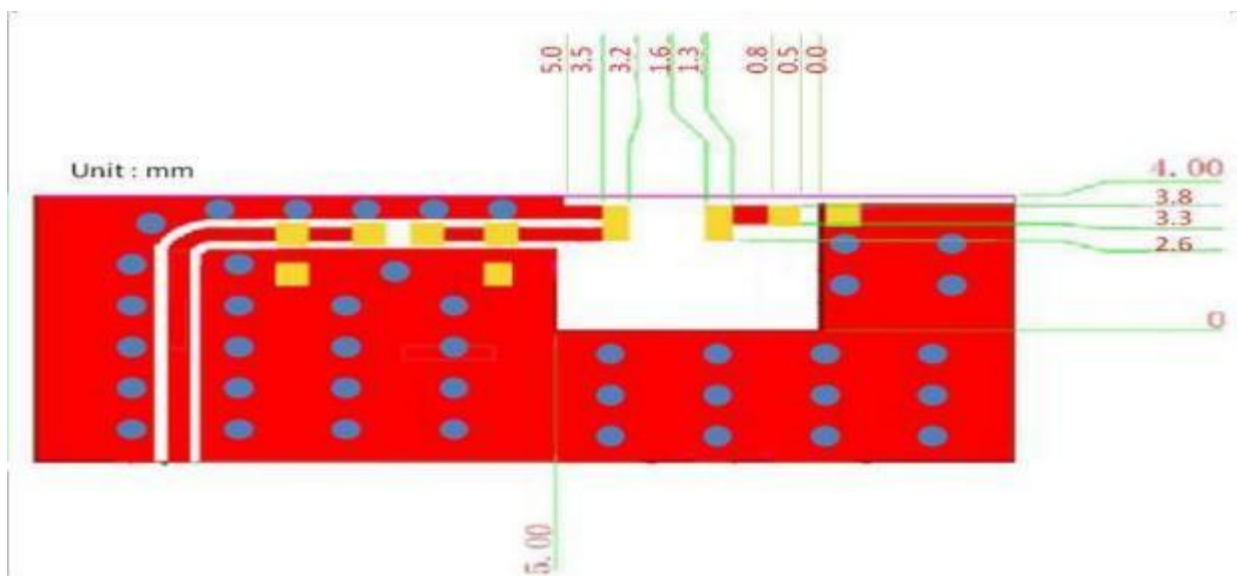


Type2 :

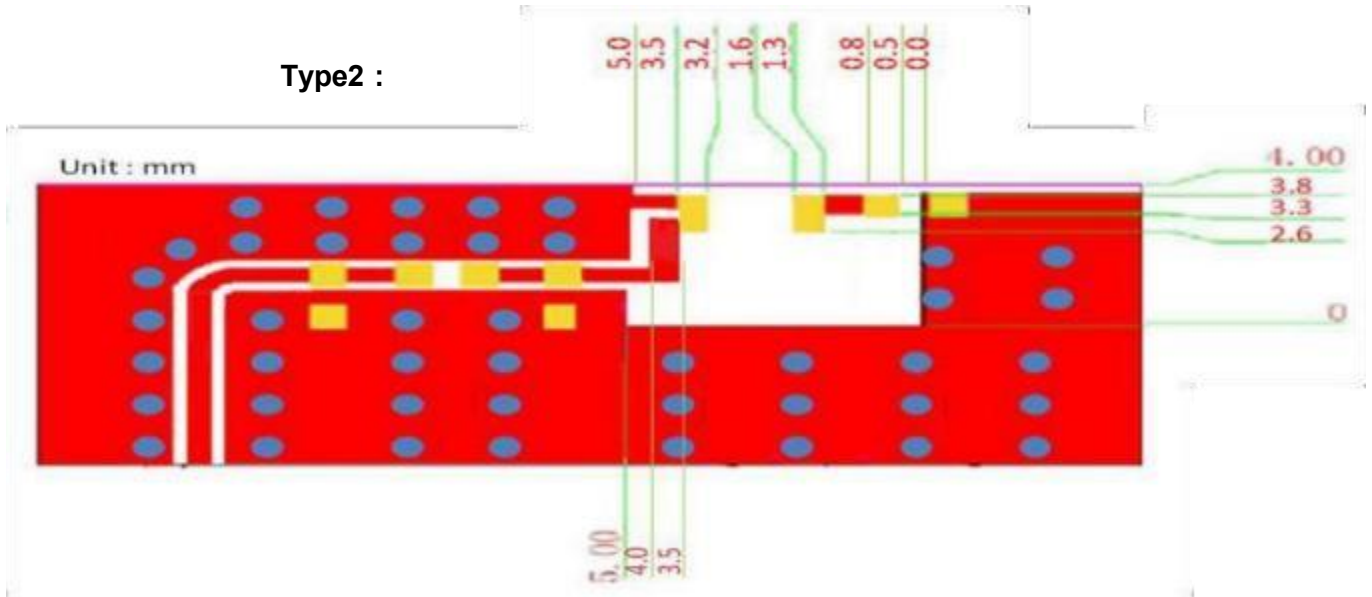

Type3 :

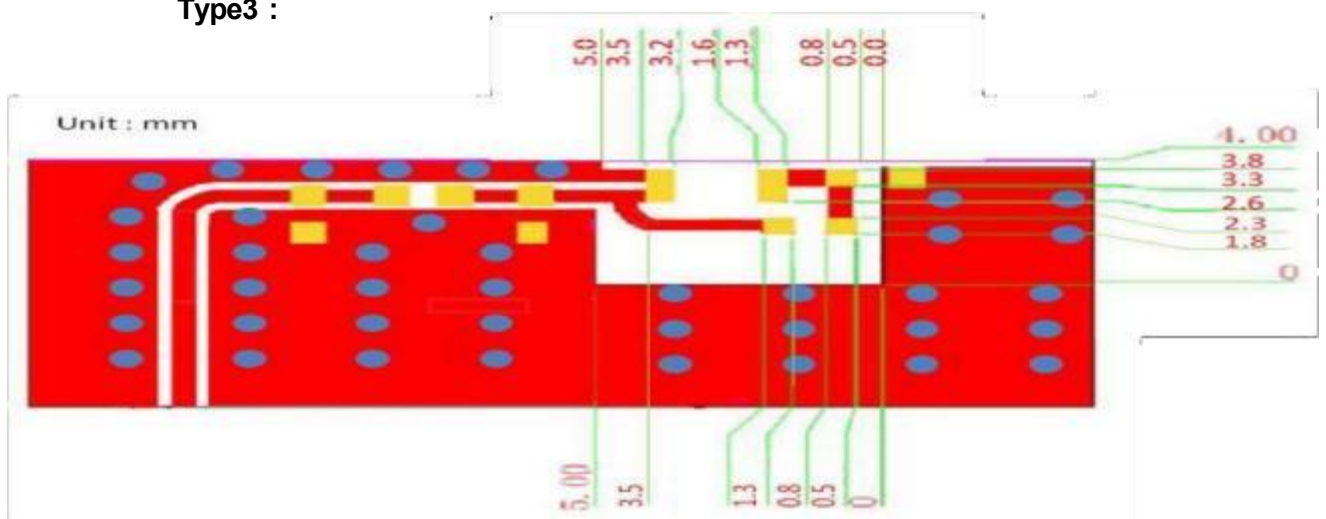


PCB Bottom View :

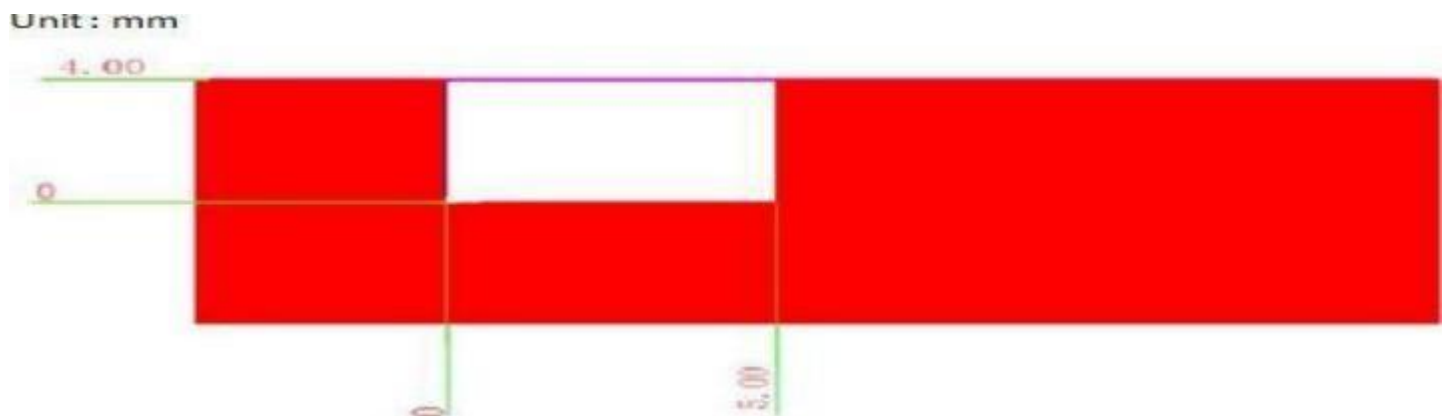

Room 1004, Jinhuan Yu Building, No. 56 Tiezai Road, Xixiang Street, Bao'an District, Shenzhen City, Guangdong Province

Evaluation Board and Matching Circuits

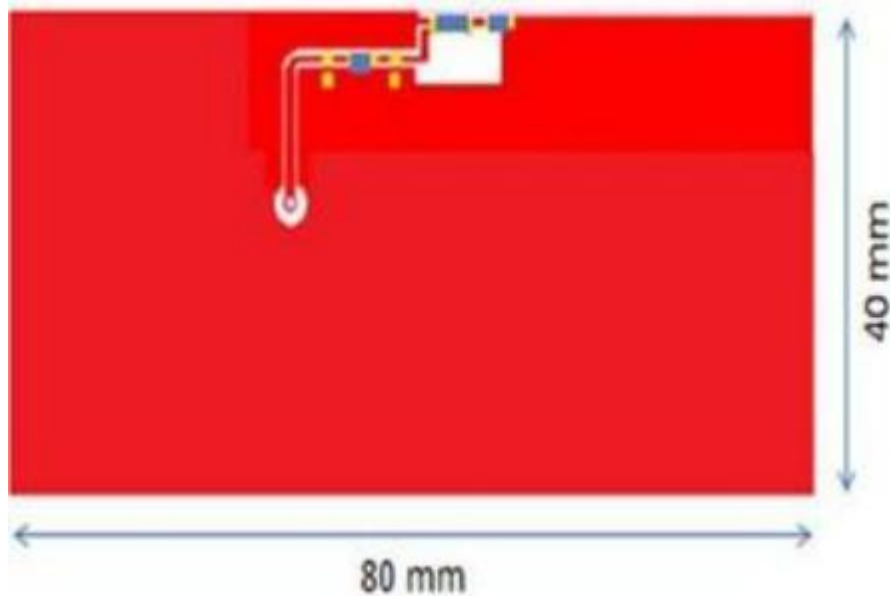


Electrical Characteristics

| Specification                 |                                 |                    |
|-------------------------------|---------------------------------|--------------------|
| Part Number                   | ANTD21W02-X1                    |                    |
| Central Frequency             | 2450                            | MHz                |
| Bandwidth                     | 90 (Min.)                       | MHz                |
| Return Loss                   | -10 (Max)                       | dB                 |
| Peak Gain                     | 2.11                            | dBi                |
| Impedance                     | 50                              | $\Omega$           |
| Operating Temperature         | -40 ~ +85                       | $^{\circ}\text{C}$ |
| Maximum Power                 | 1                               | W                  |
| Resistance to Soldering Heats | 10 ( @ 260 $^{\circ}\text{C}$ ) | sec.               |
|                               |                                 |                    |
| Polarization                  | Linear                          |                    |
| Azimuth Beamwidth             | Omni-directional                |                    |
| Termination                   | Cu / Sn (Leadless)              |                    |


Room 1004, Jinhuan Yu Building, No. 56 Tiezai Road, Xixiang Street,  
Bao'an District, Shenzhen City, Guangdong Province

### Characteristic curve


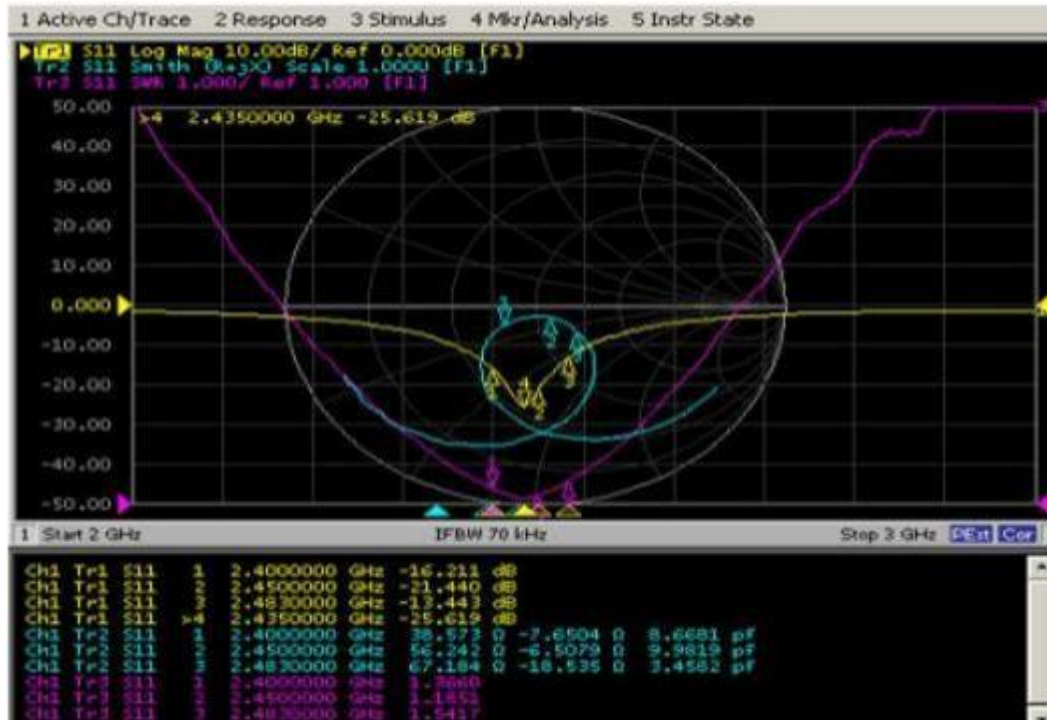


### Radiation Pattern

| Frequency (MHz) | 2400  | 2450  | 2500  |
|-----------------|-------|-------|-------|
| Efficiency (dB) | -1.42 | -1.24 | -1.47 |
| Efficiency (%)  | 71    | 75    | 71    |
| Peak Gain (dBi) | 2.11  | 2.06  | 1.94  |

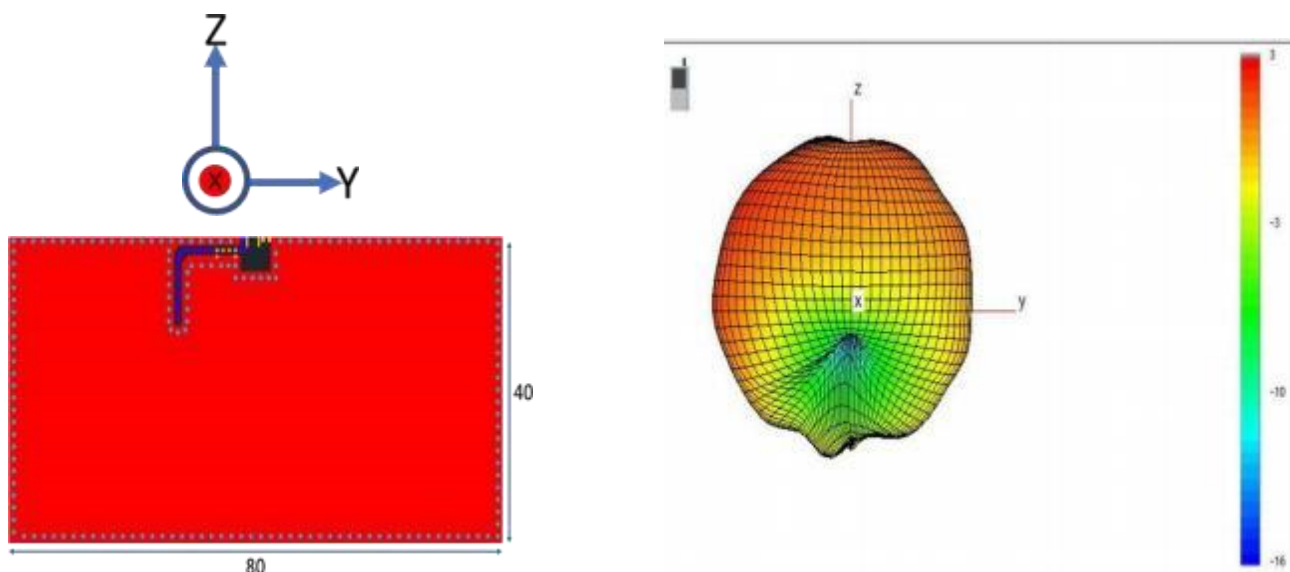


# Reliability and Test Conditions
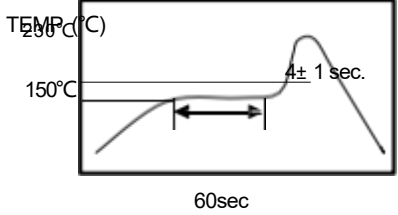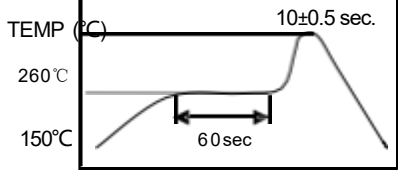
| ITEM                           | REQUIREMENTS                                                                                                                                                                                                                                                                                                                                                                                                         | TEST CONDITION                                                                                                                                                                                                                   |                  |            |   |         |      |   |                  |              |   |         |      |   |                  |              |                                                                                                                                              |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|------------|---|---------|------|---|------------------|--------------|---|---------|------|---|------------------|--------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Solderability                  | 1. Wetting shall exceed 90% coverage<br>2. No visible mechanical damage<br>                                                                                                                                                                                                                                                         | Duration: 10 sec<br>Heating temperature: 150°C/60sec.<br>Solder temperature: 230±5°C<br>Solder: Sn-Ag3.0-Cu0.5<br>Flux for lead free: rosin                                                                                      |                  |            |   |         |      |   |                  |              |   |         |      |   |                  |              |                                                                                                                                              |
| Solder heat Resistance         | 1. No visible mechanical damage<br>2. Central Freq. change :within ± 6%<br>                                                                                                                                                                                                                                                         | Duration: 10 sec<br>Heating temperature: 150°C/60sec.<br>Solder temperature: 260±5°C<br>Solder: Sn-Ag3.0-Cu0.5<br>Flux for lead free: rosin                                                                                      |                  |            |   |         |      |   |                  |              |   |         |      |   |                  |              |                                                                                                                                              |
| Component Adhesion (Push test) | 1. No visible mechanical damage                                                                                                                                                                                                                                                                                                                                                                                      | The device should be reflow soldered(230±5°C for 10sec.) to a tinned copper substrate A dynamometer force gauge should be applied the side of the attached component. must with- ST- F 0.5 Kg without failure of the termination |                  |            |   |         |      |   |                  |              |   |         |      |   |                  |              |                                                                                                                                              |
| Component Adhesion (Pull test) | 1. No visible mechanical damage                                                                                                                                                                                                                                                                                                                                                                                      | Insert 10 cm wire into the remaining open eye bend ,the ends of even wire lengths upward and wind together.<br>Terminal shall not be remarkably damaged.                                                                         |                  |            |   |         |      |   |                  |              |   |         |      |   |                  |              |                                                                                                                                              |
| Thermal shock                  | 1. No visible mechanical damage<br>2. Central Freq. change :Within ±6%<br><table border="1"> <tr> <th>Order</th><th>Temperature (°C)</th><th>Time (min)</th></tr> <tr> <td>1</td><td>+85±5°C</td><td>30±3</td></tr> <tr> <td>2</td><td>Room Temperature</td><td>Within 3 sec</td></tr> <tr> <td>3</td><td>-40±2°C</td><td>30±3</td></tr> <tr> <td>4</td><td>Room Temperature</td><td>Within 3 sec</td></tr> </table> | Order                                                                                                                                                                                                                            | Temperature (°C) | Time (min) | 1 | +85±5°C | 30±3 | 2 | Room Temperature | Within 3 sec | 3 | -40±2°C | 30±3 | 4 | Room Temperature | Within 3 sec | +85°C=>30±3min<br>-40°C=>30±3min<br>Test cycle:10 cycles<br>The chip shall be stabilized at normal condition for 2~3 hours before measuring. |
| Order                          | Temperature (°C)                                                                                                                                                                                                                                                                                                                                                                                                     | Time (min)                                                                                                                                                                                                                       |                  |            |   |         |      |   |                  |              |   |         |      |   |                  |              |                                                                                                                                              |
| 1                              | +85±5°C                                                                                                                                                                                                                                                                                                                                                                                                              | 30±3                                                                                                                                                                                                                             |                  |            |   |         |      |   |                  |              |   |         |      |   |                  |              |                                                                                                                                              |
| 2                              | Room Temperature                                                                                                                                                                                                                                                                                                                                                                                                     | Within 3 sec                                                                                                                                                                                                                     |                  |            |   |         |      |   |                  |              |   |         |      |   |                  |              |                                                                                                                                              |
| 3                              | -40±2°C                                                                                                                                                                                                                                                                                                                                                                                                              | 30±3                                                                                                                                                                                                                             |                  |            |   |         |      |   |                  |              |   |         |      |   |                  |              |                                                                                                                                              |
| 4                              | Room Temperature                                                                                                                                                                                                                                                                                                                                                                                                     | Within 3 sec                                                                                                                                                                                                                     |                  |            |   |         |      |   |                  |              |   |         |      |   |                  |              |                                                                                                                                              |
| Resistance to High Temperature | 1. No visible mechanical damage<br>2. Central Freq. change :within ±6%<br>3. No disconnection or short circuit.                                                                                                                                                                                                                                                                                                      | Temperature: 85±5°C<br>Duration: 1000± 12hrs<br>The chip shall be stabilized at normal condition for 2~3 hours before measuring.                                                                                                 |                  |            |   |         |      |   |                  |              |   |         |      |   |                  |              |                                                                                                                                              |
| Resistance to Low Temperature  | 1. No visible mechanical damage<br>2. Central Freq. change :within ±6%<br>3. No disconnection or short circuit.                                                                                                                                                                                                                                                                                                      | Temperature: -40±5°C<br>Duration: 1000± 12hrs<br>The chip shall be stabilized at normal condition for 2~3 hours before measuring.                                                                                                |                  |            |   |         |      |   |                  |              |   |         |      |   |                  |              |                                                                                                                                              |
| Humidity                       | 1. No visible mechanical damage<br>2. Central Freq. change :within ±6%<br>3. No disconnection or short circuit.                                                                                                                                                                                                                                                                                                      | Temperature: 40±2°C<br>Humidity: 90% to 95% RH<br>Duration: 1000± 12hrs<br>The chip shall be stabilized at normal condition for 2~3 hours before measuring.                                                                      |                  |            |   |         |      |   |                  |              |   |         |      |   |                  |              |                                                                                                                                              |

## Soldering and Mounting

Mildly activated rosin fluxes are preferred. The minimum amount of solder can lead to damage from the stresses caused by the difference in coefficients of expansion between solder, chip and substrate. The terminations are suitable for all wave and re-flow soldering systems. If hand soldering cannot be avoided, the preferred technique is the utilization of hot air soldering tools.

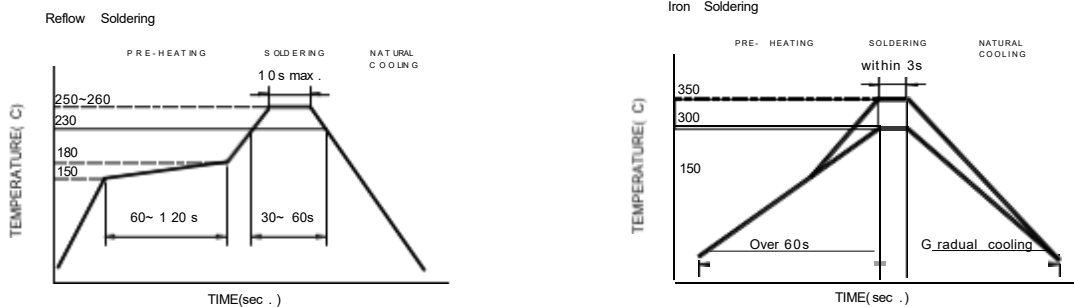

Recommended temperature profiles for re-flow soldering in Figure 1.


Products attachment with a soldering iron is discouraged due to the inherent process control limitations. In the event that a soldering iron must be employed the following precautions are recommended.

- . Preheat circuit and products to 150°C
- . Never contact the ceramic with the iron tip
- . Use a 20 watt soldering iron with tip diameter of 1.0mm
- . 280°C tip temperature (max)
- . 1.0mm tip diameter (max)
- . Limit soldering time to 3 sec.


Room 1004, Jinhuan Building, No. 56 Tiezai Road, Xixiang Street,  
Bao'an District, Shenzhen City, Guangdong Province

## Packaging Information

### ◆Tape Specification:

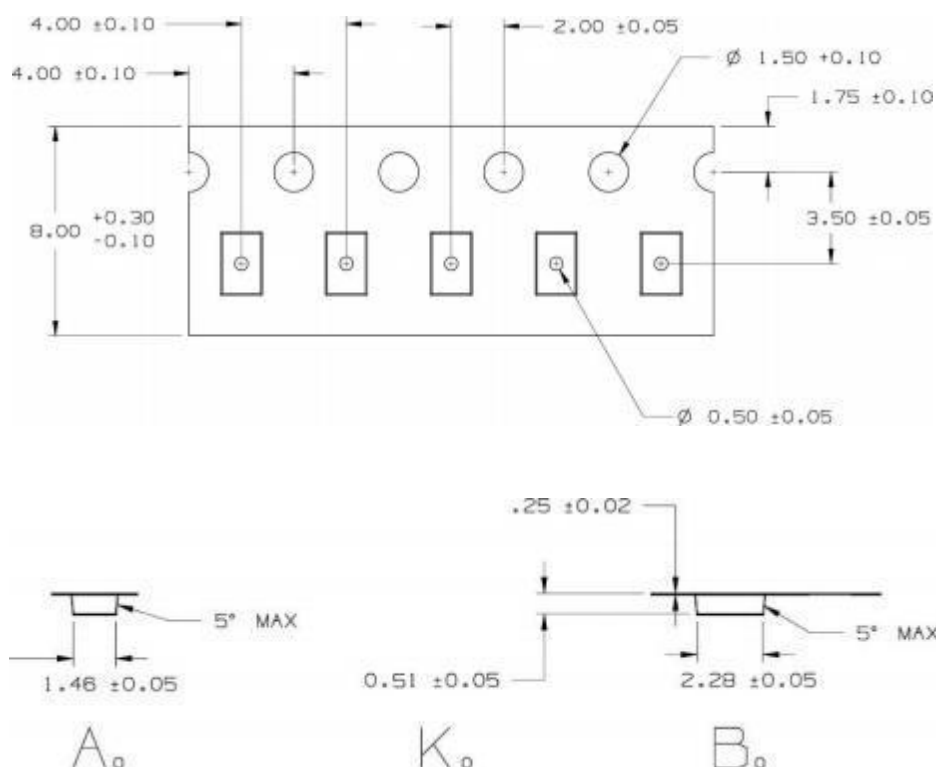

### ◆Reel Specification: (7'', $\phi 180$ mm)

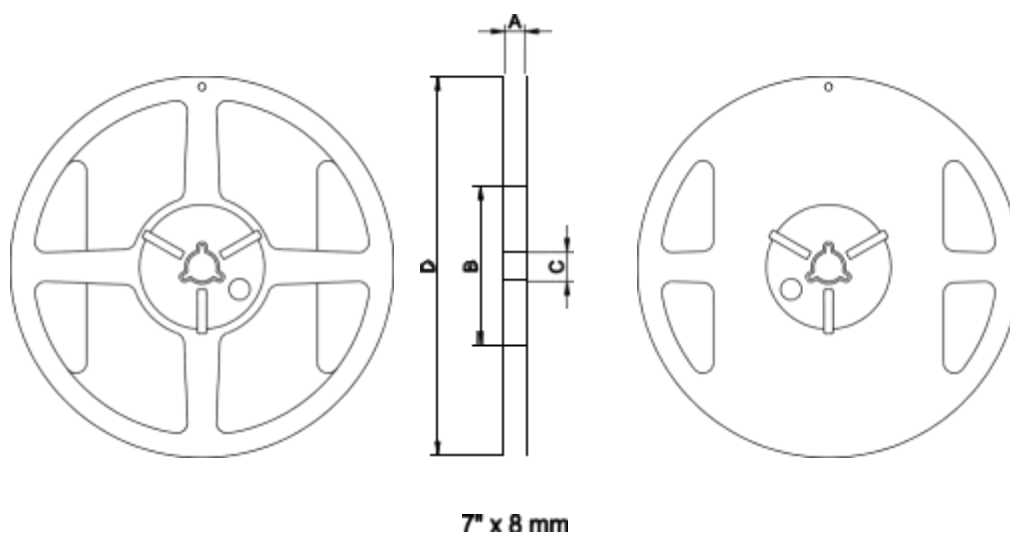

| Tape Width(mm) | A(mm)   | B(mm) | C(mm)    | D(mm) | Chip/Reel( pcs) |
|----------------|---------|-------|----------|-------|-----------------|
| 8              | 9.0±0.5 | 60±2  | 13.5±0.5 | 178±2 | 6000            |

## **H LX 20125025A03**

### **Storage and Transportation Information**

#### **Storage Conditions**

To maintain the solderability of terminal electrodes:

1. Temperature and humidity conditions: -10~ 40°C and 30~70% RH.
2. Recommended products should be used within 6 months from the time of delivery.
3. The packaging material should be kept where no chlorine or sulfur exists in the air.

#### **Transportation Conditions**

1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
3. Bulk handling should ensure that abrasion and mechanical shock are minimized.

Room 1004, Jinhuan Building, No. 56 Tiezai Road, Xixiang Street,  
Bao'an District, Shenzhen City, Guangdong Province