

TEST REPORT

Application No.: KSCR2509001954AT
FCC ID: 2BHTA-HRFM
Applicant: SYNLAN TECHNOLOGY PTE. LTD.
Address of Applicant: 7 TEMASEK BOULEVARD, #29-01D, SUNTEC TOWER ONE, SINGAPORE 038987
Manufacturer: SYNLAN TECHNOLOGY PTE. LTD.
Address of Manufacturer: 7 TEMASEK BOULEVARD, #29-01D, SUNTEC TOWER ONE, SINGAPORE 038987
Factory: Huizhou Miki Technology Co., LTD
Address of Factory: 2nd Floor, Plant No. 39, Guangtai Road, Huinan High-Tech Industrial Park, Zhongkai High-tech Zone, Huizhou City, Guangdong Province, China
Equipment Under Test (EUT):
EUT Name: Homture Magic Frame
Model No.: HFRM-AI10
Trade Mark: Homture
Standard(s) : 47 CFR Part 15, Subpart C 15.249
Date of Receipt: 2025-09-05
Date of Test: 2025-09-19 to 2025-10-14
Date of Issue: 2025-10-15

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Revision Record			
Version	Description	Date	Remark
00	Original	2025-10-15	/

Authorized for issue by:				
Tested By		Damon Zhou		
		Damon_Zhou/Project Engineer		
Approved By		Terry Hou		
		Terry Hou /Reviewer		

2 Test Summary

Radio Spectrum Matter Part			
Item	Requirement	Method	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.207	ANSI C63.10 (2020) Section 6.2	Pass
20dB Emission bandwidth	47 CFR Part 15, Subpart C 15.215	ANSI C63.10 (2020) Section 6.9	Pass
Filed strength of fundamental	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2020) Section 6.6	Pass
Radiation Spurious Emission	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2020) Section 6.6	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2020) Section 6.10	Pass



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 DETAILS OF E.U.T.	5
4.2 DESCRIPTION OF SUPPORT UNITS.....	5
4.3 MEASUREMENT UNCERTAINTY	5
4.4 TEST LOCATION	6
4.5 TEST FACILITY	6
4.6 DEVIATION FROM STANDARDS	6
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	6
5 EQUIPMENT LIST	7
6 RADIO SPECTRUM TECHNICAL REQUIREMENT	9
6.1 ANTENNA REQUIREMENT	9
7 RADIO SPECTRUM MATTER TEST RESULTS	10
7.1 CONDUCTED EMISSIONS AT AC POWER LINE (150kHz-30MHz)	10
7.2 20dB BANDWIDTH.....	14
7.3 FILED STRENGTH OF FUNDAMENTAL AND RADIATION SPURIOUS EMISSION	15
7.4 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....	18
8 TEST SETUP PHOTO	20
9 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS).....	20
10 APPENDIX	21

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 5V,2A Adapter model: A319-050200U-US2 Input: AC 100-240V,50/60Hz, Max 0.3A Output: DC 5V,2000mA
Operation Frequency Range:	24GHz-24.25GHz
Modulation:	FMCW
Antenna type:	PCB Antenna
Antenna Gain:	3.4dBi (Provided by the manufacturer)

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
The EUT has been tested as an independent unit.			

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Radiated Power	5.2dB (Below 1GHz) 5.9dB (Above 1GHz)
6	Radiated Spurious Emission Test	4.2dB (Below 30MHz) 4.5dB (30MHz-1GHz) 5.1dB (1GHz-18GHz) 5.4dB (Above 18GHz)
7	Temperature Test	1°C
8	Humidity Test	3%
9	Supply Voltages	1.5%
10	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.4 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 2541.01)**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA).

- **FCC (Designation Number: CN1172)**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0072)**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 2324E

- **VCCI (Member No: 1938)**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Radiated Test						
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	07/09/2025	07/08/2026
2	PXA Spectrum Analyzer	KEYSIGHT	N9030B	KSEM021-1	01/15/2025	01/14/2026
3	Signal Generator	Agilent	E8257C	KS301066	07/22/2025	07/21/2026
4	Loop Antenna	COM-POWER	AL-130R	KUS1806E001	03/01/2025	02/28/2027
5	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E005	07/12/2025	07/11/2026
6	Amplifier(30MHz~18GHz)	PANSHAN TECHNOLOGY	LNA:1~18G	KSEM010-1	01/15/2025	01/14/2026
8	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	KS301079	03/23/2024	03/22/2026
9	Amplifier(18~40GHz)	PANSHAN TECHNOLOGY	LNA180400G40	KSEM038	07/09/2025	07/08/2026
10	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	01/07/2024	01/06/2026
11	Horn-antenna(40-60GHz)	ERAVANT	SAZ-2410-19-S1	KSEM003-1	02/02/2021*	02/01/2031**
12	Horn-antenna(50-75GHz)	ERAVANT	SAZ-2410-15-S1	KSEM003-2	02/02/2021*	02/01/2031**
13	Horn-antenna(50-75GHz)	ERAVANT	SAZ-2410-15-S1	KSEM003-7	12/14/2022*	12/13/2032**
14	Horn-antenna(60-90GHz)	ERAVANT	SAZ-2410-12-S1	KSEM003-8	12/14/2022*	12/13/2032**
15	Horn-antenna(75-110GHz)	ERAVANT	SAZ-2410-10-S1	KSEM003-3	02/02/2021*	02/01/2031**
16	Horn-antenna(90-140GHz)	ERAVANT	SAZ-2410-08-S1	KSEM003-9	12/14/2022*	12/13/2032**
17	Horn-antenna(110-170GHz)	ERAVANT	SAZ-2410-06-S1	KSEM003-4	02/02/2021*	02/01/2031**
18	Horn-antenna(140-220GHz)	ERAVANT	SAZ-2410-05-S1	KSEM003-5	02/02/2021*	02/01/2031**
19	Horn-antenna(140-220GHz)	ERAVANT	SAZ-2410-05-S1	KSEM003-10	12/14/2022*	12/13/2032**
20	Horn-antenna(220-325GHz)	ERAVANT	SAR-2309-03-S2	KSEM003-6	02/02/2021*	02/01/2031**
21	Extended waveguide(40-60GHz)	ERAVANT	SWG-19025-FB	KSEM004-1	02/02/2021*	02/01/2031**
22	Extended waveguide(50-75GHz)	ERAVANT	SWG-15025-FB	KSEM004-2	02/02/2021*	02/01/2031**
23	Extended waveguide(50-75GHz)	ERAVANT	SWG-15025-FB	KSEM004-7	12/14/2022*	12/13/2032**
24	Extended waveguide(60-90GHz)	ERAVANT	SWG-12025-FB	KSEM004-8	12/14/2022*	12/13/2032**
25	Extended waveguide(75-110GHz)	ERAVANT	SWG-10025-FB	KSEM004-3	02/02/2021*	02/01/2031**
26	Extended waveguide(90-140GHz)	ERAVANT	SWG-08025-FB	KSEM004-9	12/14/2022*	12/13/2032**
27	Extended waveguide(110-170GHz)	ERAVANT	SWG-06025-FB	KSEM004-4	02/02/2021*	02/01/2031**
28	Extended waveguide(140-220GHz)	ERAVANT	SWG-05025-FB	KSEM004-5	02/02/2021*	02/01/2031**
29	Extended waveguide(140-220GHz)	ERAVANT	SWG-05025-FB	KSEM004-10	12/14/2022*	12/13/2032**
30	Extended waveguide(220-325GHz)	ERAVANT	SWG-03025-FB	KSEM004-6	02/02/2021*	02/01/2031**
31	Harmonic mixer(40-60GHz)	ERAVANT	STH-19SF-S1	KSEM005-2	10/01/2020*	09/30/2030**



Report No.: KSCR250900195401

Page: 8 of 27

32	Harmonic Mixer(50-75GHz)	VDI	SAX WR15	KSEM007-1	08/23/2023*	08/23/2033**
33	Harmonic Mixer(60-90GHz)	VDI	SAX WR12	KSEM007-2	08/23/2023*	08/23/2033**
34	Harmonic mixer(90-140GHz)	VDI	SAX WR8.0	KSEM007-3	08/23/2023*	08/23/2033**
35	Harmonic mixer(140-220GHz)	VDI	SAX WR5.1	KSEM007-4	08/23/2023*	08/23/2033**
36	Harmonic mixer(220-325GHz)	ERAVANT	HM 220-325	KSEM005-4	04/20/2021*	04/19/2031**
37	Upconverter	Talent	TMAM-060090-0612-12-AC	KSEM043	01/18/2022*	01/17/2032**
39	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	02/26/2025	02/25/2026
40	Software	Faratronic	EZ_EM C-v 3A1	/	NCR	NCR
41	Software	ESE	E3_V 6.111221a	/	NCR	NCR

*Calibration date provided by the equipment manufacturer.

**Calibration every ten years. During this period, there will be daily check files for the equipment and the requirements for operators will be clearly defined through SOP.

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals						
1	EMI Test Receive	R&S	ESCI	KS301196	07/09/2025	07/08/2026
2	LISN	R&S	ENV216	KS301197	01/15/2025	01/14/2026
3	LISN	Schwarzbeck	NNLK 8129	KS301091	01/15/2025	01/14/2026
4	Pulse Limiter	R&S	ESH3-Z2	KUS1902E001	12/05/2024	12/04/2025
5	CE test Cable	Thermax	/	CZ301102	01/14/2025	01/13/2026
6	Test Software	Farad	EZ-EMC	/	N.C.R	N.C.R



6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is PCB Antenna and no consideration of replacement.

Antenna location: Refer to EUT Photos.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2020) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		


7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24.2 °C Humidity: 47.5 % RH Atmospheric Pressure: 1010 mbar

Test Mode: 05: TX mode _ Keep the EUT in continuously transmitting mode.

7.1.2 Test Setup Diagram

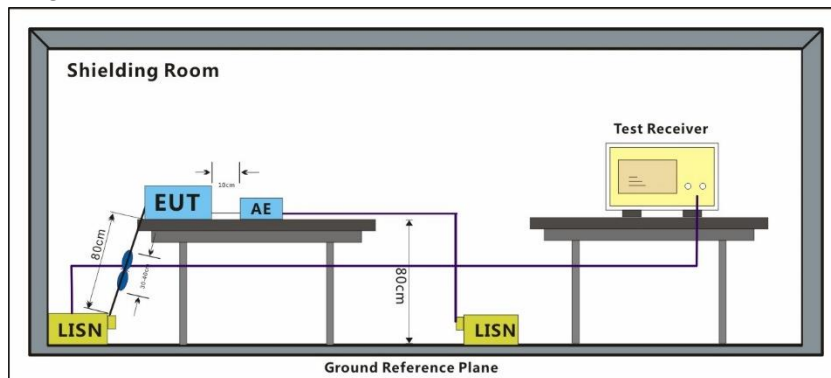


7.1.3 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark : $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{LISN Factor}$

Test Mode: 05; Line: Live line


Test Data :

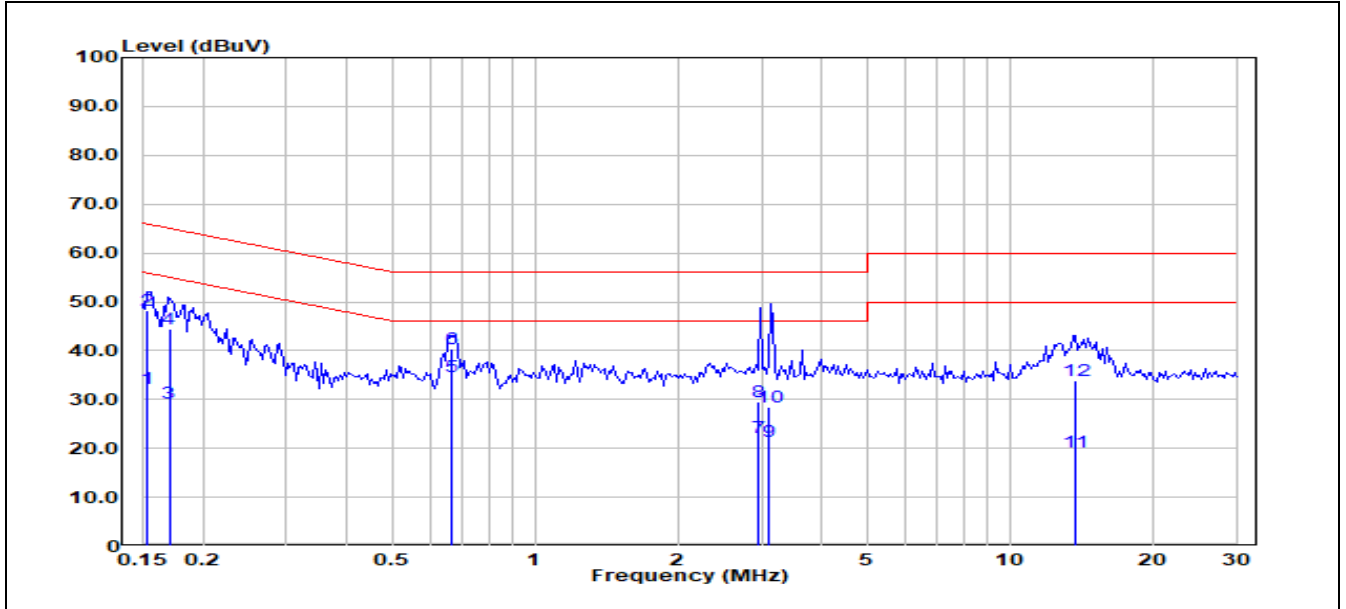

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor(dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Remark
1	0.1532	12.19	20.11	32.30	55.83	-23.53	Average
2	0.1532	28.25	20.11	48.36	65.83	-17.47	QP
3	0.1697	9.29	19.99	29.28	54.97	-25.69	Average
4	0.1697	24.51	19.99	44.50	64.97	-20.47	QP
5	0.6694	14.91	19.76	34.67	46.00	-11.33	Average
6	0.6694	20.59	19.76	40.35	56.00	-15.65	QP
7	2.9480	2.33	19.99	22.32	46.00	-23.68	Average
8	2.9480	9.60	19.99	29.59	56.00	-26.41	QP
9	3.1090	1.44	19.98	21.42	46.00	-24.58	Average
10	3.1090	8.54	19.98	28.52	56.00	-27.48	QP
11	13.7050	-0.56	19.92	19.36	50.00	-30.64	Average
12	13.7050	13.85	19.92	33.77	60.00	-26.23	QP

Test Mode: 05; Line: Neutral Line

Test Data :

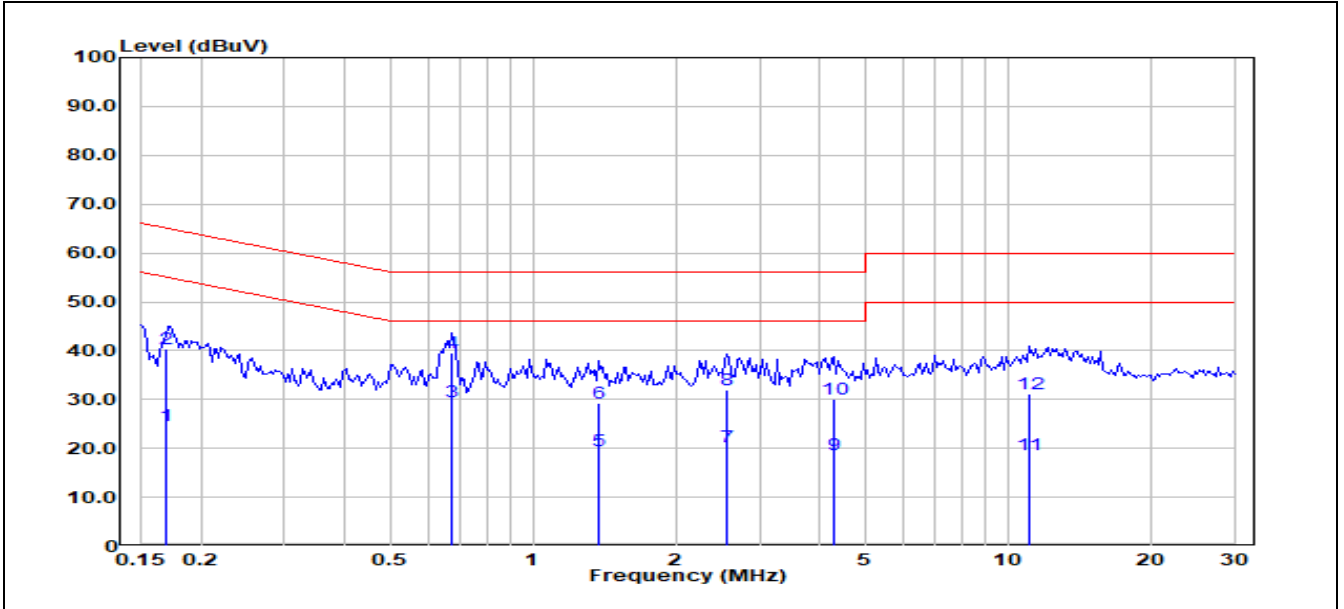

No.	Frequency (MHz)	Reading (dBUV)	Correct Factor(dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Remark
1	0.1695	4.60	19.98	24.58	54.99	-30.41	Average
2	0.1695	20.34	19.98	40.32	64.99	-24.67	QP
3	0.6729	9.84	19.68	29.52	46.00	-16.48	Average
4	0.6729	19.97	19.68	39.65	56.00	-16.35	QP
5	1.3710	-0.43	19.85	19.42	46.00	-26.58	Average
6	1.3710	9.44	19.85	29.29	56.00	-26.71	QP
7	2.5540	0.41	19.91	20.32	46.00	-25.68	Average
8	2.5540	12.12	19.91	32.03	56.00	-23.97	QP
9	4.2980	-1.06	19.82	18.76	46.00	-27.24	Average
10	4.2980	10.23	19.82	30.05	56.00	-25.95	QP
11	11.0720	-1.19	19.78	18.59	50.00	-31.41	Average
12	11.0720	11.35	19.78	31.13	60.00	-28.87	QP

7.2 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.215

Test Method: ANSI C63.10 (2020) Section 6.9


7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 25.6 °C Humidity: 49.5 % RH Atmospheric Pressure: 1010 mbar

Test Mode: 05: TX mode _ Keep the EUT in continuously transmitting mode.

7.2.2 Test Setup Diagram

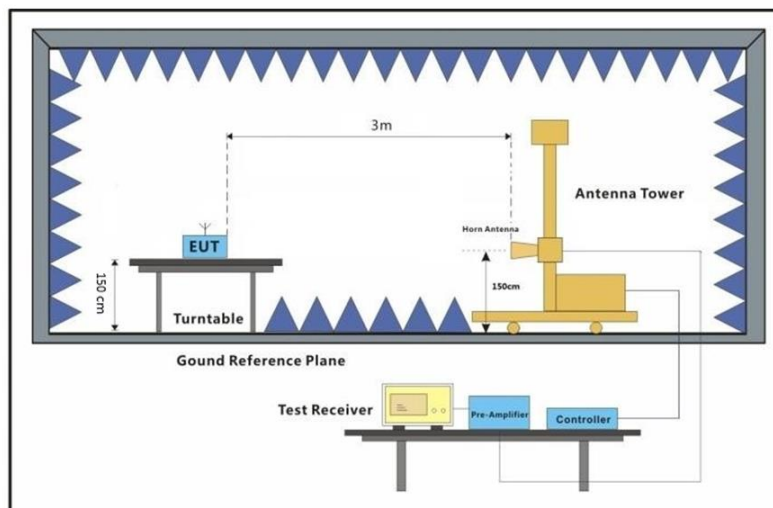

7.2.3 Measurement Procedure and Data

- 1) Place the EUT on the table and set it in the transmitting mode
- 2) SA set RBW=1%~5% OBW, VBW=3RBW and Detector=Peak
- 3) Measure and record the result of 20dB bandwidth

Please Refer to Appendix for Details

7.3 Filed Strength of Fundamental and Radiation Spurious Emission

Test Requirement 47 CFR Part 15, Subpart C 15.249(a)

Test Method: ANSI C63.10 (2020) Section 6.6

Limit:

- (1) The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency (MHz)	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	2500

* Field strength limits are specified at a distance of 3 meters.

Harmonic Limit Conversion			
Average (uV/m) at 3M	Average (dBuV/m) at 3M	Average (dBuV/m) at 1M	Peak (dBuV/m) at 1M
2500	67.9588	77.50	97.50

*(Limit = $67.96 + 20\log(3/1) = 77.5$ dBuV/m)

- (2) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits (follow the table), whichever is the lesser attenuation.

Below 30MHz

Frequency	Field Strength (μA/m)	Magnetic field strength (H-Field) (μA/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Frequency	Field Strength microvolts/m at specific distance	
	Peak	AVG
Above 40GHz	83.52dBuV/m @1m	63.52dBuV/m @1m

*(Limit = $53.98 + 20\log(3/1) = 63.52$ dBuV/m)


7.3.1 E.U.T. Operation

Operating Environment:


Temperature: 25.6 °C Humidity: 49.5 % RH Atmospheric Pressure: 1010 mbar

Test Mode: 05: TX mode _ Keep the EUT in continuously transmitting mode.


7.3.2 Test Setup Diagram

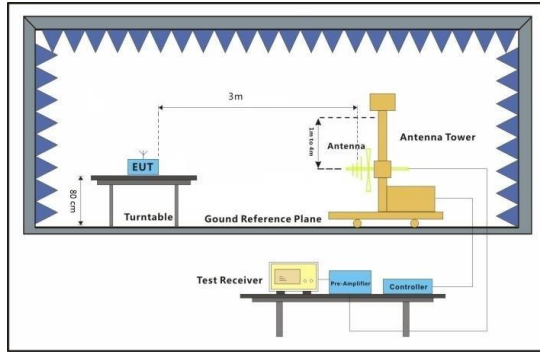


30MHz-1GHz

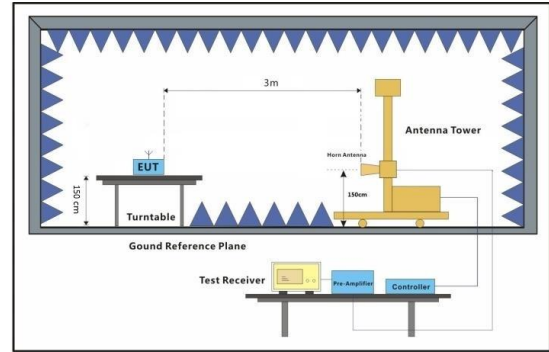

1GHz-40GHz

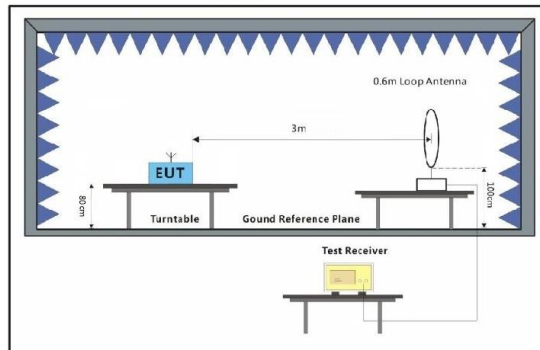

Below 30MHz

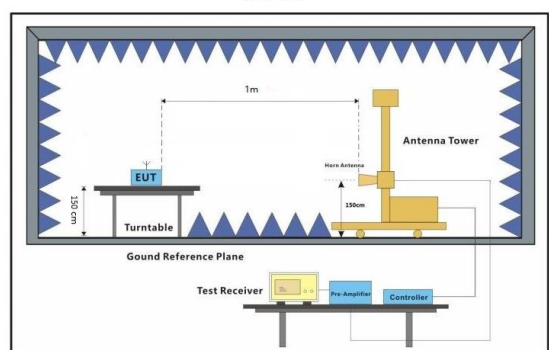

Above 40GHz

7.3.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For 1-18GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. For 18-40GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. For above 40GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 1 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- e. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- f. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- g. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- h. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Please Refer to Appendix for Details

7.4 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.10.5

Limit:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 25.6 °C Humidity: 49.5 % RH Atmospheric Pressure: 1010 mbar

Test Mode: 05: TX mode _ Keep the EUT in continuously transmitting mode.

7.4.2 Test Setup Diagram

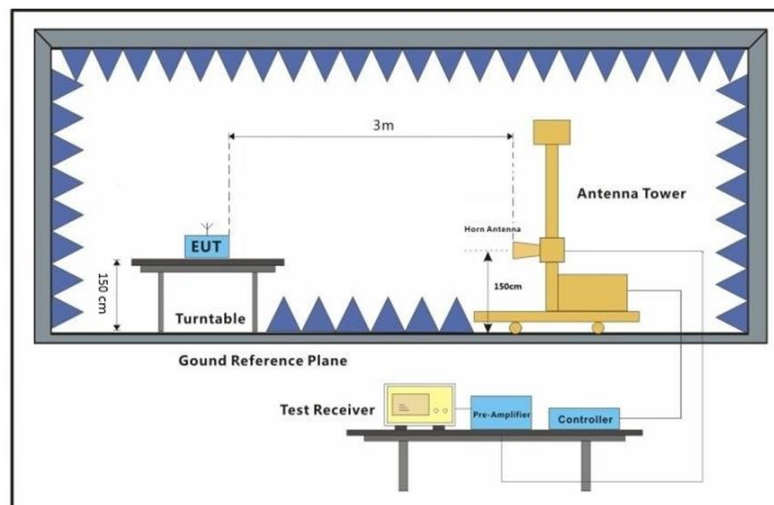

7.4.3 Measurement Procedure and Data

- 1) The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 4) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 5) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- 6) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- 7) Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamplifier Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Please Refer to Appendix for Details



Report No.: KSCR250900195401

Page: 20 of 27

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2509001954AT


9 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for KSCR2509001954AT

10 Appendix

10.1 20dB Bandwidth

Low Frequency (GHz)	Limit (GHz)	High Frequency (GHz)	Limit (GHz)	20dB Bandwidth (MHz)	Result
24.0132	24.00	24.1777	24.25	164.50	Pass

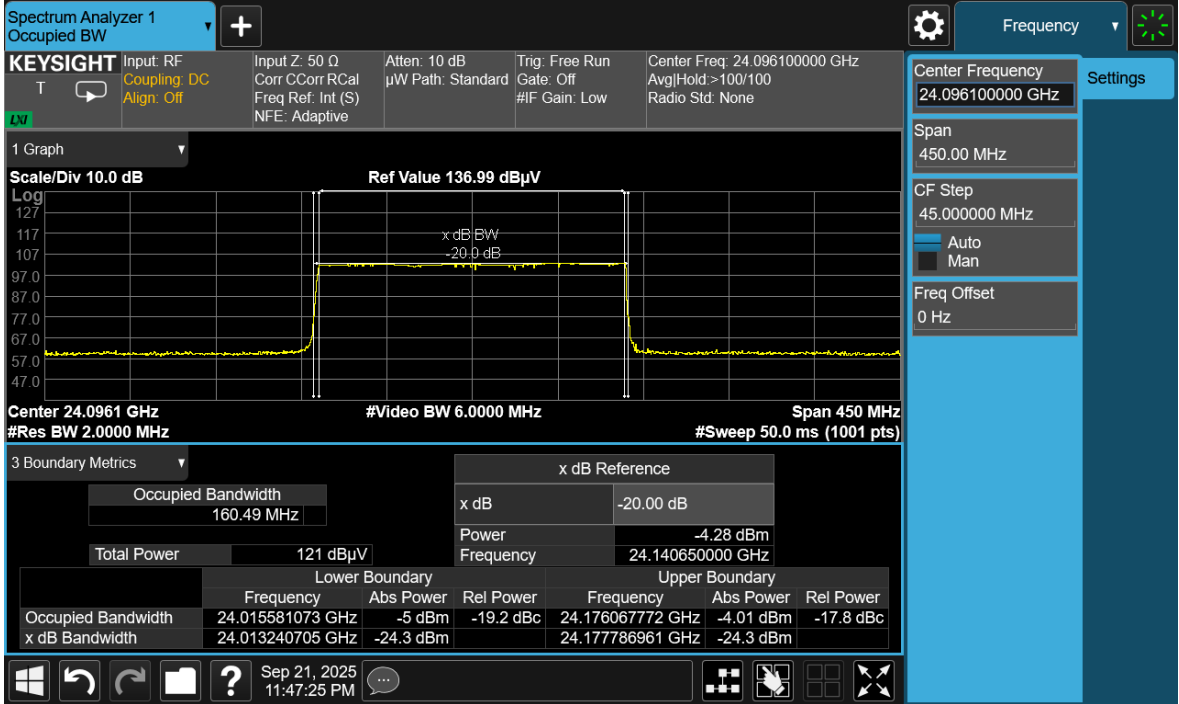


3 Boundary Metrics

Occupied Bandwidth		x dB Reference	
Occupied Bandwidth	160.49 MHz	x dB	-20.00 dB
Total Power	121 dBμV	Power	-4.28 dBm
		Frequency	24.140650000 GHz

Lower Boundary				Upper Boundary			
Frequency	Abs Power	Rel Power	Frequency	Abs Power	Rel Power	Frequency	Abs Power
24.01581073 GHz	-5 dBm	-19.2 dBc	24.176067772 GHz	-4.01 dBm	-17.8 dBc		
24.013240705 GHz	-24.3 dBm		24.177786961 GHz	-24.3 dBm			

20dB- Bandwidth

10.2 99% Bandwidth

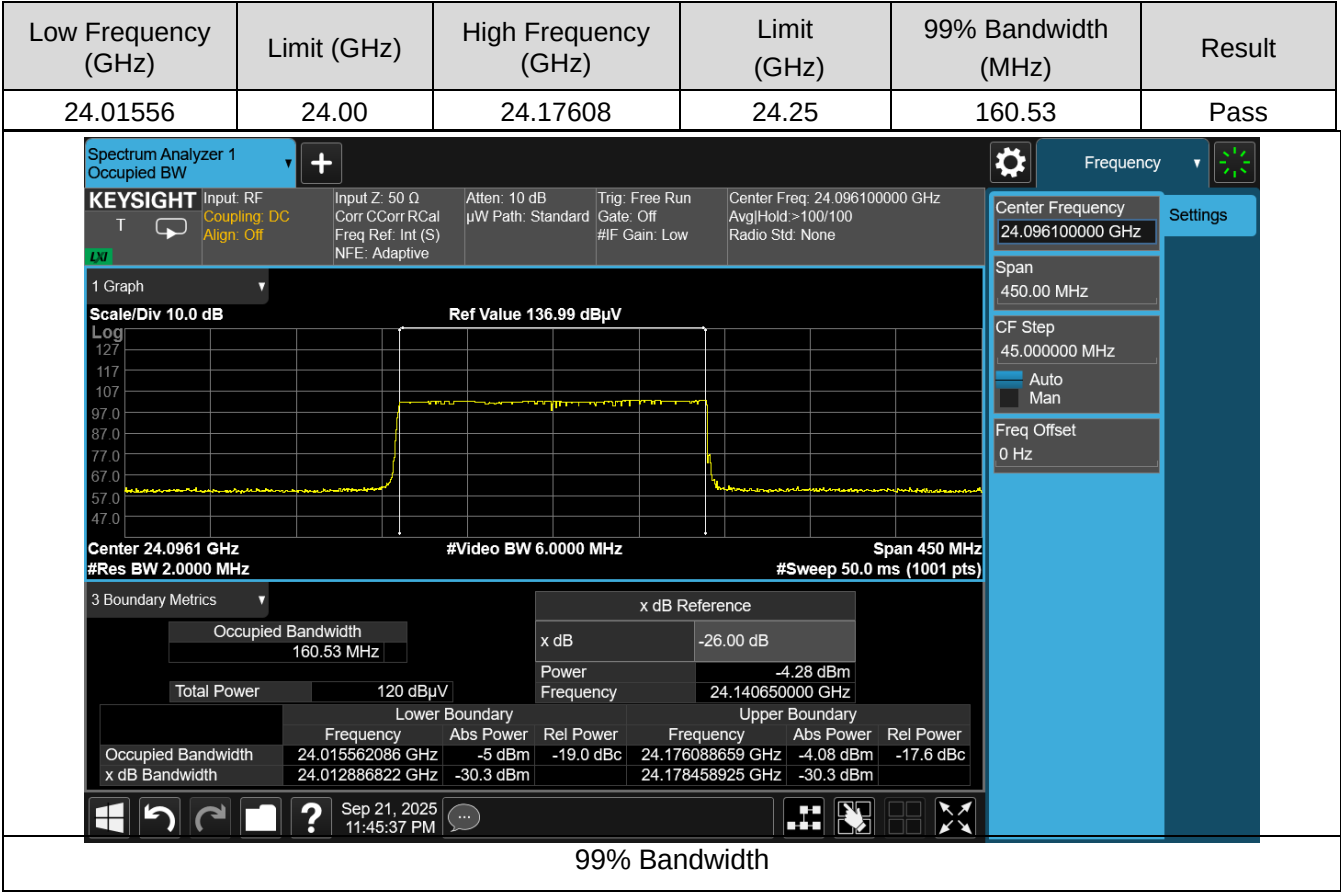

10.3 Filed Strength of Fundamental

Frequency (GHz)	Distance (m)	Desensitization factor (dB)	Peak Power @3m dBuV/m	Peak Power Limit @3m dBuV/m	Average Power @3m dBuV/m	Average Power Limit @3m dBuV/m	Result	Polarity
24.142	3	0.0002	97.6002	127.96	91.99	107.96	Pass	Horizontal
24.184	3	0.0002	101.0902	127.96	96.08	107.96	Pass	Vertical


Note 2: The FMCW modulation desensitization correct factor 0.0002 was calculated with equation below, where the BWChirp=174MHz, Tchirp=8000uS, B=1MHz.

$$\alpha = \frac{1}{\sqrt{1 + \left(\frac{2 \ln(2)}{\pi} \right)^2 \left(\frac{BW_{\text{Chirp}}}{T_{\text{Chirp}} B^2} \right)^2}}$$

where

α is the reduction in amplitude
 BW_{Chirp} is the FMCW Chirp Bandwidth
 T_{Chirp} is the FMCW Chirp Time
 B is the 3 dB IF Bandwidth = RBW


10.4 Bandedge

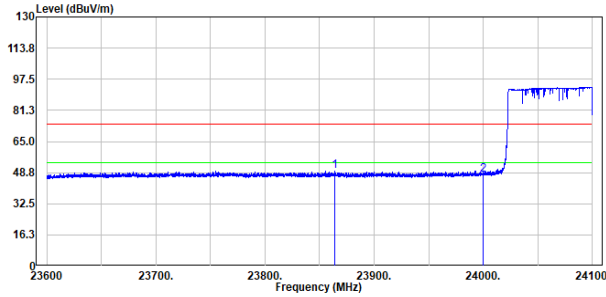

Antenna Polarity :Vertical

No.	Freq MHz	Read level dBuV	Antenna Factor dB/m	Cable Loss dB	Preamp Factor dB	Emission Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Remark
1	23863.95	54.53	39.19	10.33	54.34	49.71	74.00	-24.29	Peak
2	23999.98	51.90	39.23	10.58	54.10	47.61	74.00	-26.39	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

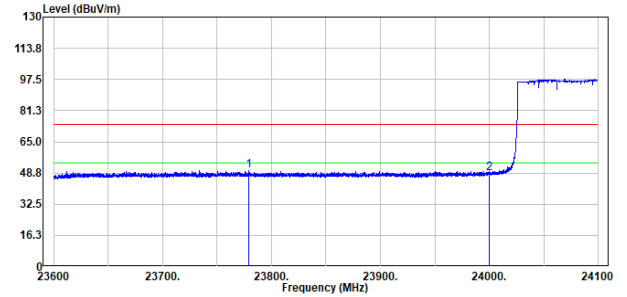


Antenna Polarity :Vertical

No.	Freq MHz	Read level dBuV	Antenna Factor dB/m	Cable Loss dB	Preamp Factor dB	Emission Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Remark
1	23778.84	55.00	39.16	10.17	54.50	49.83	74.00	-24.17	Peak
2	23999.98	52.91	39.23	10.58	54.10	48.62	74.00	-25.38	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

23600MHz-24100MHz-Horizontal


23600MHz-24100MHz-Vertical

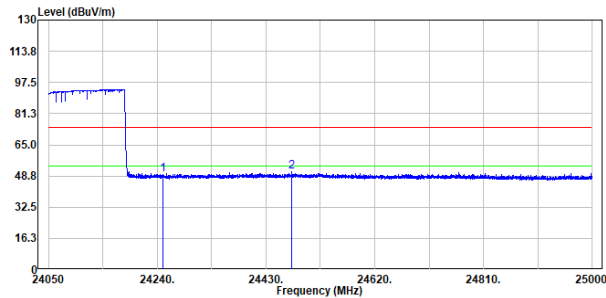

Antenna Polarity :Horizontal

No.	Freq MHz	Read level dBuV	Antenna Factor dB/m	Cable Loss dB	Preamp Factor dB	Emission Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Remark
1	24249.92	53.99	39.33	10.46	54.20	49.58	74.00	-24.42	Peak
2	24474.16	55.31	39.41	10.67	54.29	51.10	74.00	-22.90	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

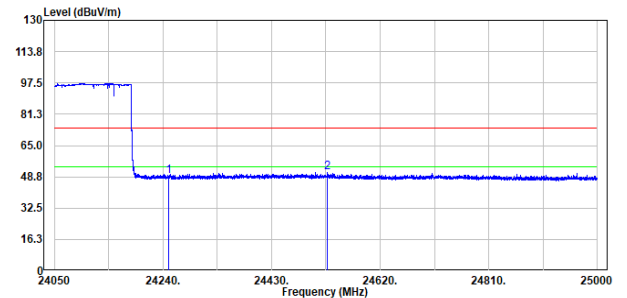

Antenna Polarity :Vertical


No.	Freq MHz	Read level dBuV	Antenna Factor dB/m	Cable Loss dB	Preamp Factor dB	Emission Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Remark
1	24249.92	53.26	39.33	10.46	54.20	48.85	74.00	-25.15	Peak
2	24527.38	55.29	39.44	10.66	54.34	51.05	74.00	-22.95	Peak

Notes: Emission Level=Read Level+Antenna Factor+Cable loss-Preamp Factor

24050MHz-25000MHz-Horizontal

24050MHz-25000MHz-Vertical

10.5 Radiated Spurious emissions below 40 GHz

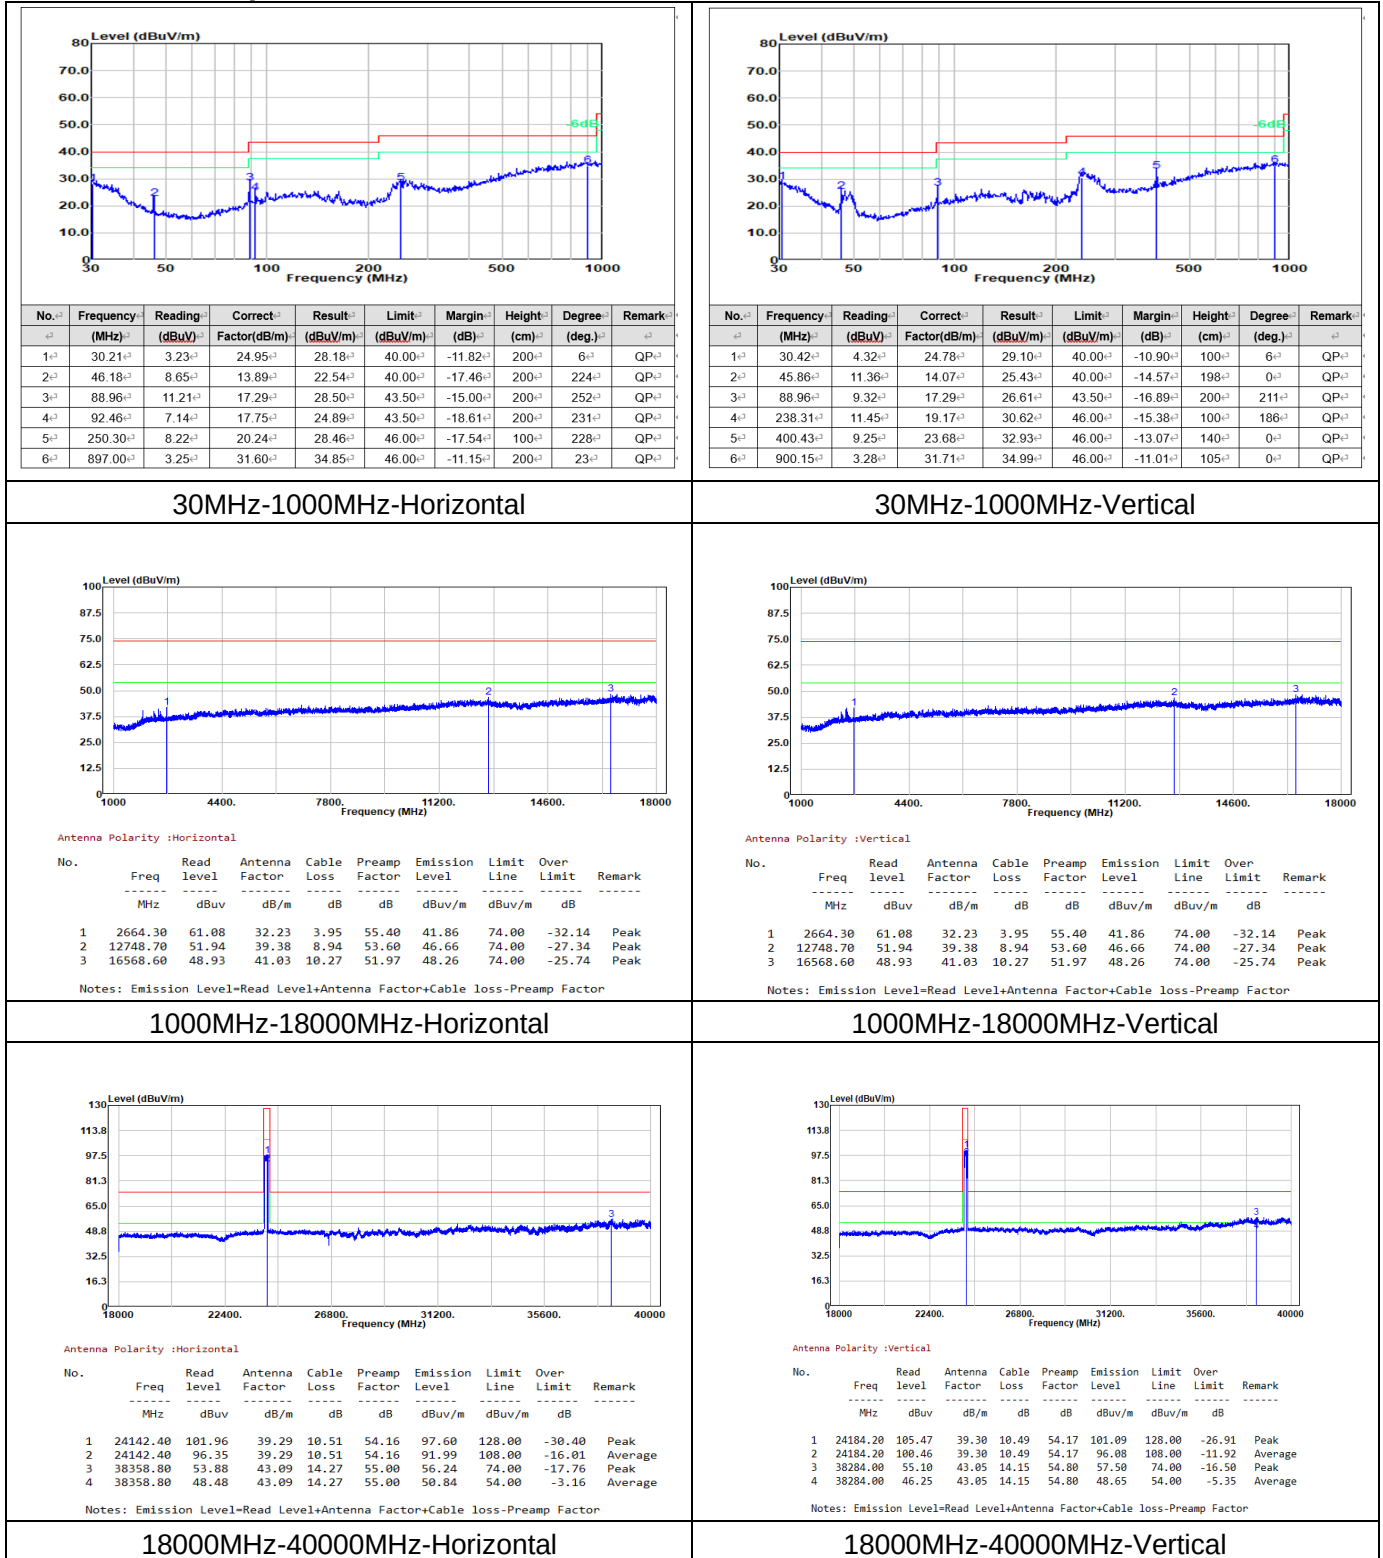


10.6 Radiated Spurious emissions above 40 GHz

Frequency (GHz)	Distance (M)	Peak Value (dBuV/m)	Average Value (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Polarization	Result
48.26	1	68.94	/	97.5	77.5	Horizontal	Pass
48.22	1	70.05	/	97.5	77.5	Vertical	Pass
72.076	1	70.15	/	97.5	77.5	Horizontal	Pass
72.201	1	69.60	/	97.5	77.5	Vertical	Pass

Note:


At a distance of 1 meter, the average limit of radiation emission is 63.5 dBuV/m, and the average limit of harmonic field strength is 77.5 dBuV/m. The test results meet the requirements

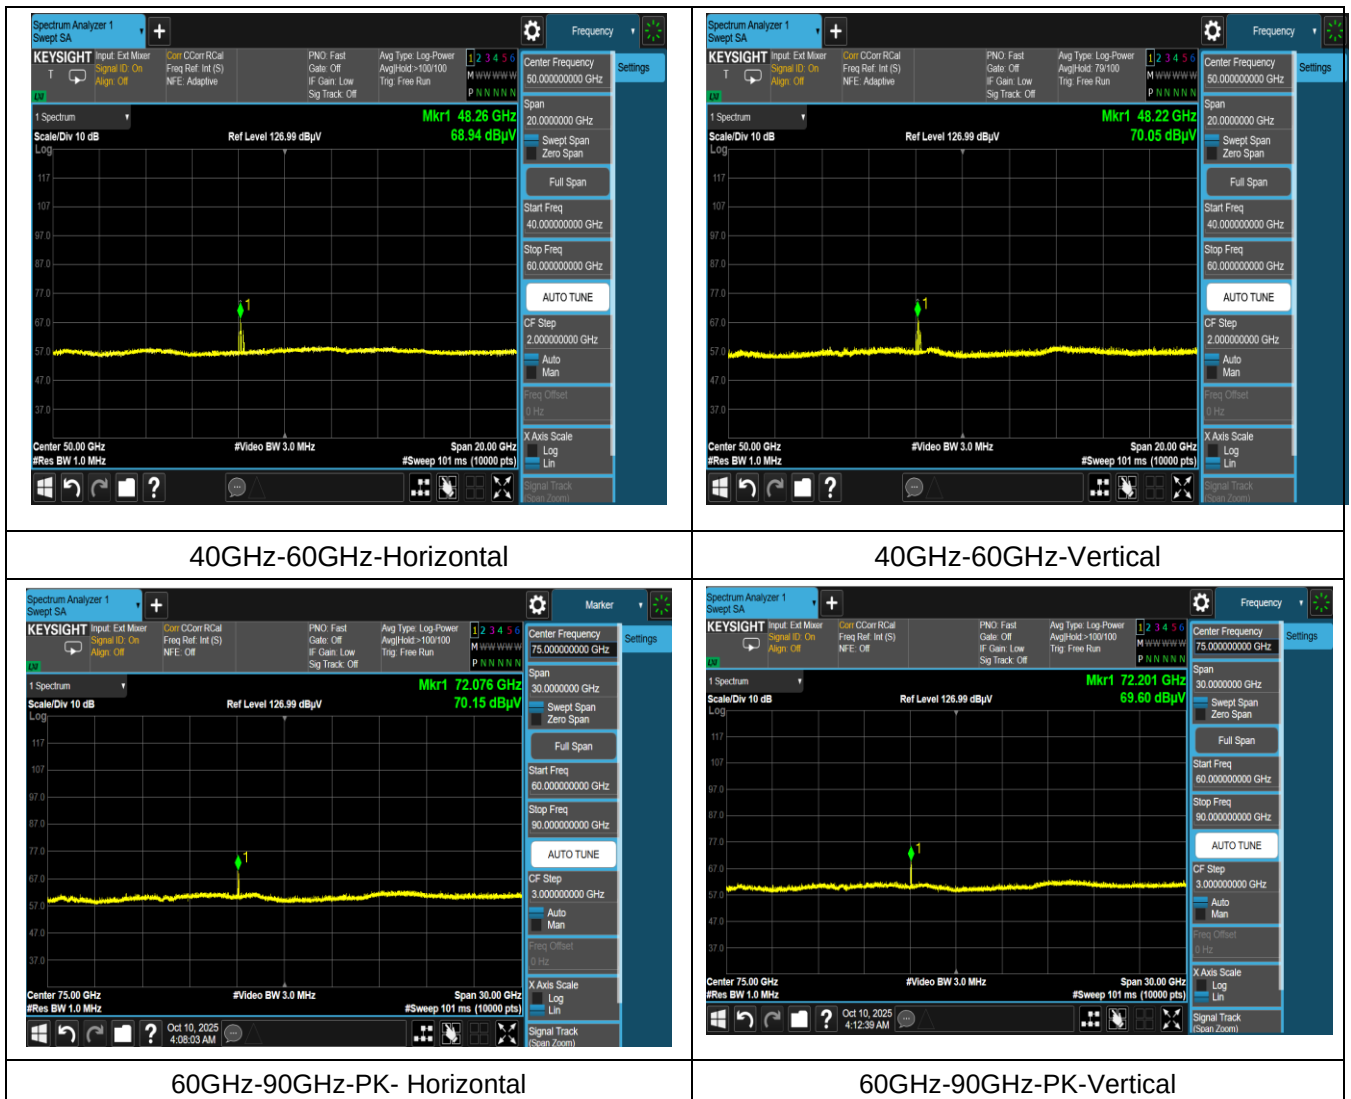

Frequency (GHz)	Distance (M)	Peak Value (dBuV/m)	Average Value (dBuV/m)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Polarization	Result
105.347	1	71.97	/	83.52	/	Horizontal	Pass
104.741	1	72.07	/	83.52	/	Vertical	Pass
105.762	1	/	61.21	/	63.52	Horizontal	Pass
105.367	1	/	62.60	/	63.52	Vertical	Pass

Note:

At a distance of 1 meter, the average limit of radiation emission is 63.5 dBuV/m, The test results meet the requirements

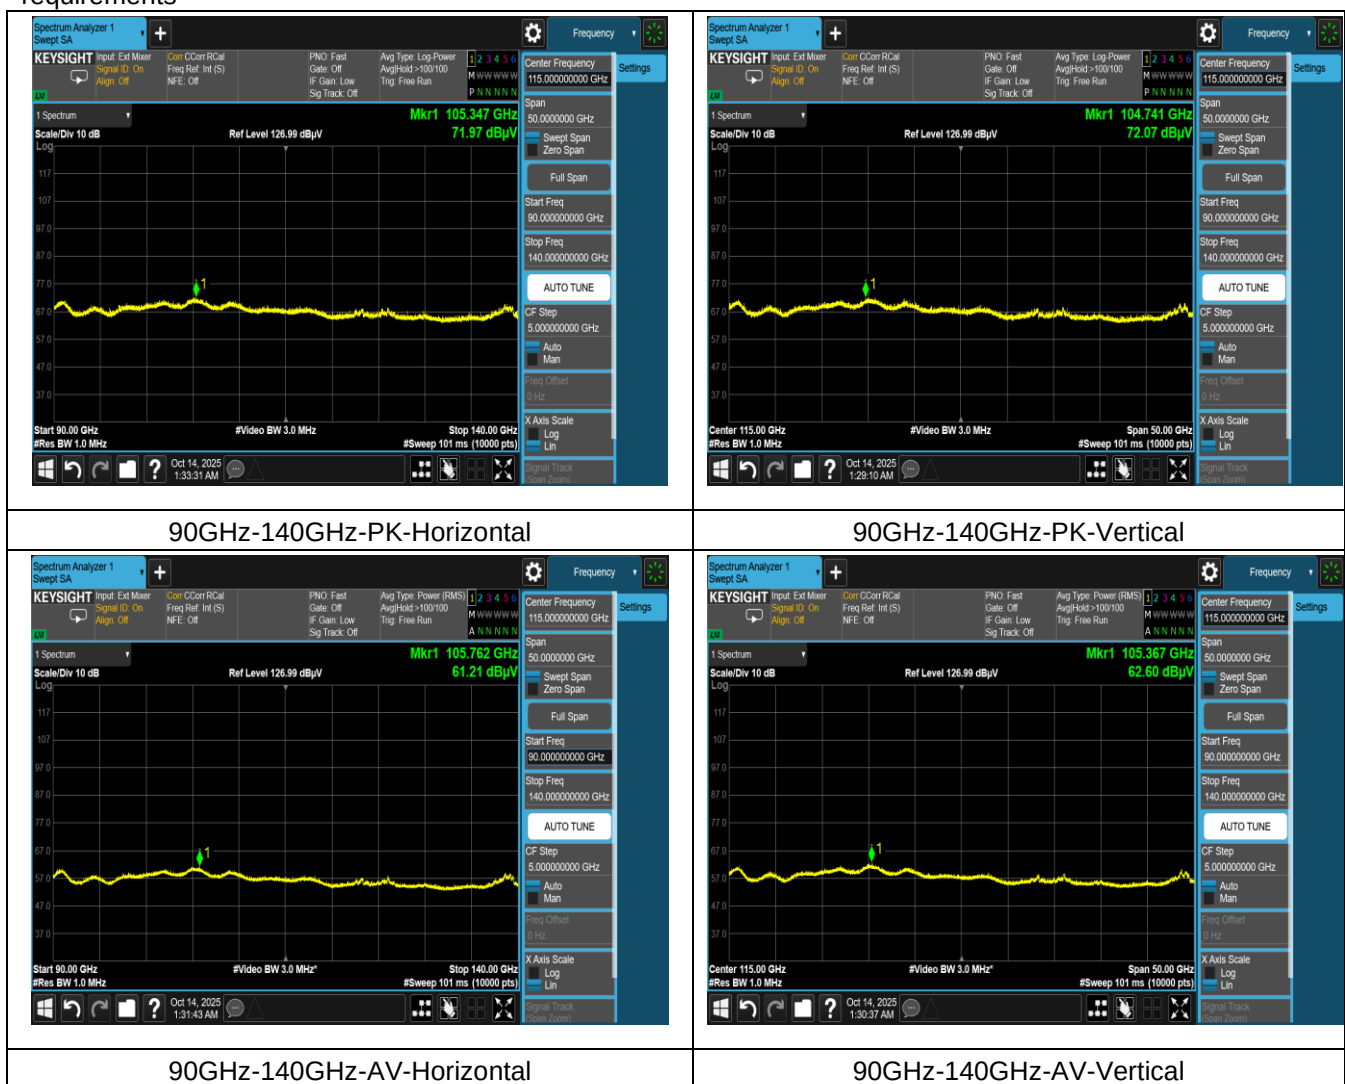

- End of the Report -