




Report No.: KSCR250900195403

Page: 72 of 403

11ax(HE20)_TX_CH_165_Horizontal

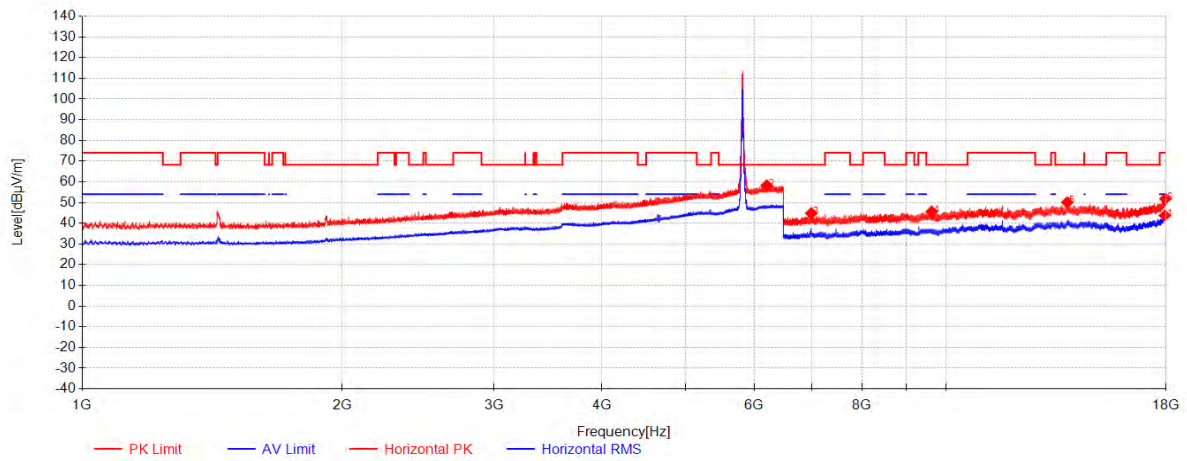


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17945.95	33.24	41.54	-31.04	43.75	54.00	10.25	Horizontal
2	6207.125	40.19	34.91	-16.83	58.28	68.20	9.92	Horizontal
3	6989.5167	51.17	36.28	-42.63	44.82	68.20	23.38	Horizontal
4	9634.9	45.57	38.06	-38.02	45.61	68.20	22.59	Horizontal
5	13832.0167	44.51	40.32	-34.72	50.11	68.20	18.09	Horizontal
6	17969.7167	41.18	41.61	-30.99	51.80	74.00	22.20	Horizontal



Report No.: KSCR250900195403

Page: 73 of 403

11ax(HE20)_TX_CH_165_Verical

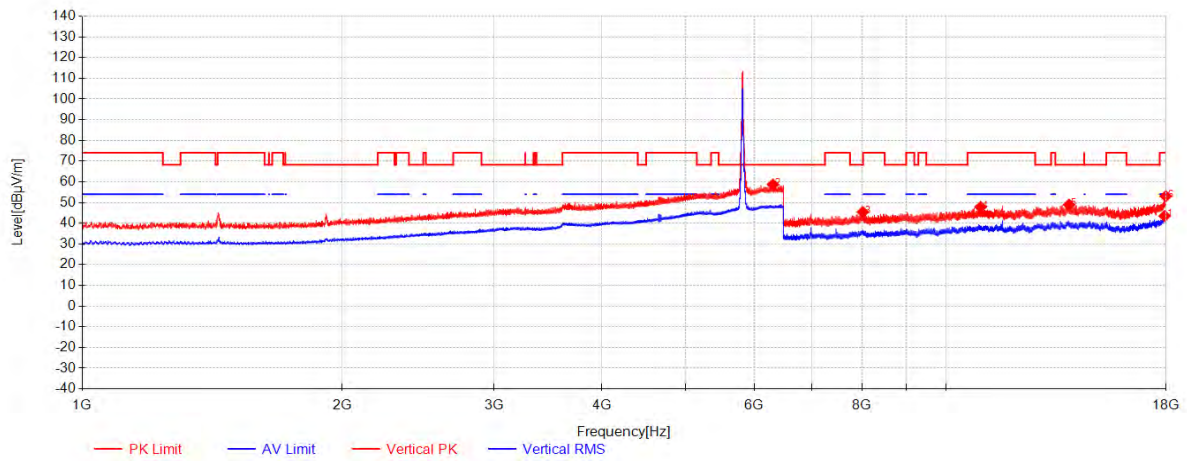


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17933.3	33.07	41.51	-31.06	43.51	54.00	10.49	Vertical
2	6309.7917	40.60	35.12	-16.99	58.72	68.20	9.48	Vertical
3	8018.7667	49.26	37.31	-41.15	45.42	68.20	22.78	Vertical
4	10977.3333	44.62	39.27	-36.04	47.86	74.00	26.14	Vertical
5	13899.8667	42.43	40.35	-33.80	48.98	68.20	19.22	Vertical
6	17985.4333	42.35	41.66	-30.96	53.05	74.00	20.95	Vertical



Report No.: KSCR250900195403

Page: 74 of 403

11ax(HE40)_TX_CH_38_Horizontal

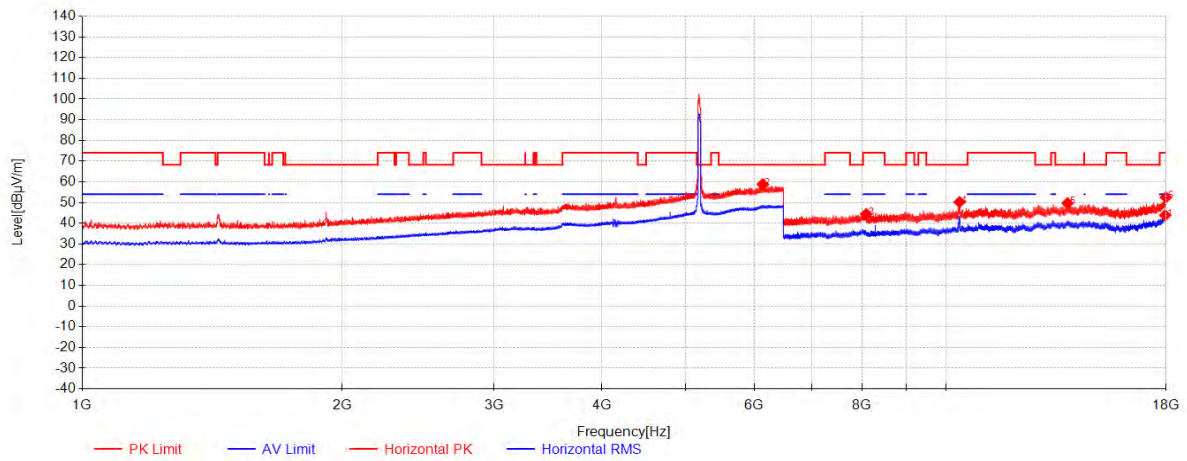


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17960.5167	33.27	41.59	-31.01	43.85	54.00	10.15	Horizontal
2	6140.6667	40.77	34.78	-16.73	58.82	68.20	9.38	Horizontal
3	8092.75	48.15	37.36	-41.04	44.47	74.00	29.53	Horizontal
4	10378.95	48.43	38.55	-36.74	50.25	68.20	17.95	Horizontal
5	13845.8167	43.93	40.32	-34.53	49.72	68.20	18.48	Horizontal
6	17994.25	41.77	41.68	-30.94	52.51	74.00	21.49	Horizontal



Report No.: KSCR250900195403

Page: 75 of 403

11ax(HE40)_TX_CH_38_Verical

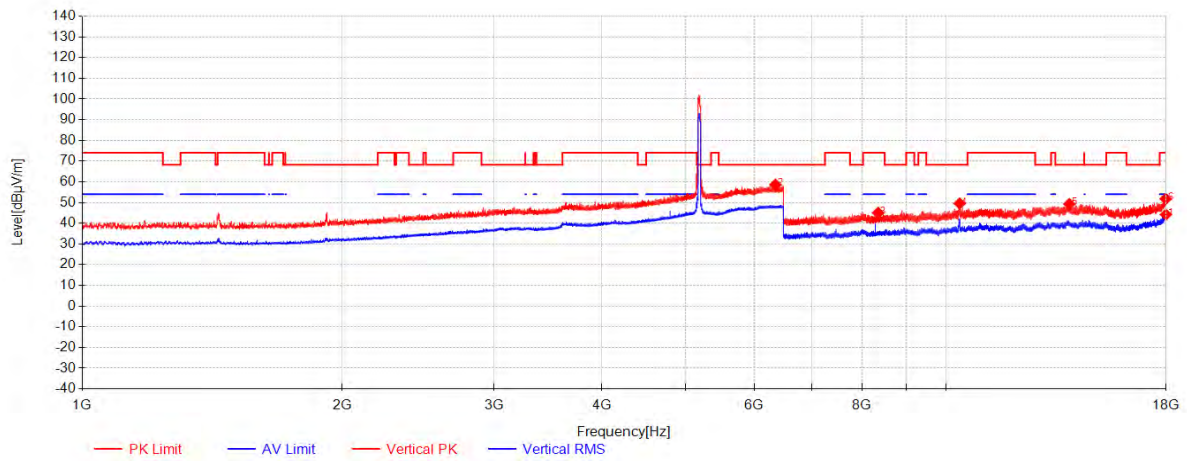


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17995.7833	33.42	41.69	-30.94	44.17	54.00	9.83	Vertical
2	6351.5	40.19	35.20	-16.80	58.59	68.20	9.61	Vertical
3	8352.2667	48.19	37.55	-40.71	45.03	74.00	28.97	Vertical
4	10382.7833	47.70	38.56	-36.71	49.55	68.20	18.65	Vertical
5	13909.0667	42.90	40.35	-33.96	49.30	68.20	18.90	Vertical
6	17985.8167	41.09	41.66	-30.96	51.79	74.00	22.21	Vertical



Report No.: KSCR250900195403

Page: 76 of 403

11ax(HE40)_TX_CH_46_Horizontal

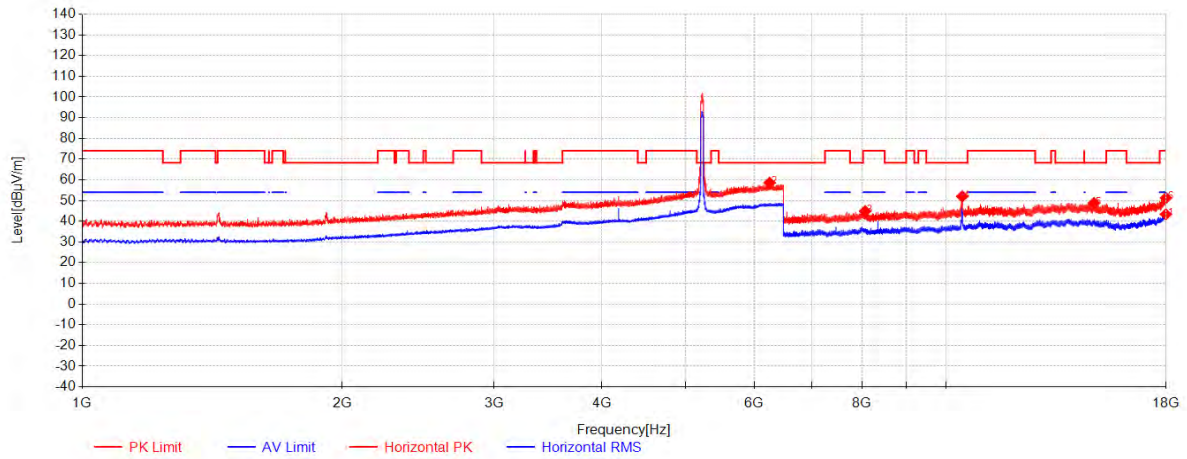


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17993.8667	32.62	41.68	-30.94	43.36	54.00	10.64	Horizontal
2	6253.875	40.52	35.01	-16.93	58.59	68.20	9.61	Horizontal
3	8067.0667	48.58	37.35	-41.08	44.85	74.00	29.15	Horizontal
4	10453.3167	49.87	38.64	-36.51	52.00	68.20	16.20	Horizontal
5	14852.45	42.71	39.89	-33.83	48.77	68.20	19.43	Horizontal
6	17998.85	40.48	41.70	-30.93	51.24	74.00	22.76	Horizontal



Report No.: KSCR250900195403

Page: 77 of 403

11ax(HE40)_TX_CH_46_Vertical

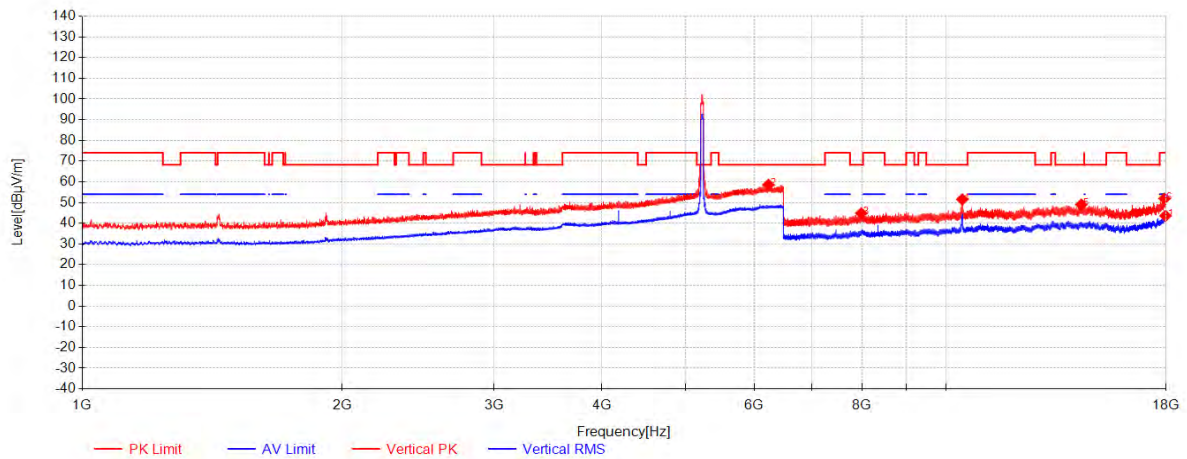


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17974.3167	32.98	41.63	-30.98	43.62	54.00	10.38	Vertical
2	6236	40.48	34.97	-16.89	58.56	68.20	9.64	Vertical
3	7986.5667	48.79	37.27	-41.22	44.84	68.20	23.36	Vertical
4	10454.85	49.41	38.65	-36.51	51.54	68.20	16.66	Vertical
5	14359.8667	43.04	40.18	-34.25	48.98	68.20	19.22	Vertical
6	17926.7833	41.51	41.49	-31.08	51.92	74.00	22.08	Vertical



Report No.: KSCR250900195403


Page: 78 of 403

11ax(HE40)_TX_CH_54_Horizontal

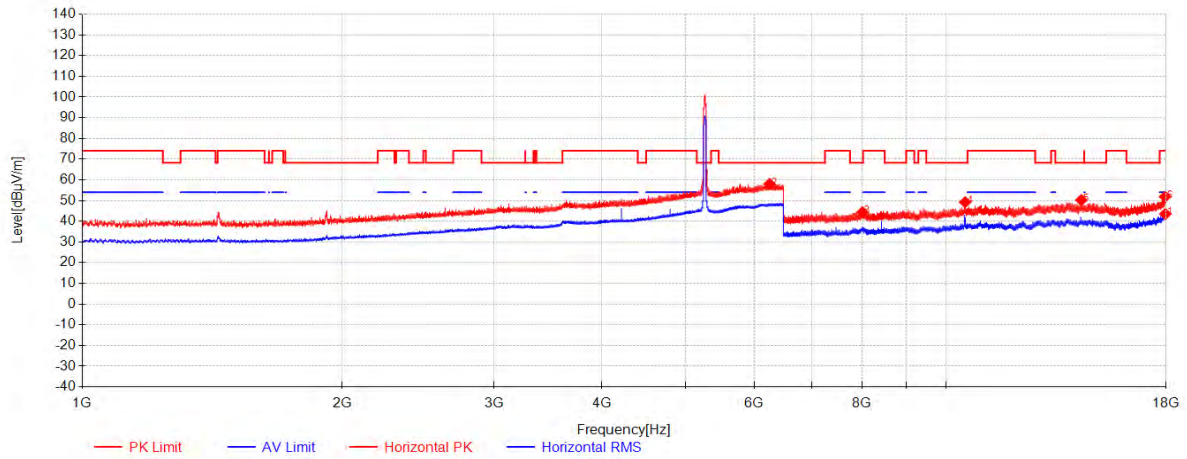

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17970.4833	32.90	41.61	-30.99	43.53	54.00	10.47	Horizontal
2	6252.0417	39.95	35.00	-16.93	58.02	68.20	10.18	Horizontal
3	8012.25	48.24	37.31	-41.16	44.39	68.20	23.81	Horizontal
4	10533.8167	46.97	38.74	-36.51	49.20	68.20	19.00	Horizontal
5	14360.25	44.32	40.18	-34.24	50.26	68.20	17.94	Horizontal
6	17955.5333	41.25	41.57	-31.02	51.80	74.00	22.20	Horizontal

11ax(HE40)_TX_CH_54_Verical

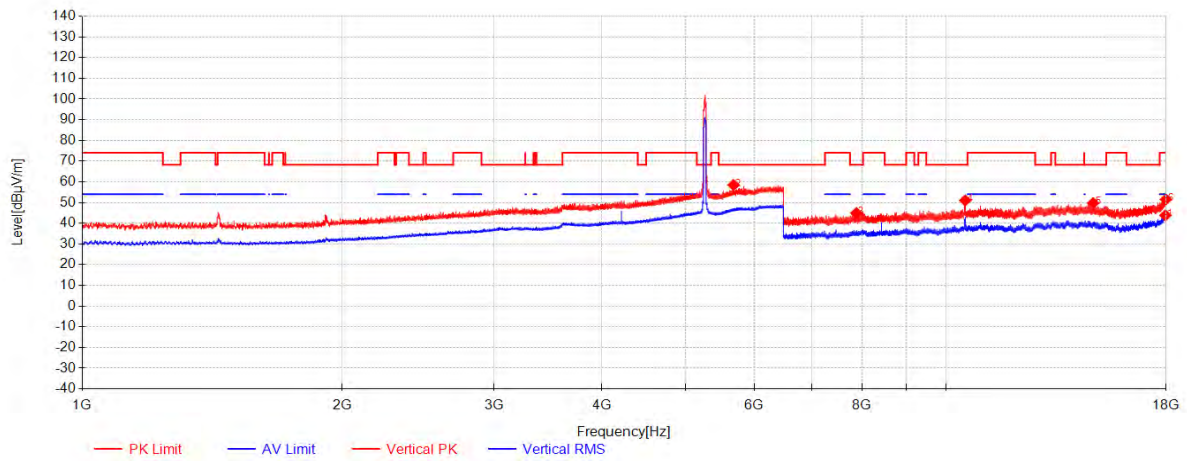


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17972.0167	33.18	41.62	-30.99	43.81	54.00	10.19	Vertical
2	5680.5	42.25	33.54	-17.31	58.48	68.20	9.72	Vertical
3	7882.3	49.26	37.06	-41.42	44.91	68.20	23.29	Vertical
4	10536.8833	48.79	38.74	-36.52	51.02	68.20	17.18	Vertical
5	14820.25	43.91	39.91	-34.12	49.70	68.20	18.50	Vertical
6	17995.4	40.73	41.69	-30.94	51.48	74.00	22.52	Vertical



Report No.: KSCR250900195403

Page: 80 of 403


11ax(HE40)_TX_CH_62_Horizontal

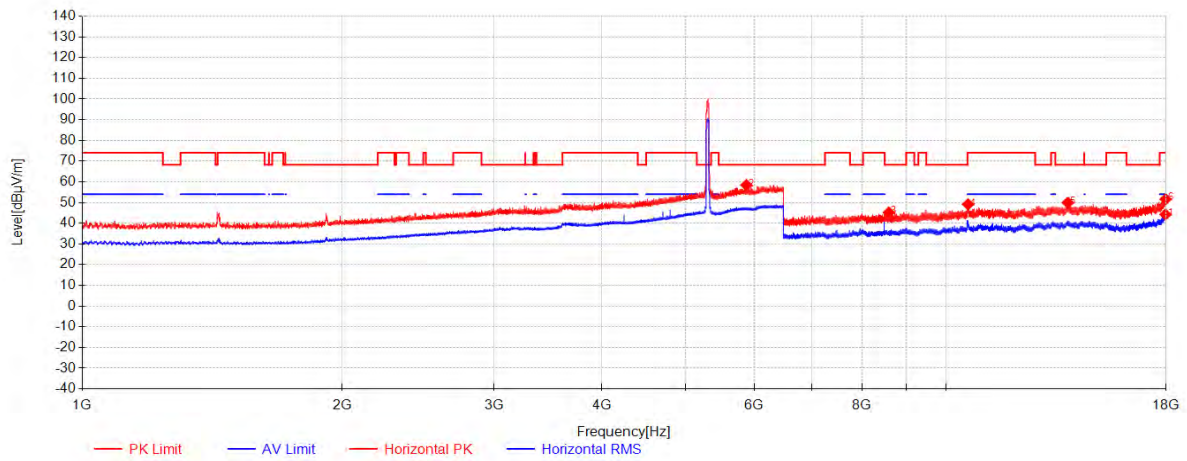

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17975.4667	33.60	41.63	-30.98	44.25	54.00	9.75	Horizontal
2	5878.5	41.18	34.14	-16.86	58.46	68.20	9.74	Horizontal
3	8596.45	47.67	37.72	-40.18	45.20	68.20	23.00	Horizontal
4	10616.2333	46.85	38.84	-36.54	49.15	74.00	24.85	Horizontal
5	13855.7833	43.99	40.33	-34.40	49.92	68.20	18.28	Horizontal
6	17982.75	40.93	41.65	-30.96	51.62	74.00	22.38	Horizontal



11ax(HE40)_TX_CH_62_Vertical

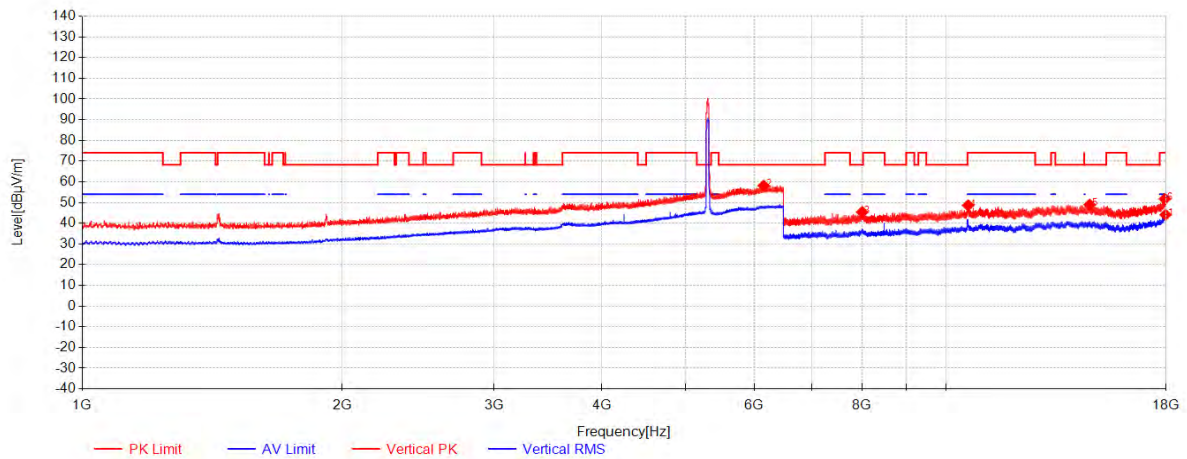


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17977	33.45	41.63	-30.98	44.11	54.00	9.89	Vertical
2	6156.7083	40.09	34.81	-16.75	58.15	68.20	10.05	Vertical
3	8004.9667	49.24	37.30	-41.17	45.37	68.20	22.83	Vertical
4	10617.7667	46.33	38.84	-36.53	48.64	74.00	25.36	Vertical
5	14682.6333	42.95	39.99	-33.96	48.99	68.20	19.21	Vertical
6	17944.8	41.23	41.54	-31.04	51.73	74.00	22.27	Vertical



Report No.: KSCR250900195403

Page: 82 of 403


11ax(HE40)_TX_CH_102_Horizontal

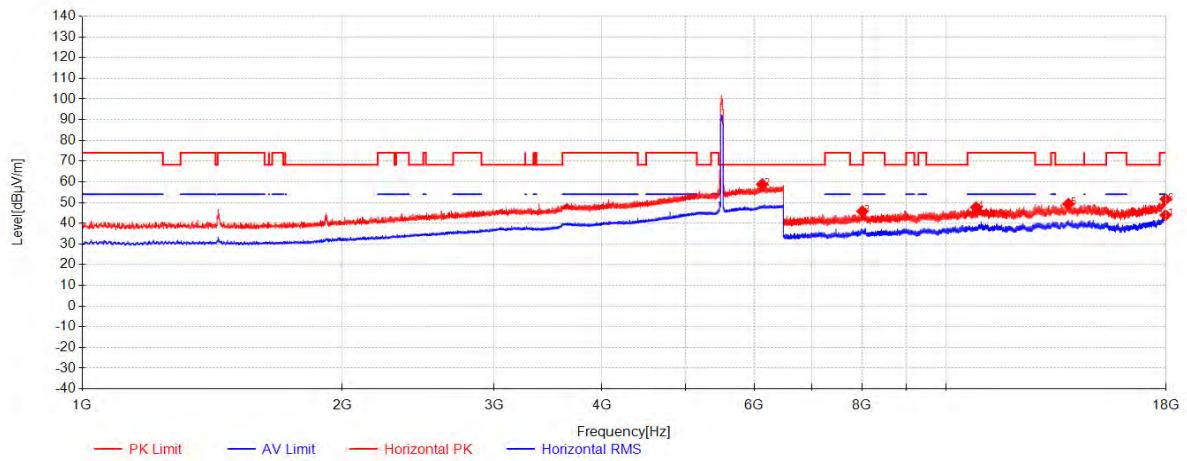

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17978.9167	33.24	41.64	-30.97	43.91	54.00	10.09	Horizontal
2	6132.875	40.80	34.77	-16.72	58.84	68.20	9.36	Horizontal
3	8009.1833	49.59	37.31	-41.17	45.73	68.20	22.47	Horizontal
4	10848.5333	45.07	39.12	-36.50	47.68	74.00	26.32	Horizontal
5	13877.25	43.13	40.34	-34.11	49.36	68.20	18.84	Horizontal
6	17987.7333	40.89	41.66	-30.95	51.60	74.00	22.40	Horizontal



11ax(HE40)_TX_CH_102_Vertical

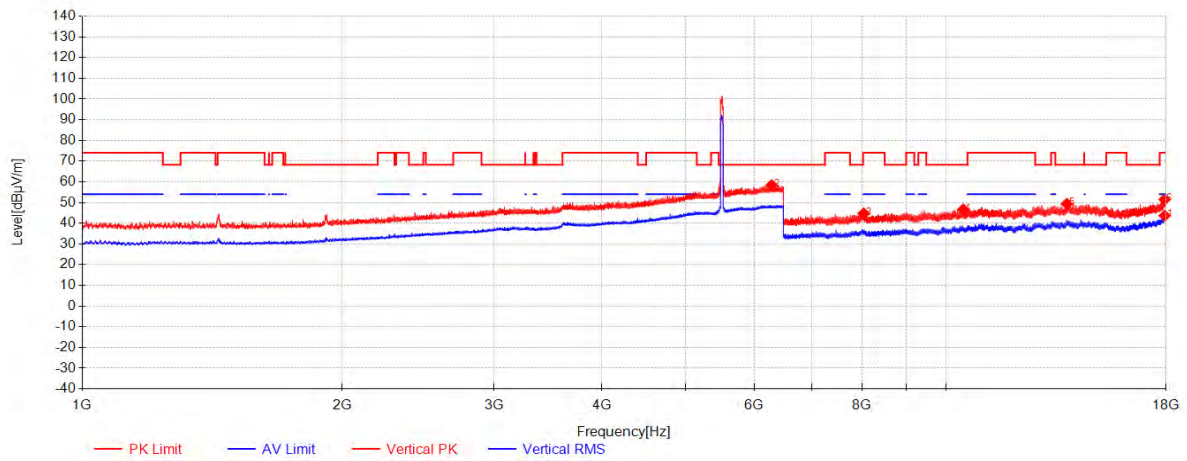


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17936.75	33.21	41.52	-31.06	43.67	54.00	10.33	Vertical
2	6289.1667	40.30	35.08	-17.02	58.36	68.20	9.84	Vertical
3	8037.9333	48.50	37.33	-41.12	44.70	74.00	29.30	Vertical
4	10481.3	44.43	38.68	-36.46	46.64	68.20	21.56	Vertical
5	13815.5333	43.96	40.31	-34.94	49.33	68.20	18.87	Vertical
6	17929.4667	41.03	41.50	-31.07	51.45	74.00	22.55	Vertical



Report No.: KSCR250900195403

Page: 84 of 403


11ax(HE40)_TX_CH_110_Horizontal

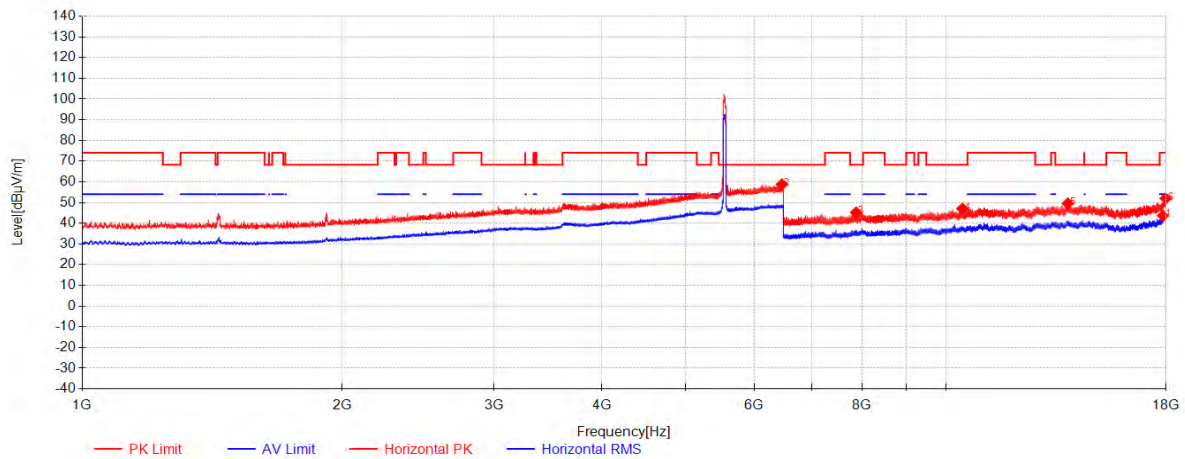

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17858.1667	33.82	41.29	-31.46	43.65	54.00	10.35	Horizontal
2	6462.875	40.08	35.43	-16.69	58.82	68.20	9.38	Horizontal
3	7877.7	49.52	37.06	-41.39	45.18	68.20	23.02	Horizontal
4	10459.0667	44.89	38.65	-36.50	47.04	68.20	21.16	Horizontal
5	13855.0167	43.64	40.33	-34.41	49.56	68.20	18.64	Horizontal
6	17991.1833	41.23	41.67	-30.95	51.96	74.00	22.04	Horizontal




11ax(HE40)_TX_CH_110_Vertical

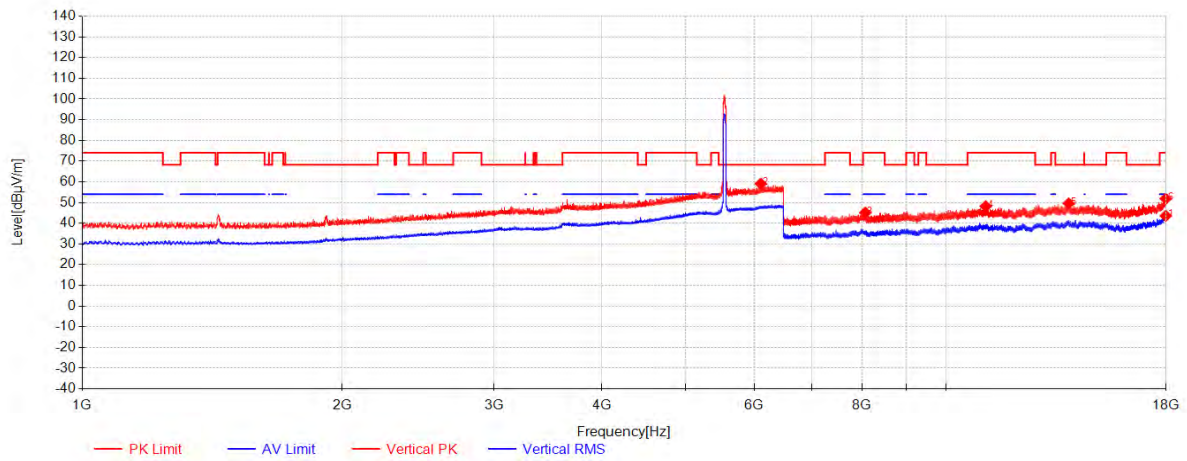

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17987.7333	32.89	41.66	-30.95	43.60	54.00	10.40	Vertical
2	6108.125	41.09	34.72	-16.69	59.12	68.20	9.08	Vertical
3	8070.1333	48.83	37.35	-41.07	45.10	74.00	28.90	Vertical
4	11128.3667	44.50	39.22	-35.55	48.17	74.00	25.83	Vertical
5	13886.8333	43.19	40.34	-33.98	49.56	68.20	18.64	Vertical
6	17989.65	41.15	41.67	-30.95	51.87	74.00	22.13	Vertical




11ax(HE40)_TX_CH_134_Horizontal

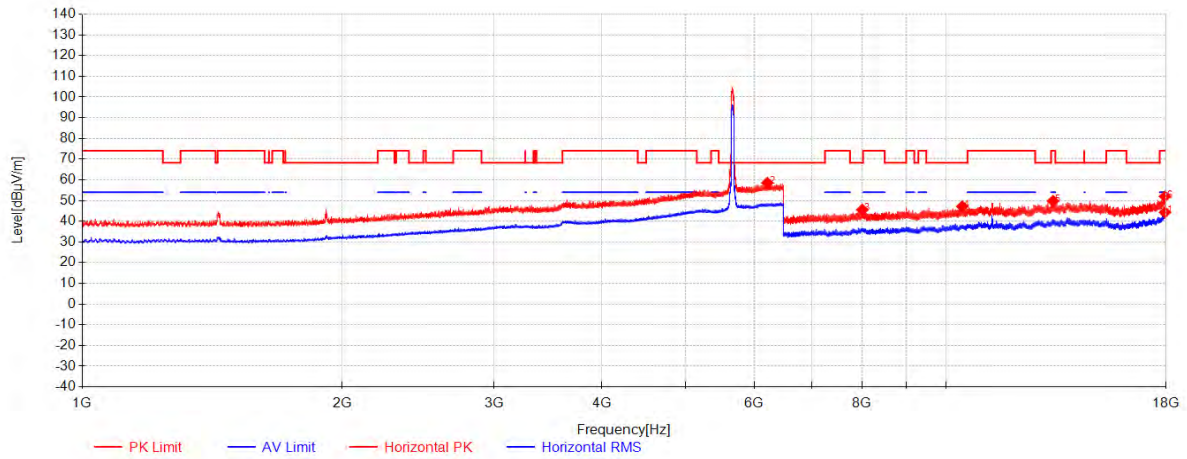

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17951.7	33.79	41.56	-31.03	44.32	54.00	9.68	Horizontal
2	6216.75	40.47	34.93	-16.85	58.55	68.20	9.65	Horizontal
3	8008.8	49.42	37.31	-41.17	45.56	68.20	22.64	Horizontal
4	10452.55	45.02	38.64	-36.52	47.15	68.20	21.05	Horizontal
5	13318.35	44.30	40.06	-34.58	49.78	74.00	24.22	Horizontal
6	17945.95	41.46	41.54	-31.04	51.97	74.00	22.03	Horizontal



11ax(HE40)_TX_CH_134_Verical

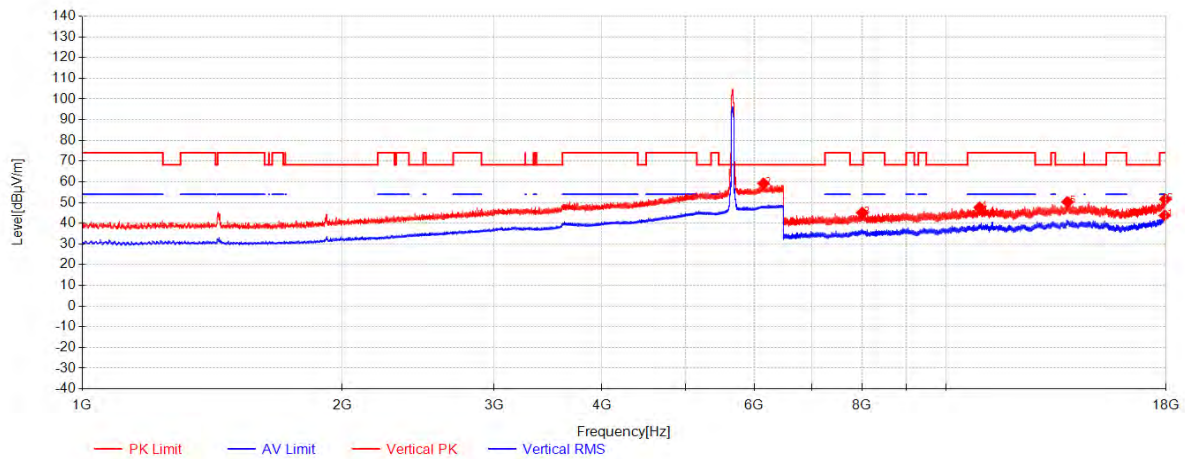


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17938.6667	33.31	41.52	-31.05	43.78	54.00	10.22	Vertical
2	6153.5	41.17	34.81	-16.75	59.23	68.20	8.97	Vertical
3	8004.5833	48.95	37.30	-41.17	45.08	68.20	23.12	Vertical
4	10948.9667	44.48	39.24	-36.10	47.62	74.00	26.38	Vertical
5	13839.6833	44.58	40.32	-34.61	50.29	68.20	17.91	Vertical
6	17972.0167	40.95	41.62	-30.99	51.58	74.00	22.42	Vertical



Report No.: KSCR250900195403


Page: 88 of 403

11ax(HE40)_TX_CH_151_Horizontal

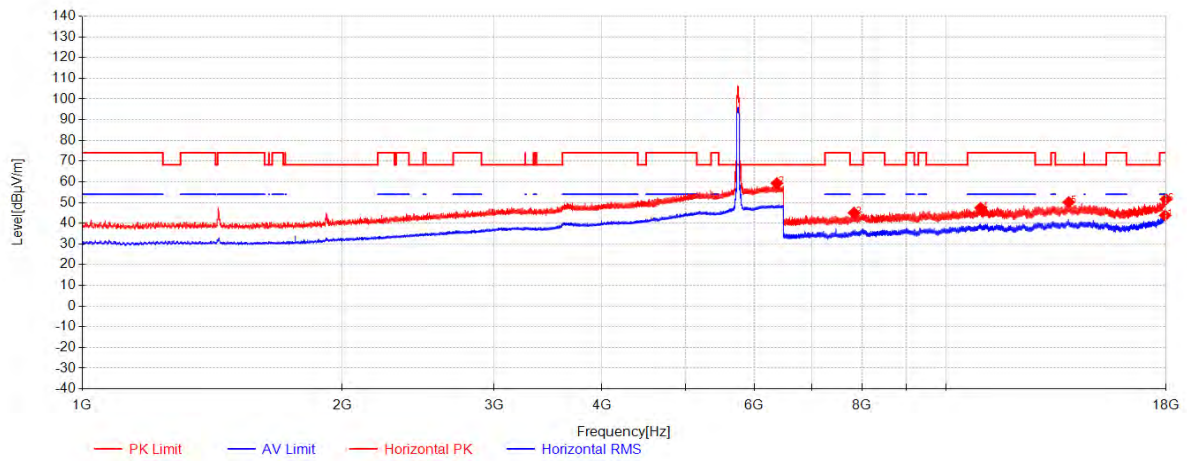

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17958.2167	33.17	41.58	-31.01	43.74	54.00	10.26	Horizontal
2	6376.7083	40.77	35.25	-16.69	59.34	68.20	8.86	Horizontal
3	7832.4667	49.24	36.96	-41.18	45.03	68.20	23.17	Horizontal
4	10976.95	44.19	39.27	-36.04	47.42	74.00	26.58	Horizontal
5	13884.5333	43.85	40.34	-34.01	50.18	68.20	18.02	Horizontal
6	17999.2333	40.83	41.70	-30.93	51.60	74.00	22.40	Horizontal

11ax(HE40)_TX_CH_151_Verical

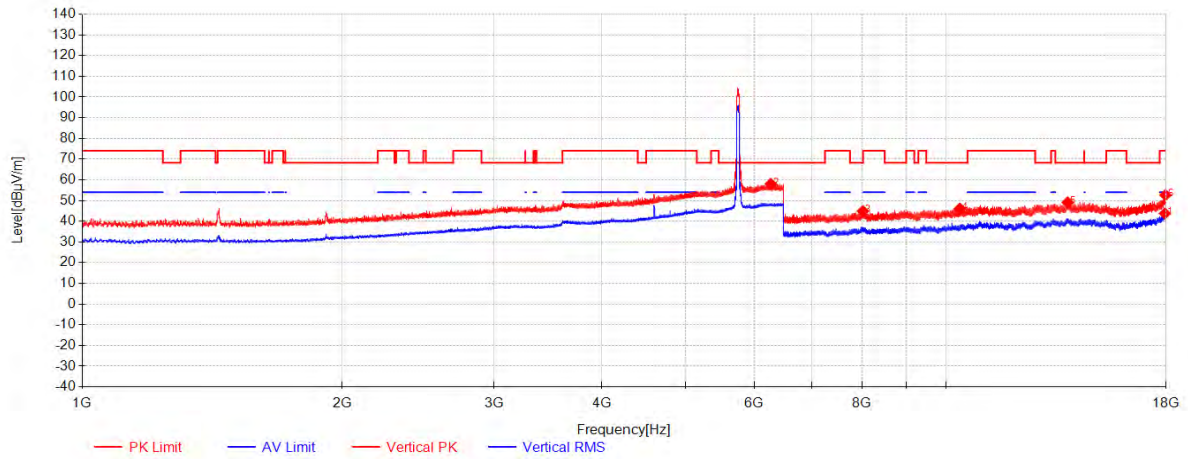


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17944.0333	33.24	41.54	-31.04	43.74	54.00	10.26	Vertical
2	6275.875	39.96	35.05	-16.98	58.03	68.20	10.17	Vertical
3	8021.8333	48.73	37.32	-41.15	44.90	68.20	23.30	Vertical
4	10388.5333	44.22	38.57	-36.68	46.11	68.20	22.09	Vertical
5	13848.5	43.28	40.32	-34.50	49.11	68.20	19.09	Vertical
6	17974.7	41.97	41.63	-30.98	52.62	74.00	21.38	Vertical



Report No.: KSCR250900195403

Page: 90 of 403

11ax(HE40)_TX_CH_159_Horizontal

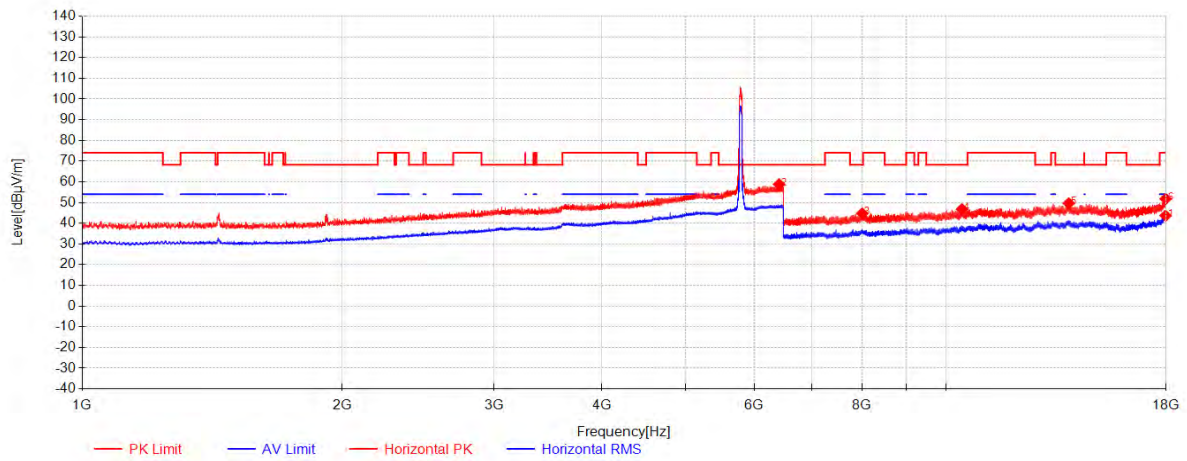


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17980.45	33.02	41.64	-30.97	43.69	54.00	10.31	Horizontal
2	6412.9167	40.07	35.33	-16.60	58.79	68.20	9.41	Horizontal
3	8007.2667	48.58	37.31	-41.17	44.72	68.20	23.48	Horizontal
4	10444.8833	44.66	38.63	-36.53	46.76	68.20	21.44	Horizontal
5	13887.6	43.25	40.34	-33.97	49.63	68.20	18.57	Horizontal
6	17986.2	41.09	41.66	-30.96	51.79	74.00	22.21	Horizontal



Report No.: KSCR250900195403

Page: 91 of 403


11ax(HE40)_TX_CH_159_Verical

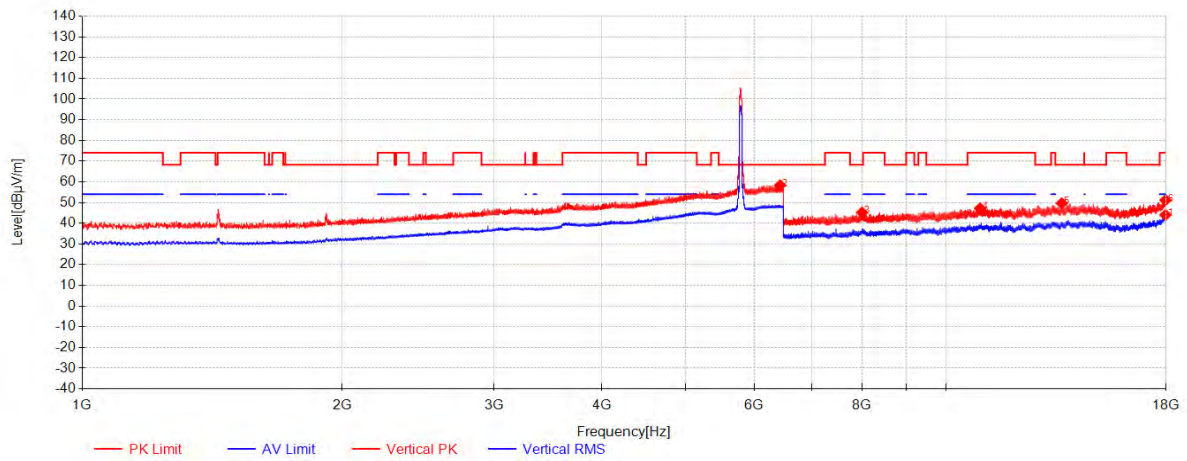

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17976.2333	33.37	41.63	-30.98	44.02	54.00	9.98	Vertical
2	6430.7917	39.57	35.36	-16.63	58.30	68.20	9.90	Vertical
3	8003.4333	49.06	37.30	-41.17	45.19	68.20	23.01	Vertical
4	10963.5333	43.97	39.26	-36.07	47.16	74.00	26.84	Vertical
5	13630	43.87	40.22	-34.44	49.65	68.20	18.55	Vertical
6	17978.5333	40.52	41.64	-30.97	51.18	74.00	22.82	Vertical



11ax(HE80)_TX_CH_42_Horizontal

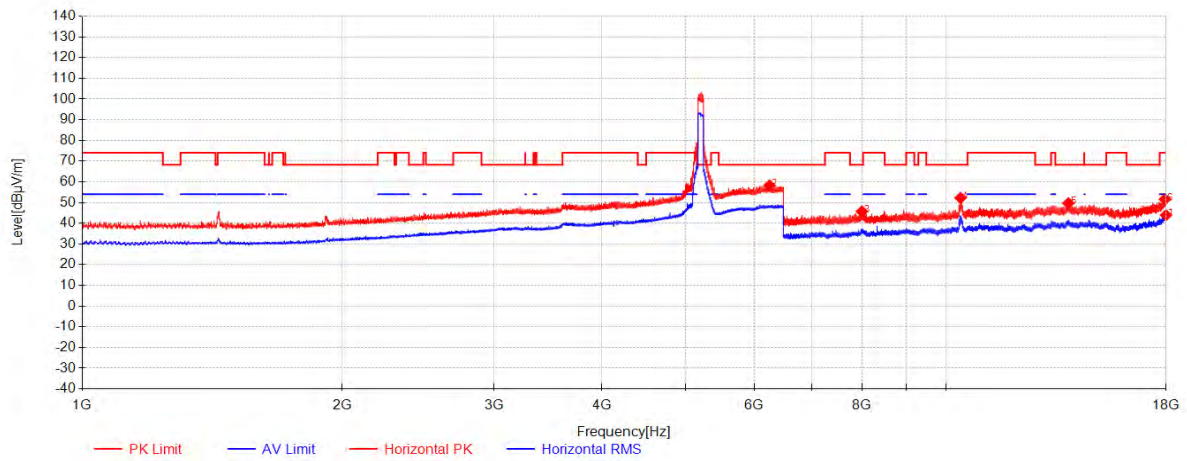


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17998.85	33.17	41.70	-30.93	43.93	54.00	10.07	Horizontal
2	6251.5833	40.23	35.00	-16.93	58.30	68.20	9.90	Horizontal
3	7999.2167	49.60	37.30	-41.18	45.72	68.20	22.48	Horizontal
4	10406.55	50.25	38.59	-36.60	52.24	68.20	15.96	Horizontal
5	13873.0333	43.54	40.34	-34.16	49.71	68.20	18.49	Horizontal
6	17948.6333	41.05	41.55	-31.03	51.57	74.00	22.43	Horizontal



Report No.: KSCR250900195403


Page: 93 of 403

11ax(HE80)_TX_CH_42_Verical

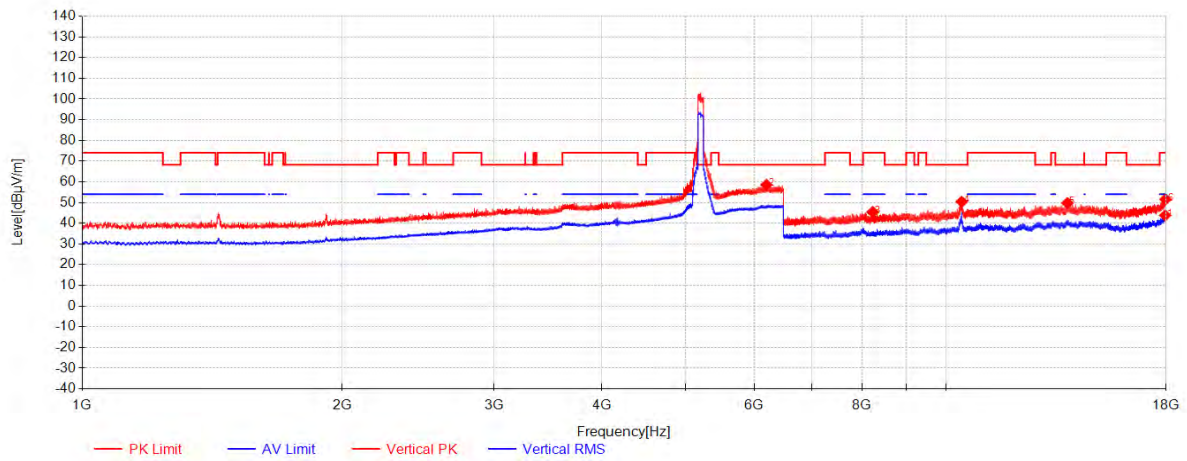


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17960.1333	33.25	41.58	-31.01	43.82	54.00	10.18	Vertical
2	6201.625	40.44	34.90	-16.81	58.53	68.20	9.67	Vertical
3	8231.5167	48.59	37.46	-40.61	45.44	74.00	28.56	Vertical
4	10438.75	48.31	38.63	-36.54	50.40	68.20	17.80	Vertical
5	13838.5333	44.03	40.32	-34.63	49.72	68.20	18.48	Vertical
6	17974.3167	40.89	41.63	-30.98	51.53	74.00	22.47	Vertical

11ax(HE80)_TX_CH_58_Horizontal

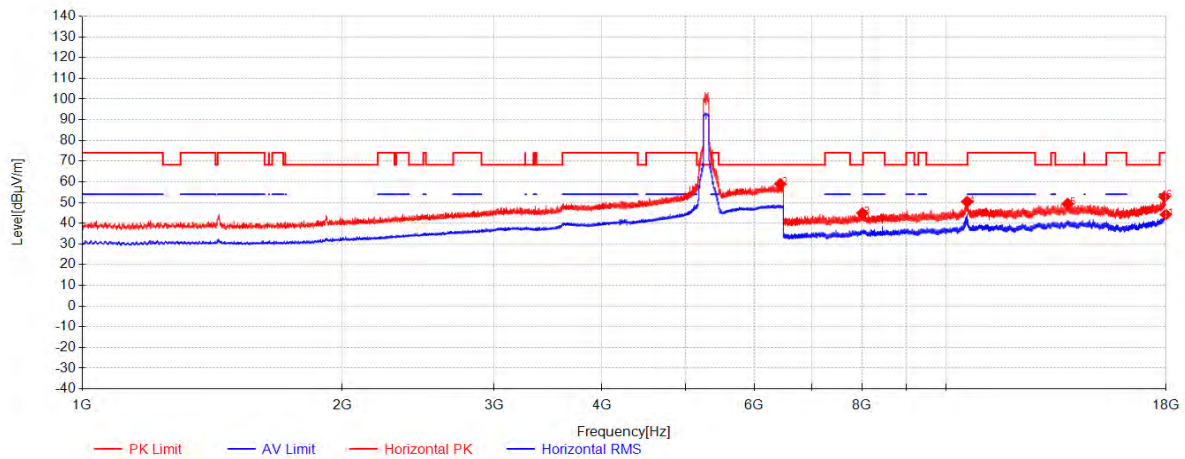

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17990.8	33.46	41.67	-30.95	44.18	54.00	9.82	Horizontal
2	6434.4583	40.25	35.37	-16.64	58.98	68.20	9.22	Horizontal
3	8011.1	48.75	37.31	-41.16	44.89	68.20	23.31	Horizontal
4	10590.1667	48.23	38.81	-36.65	50.39	68.20	17.81	Horizontal
5	13849.65	43.54	40.32	-34.48	49.39	68.20	18.81	Horizontal
6	17930.6167	42.42	41.50	-31.07	52.85	74.00	21.15	Horizontal

11ax(HE80)_TX_CH_58_Vertical

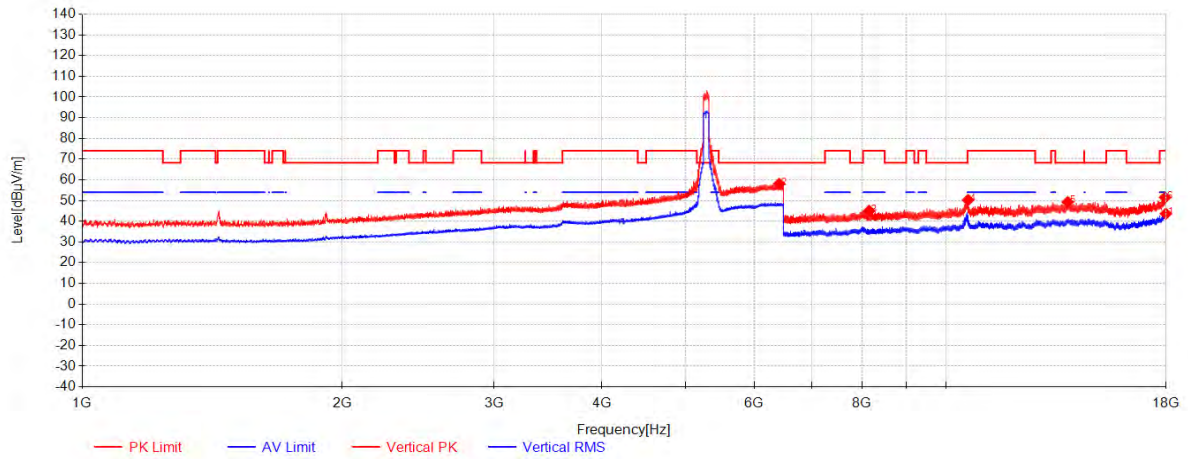


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17991.95	32.93	41.68	-30.95	43.66	54.00	10.34	Vertical
2	6416.125	39.39	35.33	-16.61	58.11	68.20	10.09	Vertical
3	8157.15	48.43	37.41	-40.78	45.06	74.00	28.94	Vertical
4	10618.15	47.93	38.84	-36.53	50.24	74.00	23.76	Vertical
5	13850.8	43.41	40.33	-34.46	49.27	68.20	18.93	Vertical
6	17956.6833	40.94	41.57	-31.02	51.50	74.00	22.50	Vertical



Report No.: KSCR250900195403

Page: 96 of 403


11ax(HE80)_TX_CH_106_Horizontal

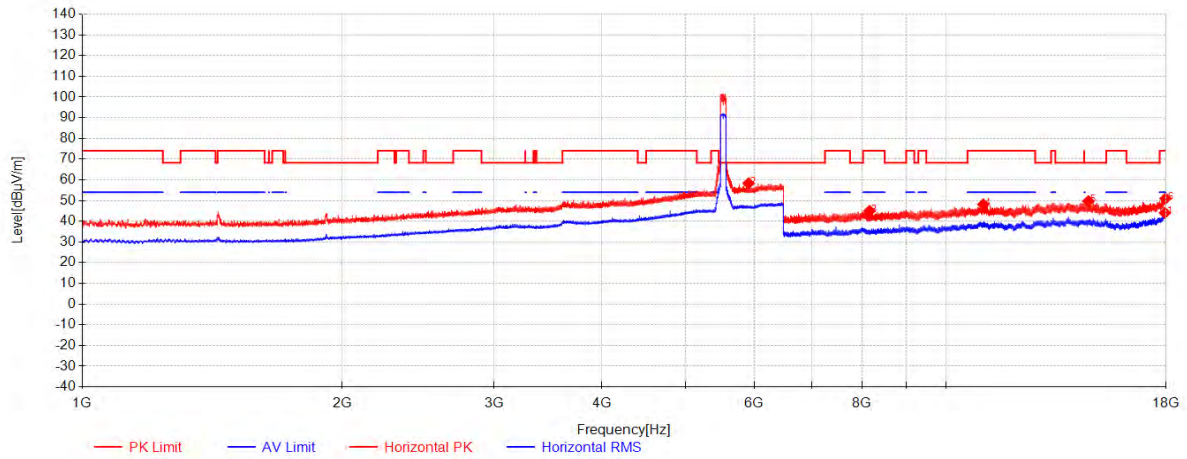

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17947.1	33.52	41.55	-31.04	44.03	54.00	9.97	Horizontal
2	5912.875	40.93	34.24	-16.85	58.32	68.20	9.88	Horizontal
3	8165.2	48.31	37.42	-40.75	44.98	74.00	29.02	Horizontal
4	11057.8333	44.71	39.27	-35.85	48.12	74.00	25.88	Horizontal
5	14638.55	43.96	40.02	-34.27	49.70	68.20	18.50	Horizontal
6	17981.6	40.32	41.65	-30.97	51.00	74.00	23.00	Horizontal




11ax(HE80)_TX_CH_106_Verical

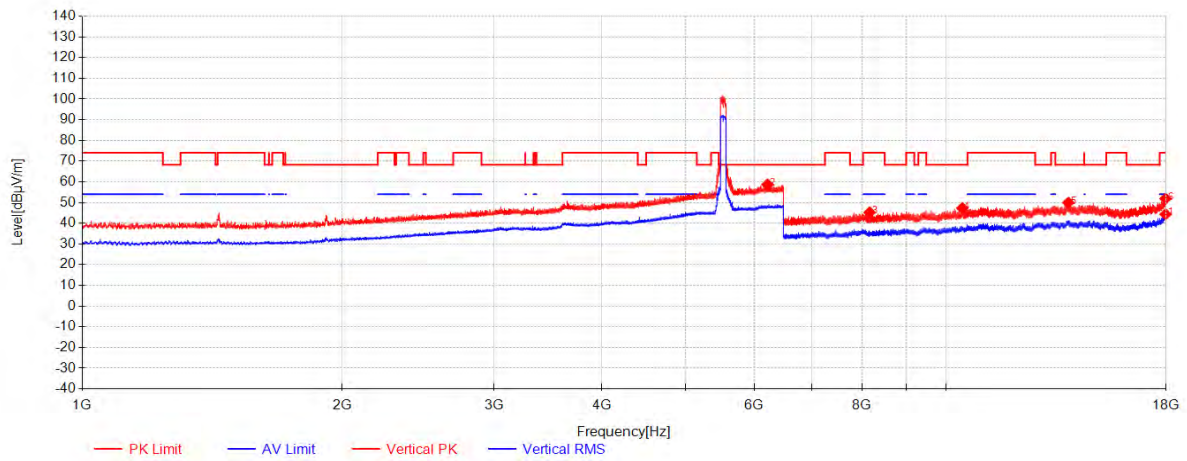

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17978.5333	33.69	41.64	-30.97	44.35	54.00	9.65	Vertical
2	6219.5	40.66	34.94	-16.85	58.74	68.20	9.46	Vertical
3	8166.7333	48.54	37.42	-40.74	45.21	74.00	28.79	Vertical
4	10456	45.16	38.65	-36.51	47.30	68.20	20.90	Vertical
5	13873.4167	43.76	40.34	-34.16	49.94	68.20	18.26	Vertical
6	17978.15	41.22	41.64	-30.97	51.88	74.00	22.12	Vertical


11ax(HE80)_TX_CH_122_Horizontal

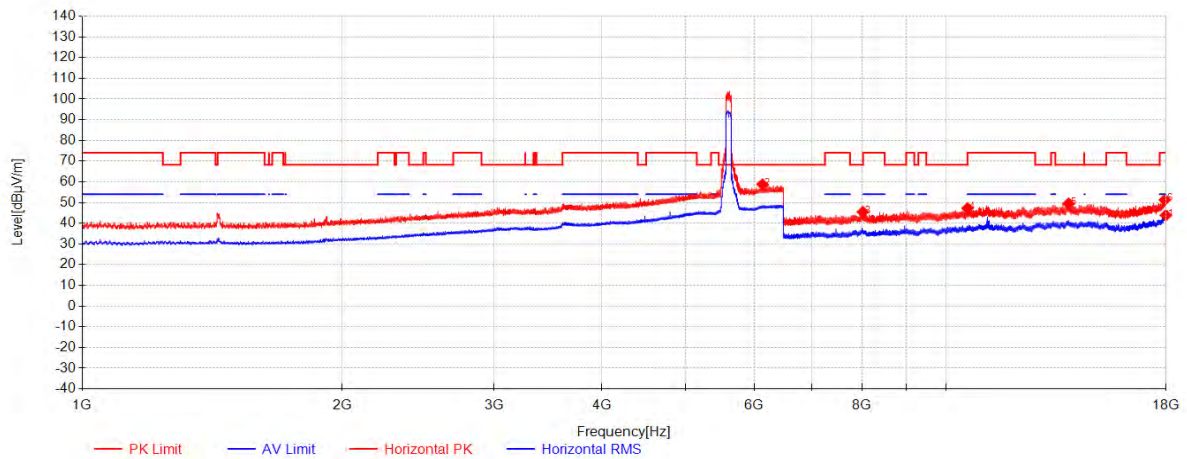

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17991.95	33.12	41.68	-30.95	43.85	54.00	10.15	Horizontal
2	6137	40.71	34.77	-16.73	58.76	68.20	9.44	Horizontal
3	8018.7667	49.30	37.31	-41.15	45.46	68.20	22.74	Horizontal
4	10602.8167	45.08	38.82	-36.65	47.26	74.00	26.74	Horizontal
5	13884.5333	43.20	40.34	-34.01	49.53	68.20	18.67	Horizontal
6	17942.8833	40.79	41.53	-31.04	51.28	74.00	22.72	Horizontal



11ax(HE80)_TX_CH_122_Vertical

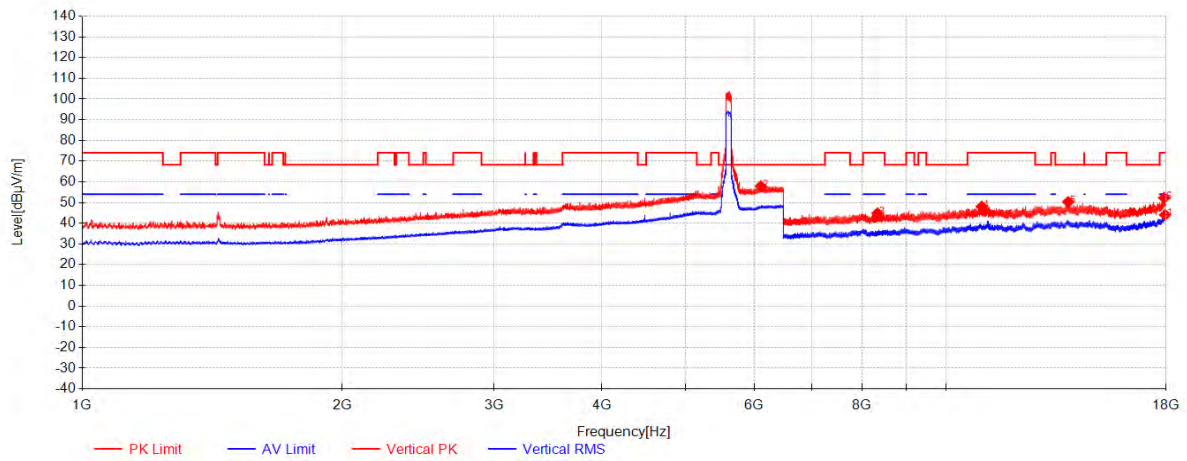


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17958.9833	33.46	41.58	-31.01	44.03	54.00	9.97	Vertical
2	6110.875	39.82	34.72	-16.69	57.85	68.20	10.35	Vertical
3	8339.2333	47.94	37.54	-40.69	44.79	74.00	29.21	Vertical
4	11011.45	44.68	39.29	-35.96	48.01	74.00	25.99	Vertical
5	13867.6667	44.21	40.33	-34.24	50.31	68.20	17.89	Vertical
6	17915.6667	41.90	41.46	-31.10	52.26	74.00	21.74	Vertical



Report No.: KSCR250900195403

Page: 100 of 403

11ax(HE80)_TX_CH_138_Horizontal

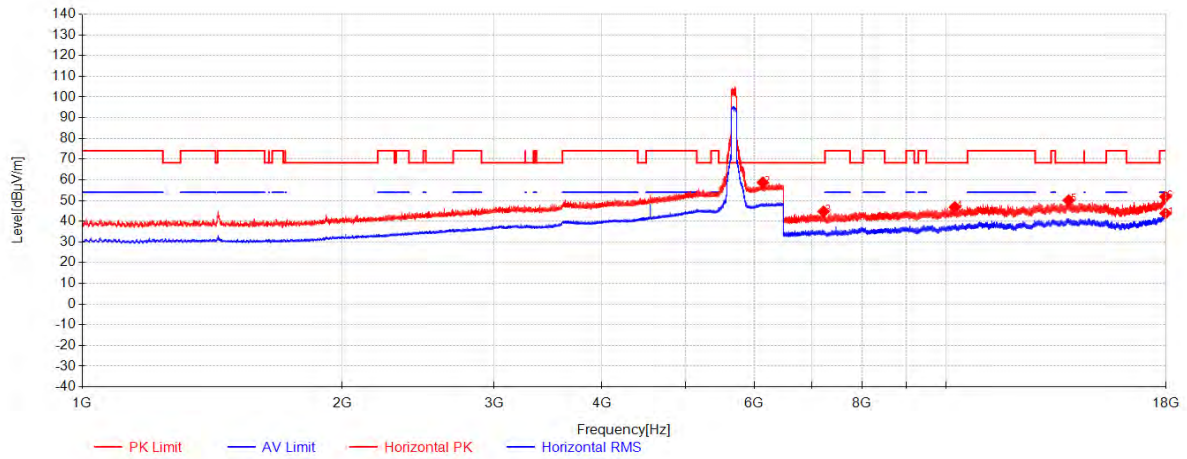


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17977.7667	33.17	41.64	-30.97	43.83	54.00	10.17	Horizontal
2	6141.125	40.69	34.78	-16.73	58.74	68.20	9.46	Horizontal
3	7221.8167	50.47	36.30	-42.05	44.72	68.20	23.48	Horizontal
4	10249.7667	45.12	38.40	-36.72	46.80	68.20	21.40	Horizontal
5	13886.0667	43.75	40.34	-33.99	50.10	68.20	18.10	Horizontal
6	17973.55	41.23	41.62	-30.98	51.87	74.00	22.13	Horizontal



Report No.: KSCR250900195403

Page: 101 of 403

11ax(HE80)_TX_CH_138_Verical

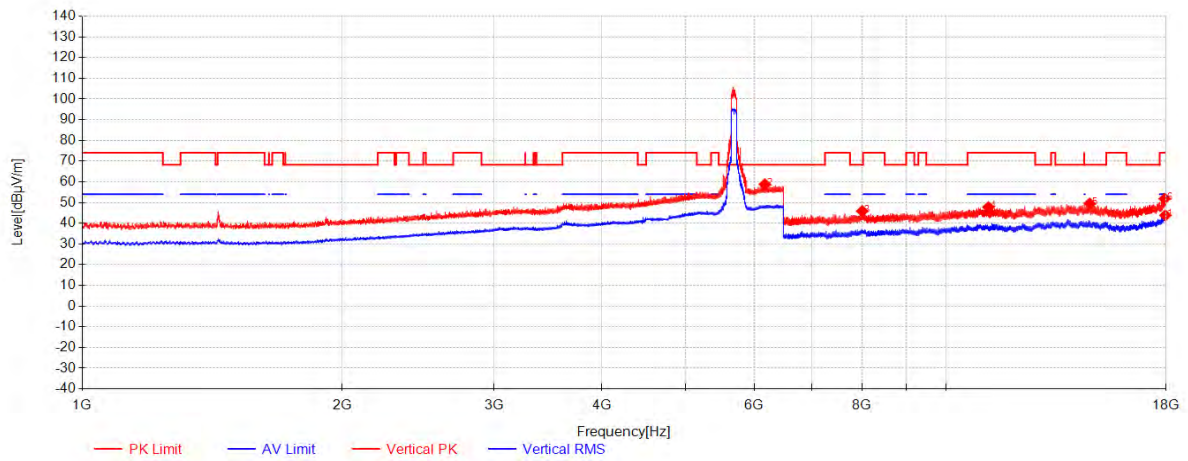


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17972.4	33.20	41.62	-30.99	43.83	54.00	10.17	Vertical
2	6174.5833	40.72	34.85	-16.78	58.79	68.20	9.41	Vertical
3	8006.5	49.75	37.30	-41.17	45.88	68.20	22.32	Vertical
4	11208.8667	43.74	39.17	-35.15	47.77	74.00	26.23	Vertical
5	14685.7	43.46	39.99	-33.93	49.52	68.20	18.68	Vertical
6	17934.8333	41.37	41.51	-31.06	51.82	74.00	22.18	Vertical



Report No.: KSCR250900195403


Page: 102 of 403

11ax(HE80)_TX_CH_155_Horizontal

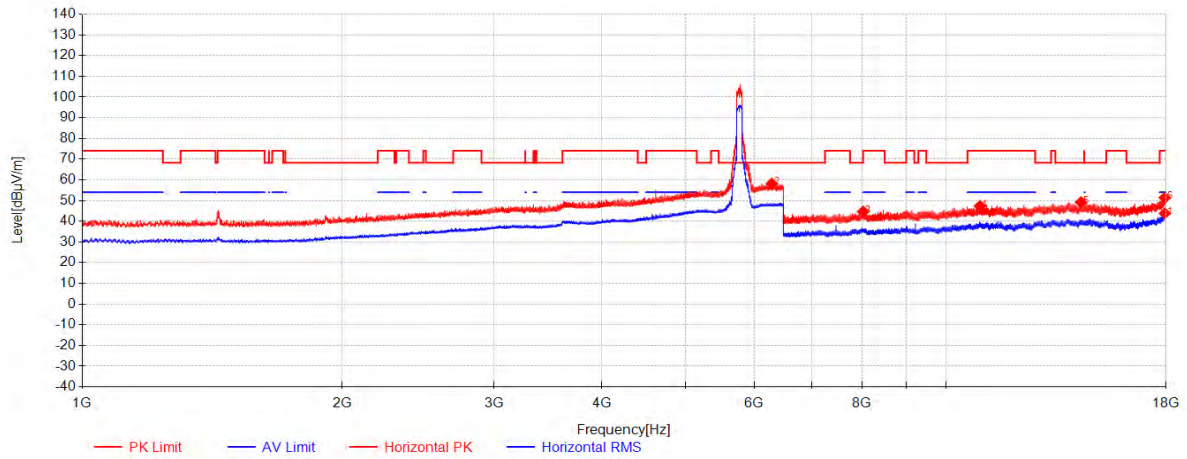

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17941.7333	33.33	41.53	-31.05	43.81	54.00	10.19	Horizontal
2	6290.5417	40.08	35.08	-17.02	58.14	68.20	10.06	Horizontal
3	8026.05	48.48	37.32	-41.14	44.66	74.00	29.34	Horizontal
4	10961.2333	44.19	39.25	-36.07	47.37	74.00	26.63	Horizontal
5	14347.9833	43.38	40.19	-34.39	49.18	68.20	19.02	Horizontal
6	17940.5833	40.85	41.53	-31.05	51.33	74.00	22.67	Horizontal

11ax(HE80)_TX_CH_155_Verical

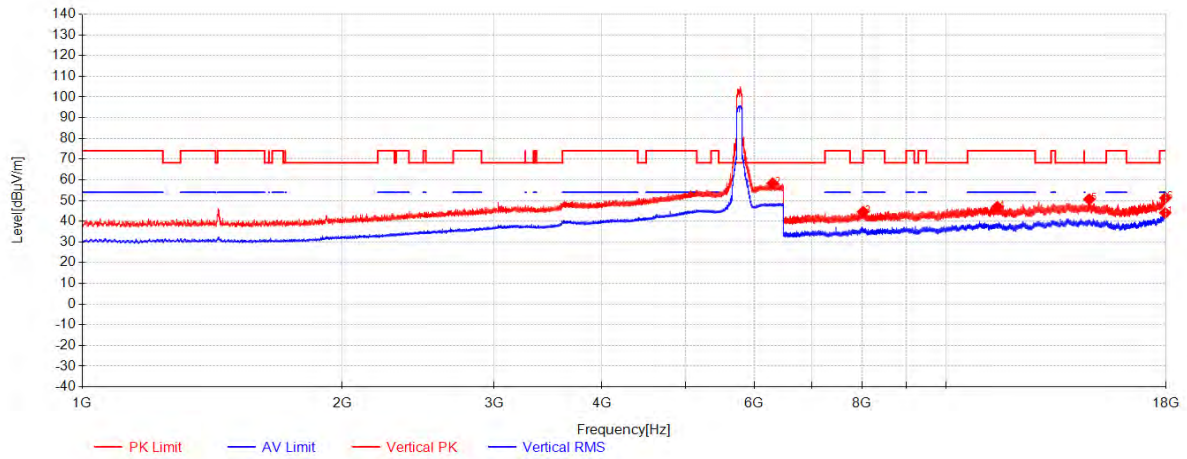

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17961.6667	33.44	41.59	-31.01	44.02	54.00	9.98	Vertical
2	6303.375	40.25	35.11	-17.02	58.33	68.20	9.87	Vertical
3	8024.1333	48.41	37.32	-41.14	44.58	68.20	23.62	Vertical
4	11479.8833	43.75	39.01	-35.81	46.95	74.00	27.05	Vertical
5	14669.2167	44.62	40.00	-34.05	50.57	68.20	17.63	Vertical
6	17973.9333	40.60	41.62	-30.98	51.24	74.00	22.76	Vertical

7.4 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)
Test Method: ANSI C63.10 (2020) Section 6.10.5
Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C

Humidity: 49.6 % RH


Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all

		modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	02	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	03	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40/80, Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

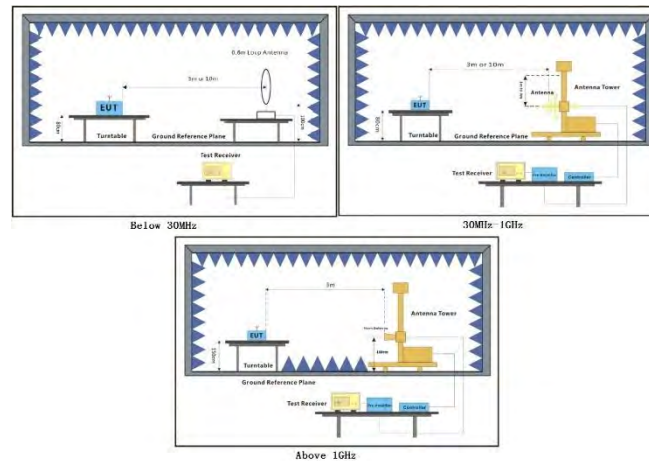

7.4.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 3: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.




11a_TX_CH_36_Horizontal_Peak

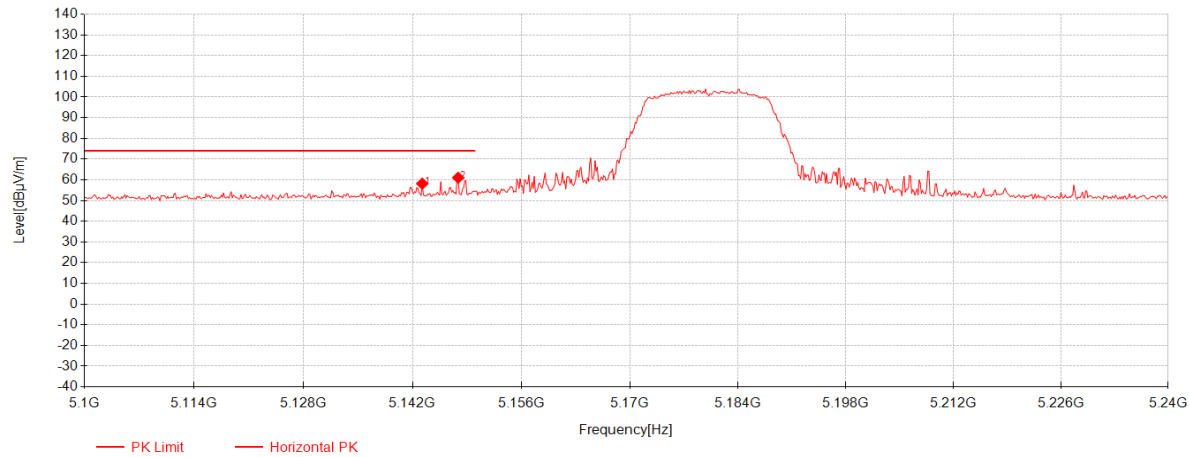

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5143.26	43.29	33.07	-18.20	58.16	74.00	15.84	Horizontal
2	5147.88	46.17	33.07	-18.19	61.05	74.00	12.95	Horizontal




11a_TX_CH_36_Horizontal_Average

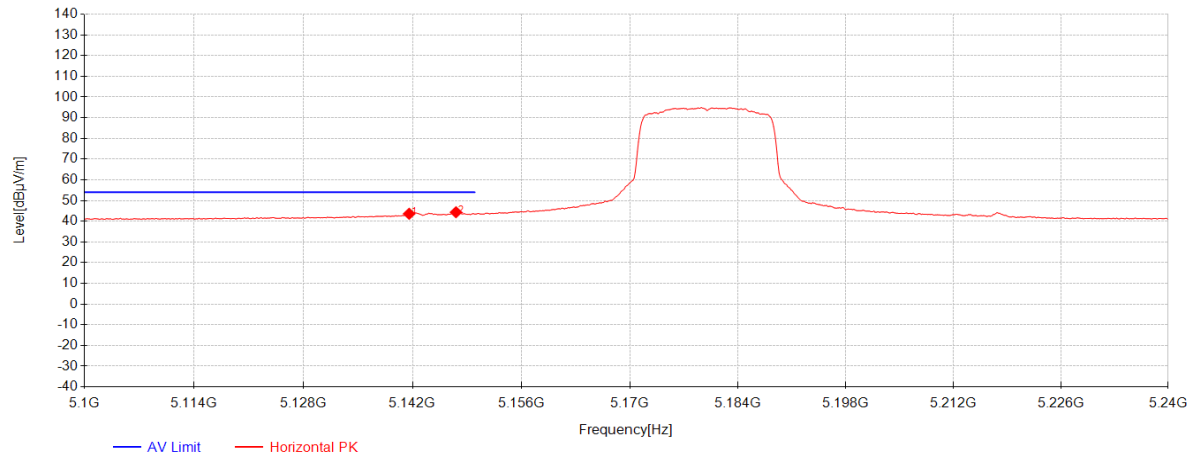

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5141.58	28.75	33.07	-18.21	43.62	54.00	10.38	Horizontal
2	5147.6	29.47	33.07	-18.19	44.35	54.00	9.65	Horizontal




11a_TX_CH_36_Vertical_Peak

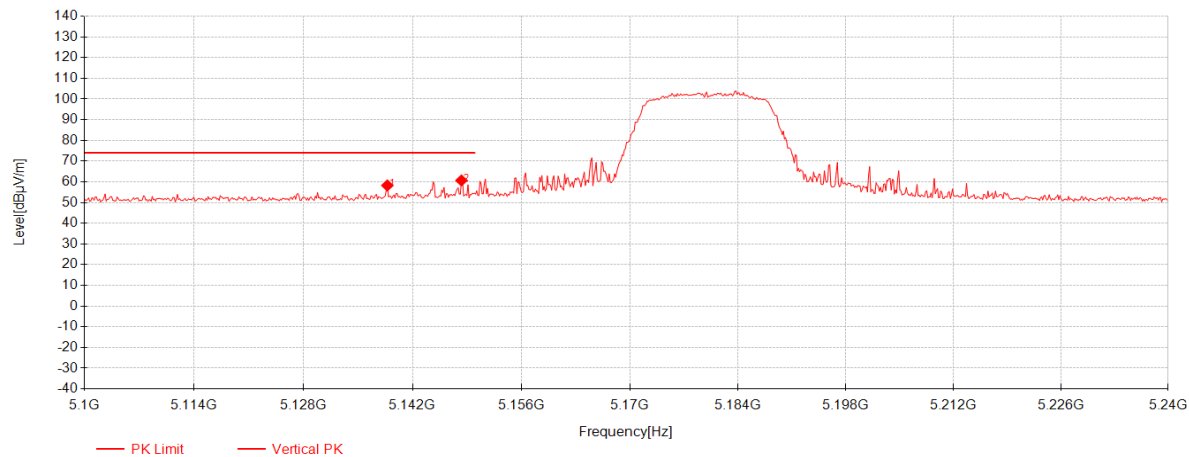

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5138.78	43.39	33.07	-18.21	58.25	74.00	15.75	Vertical
2	5148.3	45.77	33.07	-18.19	60.66	74.00	13.34	Vertical




11a_TX_CH_36_Vertical_Average

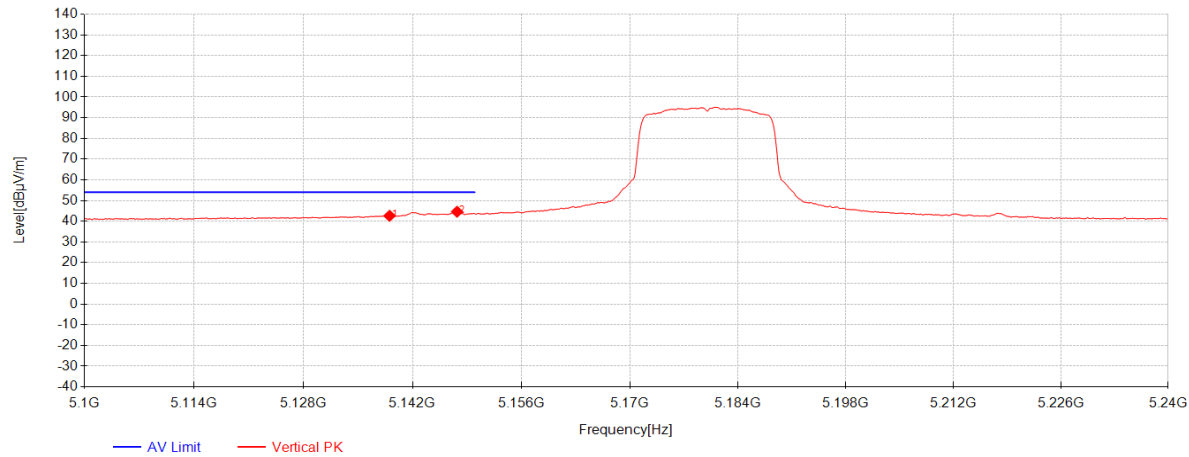

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	5139.06	27.77	33.07	-18.21	42.63	54.00	11.37	Vertical
2	5147.74	29.72	33.07	-18.19	44.60	54.00	9.40	Vertical




11a_TX_CH_64_Horizontal_Peak

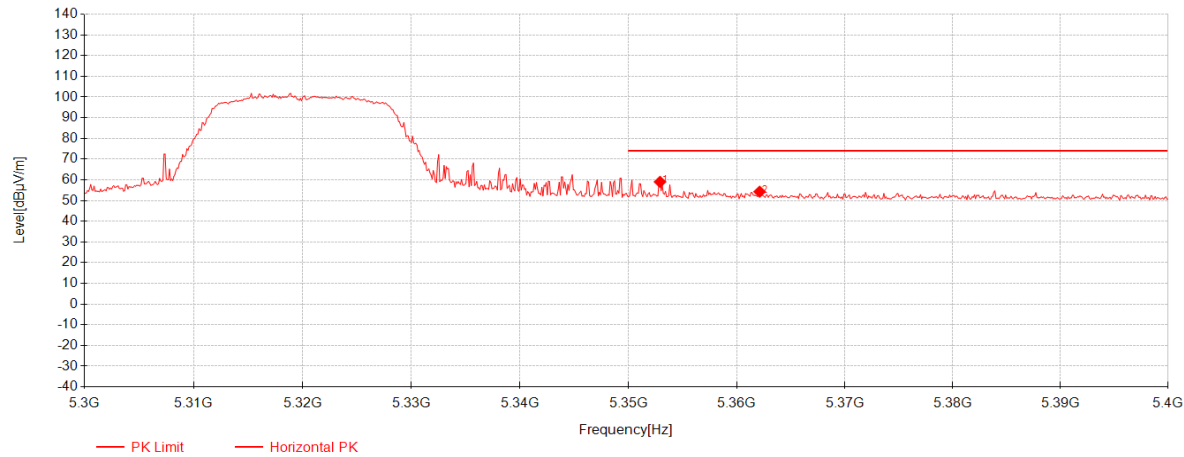

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5352.9	43.74	33.03	-17.75	59.02	74.00	14.98	Horizontal
2	5362.1	39.00	33.03	-17.77	54.26	74.00	19.74	Horizontal




11a_TX_CH_64_Horizontal_Average

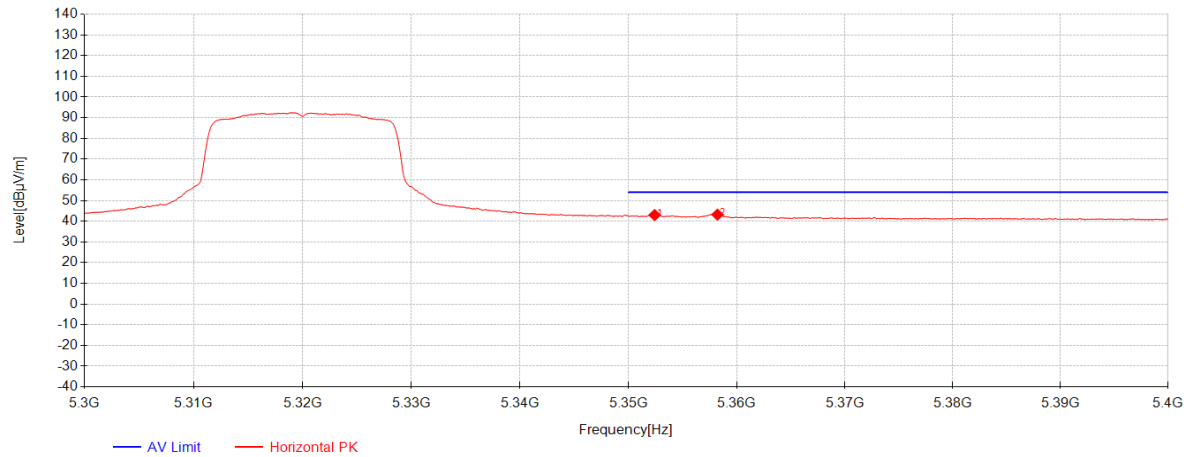

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5352.4	27.72	33.03	-17.75	43.00	54.00	11.00	Horizontal
2	5358.2	27.95	33.03	-17.76	43.22	54.00	10.78	Horizontal




11a_TX_CH_64_Vertical_Peak

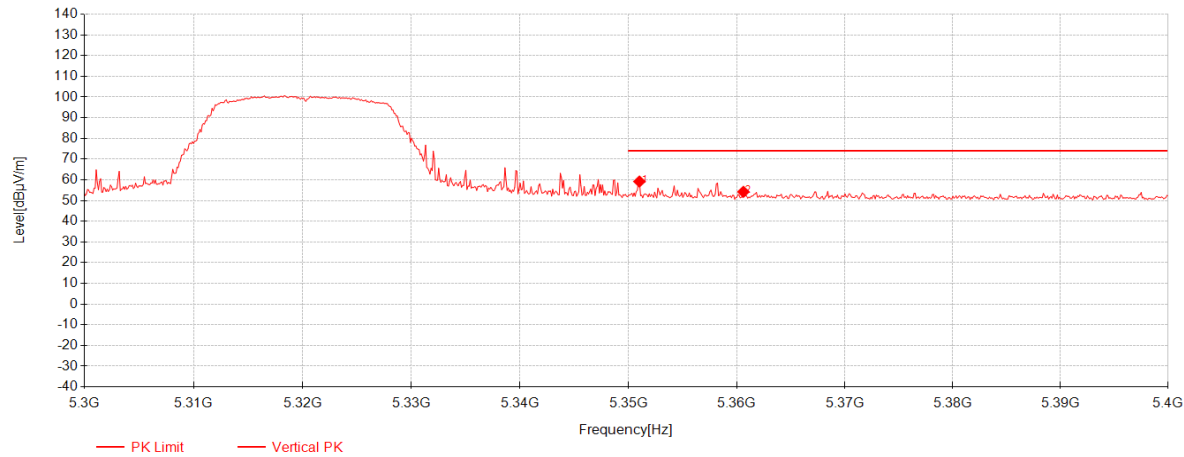

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5351	43.92	33.03	-17.75	59.20	74.00	14.80	Vertical
2	5360.6	38.95	33.03	-17.76	54.21	74.00	19.79	Vertical




11a_TX_CH_64_Vertical_Average

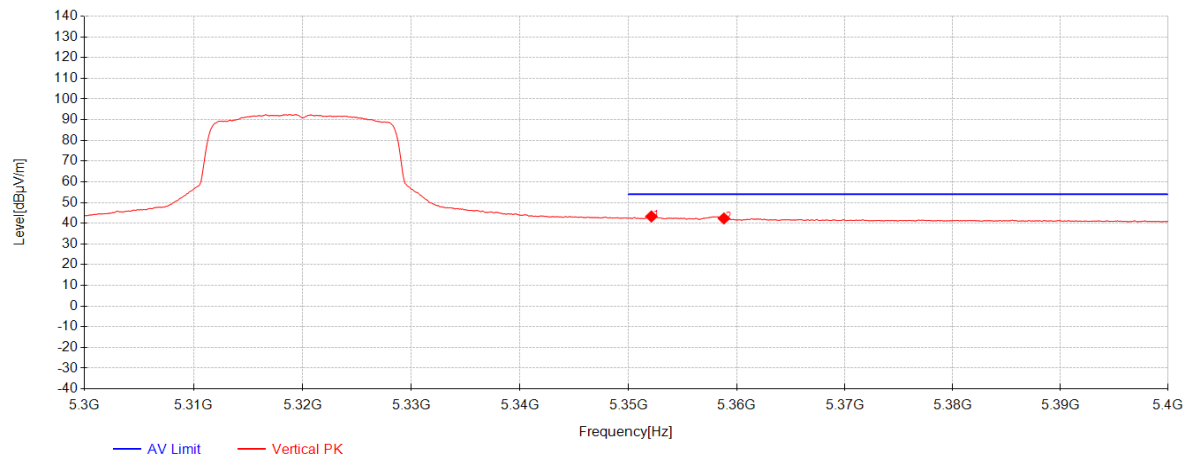

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5352.1	28.01	33.03	-17.75	43.29	54.00	10.71	Vertical
2	5358.8	27.04	33.03	-17.76	42.31	54.00	11.69	Vertical




11a_TX_CH_100_Horizontal_Peak

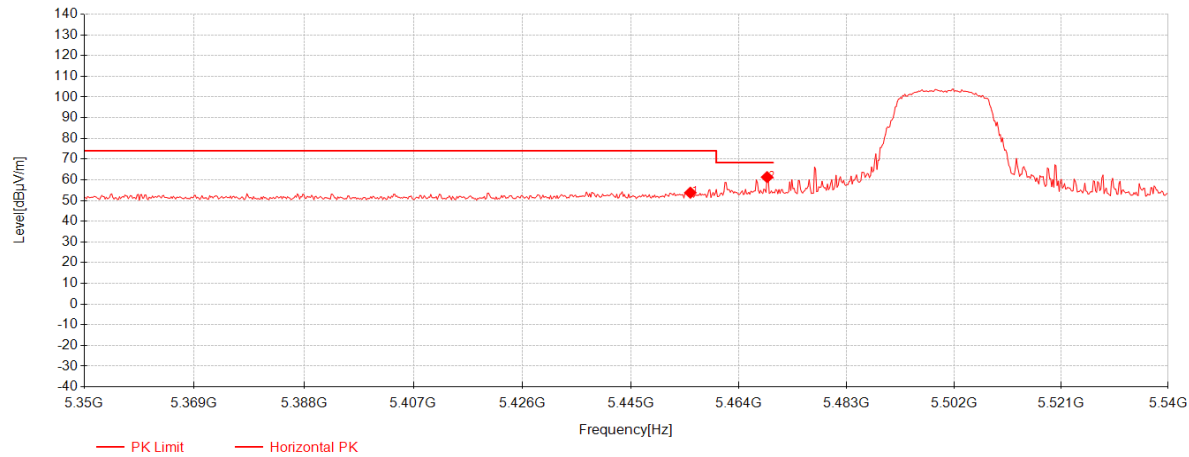

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	5455.45	38.43	33.01	-17.65	53.79	74.00	20.21	Horizontal
2	5468.94	45.92	33.01	-17.61	61.31	68.30	6.99	Horizontal




11a_TX_CH_100_Horizontal_Average

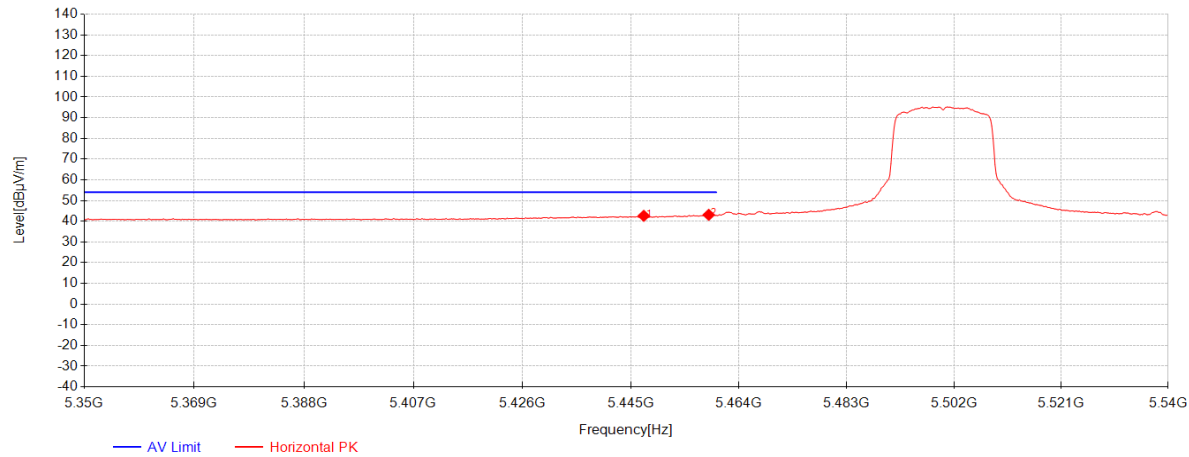

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5447.28	27.29	33.01	-17.68	42.62	54.00	11.38	Horizontal
2	5458.68	27.75	33.01	-17.64	43.11	54.00	10.89	Horizontal




11a_TX_CH_100_Vertical_Peak

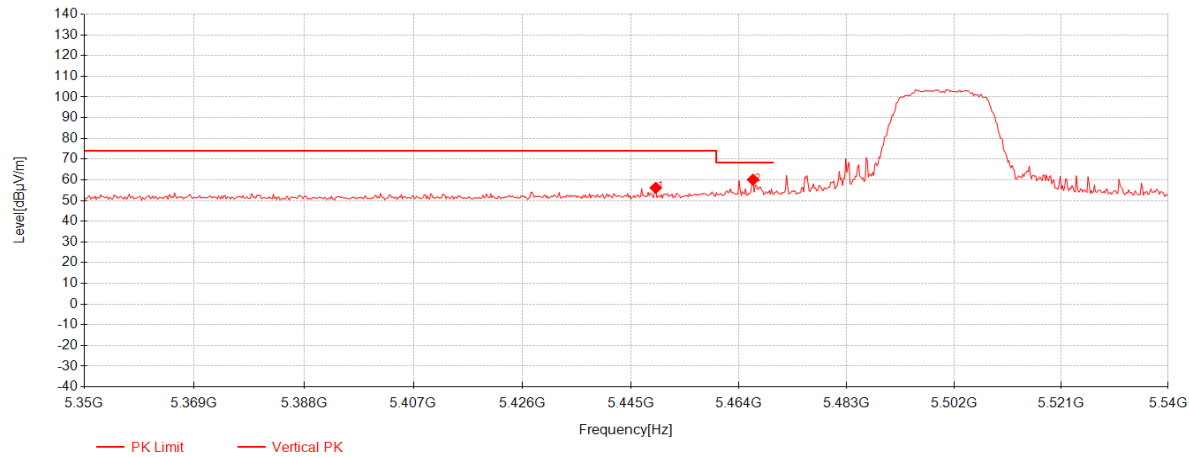

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5449.37	40.82	33.01	-17.67	56.16	74.00	17.84	Vertical
2	5466.47	44.68	33.01	-17.62	60.07	68.30	8.23	Vertical




11a_TX_CH_100_Veritical_Average

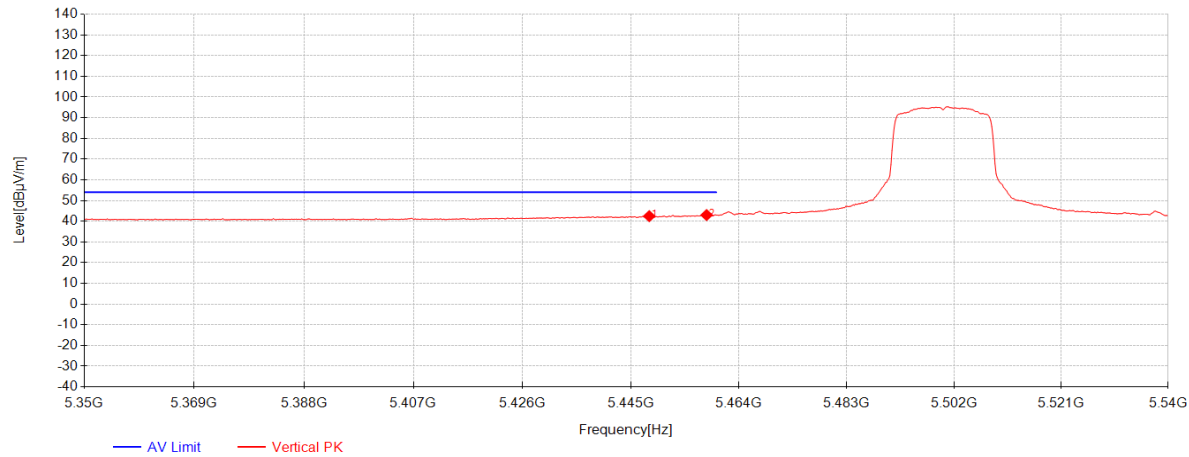

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5448.23	27.13	33.01	-17.68	42.47	54.00	11.53	Vertical
2	5458.3	27.63	33.01	-17.65	42.99	54.00	11.01	Vertical




11a_TX_CH_140_Horizontal_Peak

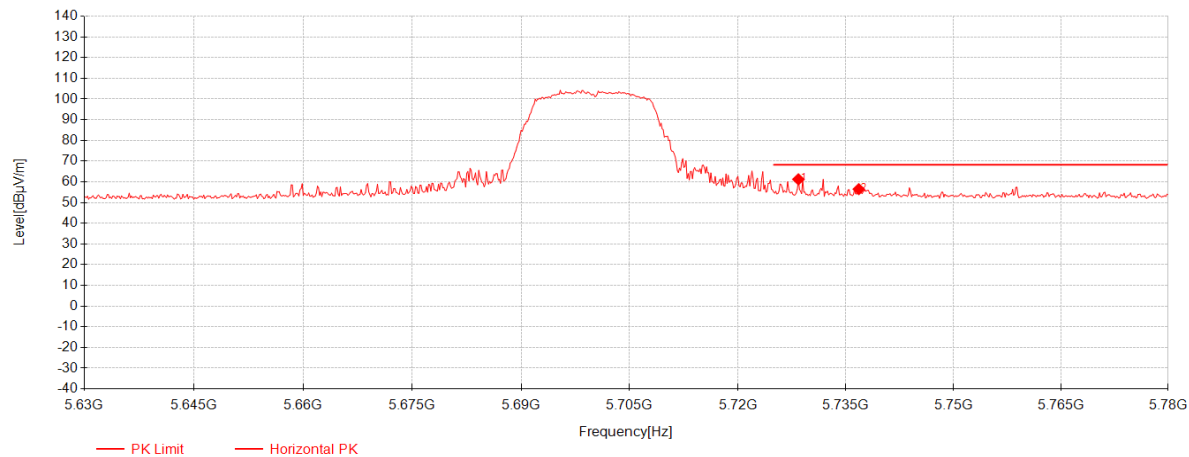

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5728.4	44.80	33.69	-17.24	61.24	68.20	6.96	Horizontal
2	5736.8	39.98	33.71	-17.22	56.47	68.20	11.73	Horizontal




11a_TX_CH_140_Vertical_Peak

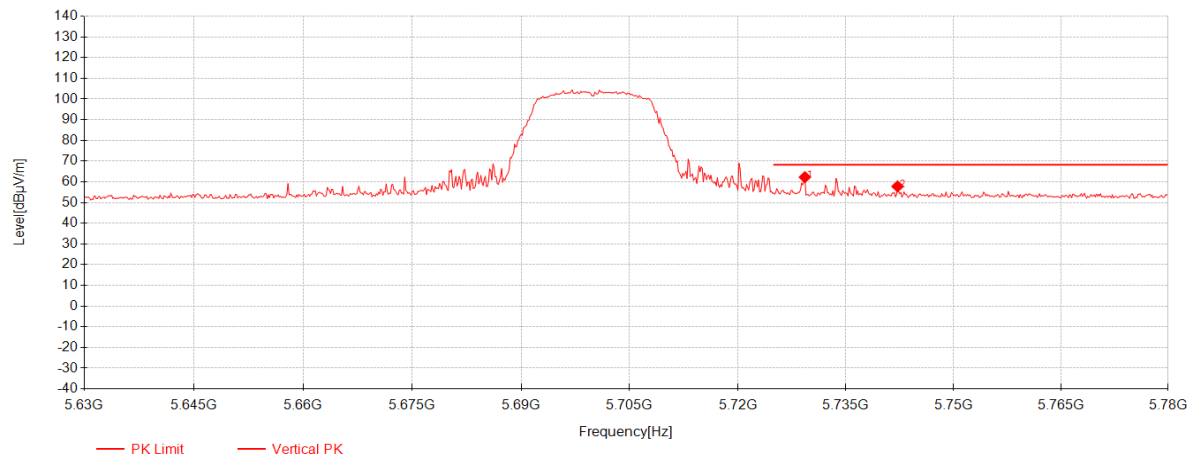

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	5729.3	45.80	33.69	-17.24	62.25	68.20	5.95	Vertical
2	5742.2	41.26	33.73	-17.20	57.79	68.20	10.41	Vertical




11a_TX_CH_149_Horizontal_Peak

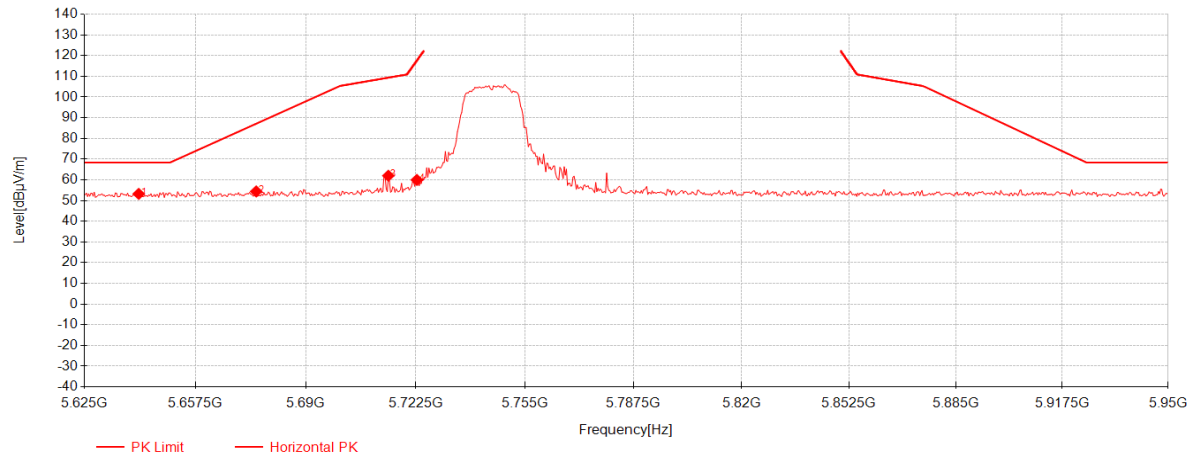

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5640.925	37.07	33.42	-17.27	53.22	68.30	15.08	Horizontal
2	5675.375	38.17	33.53	-17.31	54.39	87.12	32.73	Horizontal
3	5714.375	45.62	33.64	-17.29	61.98	109.33	47.35	Horizontal
4	5722.825	43.55	33.67	-17.26	59.96	117.34	57.38	Horizontal




11a_TX_CH_149_Vertical_Peak

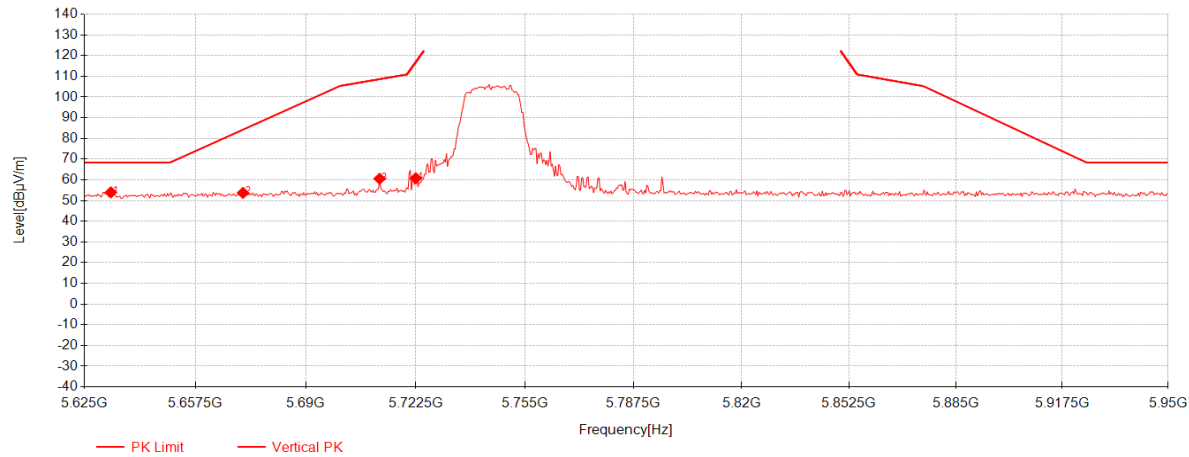

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	5632.8	37.83	33.40	-17.26	53.97	68.30	14.33	Vertical
2	5671.475	37.49	33.51	-17.30	53.70	84.23	30.53	Vertical
3	5711.775	44.20	33.64	-17.29	60.54	108.60	48.06	Vertical
4	5722.5	44.35	33.67	-17.26	60.76	116.60	55.84	Vertical




11a_TX_CH_165_Horizontal_Peak

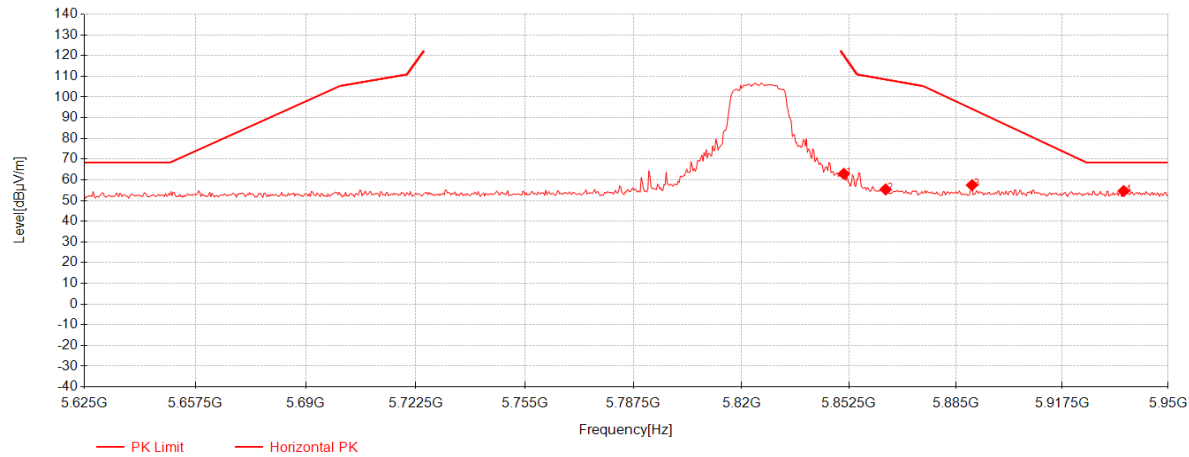

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5850.875	45.78	34.05	-16.91	62.92	120.30	57.38	Horizontal
2	5863.55	38.15	34.09	-16.89	55.35	108.50	53.15	Horizontal
3	5889.875	40.11	34.17	-16.83	57.45	94.26	36.81	Horizontal
4	5936.35	37.20	34.31	-16.92	54.59	68.30	13.71	Horizontal




11a_TX_CH_165_Vertical_Peak

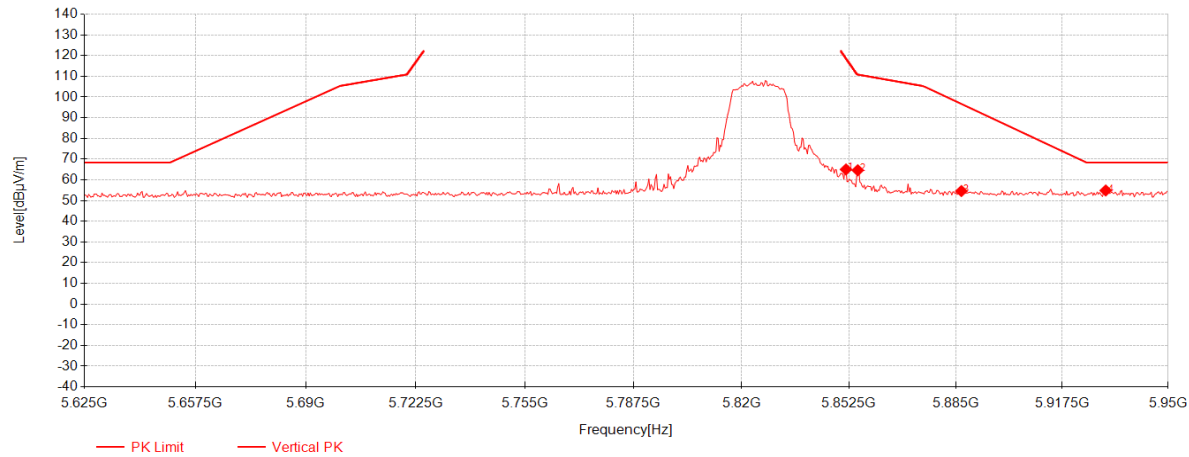

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	5851.525	47.89	34.05	-16.91	65.03	118.82	53.79	Vertical
2	5855.1	47.48	34.07	-16.90	64.64	110.87	46.23	Vertical
3	5886.625	37.27	34.16	-16.84	54.59	96.67	42.08	Vertical
4	5930.825	37.47	34.29	-16.91	54.86	68.30	13.44	Vertical




11ax(HE20)_TX_CH_36_Horizontal_Peak

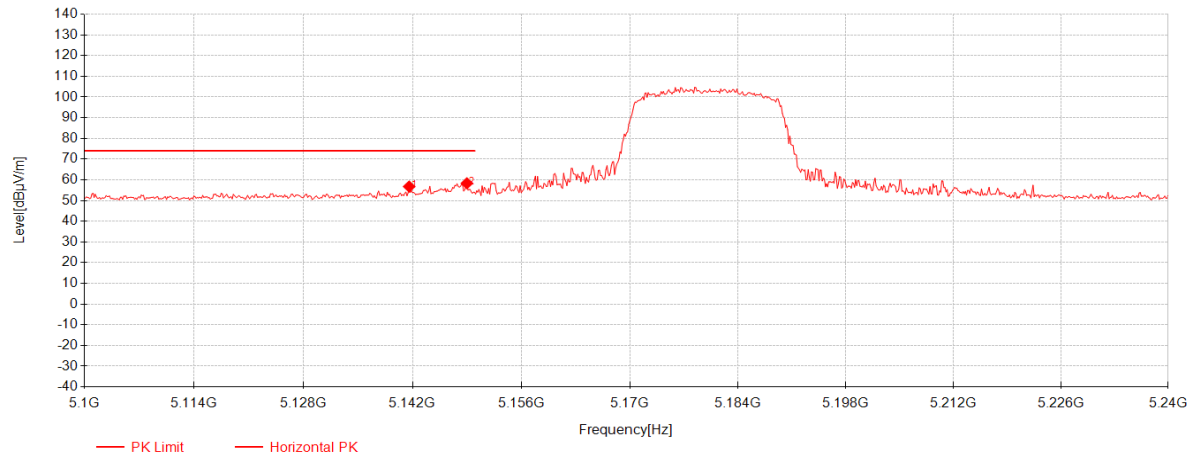

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5141.58	41.89	33.07	-18.21	56.76	74.00	17.24	Horizontal
2	5149	43.44	33.07	-18.18	58.33	74.00	15.67	Horizontal




11ax(HE20)_TX_CH_36_Horizontal_Average

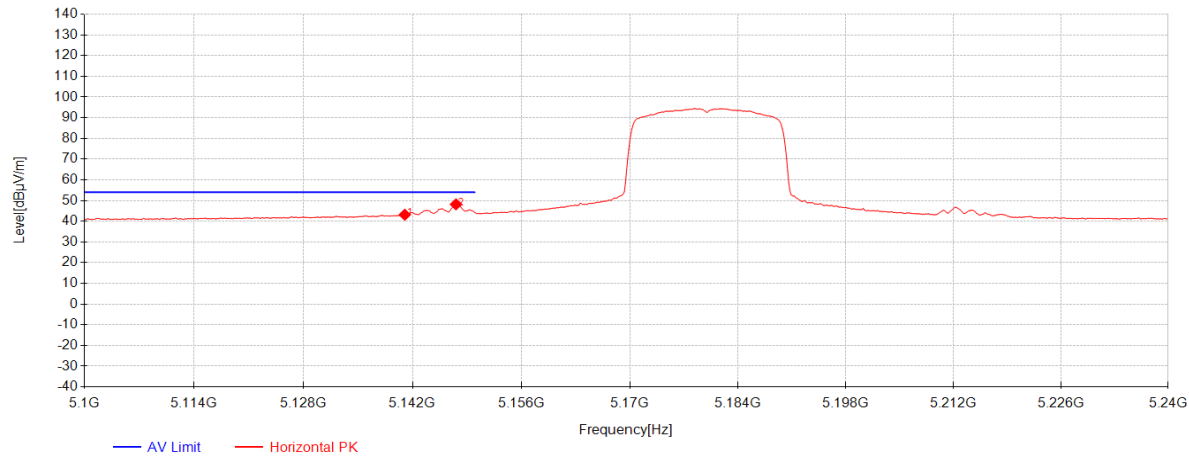

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5141.02	28.29	33.07	-18.21	43.15	54.00	10.85	Horizontal
2	5147.6	33.28	33.07	-18.19	48.16	54.00	5.84	Horizontal




11ax(HE20)_TX_CH_36_Veritical_Peak

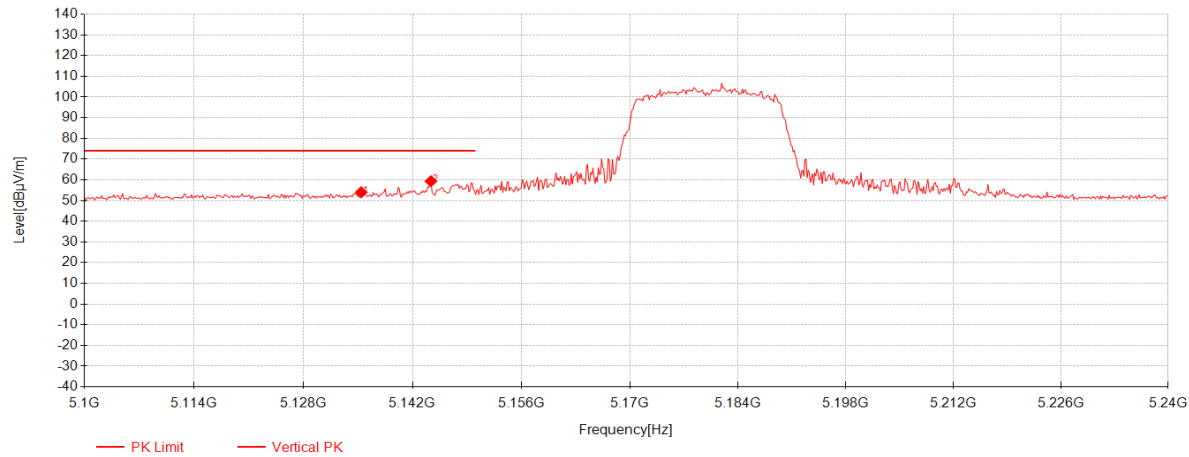

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5135.42	39.14	33.07	-18.22	53.99	74.00	20.01	Vertical
2	5144.38	44.47	33.07	-18.20	59.34	74.00	14.66	Vertical




11ax(HE20)_TX_CH_36_Veritical_Average

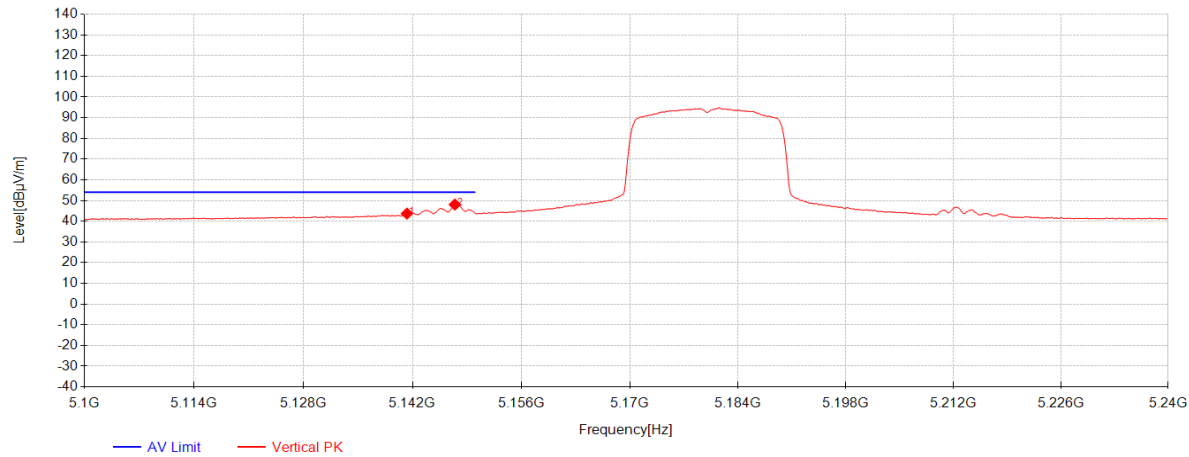

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5141.3	28.82	33.07	-18.21	43.69	54.00	10.31	Vertical
2	5147.46	33.16	33.07	-18.19	48.04	54.00	5.96	Vertical




11ax(HE20)_TX_CH_64_Horizontal_Peak

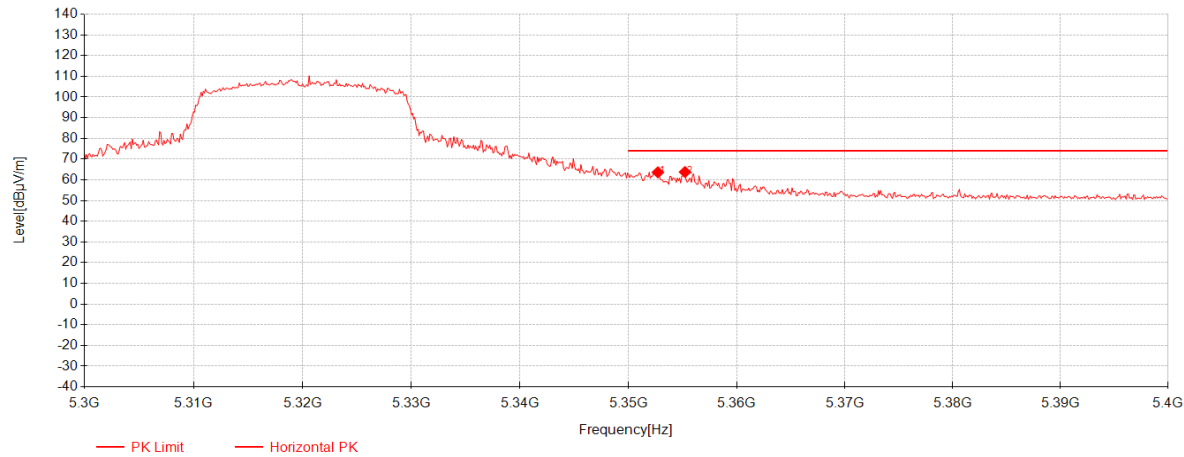

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5352.7	48.34	33.03	-17.75	63.62	74.00	10.38	Horizontal
2	5355.2	48.50	33.03	-17.76	63.77	74.00	10.23	Horizontal




11ax(HE20)_TX_CH_64_Horizontal_Average

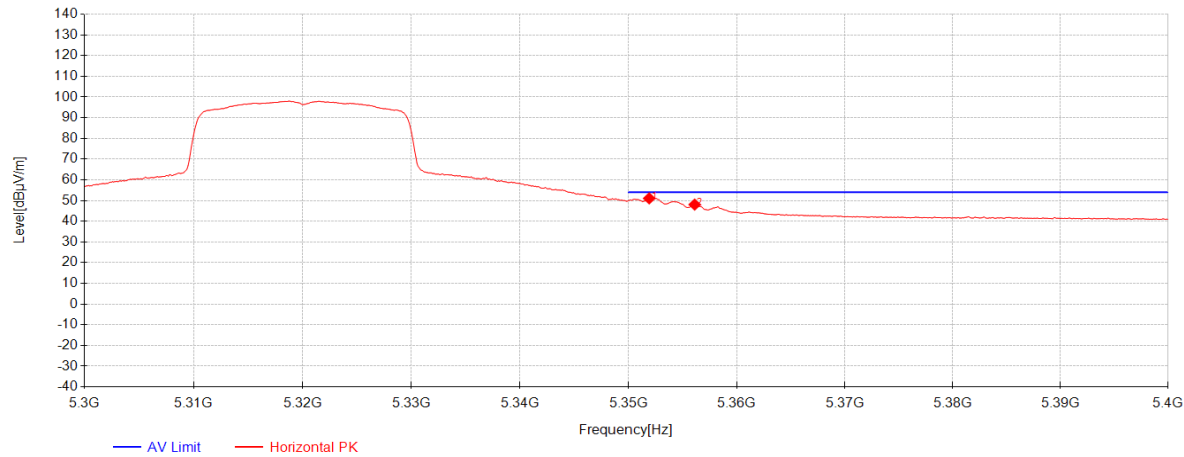

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5351.9	35.77	33.03	-17.75	51.05	54.00	2.95	Horizontal
2	5356.1	32.78	33.03	-17.76	48.05	54.00	5.95	Horizontal




11ax(HE20)_TX_CH_64_Veritical_Peak

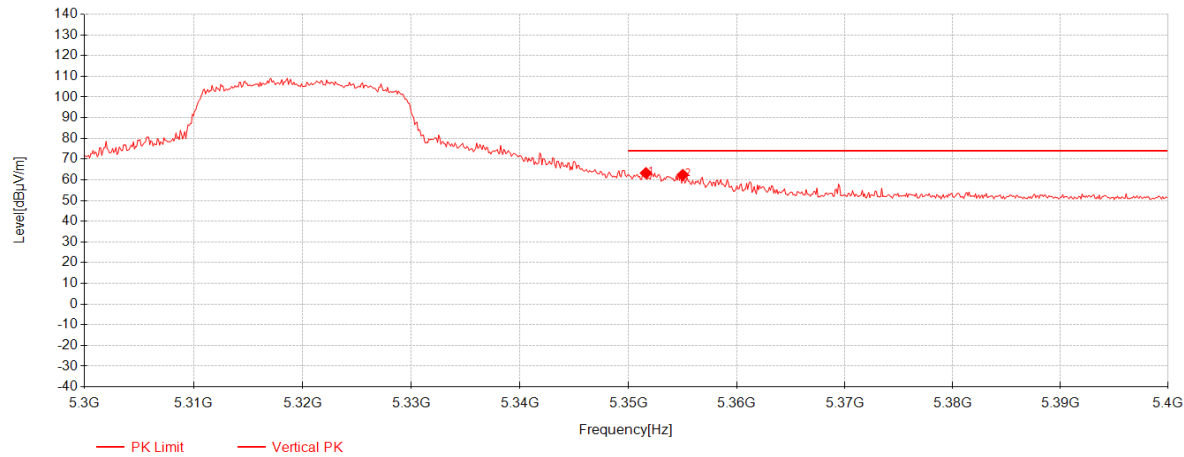

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5351.6	47.99	33.03	-17.75	63.27	74.00	10.73	Vertical
2	5355	47.10	33.03	-17.76	62.37	74.00	11.63	Vertical




11ax(HE20)_TX_CH_64_Veritical_Average

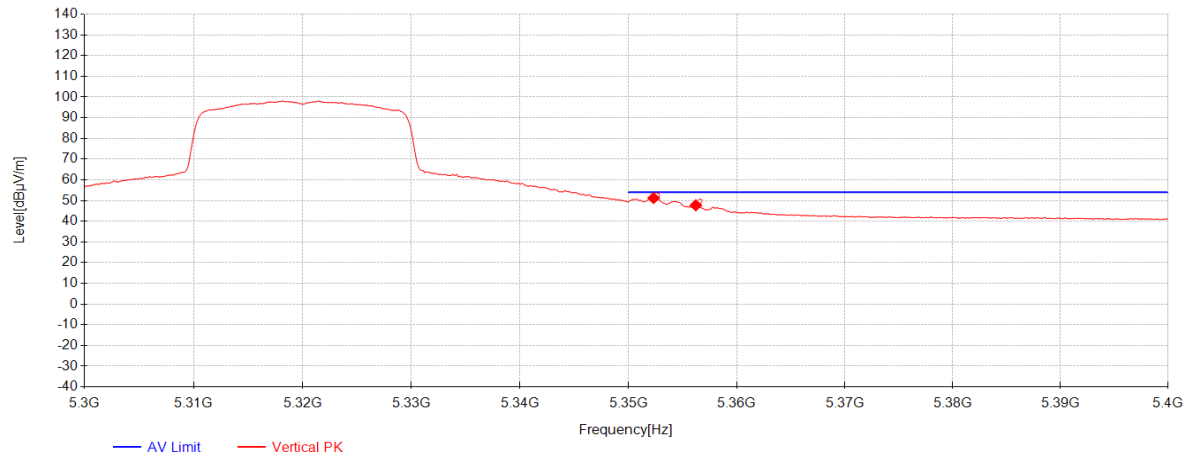

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5352.3	35.92	33.03	-17.75	51.20	54.00	2.80	Vertical
2	5356.2	32.42	33.03	-17.76	47.69	54.00	6.31	Vertical




11ax(HE20)_TX_CH_100_Horizontal_Peak

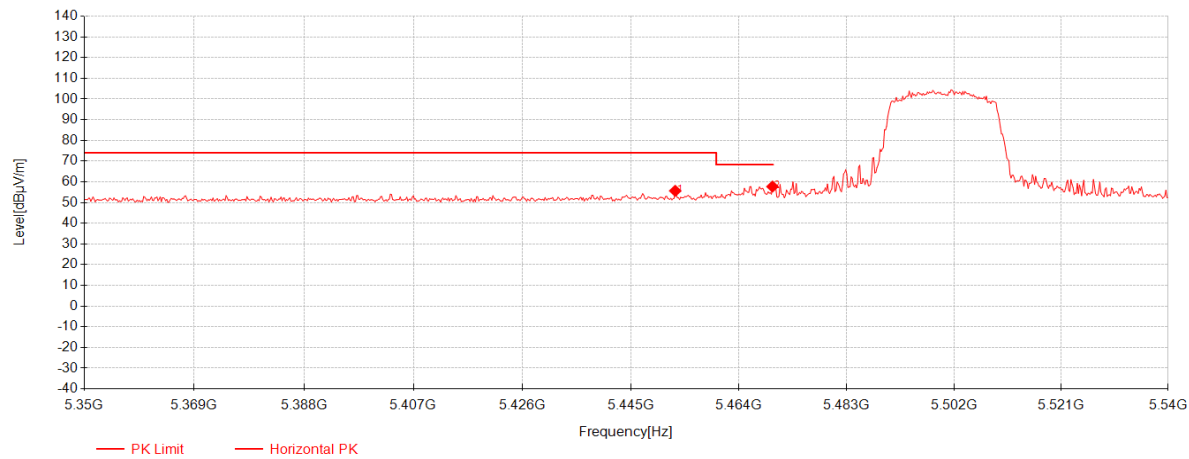

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5452.79	40.30	33.01	-17.66	55.65	74.00	18.35	Horizontal
2	5469.89	42.31	33.01	-17.61	57.71	68.30	10.59	Horizontal




11ax(HE20)_TX_CH_100_Horizontal_Average

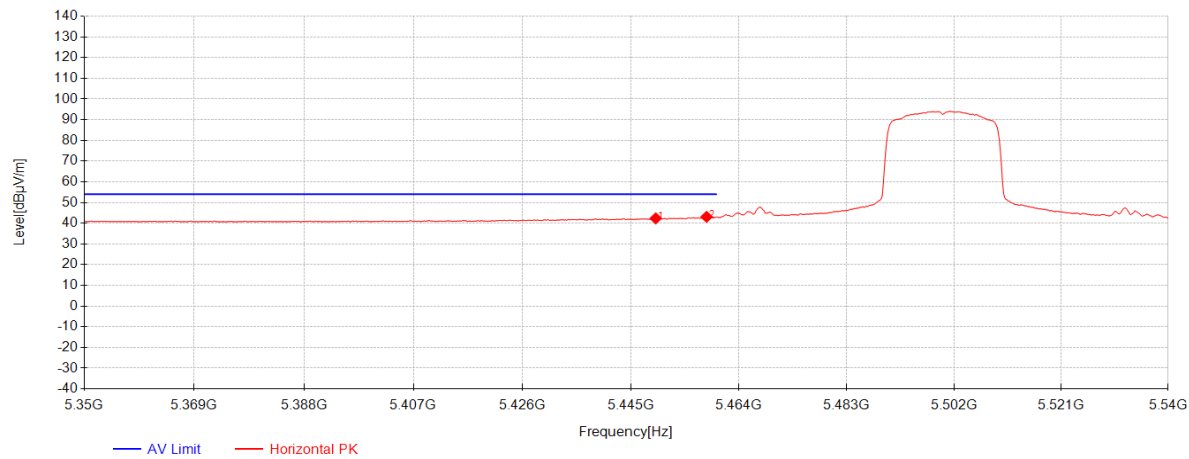

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5449.37	27.02	33.01	-17.67	42.36	54.00	11.64	Horizontal
2	5458.3	27.75	33.01	-17.65	43.11	54.00	10.89	Horizontal




11ax(HE20)_TX_CH_100_Vertical_Peak

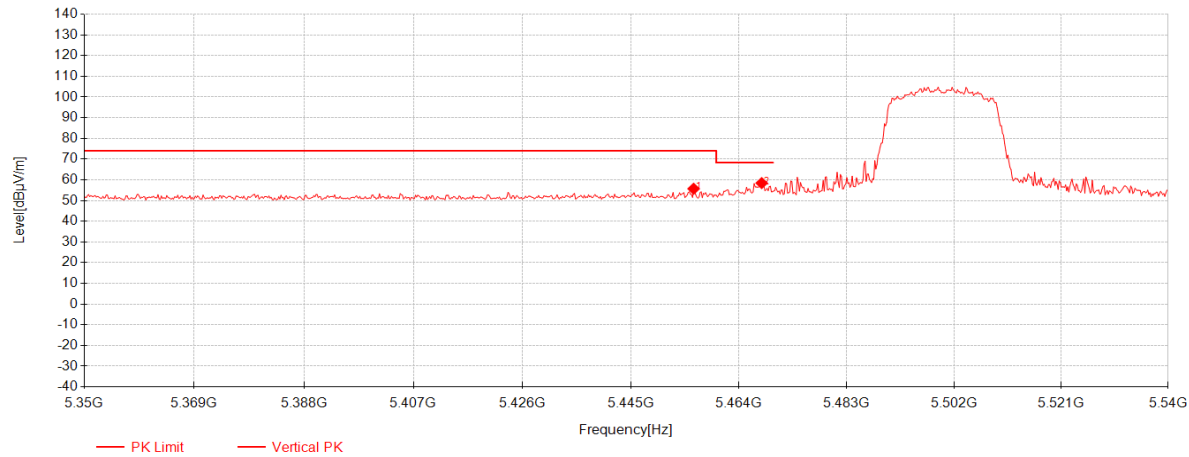

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5456.02	40.34	33.01	-17.65	55.70	74.00	18.30	Vertical
2	5467.99	43.05	33.01	-17.62	58.44	68.30	9.86	Vertical




11ax(HE20)_TX_CH_100_Vetical_Average

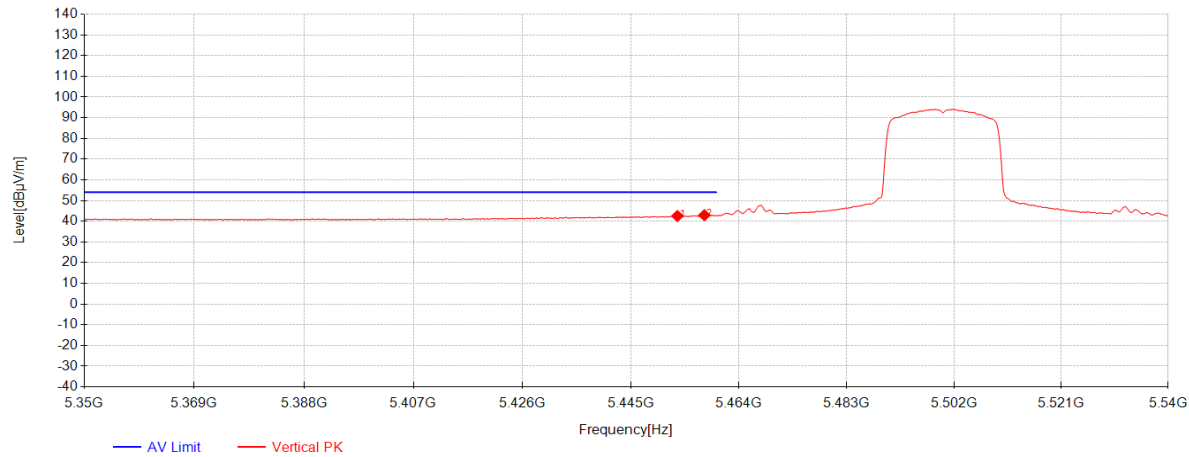

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5453.17	27.18	33.01	-17.66	42.53	54.00	11.47	Vertical
2	5457.92	27.56	33.01	-17.65	42.92	54.00	11.08	Vertical




11ax(HE20)_TX_CH_140_Horizontal_Peak

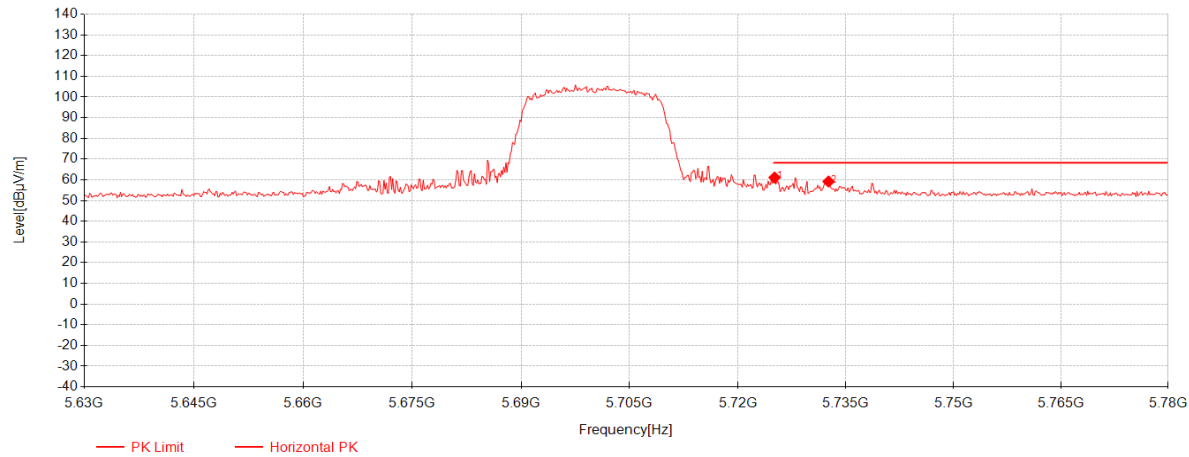

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5725.1	44.69	33.68	-17.25	61.11	68.20	7.09	Horizontal
2	5732.6	42.72	33.70	-17.23	59.19	68.20	9.01	Horizontal




11ax(HE20)_TX_CH_140_Vertical_Peak

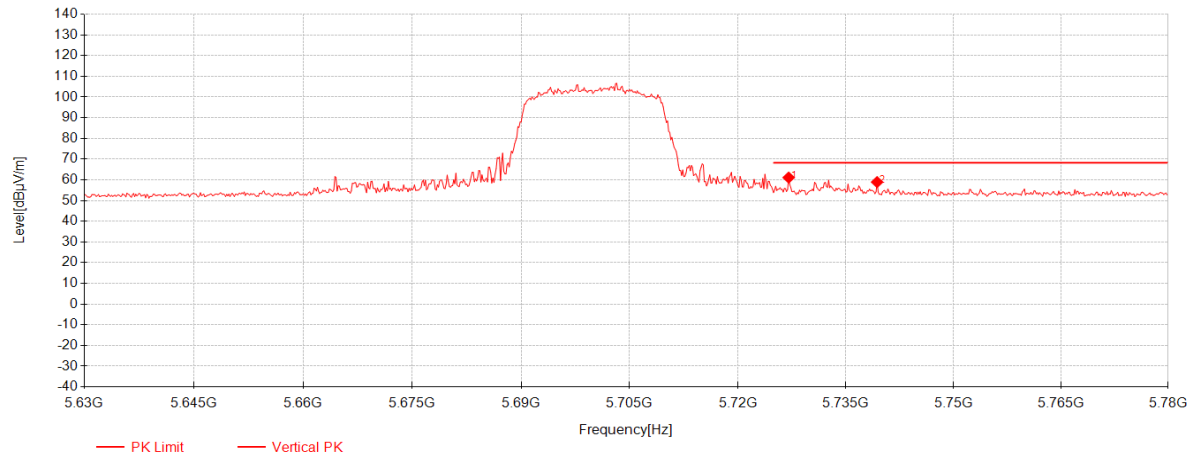

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5727.05	44.66	33.68	-17.25	61.10	68.20	7.10	Vertical
2	5739.35	42.42	33.72	-17.21	58.93	68.20	9.27	Vertical



11ax(HE20)_TX_CH_149_Horizontal_Peak

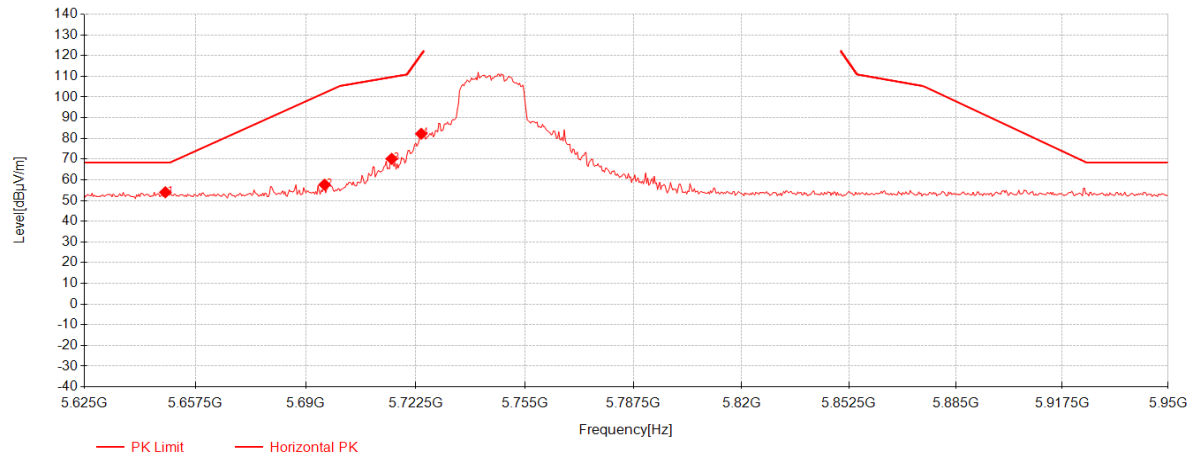


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5648.725	37.82	33.45	-17.28	53.99	68.30	14.31	Horizontal
2	5695.525	41.42	33.59	-17.33	57.68	102.00	44.32	Horizontal
3	5715.35	53.77	33.65	-17.28	70.13	109.60	39.47	Horizontal
4	5724.125	65.82	33.67	-17.26	82.24	120.31	38.07	Horizontal



Report No.: KSCR250900195403


Page: 140 of 403

11ax(HE20)_TX_CH_149_Verical_Peak

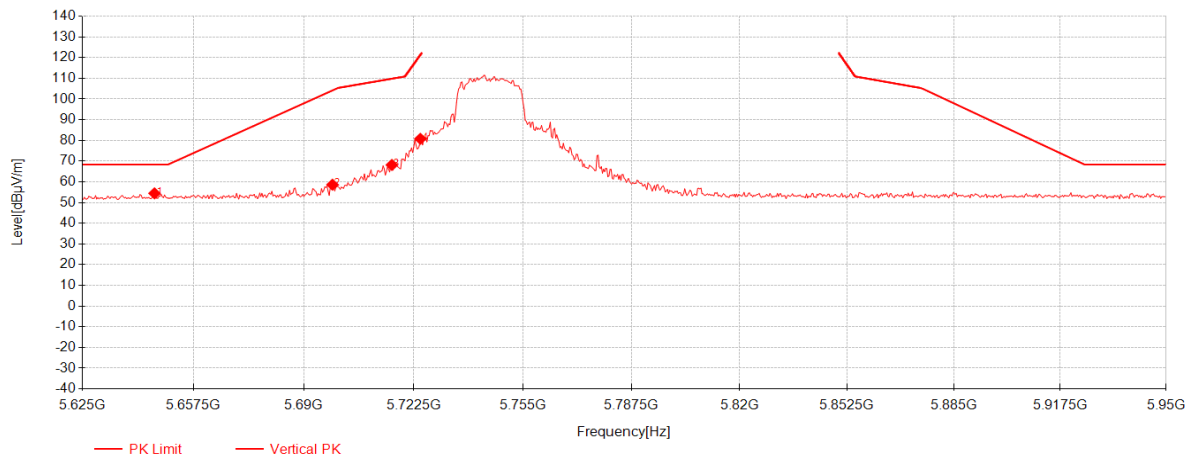

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5646.125	38.28	33.44	-17.28	54.44	68.30	13.86	Vertical
2	5698.45	42.35	33.60	-17.33	58.62	104.16	45.54	Vertical
3	5716	51.80	33.65	-17.28	68.17	109.78	41.61	Vertical
4	5724.45	64.37	33.67	-17.25	80.79	121.05	40.26	Vertical


11ax(HE20)_TX_CH_165_Horizontal_Peak

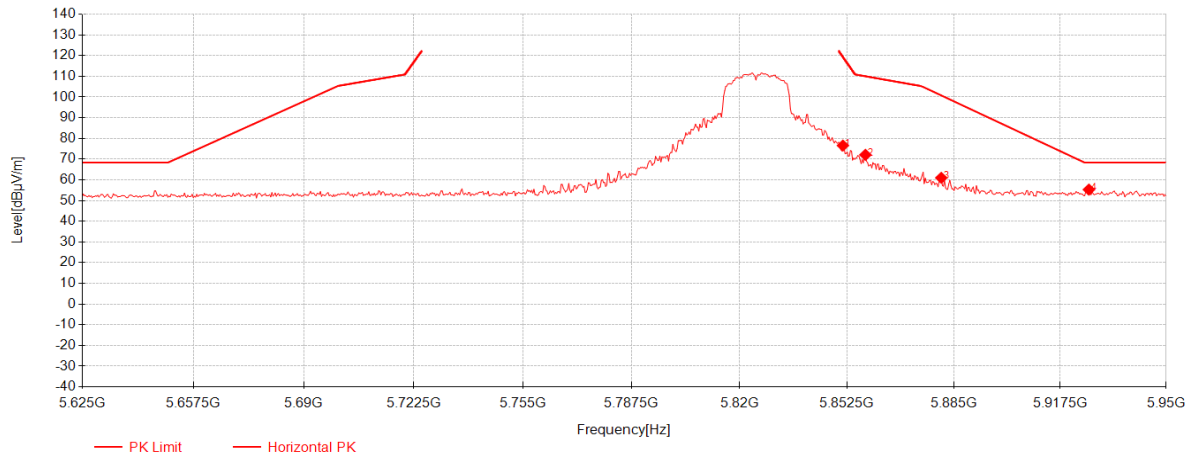

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5851.2	59.42	34.05	-16.91	76.56	119.56	43.00	Horizontal
2	5858.025	54.89	34.07	-16.90	72.07	110.05	37.98	Horizontal
3	5881.1	43.69	34.14	-16.85	60.98	100.77	39.79	Horizontal
4	5926.275	37.90	34.28	-16.89	55.29	68.30	13.01	Horizontal




11ax(HE20)_TX_CH_165_Verical_Peak

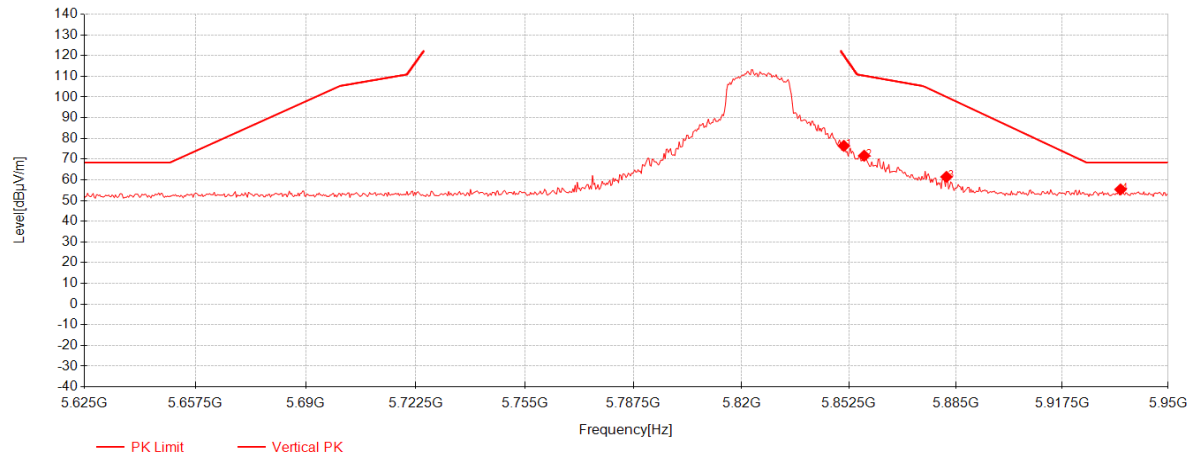

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5850.875	59.27	34.05	-16.91	76.41	120.30	43.89	Vertical
2	5857.05	54.47	34.07	-16.90	71.64	110.33	38.69	Vertical
3	5882.075	44.13	34.15	-16.85	61.43	100.05	38.62	Vertical
4	5935.375	37.98	34.31	-16.92	55.37	68.30	12.93	Vertical




11ax(HE40)_TX_CH_38_Horizontal_Peak

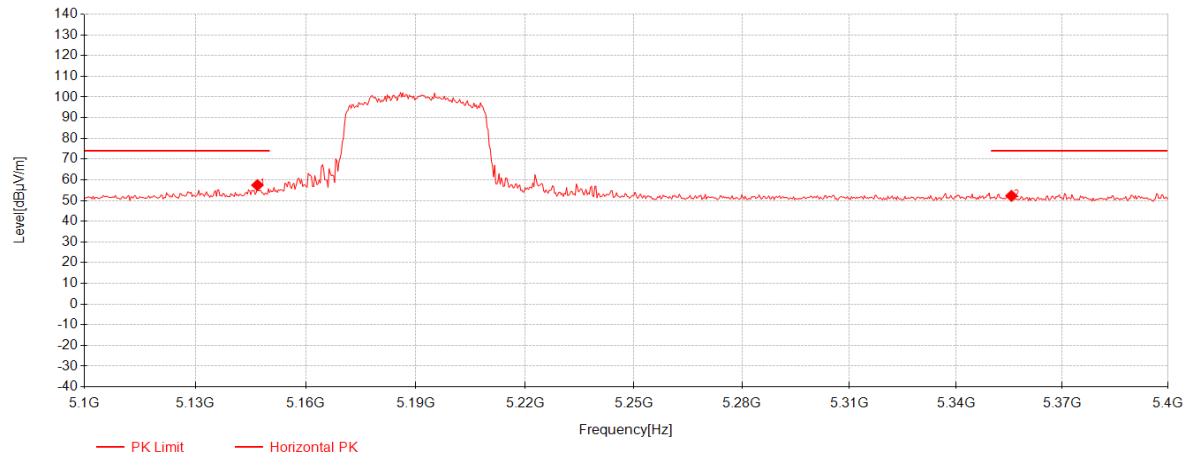

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5146.8	42.57	33.07	-18.19	57.45	74.00	16.55	Horizontal
2	5355.6	36.99	33.03	-17.76	52.26	74.00	21.74	Horizontal




11ax(HE40)_TX_CH_38_Horizontal_Average

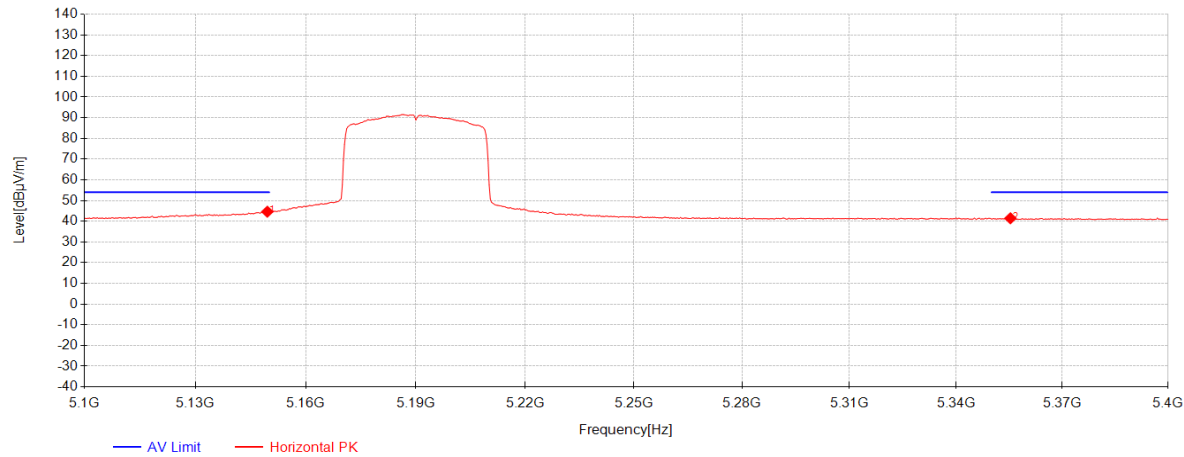

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5149.5	29.72	33.07	-18.18	44.61	54.00	9.39	Horizontal
2	5355.3	26.17	33.03	-17.76	41.44	54.00	12.56	Horizontal




11ax(HE40)_TX_CH_38_Veritical_Peak

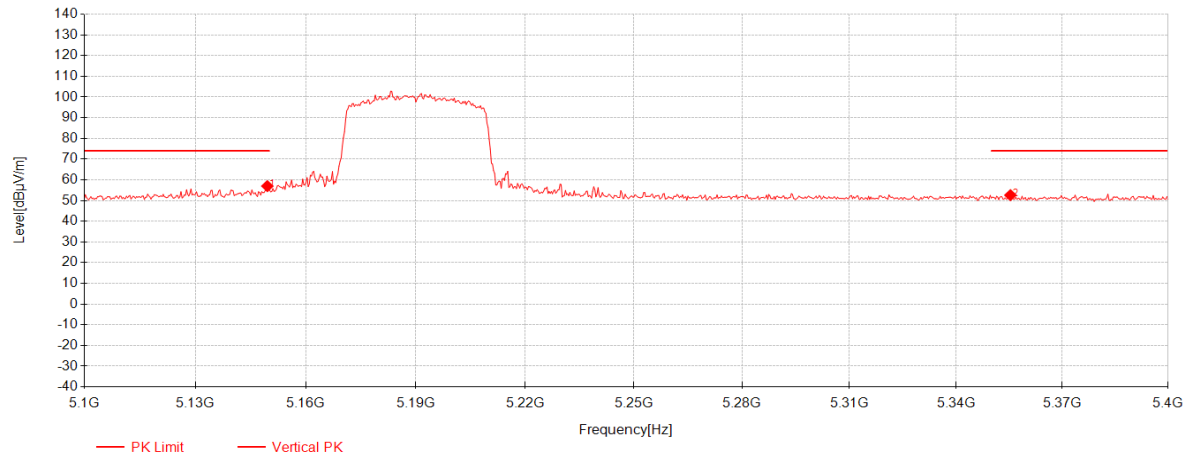

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5149.5	42.09	33.07	-18.18	56.98	74.00	17.02	Vertical
2	5355.3	37.34	33.03	-17.76	52.61	74.00	21.39	Vertical




11ax(HE40)_TX_CH_38_Veritical_Average

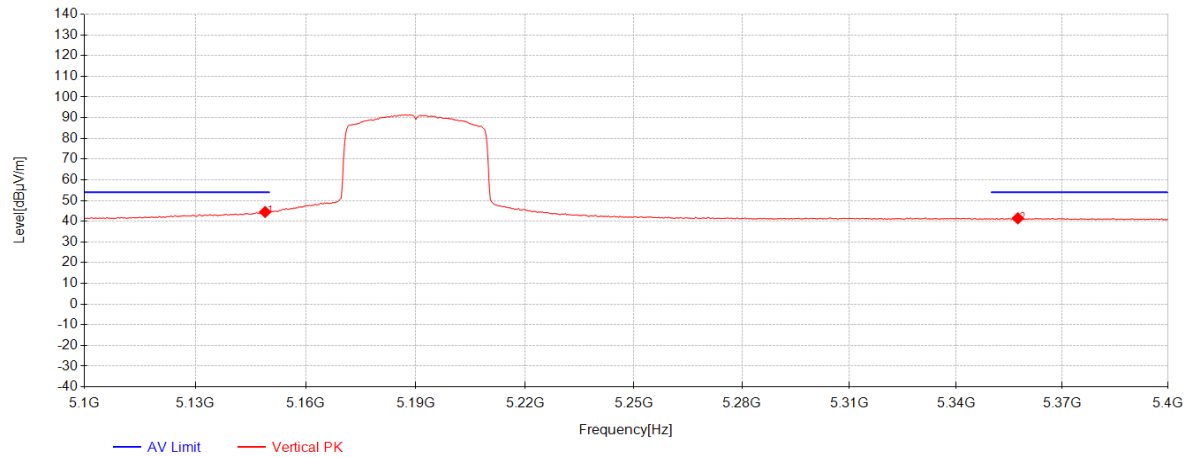

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.9	29.57	33.07	-18.18	44.46	54.00	9.54	Vertical
2	5357.4	26.15	33.03	-17.76	41.42	54.00	12.58	Vertical




11ax(HE40)_TX_CH_62_Horizontal_Peak

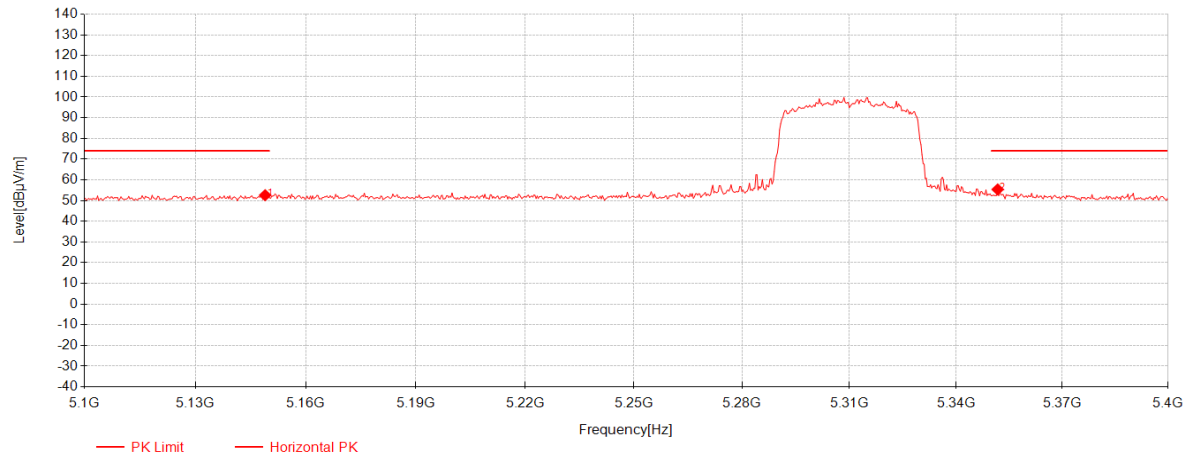

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.9	37.70	33.07	-18.18	52.59	74.00	21.41	Horizontal
2	5351.7	40.10	33.03	-17.75	55.38	74.00	18.62	Horizontal




11ax(HE40)_TX_CH_62_Horizontal_Average

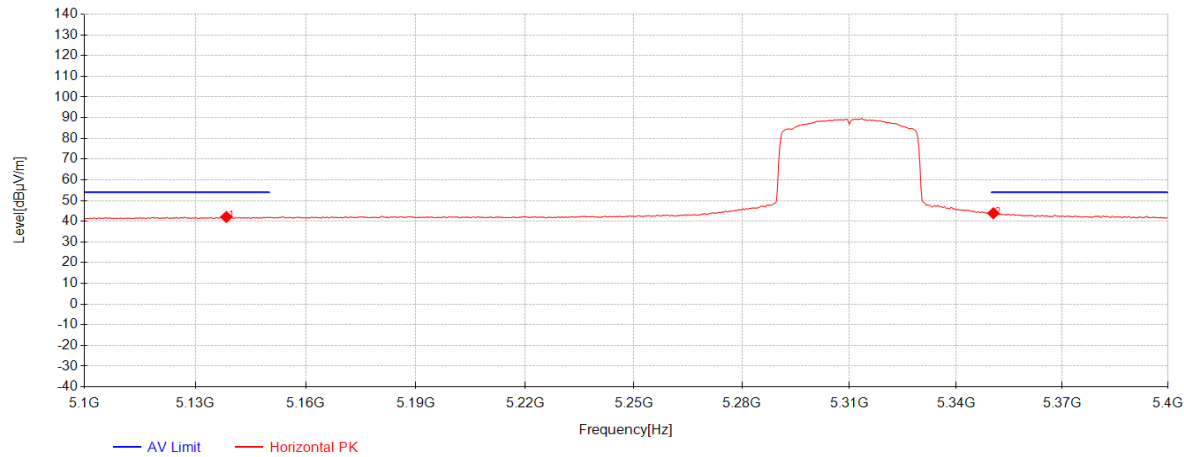

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5138.4	27.19	33.07	-18.21	42.05	54.00	11.95	Horizontal
2	5350.5	28.59	33.03	-17.75	43.87	54.00	10.13	Horizontal




11ax(HE40)_TX_CH_62_Veritical_Peak

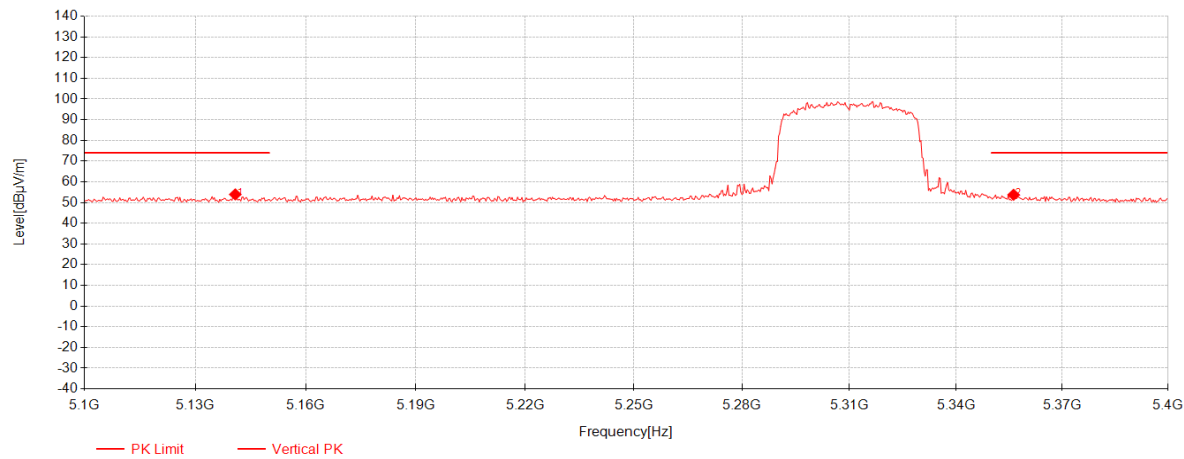

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5140.8	39.07	33.07	-18.21	53.93	74.00	20.07	Vertical
2	5356.2	38.49	33.03	-17.76	53.76	74.00	20.24	Vertical




11ax(HE40)_TX_CH_62_Veritical_Average

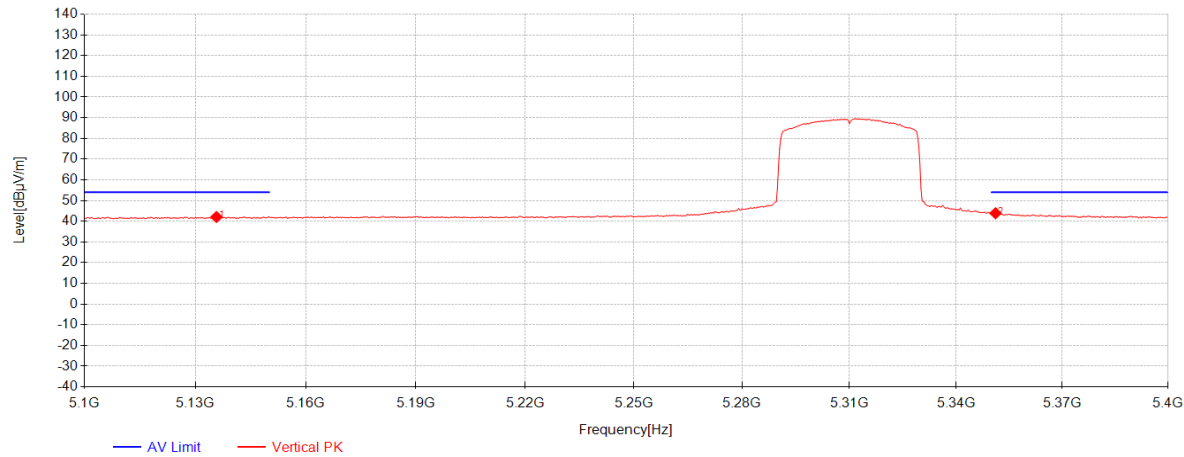

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5135.7	27.20	33.07	-18.22	42.05	54.00	11.95	Vertical
2	5351.1	28.59	33.03	-17.75	43.87	54.00	10.13	Vertical




11ax(HE40)_TX_CH_102_Horizontal_Peak

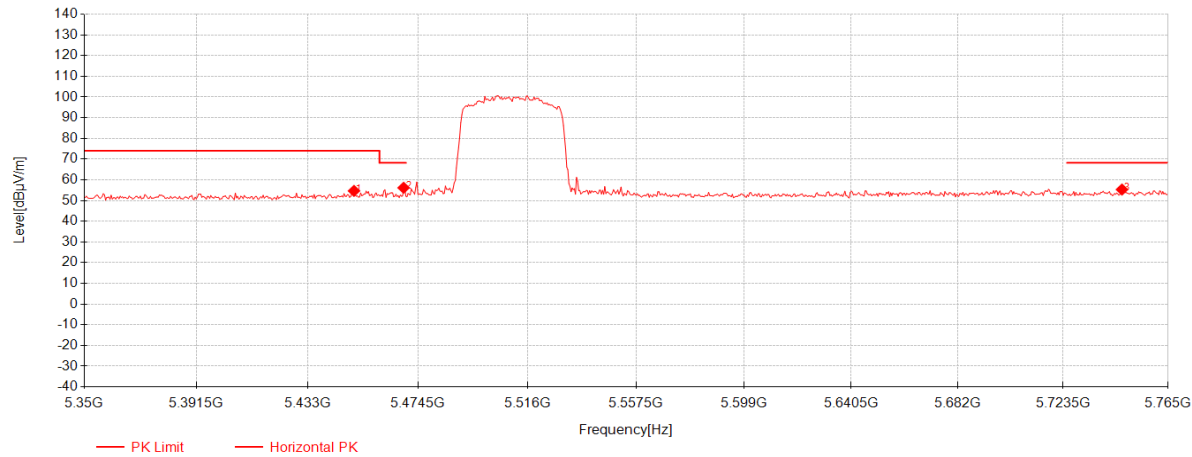

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5450.43	39.32	33.01	-17.67	54.66	74.00	19.34	Horizontal
2	5469.105	40.78	33.01	-17.61	56.17	68.20	12.03	Horizontal
3	5746.74	38.76	33.74	-17.19	55.32	68.20	12.88	Horizontal




11ax(HE40)_TX_CH_102_Horizontal_Average

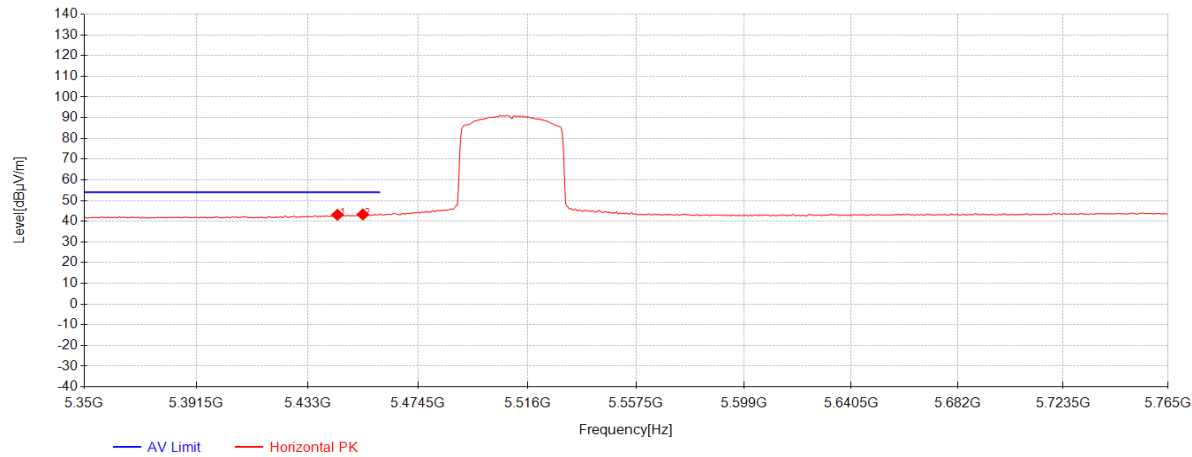

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5444.205	27.81	33.01	-17.69	43.13	54.00	10.87	Horizontal
2	5453.75	27.92	33.01	-17.66	43.27	54.00	10.73	Horizontal




11ax(HE40)_TX_CH_102_Vertical_Peak

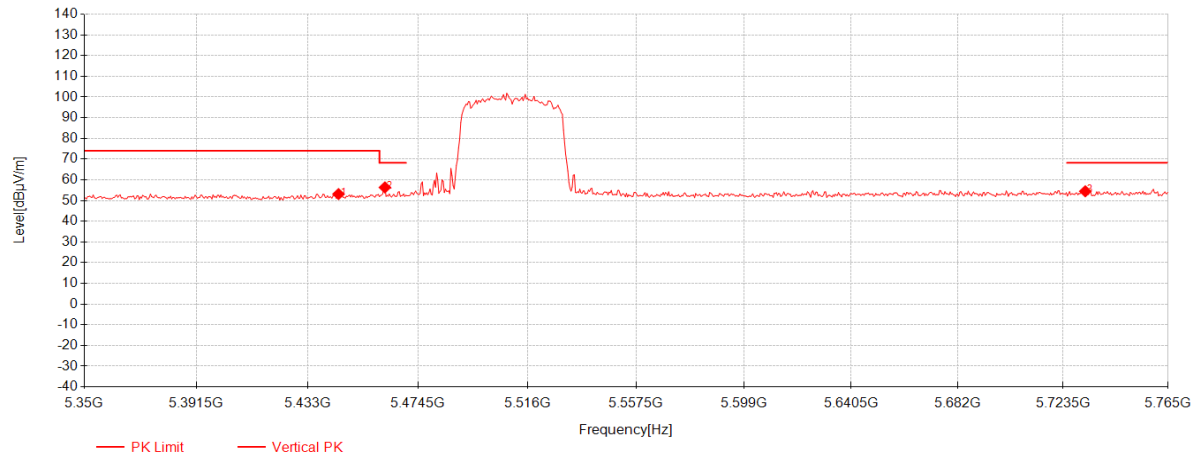

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5444.62	37.80	33.01	-17.69	53.12	74.00	20.88	Vertical
2	5462.05	40.98	33.01	-17.63	56.35	68.20	11.85	Vertical
3	5732.215	38.01	33.70	-17.23	54.48	68.20	13.72	Vertical




11ax(HE40)_TX_CH_102_Vertical_Average

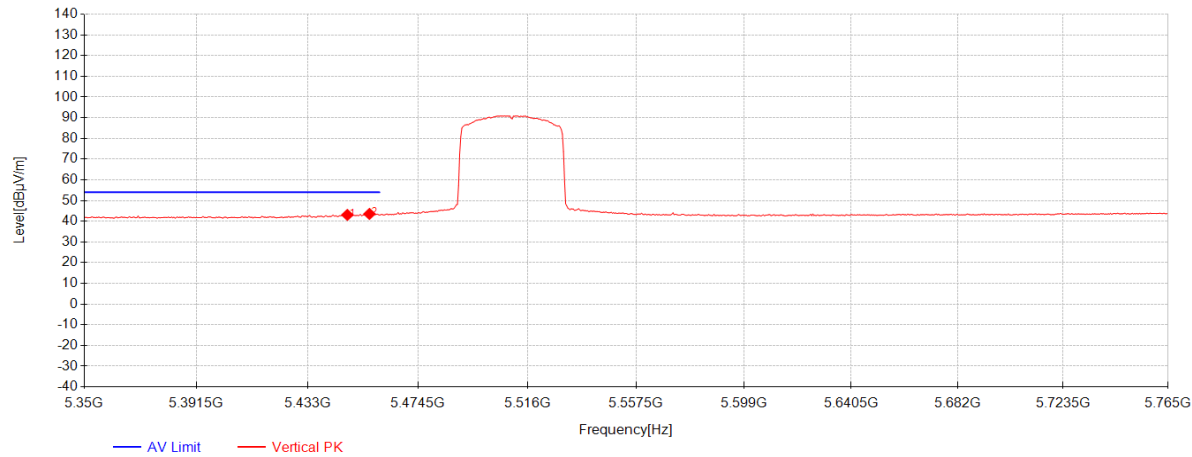

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5447.94	27.74	33.01	-17.68	43.07	54.00	10.93	Vertical
2	5456.24	28.18	33.01	-17.65	43.54	54.00	10.46	Vertical



11ax(HE40)_TX_CH_134_Horizontal_Peak

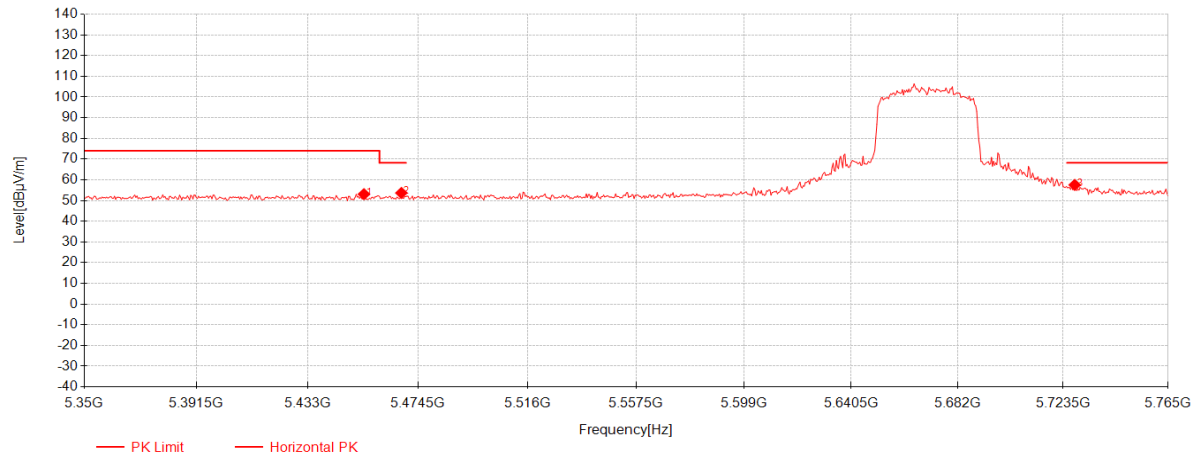

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5454.165	37.73	33.01	-17.66	53.08	74.00	20.92	Horizontal
2	5468.275	38.29	33.01	-17.62	53.68	68.20	14.52	Horizontal
3	5728.065	41.11	33.68	-17.24	57.55	68.20	10.65	Horizontal