

TEST REPORT

Applicant Name: YZ Intelligence Technology Co., Ltd.
Address: Bldg.L2, WUT Park, East Lake Hi-Tech Development Zone
Wuhan Hubei China
Report Number: 2401V45749E-RF-00B
FCC ID: 2BH TL-Z6000

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: Z6 Smart POS Terminal
Model No.: Z6000
Multiple Model(s) No.: N/A
Trade Mark: **YZPOS**
Date Received: 2024/07/16
Issue Date: 2024/11/07

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Bruce Lin

Bruce Lin
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	8
DUTY CYCLE	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	11
TEST EQUIPMENT LIST	12
FCC§15.247 (I), §1.1307 (B) (1) & §2.1093 - RF EXPOSURE.....	14
APPLICABLE STANDARD	14
MEASUREMENT RESULT	14
FCC §15.203 - ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (A) - AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
FACTOR & OVER LIMIT CALCULATION.....	17
TEST DATA	17
FCC §15.209, §15.205 & §15.247(D) - SPURIOUS EMISSIONS	25
APPLICABLE STANDARD	25
EUT SETUP	25
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	26
TEST PROCEDURE	27
FACTOR & OVER LIMIT/MARGIN CALCULATION	27
TEST DATA	27
FCC §15.247(A) (2) - 6 DB EMISSION BANDWIDTH.....	53
APPLICABLE STANDARD	53
TEST PROCEDURE	53
TEST DATA	53

FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER	54
APPLICABLE STANDARD	54
TEST PROCEDURE	54
TEST DATA	55
FCC §15.247(D) - 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....	56
APPLICABLE STANDARD	56
TEST PROCEDURE	56
TEST DATA	56
FCC §15.247(E) - POWER SPECTRAL DENSITY.....	57
APPLICABLE STANDARD	57
TEST PROCEDURE	57
TEST DATA	57
EUT PHOTOGRAPHS.....	58
TEST SETUP PHOTOGRAPHS	59
APPENDIX - BLE	60
APPENDIX A: DTS BANDWIDTH	60
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	64
APPENDIX C: MAXIMUM CONDUCTED PEAK OUTPUT POWER.....	68
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	71
APPENDIX E: BAND EDGE MEASUREMENTS.....	75
APPENDIX F: DUTY CYCLE	77
APPENDIX – WI-FI.....	78
APPENDIX A: DTS BANDWIDTH	78
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	84
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	90
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	91
APPENDIX E: BAND EDGE MEASUREMENTS.....	97
APPENDIX F: DUTY CYCLE	100

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401V45749E-RF-00B	Original Report	2024/11/07

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Z6 Smart POS Terminal
Tested Model	Z6000
Multiple Model(s)	N/A
Frequency Range	BLE: 2402-2480MHz Wi-Fi: 2412-2462MHz
Maximum Conducted Output Peak Power	BLE: 0.81dBm Wi-Fi: 19.22dBm
Modulation Technique	BLE: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification [#]	1.93dBi (provided by the applicant)
Voltage Range	DC 7.4V from battery or DC 5V from adapter
Sample serial number	2OEM-1 for Conducted and Radiated Emissions Test 2OEM-6 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Adapter1 Model: AS1201A-0502000USU Input: AC 100-240V, 50/60Hz, 0.35A MAX Output: DC 5V, 2000mA Adapter2 Model: PD018W-G Input: AC 100-240V, 50/60Hz, 0.5A Max Output: DC 5V, 3.0A or DC 9V, 2.0A or DC 12V, 1.5A
Note: The EUT charged by two adapters, the worst case adapter 2 was selected to test for AC line conducted emissions according to NII report test result. Note: The EUT charged by two adapters, the worst case adapter 1 was selected to test for radiated emission below 1GHz according to DSS report test result.	

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF output power, conducted		0.72 dB(k=2, 95% level of confidence)
AC Power Lines Conducted Emissions	9kHz~150 kHz	3.94dB(k=2, 95% level of confidence)
	150 kHz ~30MHz	3.84dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.30dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.05dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.35dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.44dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.16dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 2.4GHz Wi-Fi mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 6 and 11.

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

“Pandora.exe”[#] exercise software was used.

The device was tested with the worst case was performed as below:

Mode	Data rate	Power Level [#]		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	Default	Default	Default
802.11g	6Mbps	Default	Default	Default
802.11n20	MCS0	Default	Default	Default
BLE 1M	1Mbps	Default	Default	Default
BLE 2M	2Mbps	Default	Default	Default

Note: the power level was provided by applicant.

Duty cycle

Test Information		Environmental Conditions	
Test Date:	2024/07/28-2024/07/29	Temperature:	24 °C
Test Mode:	Transmitting	Relative Humidity:	49~55 %
Tester:	Tom Tan	ATM Pressure:	101.0 kPa
Note: The test data please refer to the Appendix.			

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded Un-detachable AC cable	1.2	LISN/AC Mains	Socket
Un-shielding Detachable USB Cable	1.0	Adapter	EUT

Block Diagram of Test Setup


For Conducted Emissions:

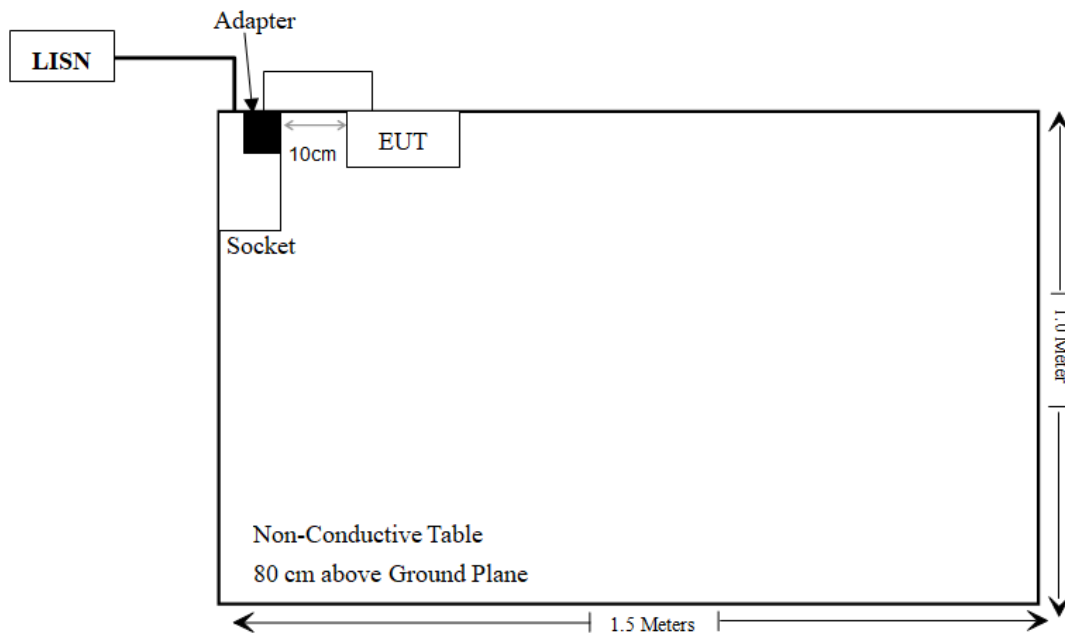

For Radiated Emissions below 1GHz:

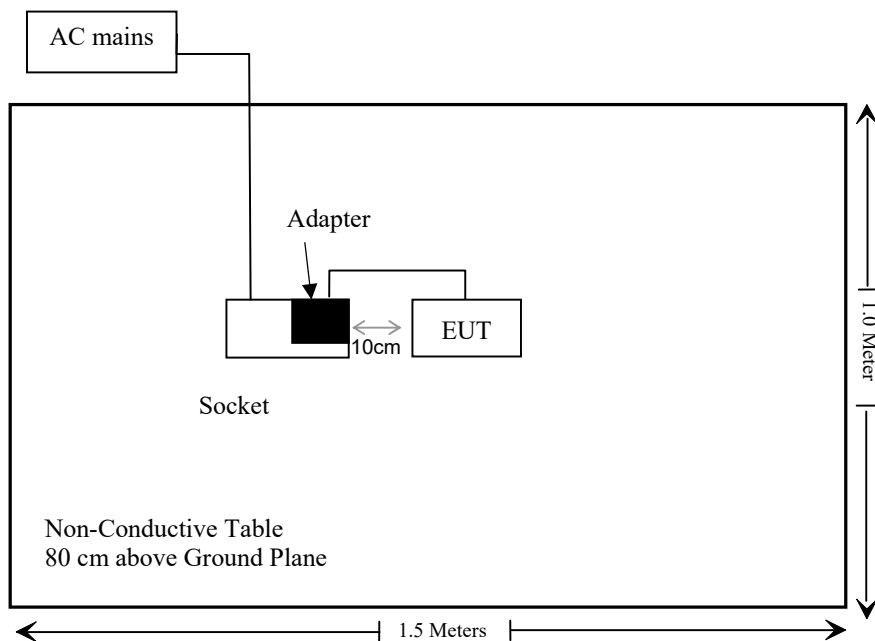

For Radiated Emissions above 1GHz:

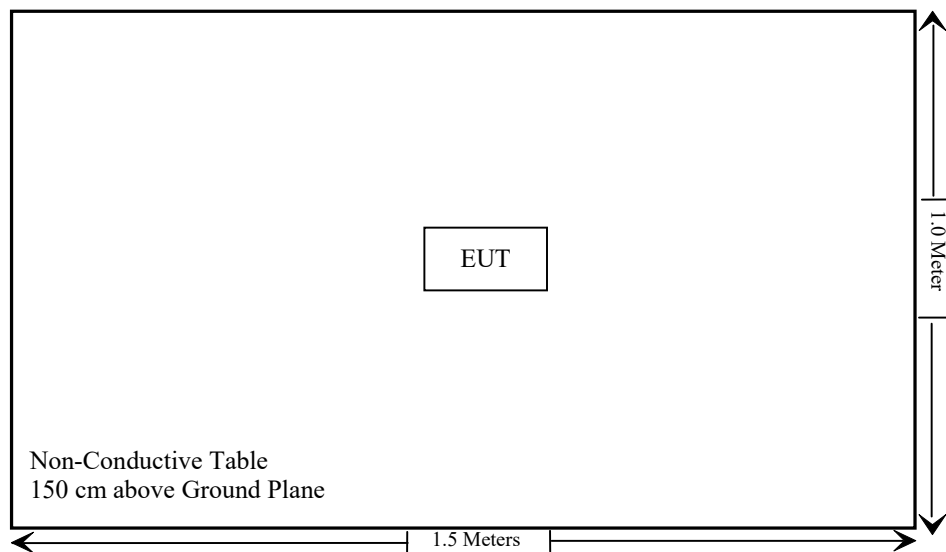

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2024/05/21	2025/05/20
Unknown	CE Cable	Unknown	UF A210B-1-0720-504504	2024/05/21	2025/05/20
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
BACL	Active Loop Antenna	1313-1A	4031911	2024/05/14	2027/05/13
Unknown	Cable	2Y194	0735	2024/05/21	2025/05/20
Unknown	Cable	PNG214	1354	2024/05/21	2025/05/20
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
Unknown	RF Cable	KMSE	735	2024/06/18	2025/06/17
Unknown	RF Cable	UFA147	219661	2024/06/18	2025/06/17
Unknown	RF Cable	XH750A-N	J-10M	2024/06/18	2025/06/17
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	2024/06/18	2025/06/17
A.H.System	Pre-amplifier	PAM-1840VH	190	2024/06/18	2025/06/17
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2024/06/18	2025/06/17
Audix	EMI Test software	E3	191218(V9)	NCR	NCR

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Tonscend	RF control Unit	JS0806-2	19D8060154	2023/09/06	2024/09/05
ANRITSU	Microwave peak power sensor	MA24418A	12622	2024/05/21	2025/05/20
Rohde & Schwarz	Spectrum Analyzer	FSV40	101473	2024/01/16	2025/01/15
Unknown	10dB Attenuator	Unknown	F-03-EM065	2024/06/27	2025/06/26
Unknown	RF Cable	65475	01670515	2024/06/27	2025/06/26

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 - RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

- a) According to KDB 447498 D01 General RF Exposure Guidance v06

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

For worst case:

For BLE:

Frequency (MHz)	Maximum Tune-up power [#]		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
	(dBm)	(mW)				
2402-2480	1.0	1.26	5	0.4	3.0	Yes

Result: No Standalone SAR test is required

For Wi-Fi mode, please refer to SAR report: 2402V45749E-20.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached, the antenna gain[#] is 1.93dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup



Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).


Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Macy Shi on 2024-11-05.

EUT operation mode: Transmitting

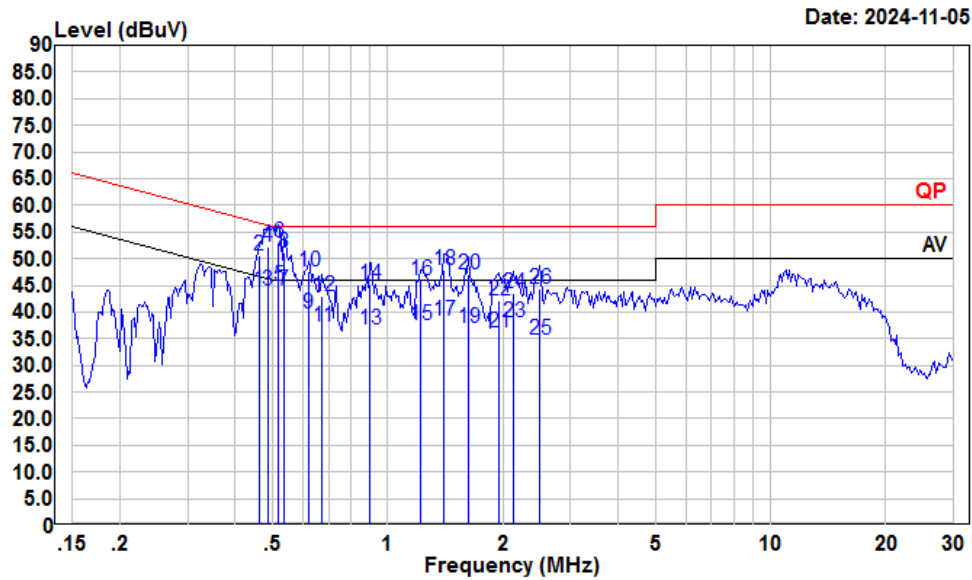BLE: (Maximum output power mode, BLE 1M Middle channel)**AC 120V/60 Hz, Line**

Condition: Line

Project : 2401V45749E-RF


tester : Macy.shi

Note : BLE Transmitting

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.461	23.50	44.15	10.53	10.12	46.67	-2.52	Average
2	0.461	29.80	50.45	10.53	10.12	56.67	-6.22	QP
3	0.486	23.43	44.07	10.51	10.13	46.23	-2.16	Average
4	0.486	31.61	52.25	10.51	10.13	56.23	-3.98	QP
5	0.518	24.16	44.80	10.50	10.14	46.00	-1.20	Average
6	0.518	32.33	52.97	10.50	10.14	56.00	-3.03	QP
7	0.535	23.40	44.03	10.50	10.13	46.00	-1.97	Average
8	0.535	30.50	51.13	10.50	10.13	56.00	-4.87	QP
9	0.621	19.10	39.73	10.50	10.13	46.00	-6.27	Average
10	0.621	26.90	47.53	10.50	10.13	56.00	-8.47	QP
11	0.675	16.50	37.14	10.50	10.14	46.00	-8.86	Average
12	0.675	22.40	43.04	10.50	10.14	56.00	-12.96	QP
13	0.899	16.30	36.83	10.43	10.10	46.00	-9.17	Average
14	0.899	24.50	45.03	10.43	10.10	56.00	-10.97	QP
15	1.223	16.80	37.40	10.46	10.14	46.00	-8.60	Average
16	1.223	25.30	45.90	10.46	10.14	56.00	-10.10	QP

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
17	1.403	17.60	38.25	10.50	10.15	46.00	-7.75	Average
18	1.403	27.20	47.85	10.50	10.15	56.00	-8.15	QP
19	1.628	16.30	37.01	10.54	10.17	46.00	-8.99	Average
20	1.628	26.40	47.11	10.54	10.17	56.00	-8.89	QP
21	1.949	15.30	36.08	10.59	10.19	46.00	-9.92	Average
22	1.949	21.50	42.28	10.59	10.19	56.00	-13.72	QP
23	2.121	17.30	38.06	10.57	10.19	46.00	-7.94	Average
24	2.121	22.70	43.46	10.57	10.19	56.00	-12.54	QP
25	2.487	14.26	34.94	10.51	10.17	46.00	-11.06	Average
26	2.487	23.59	44.27	10.51	10.17	56.00	-11.73	QP

AC 120V/60 Hz, Neutral

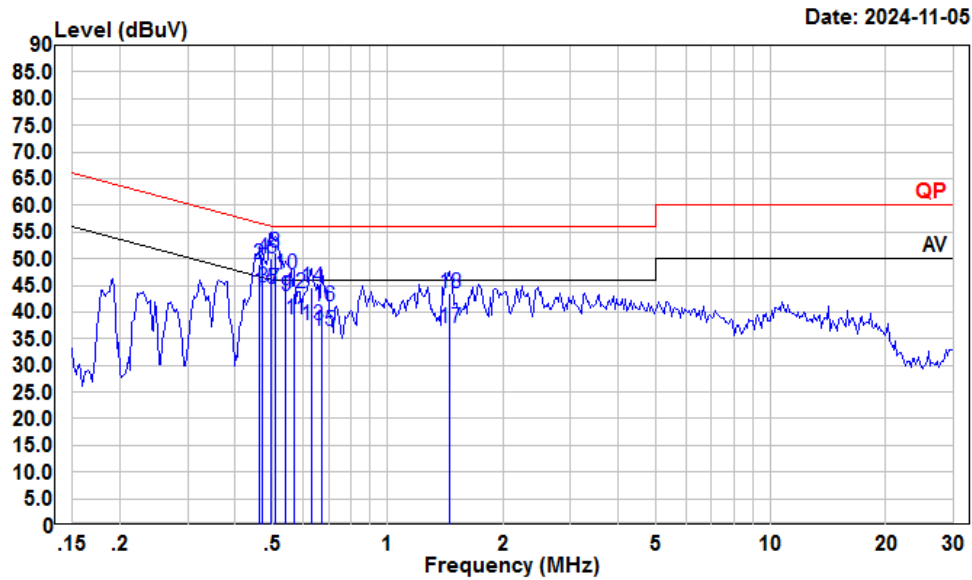

Condition: Neutral


Project : 2401V45749E-RF

tester : Macy.shi

Note : BLE Transmitting

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.461	23.11	43.90	10.67	10.12	46.67	-2.77	Average
2	0.461	28.11	48.90	10.67	10.12	56.67	-7.77	QP
3	0.471	23.80	44.61	10.68	10.13	46.49	-1.88	Average
4	0.471	29.30	50.11	10.68	10.13	56.49	-6.38	QP
5	0.497	23.59	44.43	10.70	10.14	46.05	-1.62	Average
6	0.497	29.14	49.98	10.70	10.14	56.05	-6.07	QP
7	0.507	23.42	44.26	10.70	10.14	46.00	-1.74	Average
8	0.507	30.41	51.25	10.70	10.14	56.00	-4.75	QP
9	0.541	22.20	43.03	10.70	10.13	46.00	-2.97	Average
10	0.541	26.20	47.03	10.70	10.13	56.00	-8.97	QP
11	0.570	17.90	38.73	10.70	10.13	46.00	-7.27	Average
12	0.570	22.60	43.43	10.70	10.13	56.00	-12.57	QP
13	0.634	16.70	37.53	10.70	10.13	46.00	-8.47	Average
14	0.634	23.90	44.73	10.70	10.13	56.00	-11.27	QP
15	0.675	15.70	36.54	10.70	10.14	46.00	-9.46	Average
16	0.675	20.30	41.14	10.70	10.14	56.00	-14.86	QP

	Freq	Read Level	LISN Level	Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
17	1.449	16.20	36.99	10.63	10.16	46.00	-9.01	Average
18	1.449	22.70	43.49	10.63	10.16	56.00	-12.51	QP

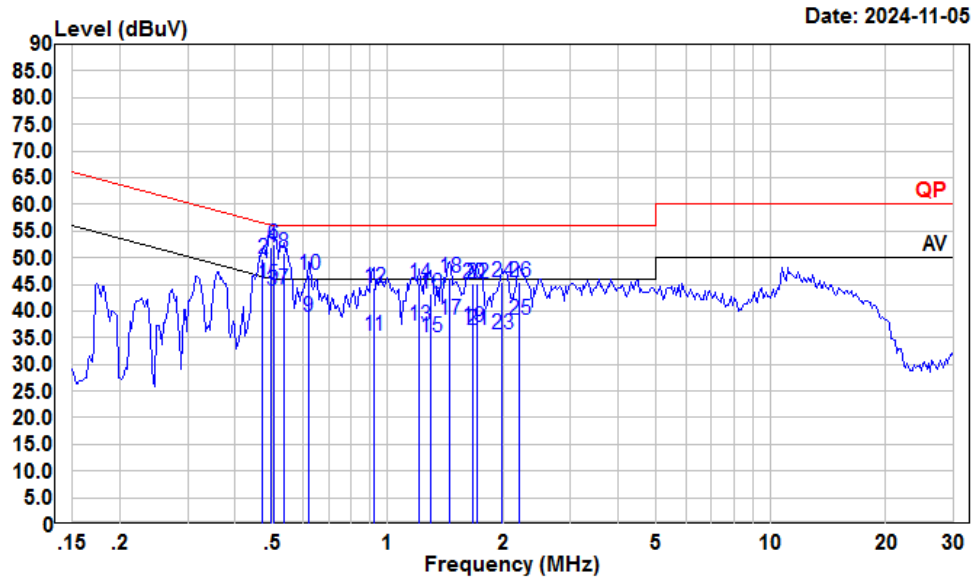2.4G Wi-Fi: (Maximum output power mode, 802.11g Low channel)**AC 120V/60 Hz, Line**

Condition: Line

Project : 2401V45749E-RF


tester : Macy.shi

Note : 2.4G WIFI Transmitting

	Freq	Read Level	LISN Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.471	24.60	45.25	10.52	10.13	46.49	-1.24	Average
2	0.471	29.20	49.85	10.52	10.13	56.49	-6.64	QP
3	0.497	23.22	43.86	10.50	10.14	46.05	-2.19	Average
4	0.497	31.41	52.05	10.50	10.14	56.05	-4.00	QP
5	0.502	24.34	44.98	10.50	10.14	46.00	-1.02	Average
6	0.502	31.75	52.39	10.50	10.14	56.00	-3.61	QP
7	0.535	23.40	44.03	10.50	10.13	46.00	-1.97	Average
8	0.535	30.10	50.73	10.50	10.13	56.00	-5.27	QP
9	0.621	18.20	38.83	10.50	10.13	46.00	-7.17	Average
10	0.621	26.20	46.83	10.50	10.13	56.00	-9.17	QP
11	0.918	14.81	35.33	10.42	10.10	46.00	-10.67	Average
12	0.918	23.71	44.23	10.42	10.10	56.00	-11.77	QP
13	1.210	16.81	37.40	10.45	10.14	46.00	-8.60	Average
14	1.210	24.61	45.20	10.45	10.14	56.00	-10.80	QP
15	1.289	14.60	35.22	10.47	10.15	46.00	-10.78	Average
16	1.289	22.70	43.32	10.47	10.15	56.00	-12.68	QP

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
17	1.449	17.79	38.46	10.51	10.16	46.00	-7.54	Average
18	1.449	25.49	46.16	10.51	10.16	56.00	-9.84	QP
19	1.662	16.30	37.02	10.55	10.17	46.00	-8.98	Average
20	1.662	24.50	45.22	10.55	10.17	56.00	-10.78	QP
21	1.716	15.70	36.43	10.56	10.17	46.00	-9.57	Average
22	1.716	24.30	45.03	10.56	10.17	56.00	-10.97	QP
23	1.991	14.80	35.59	10.60	10.19	46.00	-10.41	Average
24	1.991	24.60	45.39	10.60	10.19	56.00	-10.61	QP
25	2.213	17.60	38.34	10.56	10.18	46.00	-7.66	Average
26	2.213	24.55	45.29	10.56	10.18	56.00	-10.71	QP

AC 120V/60 Hz, Neutral

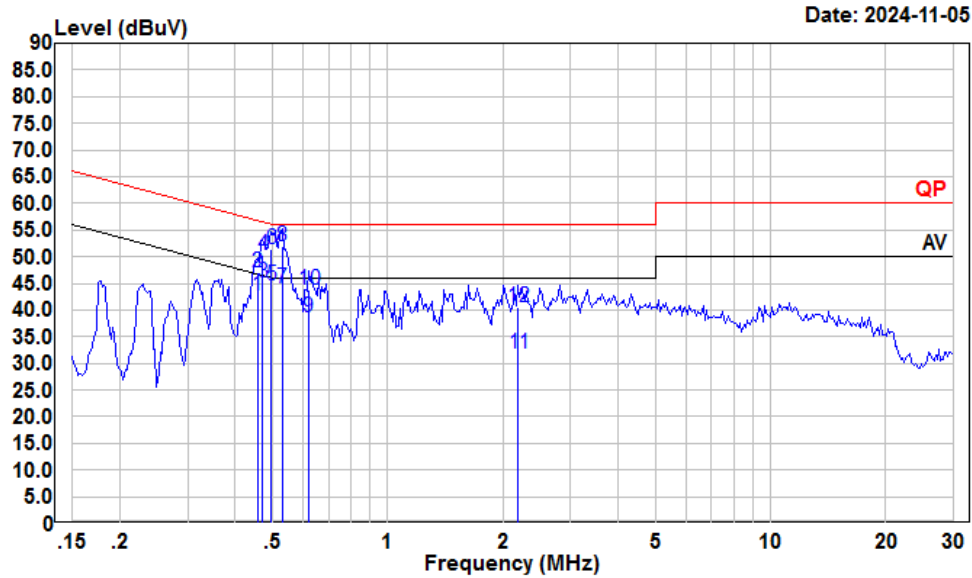

Condition: Neutral

Project : 2401V45749E-RF



tester : Macy.shi


Note : 2.4G WIFI Transmitting

	Freq	Read Level	Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	dB	dBuV	dB	
1	0.456	21.90	42.69	10.67	10.12	46.76	-4.07	Average
2	0.456	26.20	46.99	10.67	10.12	56.76	-9.77	QP
3	0.471	24.40	45.21	10.68	10.13	46.49	-1.28	Average
4	0.471	29.50	50.31	10.68	10.13	56.49	-6.18	QP
5	0.497	23.72	44.56	10.70	10.14	46.05	-1.49	Average
6	0.497	30.61	51.45	10.70	10.14	56.05	-4.60	QP
7	0.529	23.29	44.12	10.70	10.13	46.00	-1.88	Average
8	0.529	31.15	51.98	10.70	10.13	56.00	-4.02	QP
9	0.621	17.90	38.73	10.70	10.13	46.00	-7.27	Average
10	0.621	22.90	43.73	10.70	10.13	56.00	-12.27	QP
11	2.190	11.24	31.82	10.40	10.18	46.00	-14.18	Average
12	2.190	20.08	40.66	10.40	10.18	56.00	-15.34	QP

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

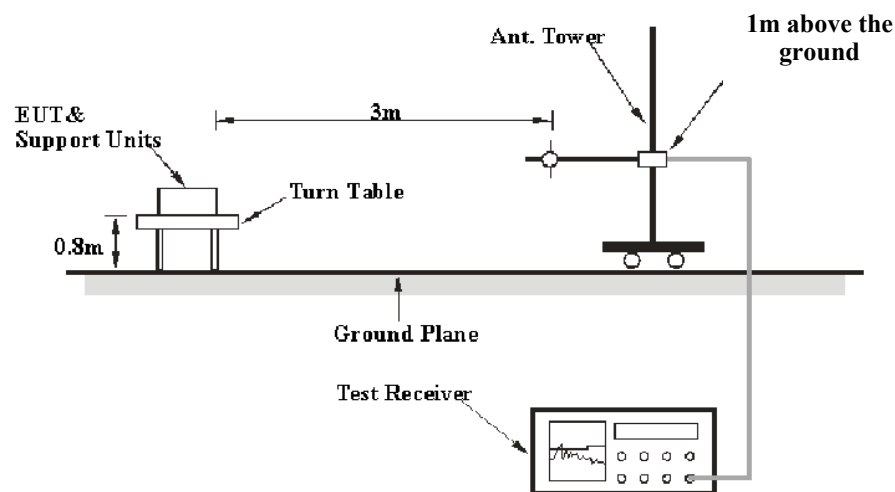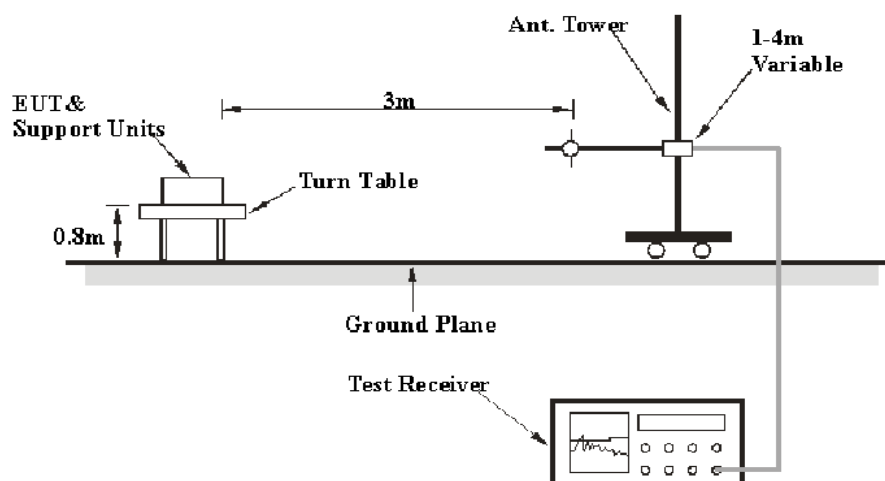EUT Setup**9 kHz-30MHz:****30MHz-1GHz:**

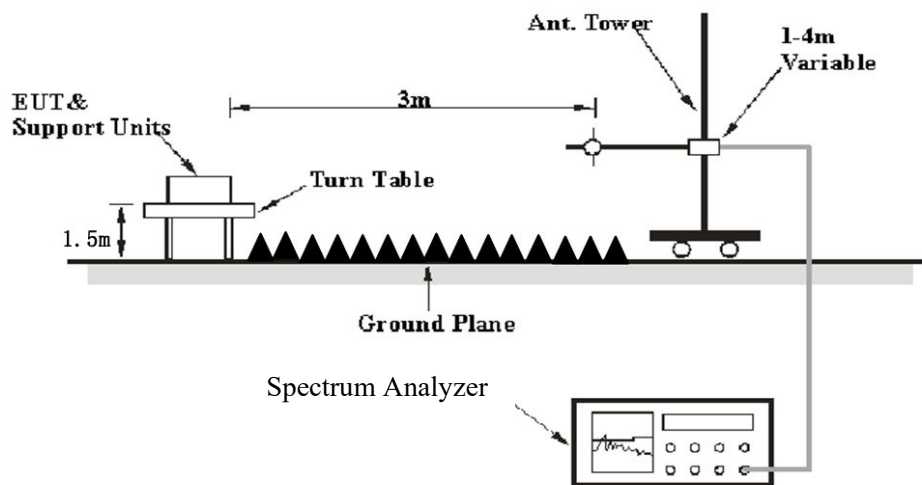Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

1-25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	≥1/Ton

Note: Ton is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level/Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data

Environmental Conditions

Temperature:	22~25.5 °C
Relative Humidity:	50~54 %
ATM Pressure:	101.0 kPa


The testing was performed by Anson Su on 2024-08-05 for below 1GHz and Zenos Qiao from 2024-08-06 to 2024-08-30 for above 1GHz.

EUT operation mode: Transmitting

Note: Pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation was recorded.


BLE (Maximum output power mode, BLE 1M Middle channel)

9 kHz-30MHz: Parallel (worst case)

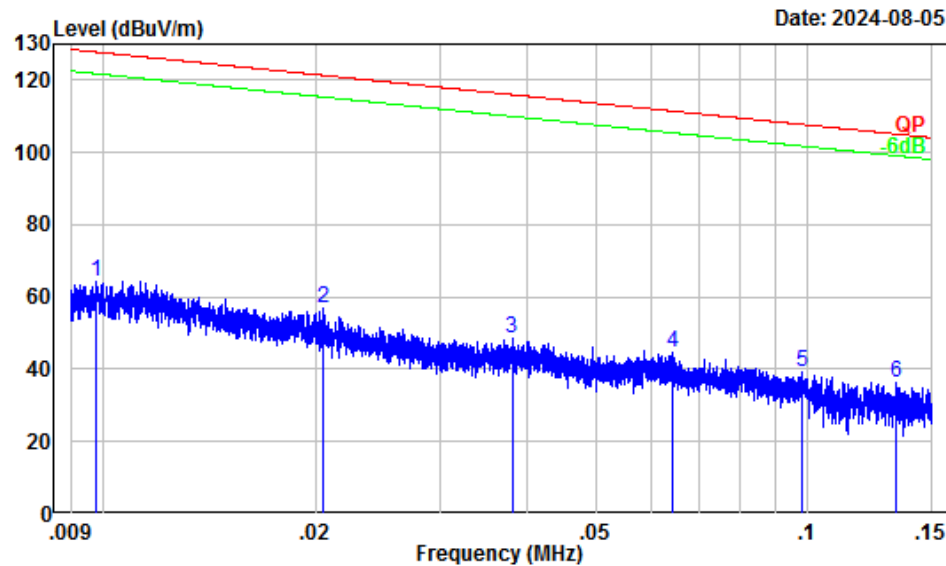

Site : Chamber A
Condition : 3m
Project Number: 2401V45749E-RF
Test Mode : BLE
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	37.87	26.43	64.30	127.81	-63.51	Peak
2	0.02	32.29	24.41	56.70	121.34	-64.64	Peak
3	0.04	25.71	22.85	48.56	116.00	-67.44	Peak
4	0.06	21.15	23.40	44.55	111.44	-66.89	Peak
5	0.10	17.25	21.83	39.08	107.78	-68.70	Peak
6	0.13	15.49	20.88	36.37	105.10	-68.73	Peak

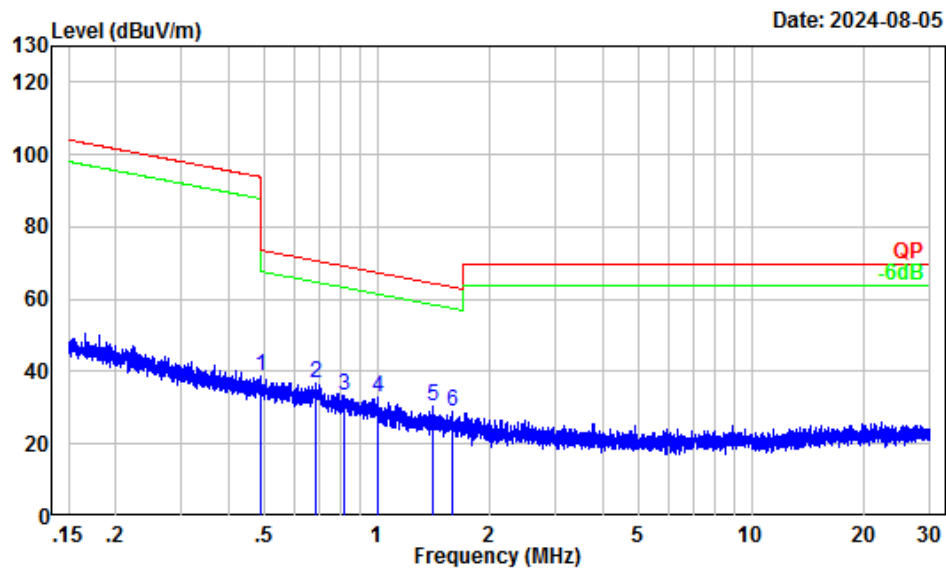


Site : Chamber A
 Condition : 3m
 Project Number: 2401V45749E-RF
 Test Mode : BLE
 Tester : Anson Su

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.49	3.76	34.84	38.60	93.86	-55.26	Peak
2	0.69	1.23	35.40	36.63	70.79	-34.16	Peak
3	0.82	-0.24	33.74	33.50	69.26	-35.76	Peak
4	1.01	-1.61	34.46	32.85	67.42	-34.57	Peak
5	1.41	-3.03	33.26	30.23	64.41	-34.18	Peak
6	1.59	-3.63	32.56	28.93	63.38	-34.45	Peak

30MHz-1GHz:


Horizontal

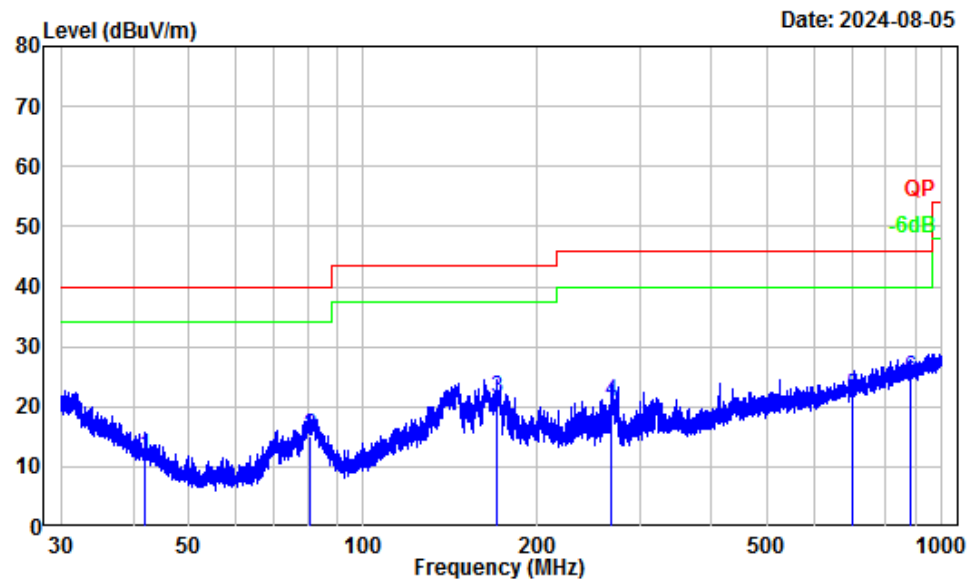

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401V45749E-RF
Test Mode : BLE
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	41.99	-13.66	25.31	11.65	40.00	-28.35 QP
2	80.89	-17.74	32.89	15.15	40.00	-24.85 QP
3	170.05	-12.91	34.36	21.45	43.50	-22.05 QP
4	267.90	-12.21	33.14	20.93	46.00	-25.07 QP
5	698.39	-3.58	25.17	21.59	46.00	-24.41 QP
6	879.86	-0.37	25.04	24.67	46.00	-21.33 QP

Vertical

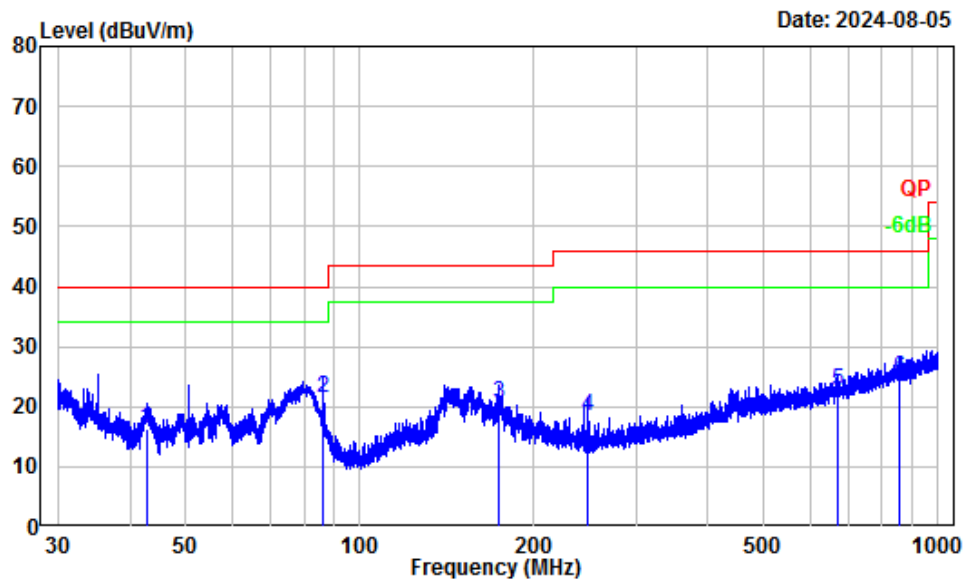


Site : Chamber A
Condition : 3m Vertical
Project Number: 2401V45749E-RF
Test Mode : BLE
Tester : Anson Su

	Freq Factor		Read Level	Limit Level	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	42.67	-14.06	30.50	16.44	40.00	-23.56 QP
2	86.58	-17.74	39.24	21.50	40.00	-18.50 QP
3	174.27	-12.25	32.64	20.39	43.50	-23.11 QP
4	248.44	-12.84	31.34	18.50	46.00	-27.50 QP
5	671.08	-3.87	26.40	22.53	46.00	-23.47 QP
6	860.41	-0.60	25.49	24.89	46.00	-21.11 QP


2.4G Wi-Fi (Maximum output power mode, 802.11g Low channel)

9 kHz-30MHz: Parallel (worst case)

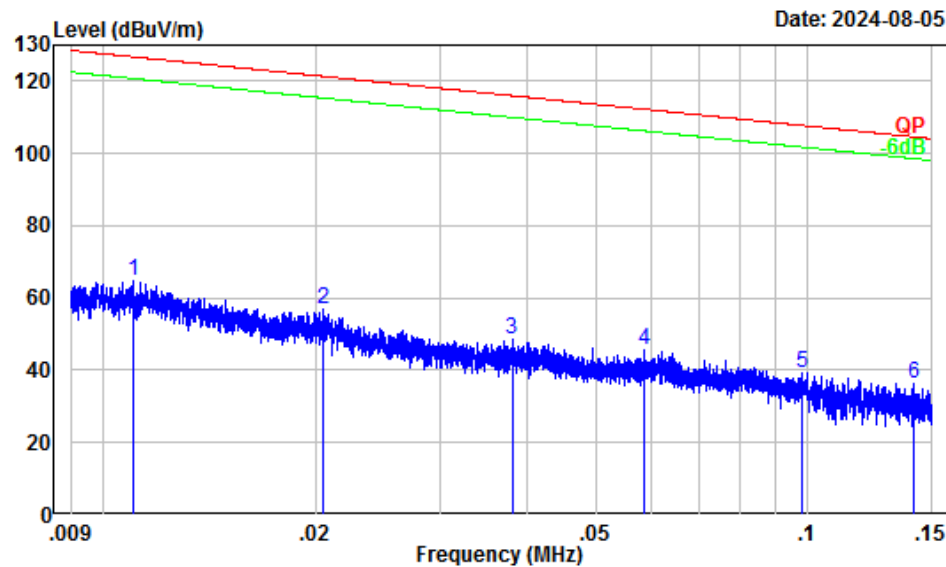


Site : Chamber A
Condition : 3m
Project Number: 2401V45749E-RF
Test Mode : 2.4G WIFI
Tester : Anson Su

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.01	37.16	27.37	64.53	126.75	-62.22	Peak
2	0.02	32.29	24.41	56.70	121.34	-64.64	Peak
3	0.04	25.71	22.85	48.56	116.00	-67.44	Peak
4	0.06	21.90	23.58	45.48	112.23	-66.75	Peak
5	0.10	17.25	21.83	39.08	107.78	-68.70	Peak
6	0.14	15.13	21.25	36.38	104.61	-68.23	Peak

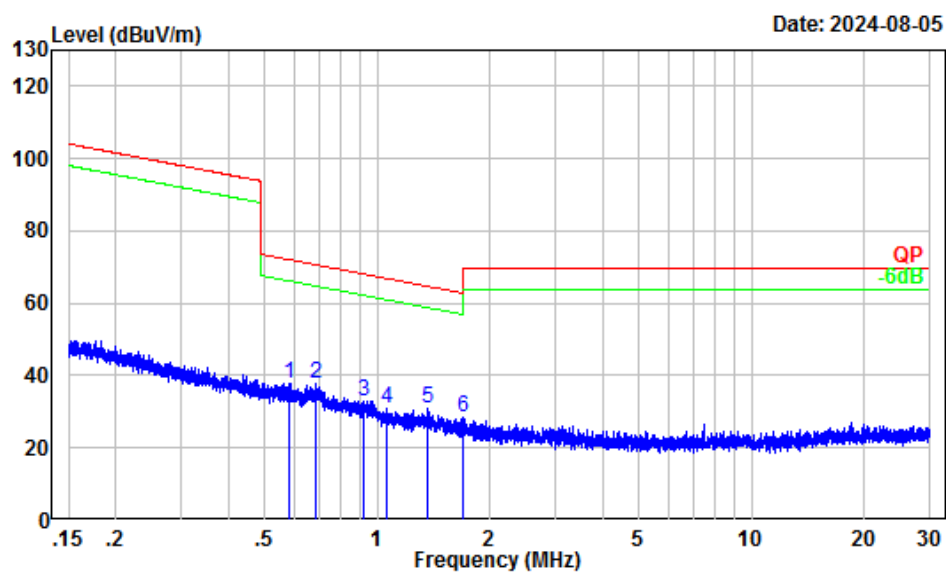

Site : Chamber A
 Condition : 3m
 Project Number: 2401V45749E-RF
 Test Mode : 2.4G WIFI
 Tester : Anson Su


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	0.59	2.46	35.27	37.73	72.23	-34.50	Peak
2	0.69	1.26	36.62	37.88	70.82	-32.94	Peak
3	0.92	-1.03	34.02	32.99	68.17	-35.18	Peak
4	1.06	-1.81	32.52	30.71	66.94	-36.23	Peak
5	1.37	-2.87	33.85	30.98	64.69	-33.71	Peak
6	1.70	-4.02	32.71	28.69	62.78	-34.09	Peak

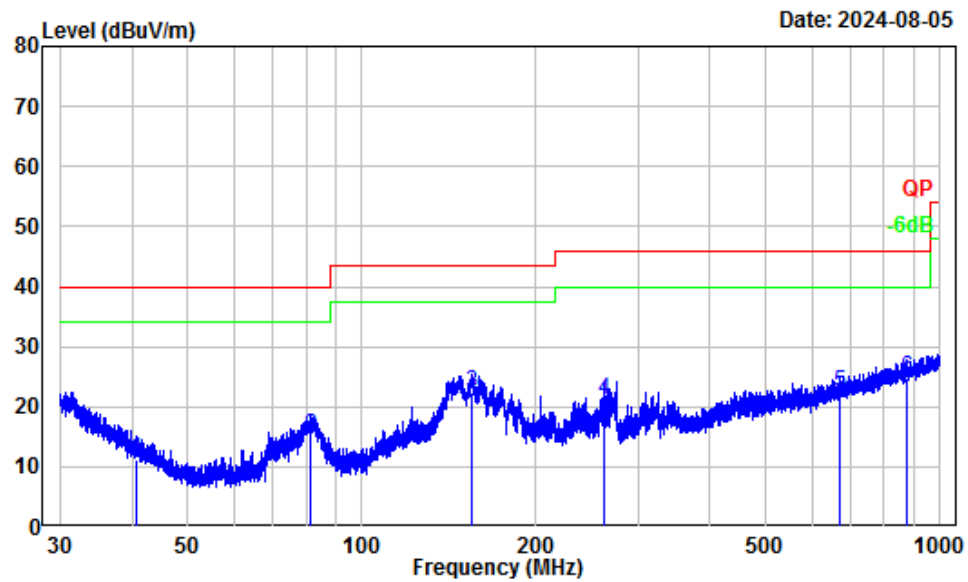Horizontal

Site : Chamber A
Condition : 3m Horizontal
Project Number: 2401V45749E-RF
Test Mode : 2.4G WIFI
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	40.70	-12.94	24.04	11.10	40.00	-28.90	QP
2	81.28	-17.74	32.69	14.95	40.00	-25.05	QP
3	155.23	-12.37	34.59	22.22	43.50	-21.28	QP
4	261.75	-12.45	33.50	21.05	46.00	-24.95	QP
5	670.78	-3.87	26.10	22.23	46.00	-23.77	QP
6	879.09	-0.38	25.07	24.69	46.00	-21.31	QP

Vertical

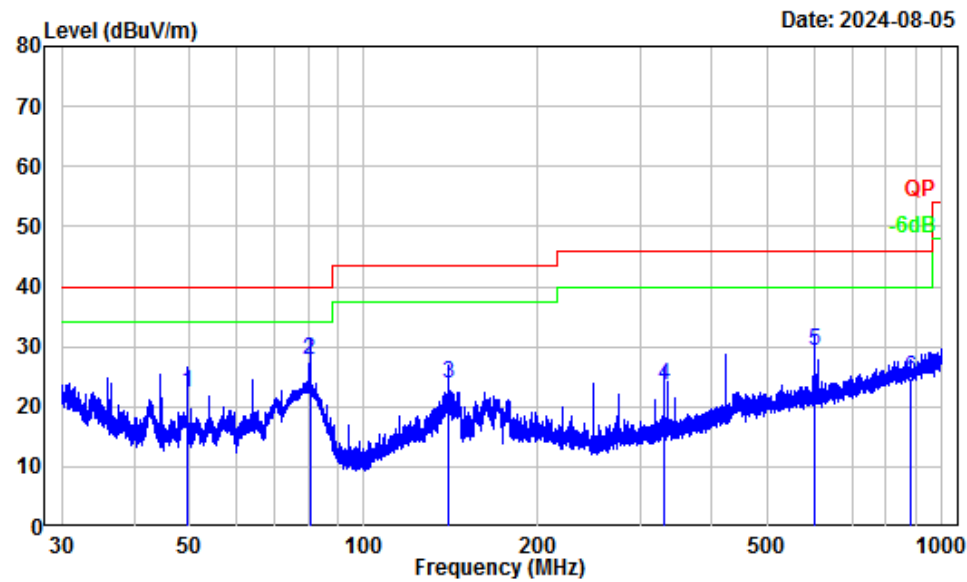

Site : Chamber A
Condition : 3m Vertical
Project Number: 2401V45749E-RF
Test Mode : 2.4G WIFI
Tester : Anson Su

	Freq Factor		Read Level		Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	49.38	-17.71	40.12	22.41	40.00	-17.59	QP
2	80.57	-17.74	45.58	27.84	40.00	-12.16	QP
3	139.61	-11.63	35.46	23.83	43.50	-19.67	QP
4	331.50	-10.37	33.96	23.59	46.00	-22.41	QP
5	603.27	-5.39	34.58	29.19	46.00	-16.81	QP
6	883.73	-0.33	25.02	24.69	46.00	-21.31	QP

1-25 GHz:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
BLE 1M							
Low Channel 2402MHz							
2388.89	55.57	PK	H	-2.93	52.64	74	-21.36
2388.89	41.64	AV	H	-2.93	38.71	54	-15.29
2389.24	55.29	PK	V	-2.93	52.36	74	-21.64
2389.24	41.85	AV	V	-2.93	38.92	54	-15.08
4804.00	46.95	PK	H	2.42	49.37	74	-24.63
4804.00	32.76	AV	H	2.42	35.18	54	-18.82
4804.00	47.14	PK	V	2.42	49.56	74	-24.44
4804.00	32.89	AV	V	2.42	35.31	54	-18.69
Middle Channel 2440MHz							
4880.00	46.87	PK	H	2.58	49.45	74	-24.55
4880.00	32.65	AV	H	2.58	35.23	54	-18.77
4880.00	47.02	PK	V	2.58	49.60	74	-24.40
4880.00	32.78	AV	V	2.58	35.36	54	-18.64
High Channel 2480MHz							
2483.68	55.64	PK	H	-3.17	52.47	74	-21.53
2483.68	41.98	AV	H	-3.17	38.81	54	-15.19
2483.87	56.01	PK	V	-3.17	52.84	74	-21.16
2483.87	42.27	AV	V	-3.17	39.10	54	-14.90
4960.00	47.09	PK	H	2.68	49.77	74	-24.23
4960.00	32.71	AV	H	2.68	35.39	54	-18.61
4960.00	47.36	PK	V	2.68	50.04	74	-23.96
4960.00	32.93	AV	V	2.68	35.61	54	-18.39

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
BLE 2M							
Low Channel 2402MHz							
2385.35	55.07	PK	H	-2.93	52.14	74	-21.86
2385.35	42.14	AV	H	-2.93	39.21	54	-14.79
2382.53	55.36	PK	V	-2.93	52.43	74	-21.57
2382.53	42.29	AV	V	-2.93	39.36	54	-14.64
4804.00	47.20	PK	H	2.42	49.62	74	-24.38
4804.00	33.13	AV	H	2.42	35.55	54	-18.45
4804.00	47.41	PK	V	2.42	49.83	74	-24.17
4804.00	33.32	AV	V	2.42	35.74	54	-18.26
Middle Channel 2440MHz							
4880.00	47.01	PK	H	2.58	49.59	74	-24.41
4880.00	33.12	AV	H	2.58	35.70	54	-18.30
4880.00	47.19	PK	V	2.58	49.77	74	-24.23
4880.00	33.23	AV	V	2.58	35.81	54	-18.19
High Channel 2480MHz							
2483.99	55.48	PK	H	-3.17	52.31	74	-21.69
2483.99	42.61	AV	H	-3.17	39.44	54	-14.56
2483.58	55.93	PK	V	-3.17	52.76	74	-21.24
2483.58	42.82	AV	V	-3.17	39.65	54	-14.35
4960.00	47.47	PK	H	2.68	50.15	74	-23.85
4960.00	33.19	AV	H	2.68	35.87	54	-18.13
4960.00	47.64	PK	V	2.68	50.32	74	-23.68
4960.00	33.35	AV	V	2.68	36.03	54	-17.97

Note:


Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit


The other spurious emission which is in the noise floor level was not recorded.

Test plots for worst Band Edge Measurements (Radiated):

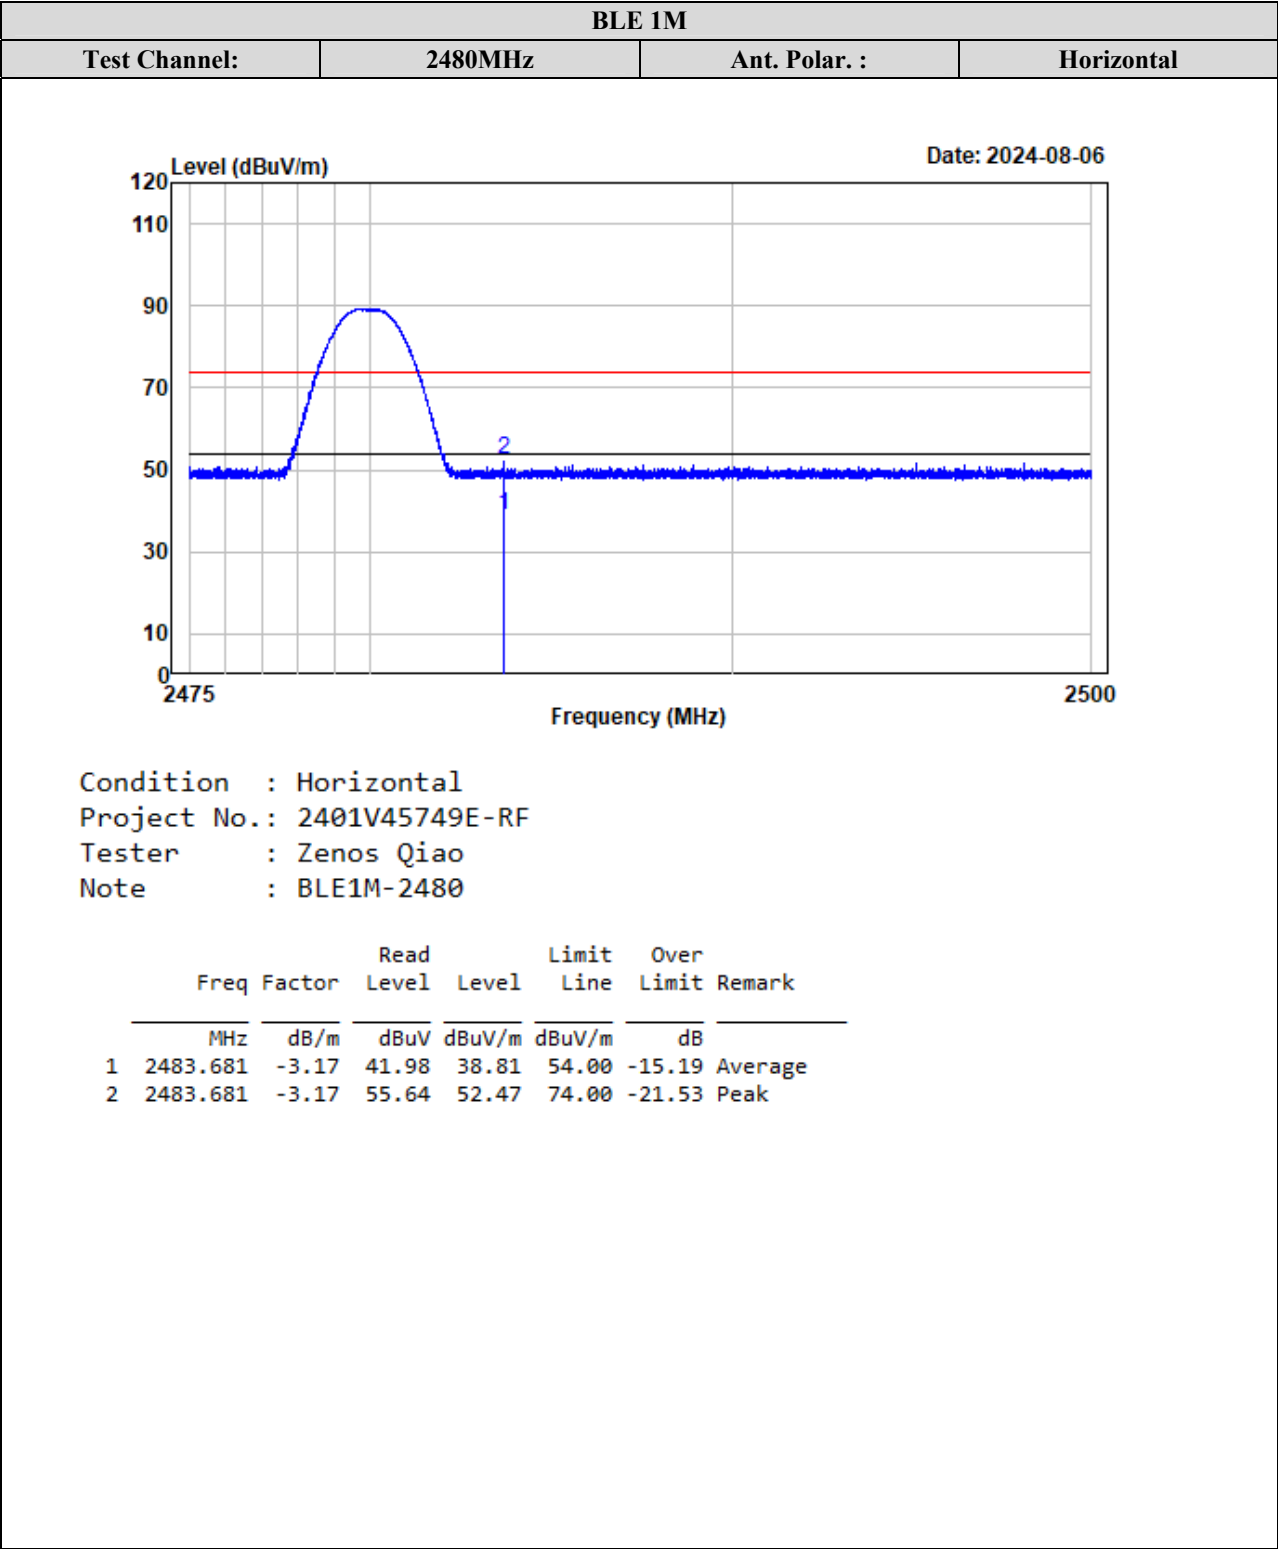

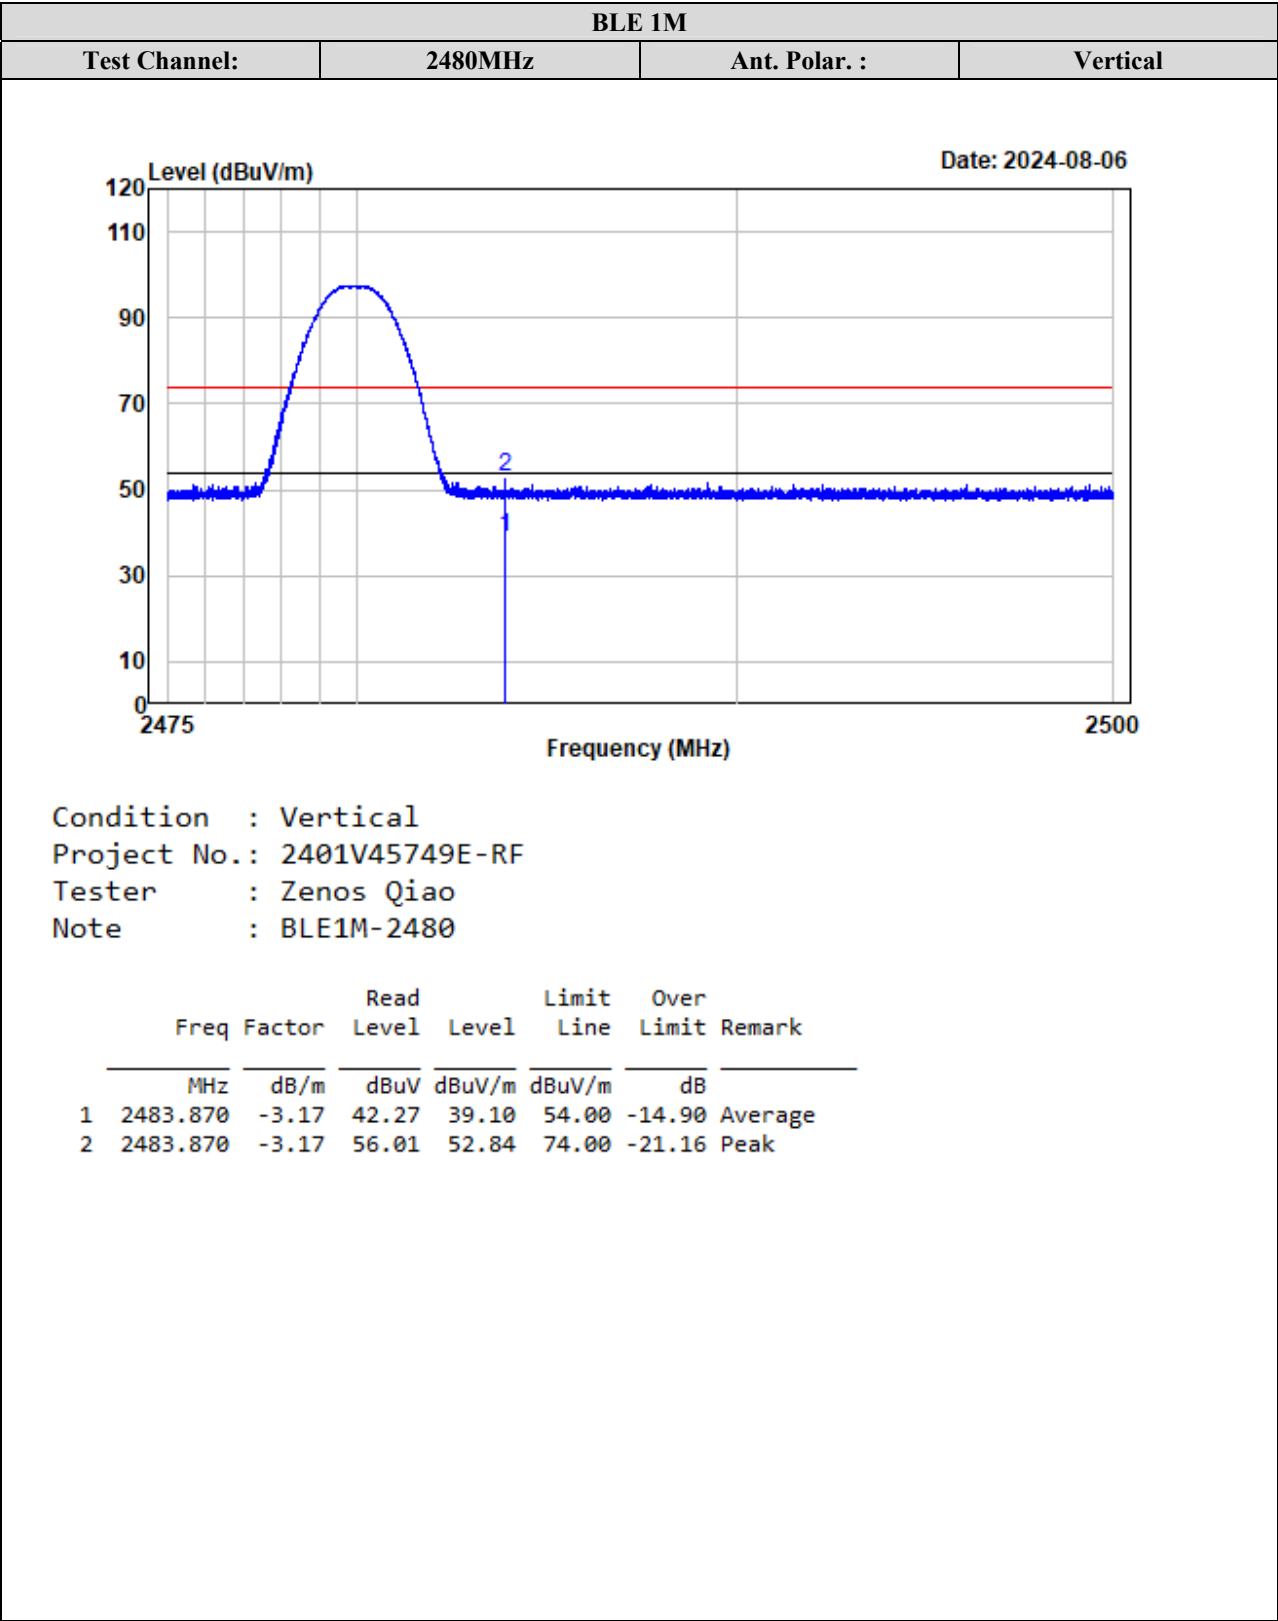

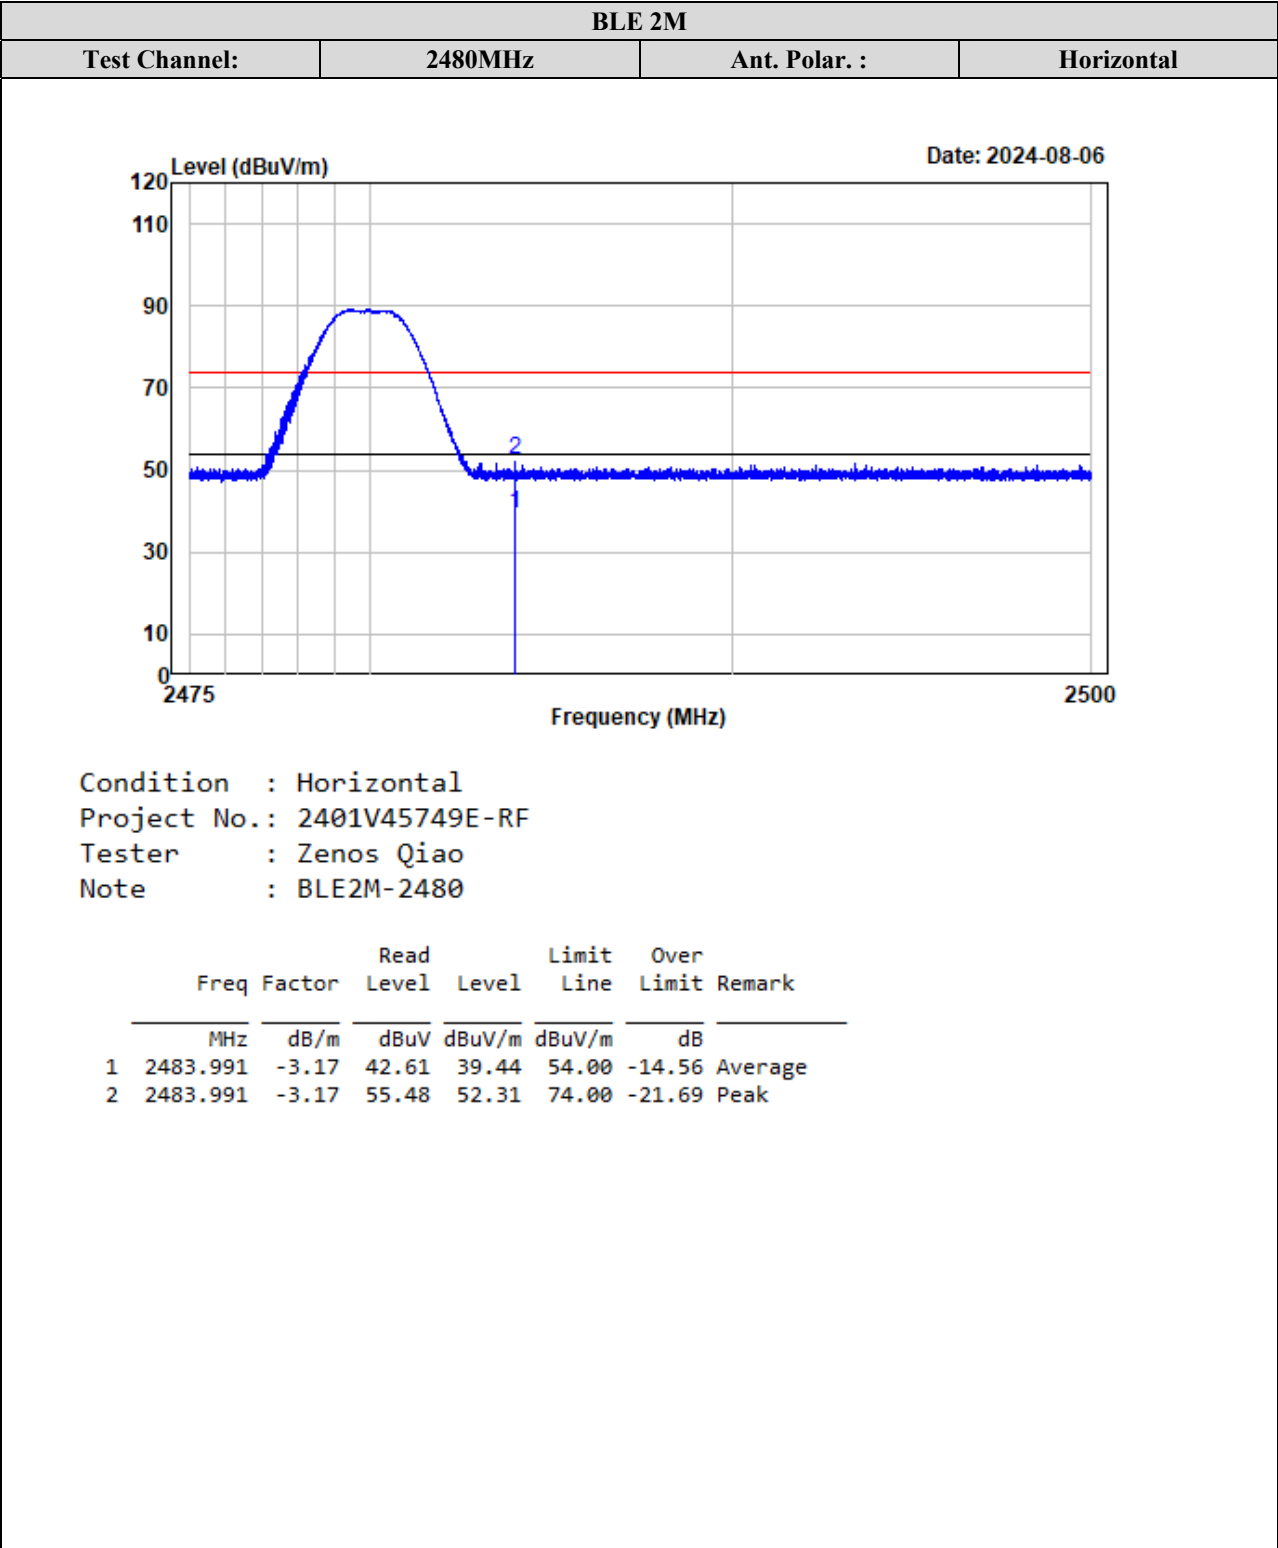

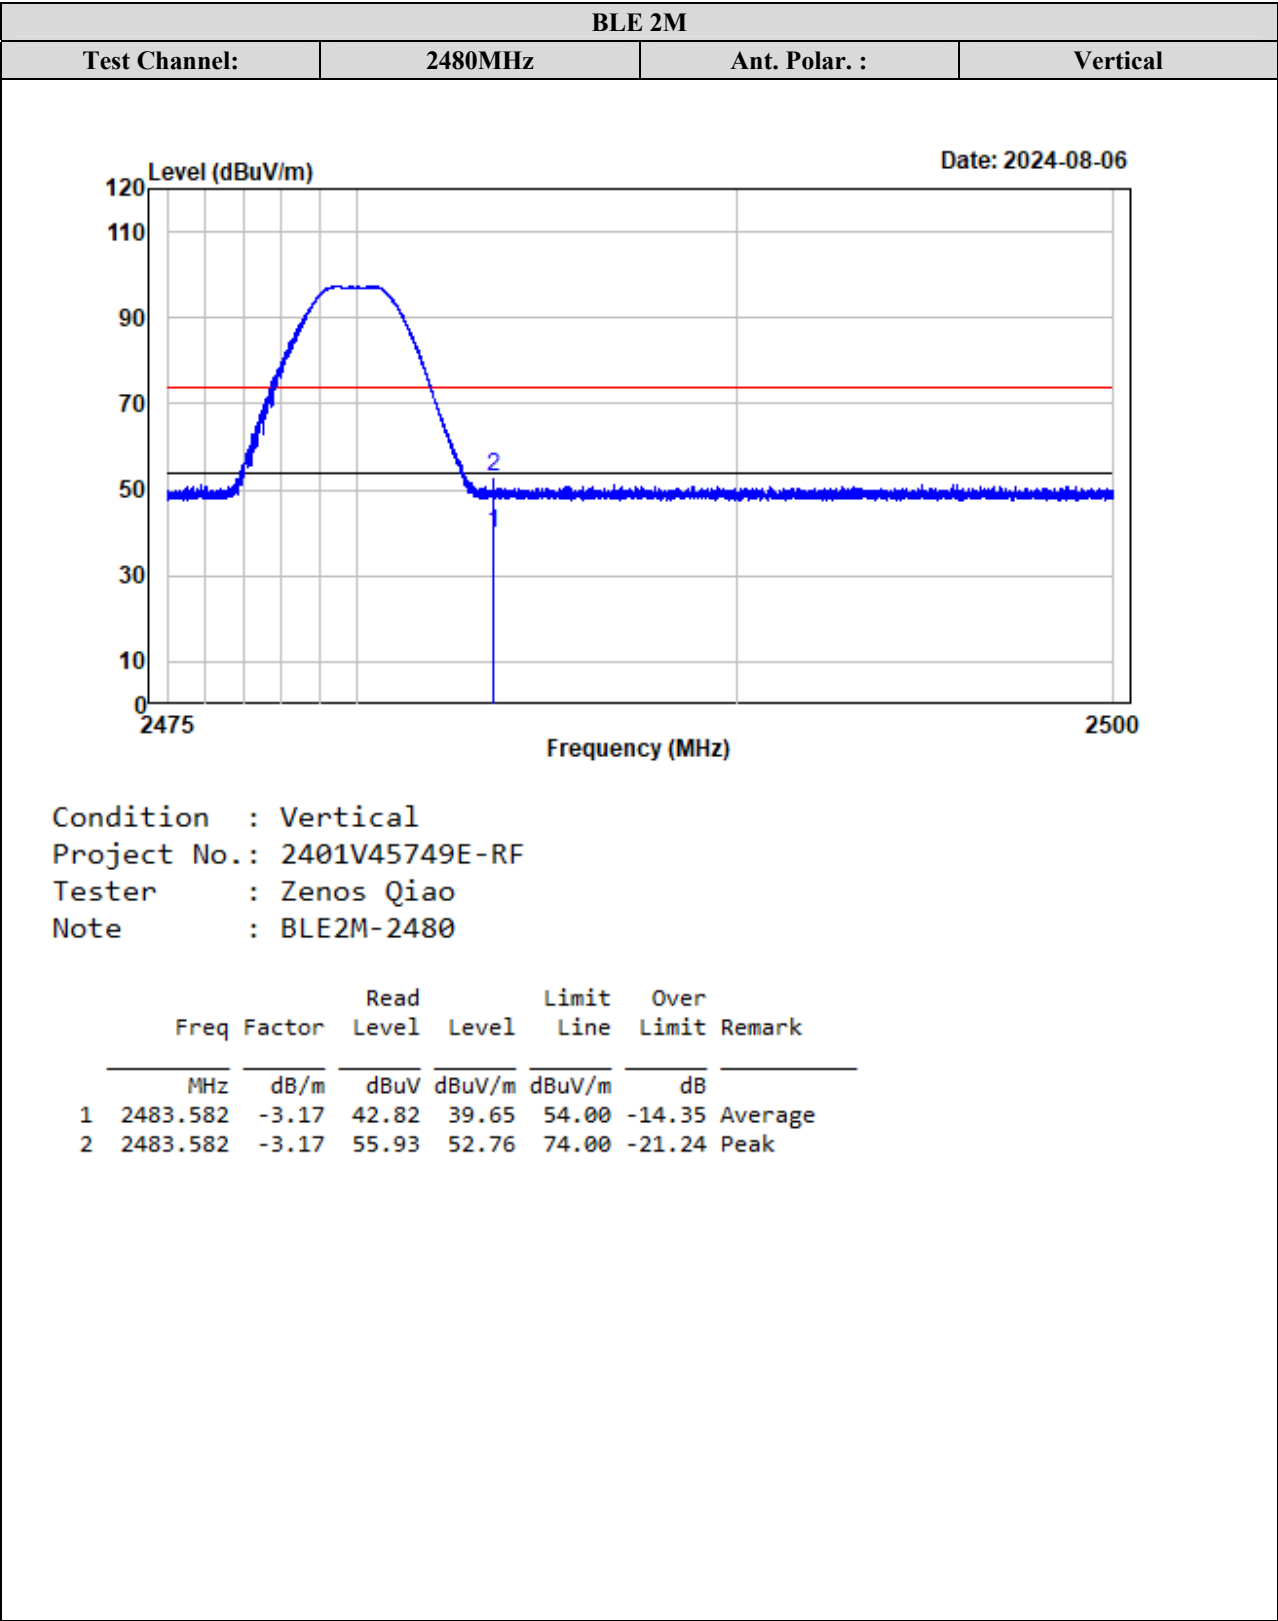

2.4G Wi-Fi

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11b							
Low Channel 2412MHz							
2386.16	55.14	PK	H	-2.93	52.21	74	-21.79
2386.16	40.97	AV	H	-2.93	38.04	54	-15.96
2385.89	55.49	PK	V	-2.93	52.56	74	-21.44
2385.89	41.28	AV	V	-2.93	38.35	54	-15.65
4824.00	50.15	PK	H	2.45	52.60	74	-21.40
4824.00	46.23	AV	H	2.45	48.68	54	-5.32
4824.00	49.02	PK	V	2.45	51.47	74	-22.53
4824.00	45.13	AV	V	2.45	47.58	54	-6.42
Middle Channel 2437MHz							
4874.00	52.29	PK	H	2.56	54.85	74	-19.15
4874.00	48.32	AV	H	2.56	50.88	54	-3.12
4874.00	51.05	PK	V	2.56	53.61	74	-20.39
4874.00	47.47	AV	V	2.56	50.03	54	-3.97
High Channel 2462MHz							
2483.73	55.53	PK	H	-3.17	52.36	74	-21.64
2483.73	41.48	AV	H	-3.17	38.31	54	-15.69
2483.58	55.96	PK	V	-3.17	52.79	74	-21.21
2483.58	41.87	AV	V	-3.17	38.70	54	-15.30
4924.00	50.39	PK	H	2.63	53.02	74	-20.98
4924.00	46.57	AV	H	2.63	49.20	54	-4.80
4924.00	49.25	PK	V	2.63	51.88	74	-22.12
4924.00	45.38	AV	V	2.63	48.01	54	-5.99

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11g							
Low Channel 2412MHz							
2389.57	69.09	PK	H	-2.93	66.16	74	-7.84
2389.57	45.52	AV	H	-2.93	42.59	54	-11.41
2389.72	70.46	PK	V	-2.93	67.53	74	-6.47
2389.72	46.35	AV	V	-2.93	43.42	54	-10.58
4824.00	49.99	PK	H	2.45	52.44	74	-21.56
4824.00	36.75	AV	H	2.45	39.20	54	-14.80
4824.00	48.68	PK	V	2.45	51.13	74	-22.87
4824.00	35.87	AV	V	2.45	38.32	54	-15.68
Middle Channel 2437MHz							
4874.00	51.87	PK	H	2.56	54.43	74	-19.57
4874.00	38.66	AV	H	2.56	41.22	54	-12.78
4874.00	50.54	PK	V	2.56	53.10	74	-20.90
4874.00	37.75	AV	V	2.56	40.31	54	-13.69
High Channel 2462MHz							
2483.63	71.69	PK	H	-3.17	68.52	74	-5.48
2483.63	46.32	AV	H	-3.17	43.15	54	-10.85
2483.70	73.14	PK	V	-3.17	69.97	74	-4.03
2483.70	47.05	AV	V	-3.17	43.88	54	-10.12
4924.00	50.32	PK	H	2.63	52.95	74	-21.05
4924.00	36.94	AV	H	2.63	39.57	54	-14.43
4924.00	49.13	PK	V	2.63	51.76	74	-22.24
4924.00	36.07	AV	V	2.63	38.70	54	-15.30

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/AV					
802.11n20							
Low Channel 2412MHz							
2389.69	69.37	PK	H	-2.93	66.44	74	-7.56
2389.69	45.41	AV	H	-2.93	42.48	54	-11.52
2389.48	70.78	PK	V	-2.93	67.85	74	-6.15
2389.48	46.14	AV	V	-2.93	43.21	54	-10.79
4824.00	49.91	PK	H	2.45	52.36	74	-21.64
4824.00	36.89	AV	H	2.45	39.34	54	-14.66
4824.00	48.72	PK	V	2.45	51.17	74	-22.83
4824.00	36.04	AV	V	2.45	38.49	54	-15.51
Middle Channel 2437MHz							
4874.00	52.10	PK	H	2.56	54.66	74	-19.34
4874.00	38.56	AV	H	2.56	41.12	54	-12.88
4874.00	50.85	PK	V	2.56	53.41	74	-20.59
4874.00	37.67	AV	V	2.56	40.23	54	-13.77
High Channel 2462MHz							
2483.54	72.48	PK	H	-3.17	69.31	74	-4.69
2483.54	46.54	AV	H	-3.17	43.37	54	-10.63
2483.65	73.96	PK	V	-3.17	70.79	74	-3.21
2483.65	47.37	AV	V	-3.17	44.20	54	-9.80
4924.00	50.75	PK	H	2.63	53.38	74	-20.62
4924.00	37.21	AV	H	2.63	39.84	54	-14.16
4924.00	49.54	PK	V	2.63	52.17	74	-21.83
4924.00	36.39	AV	V	2.63	39.02	54	-14.98

Note:


Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit


The other spurious emission which is in the noise floor level was not recorded.


Test plots for worst Band Edge Measurements (Radiated):

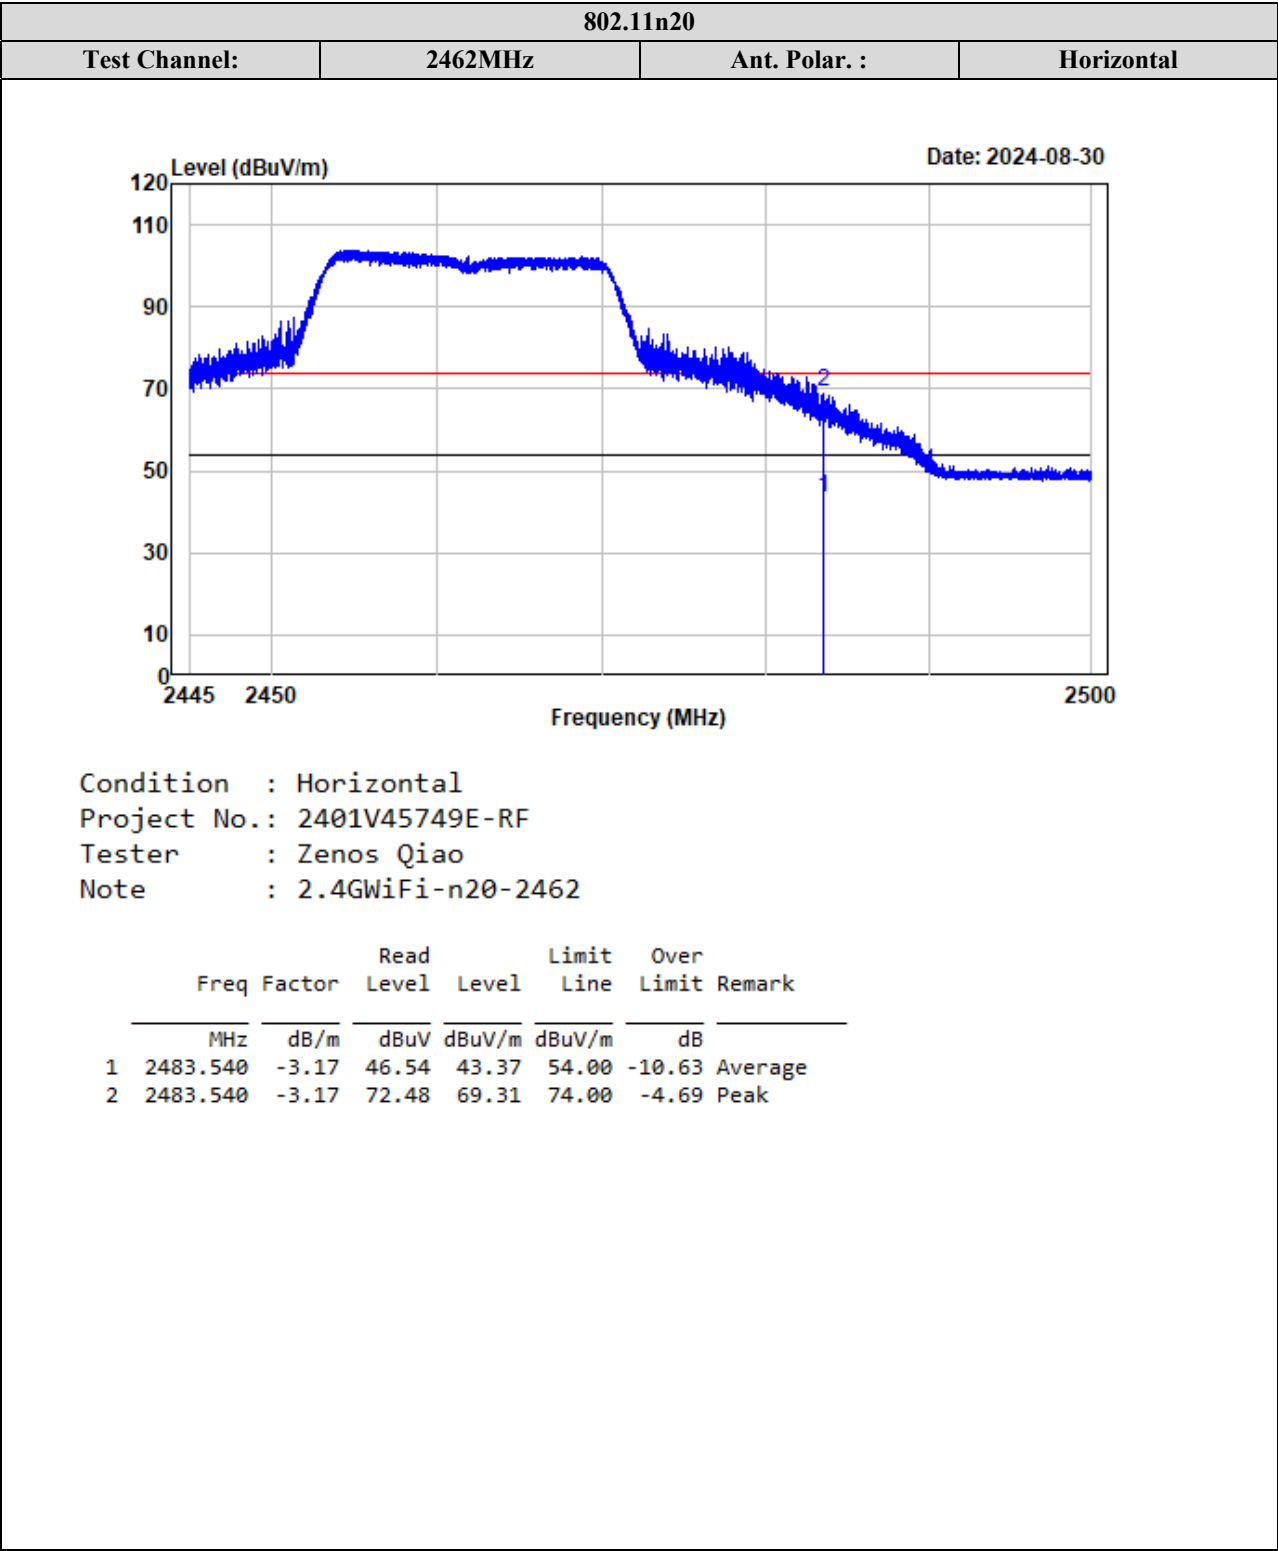


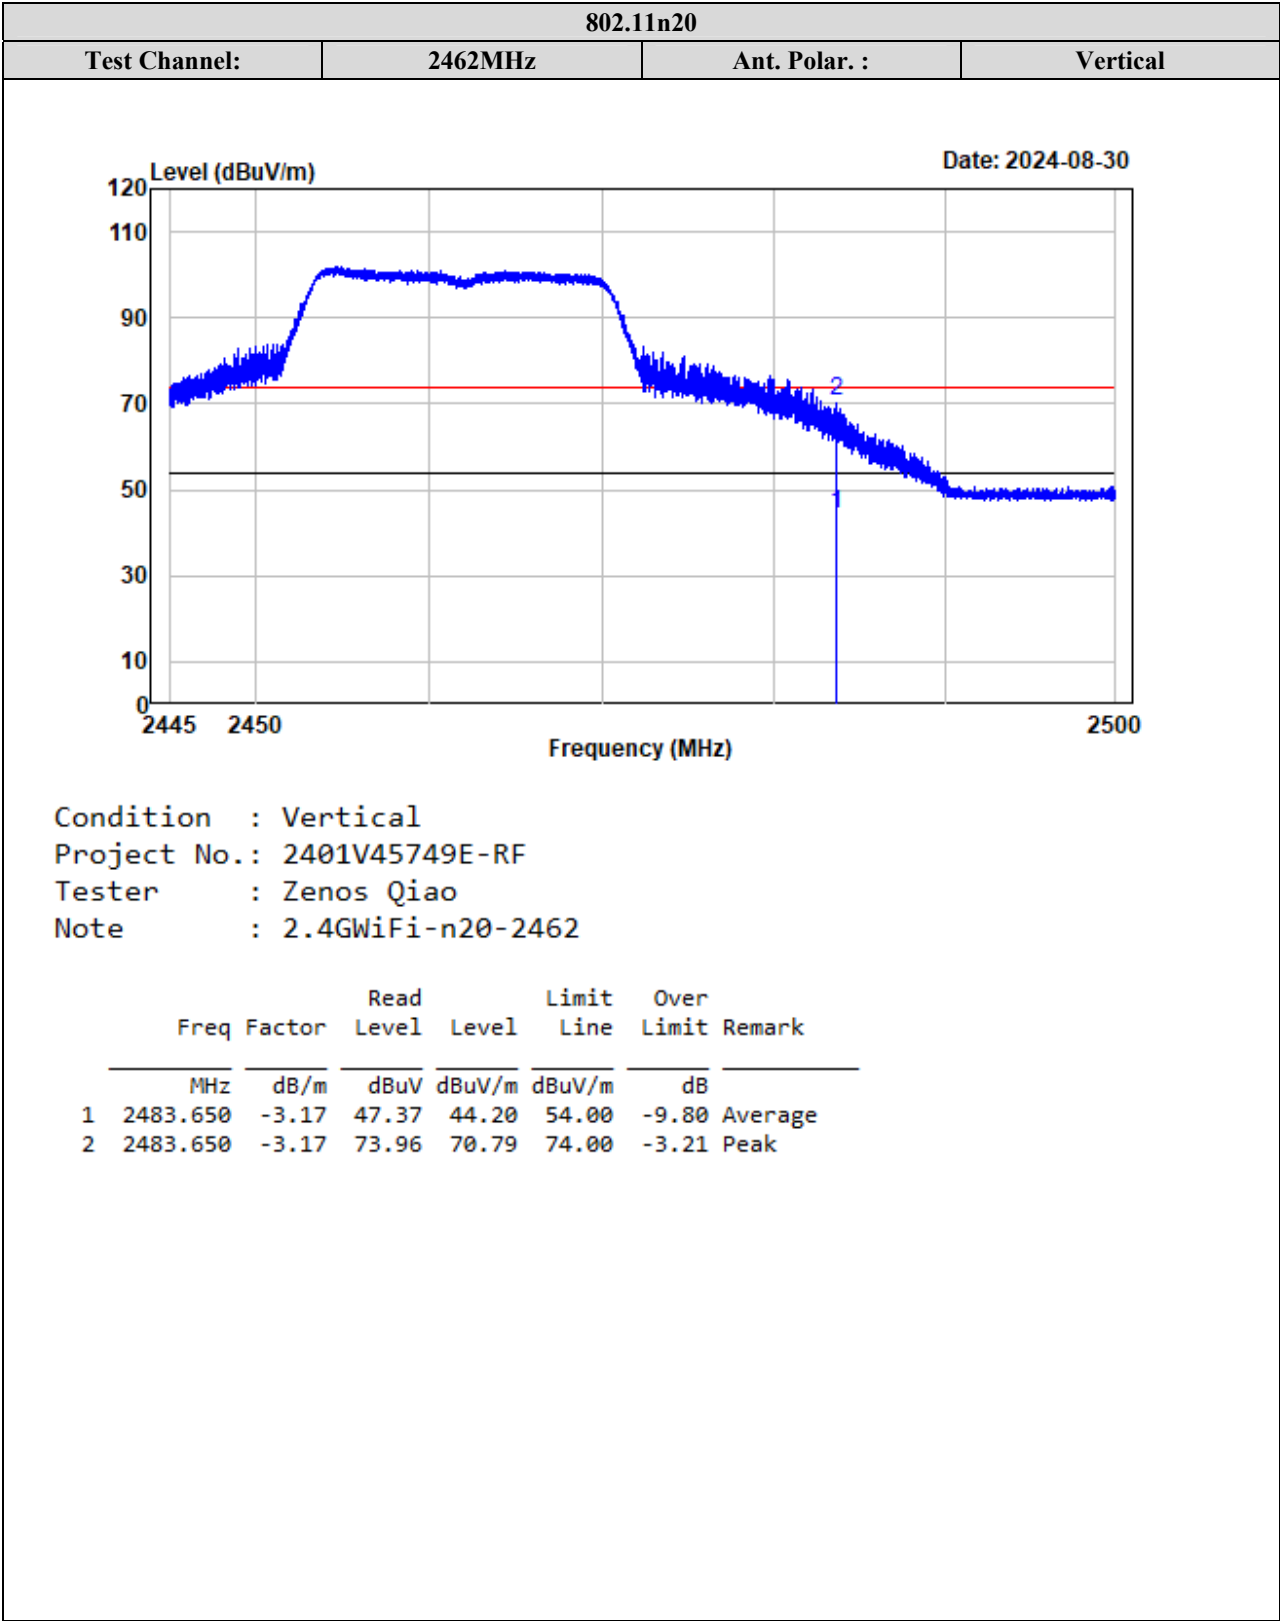



Listed with the worst harmonic margin test plots:

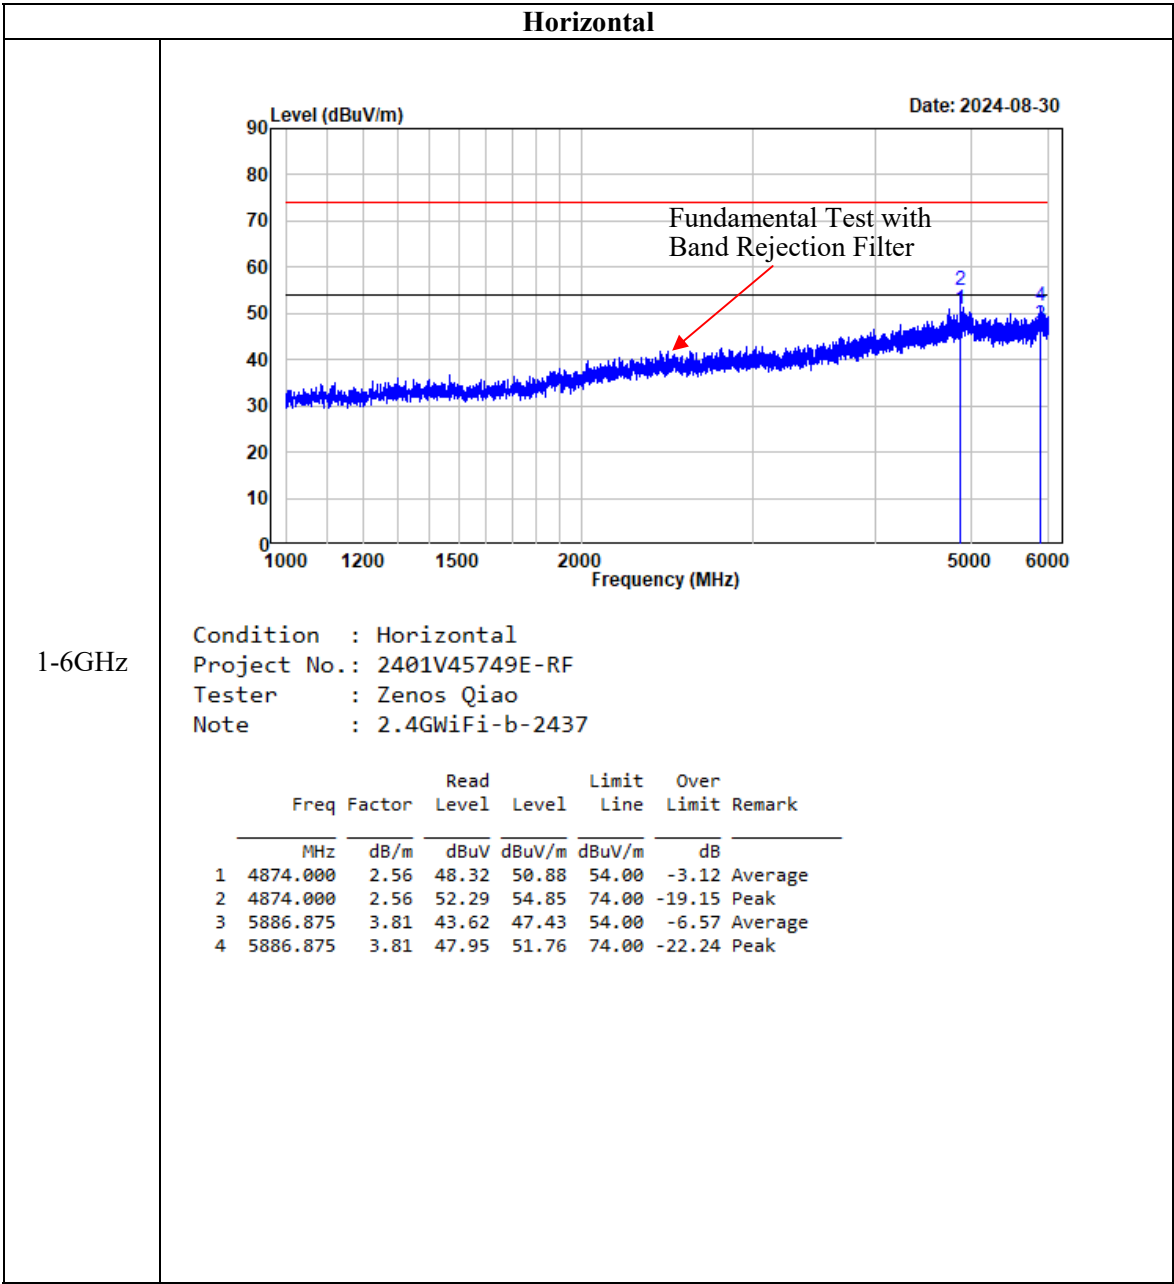


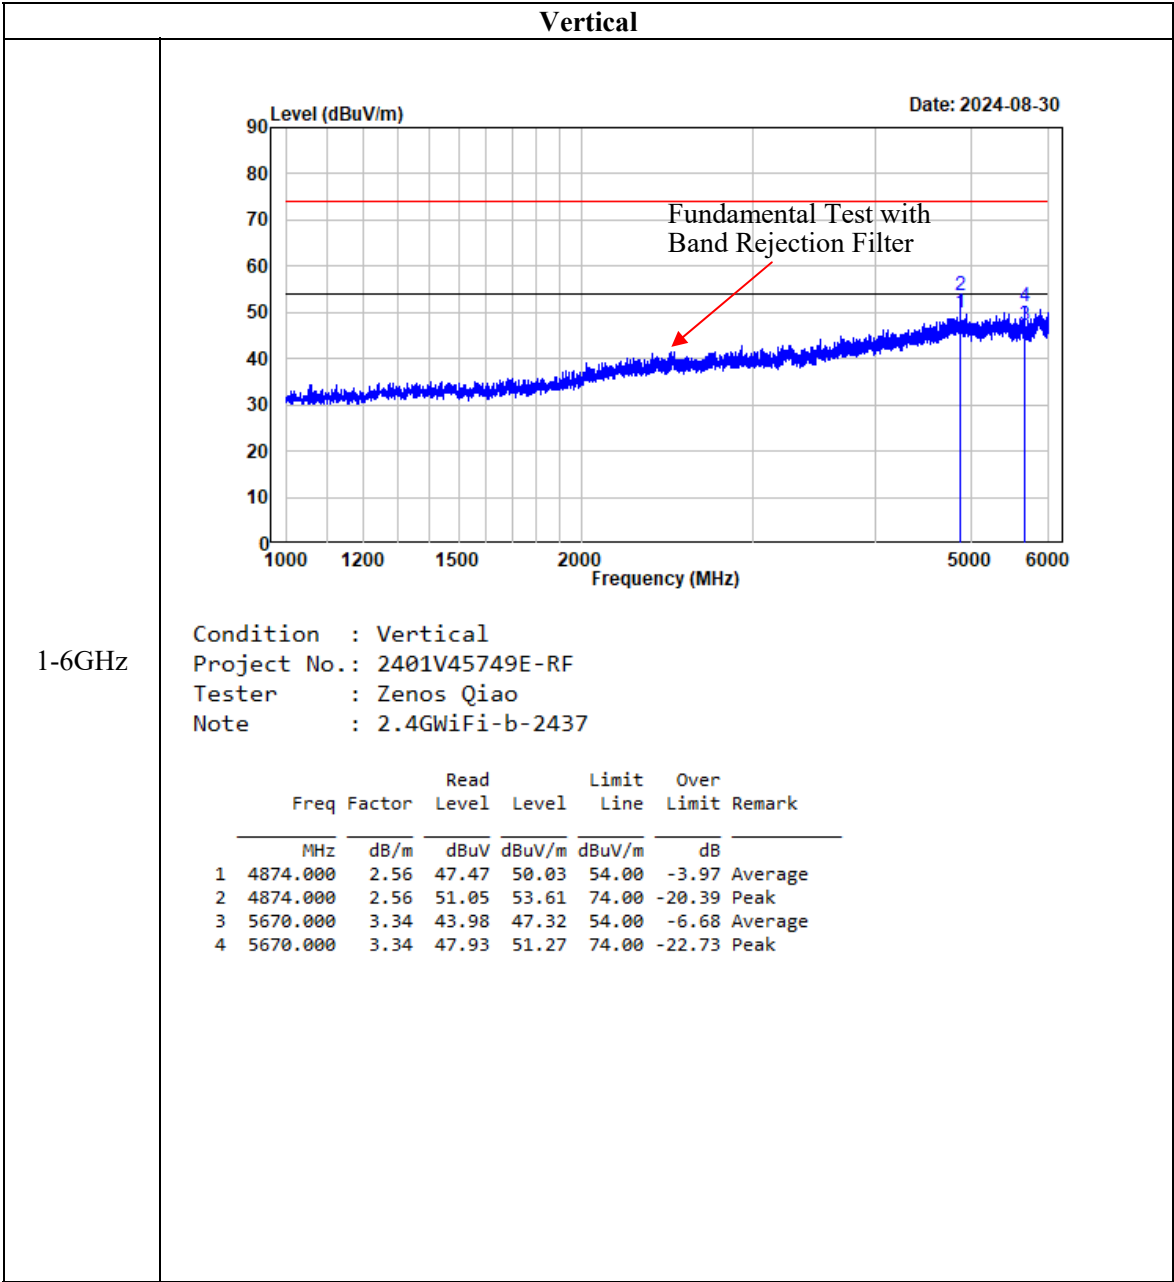

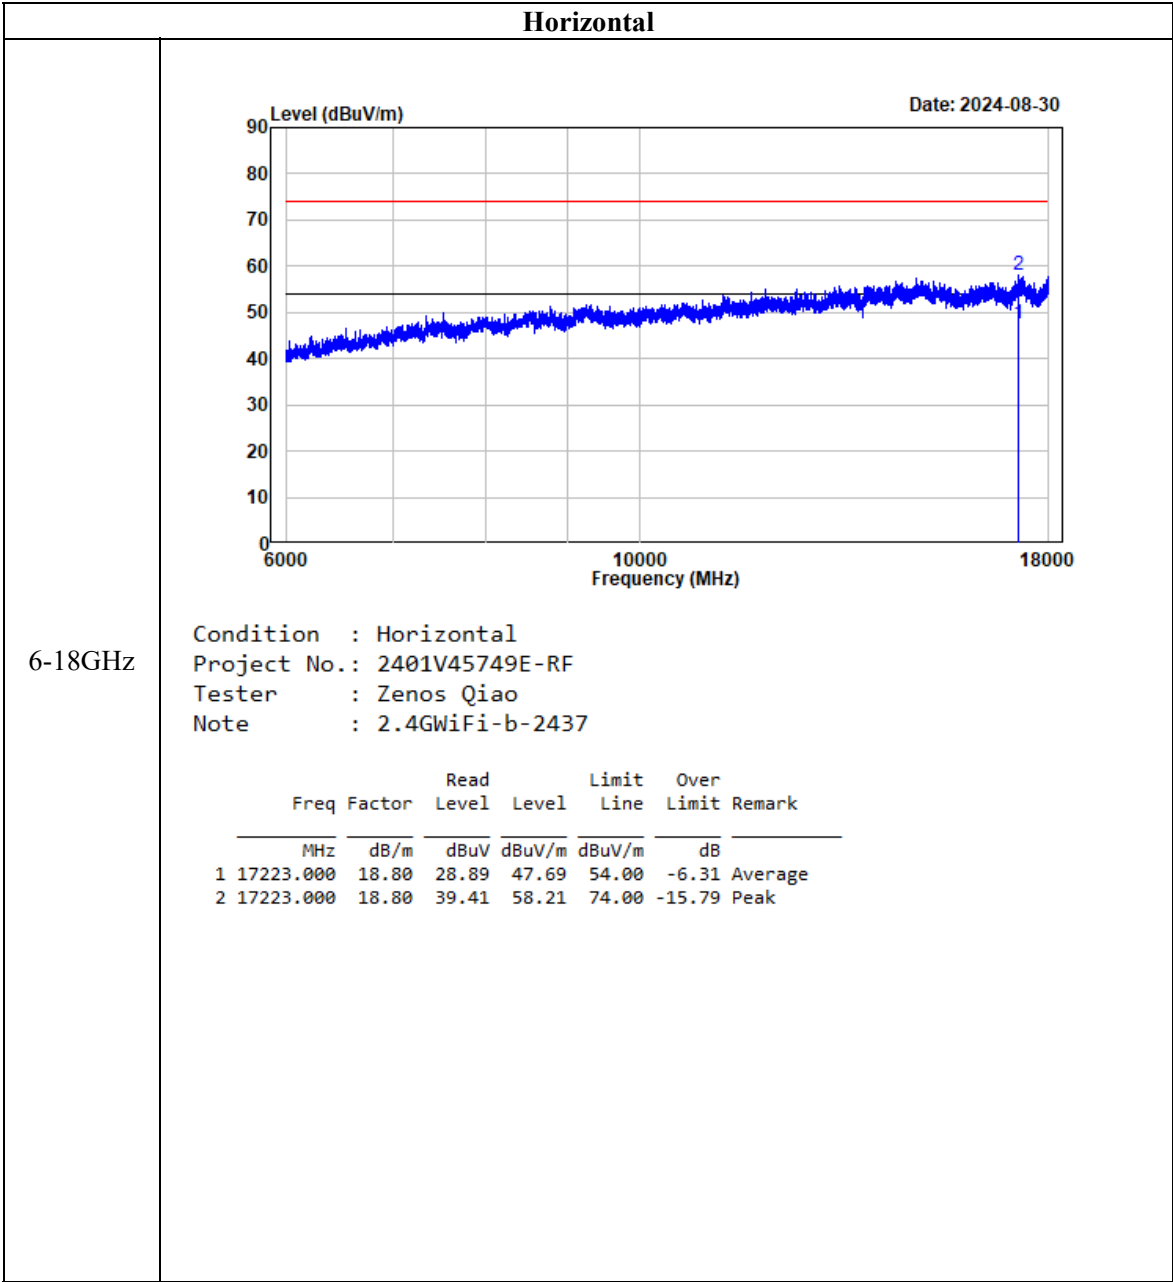

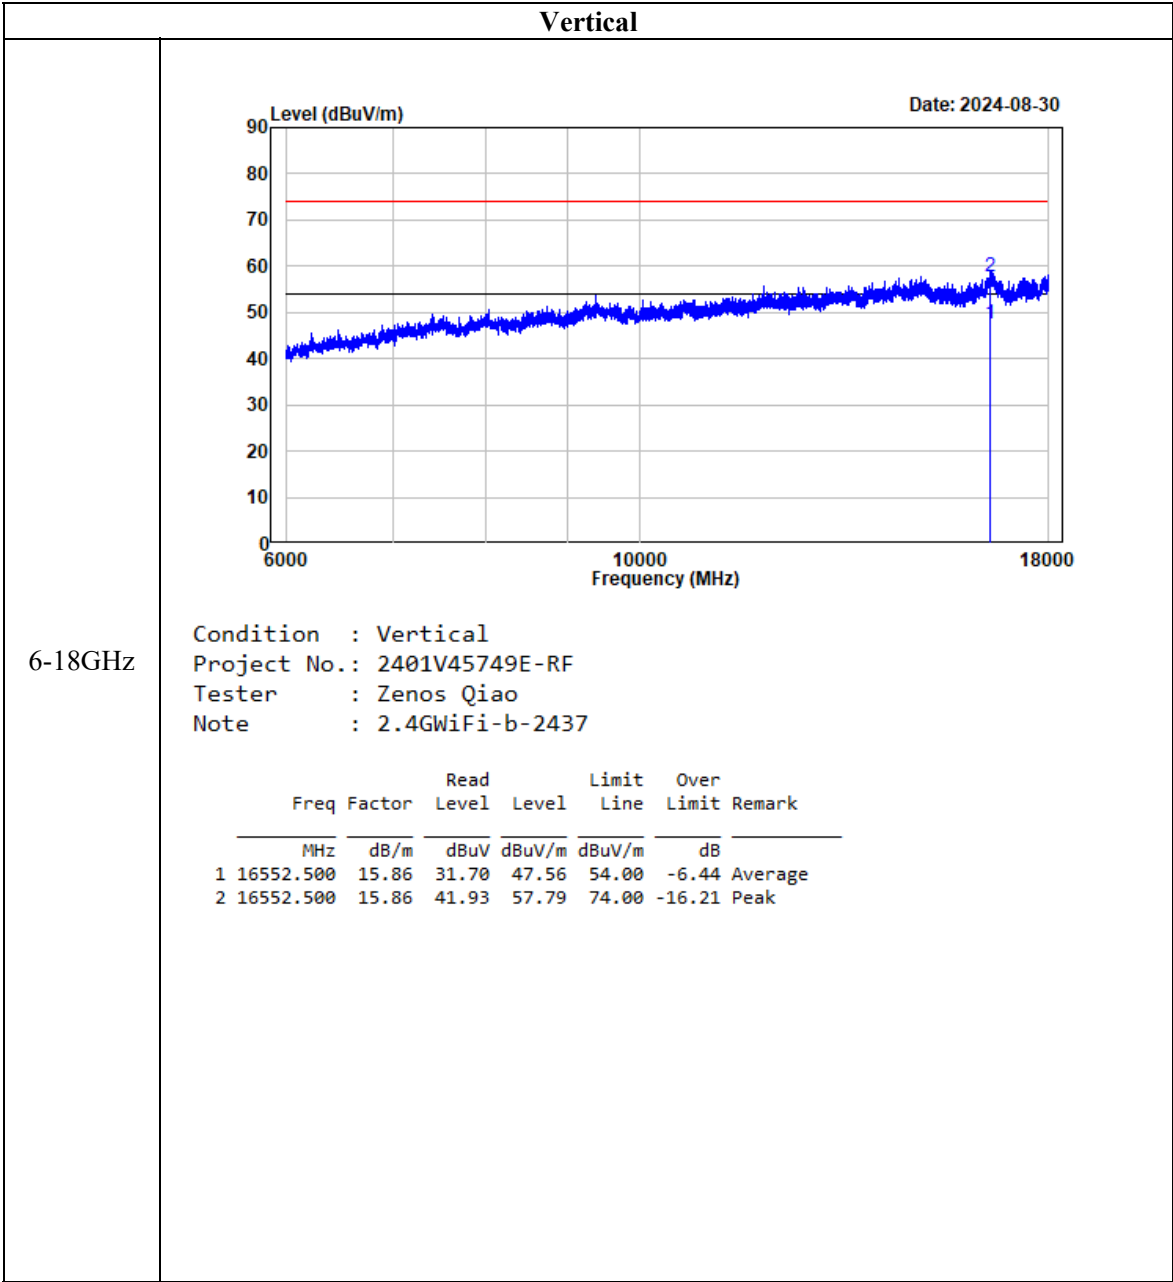

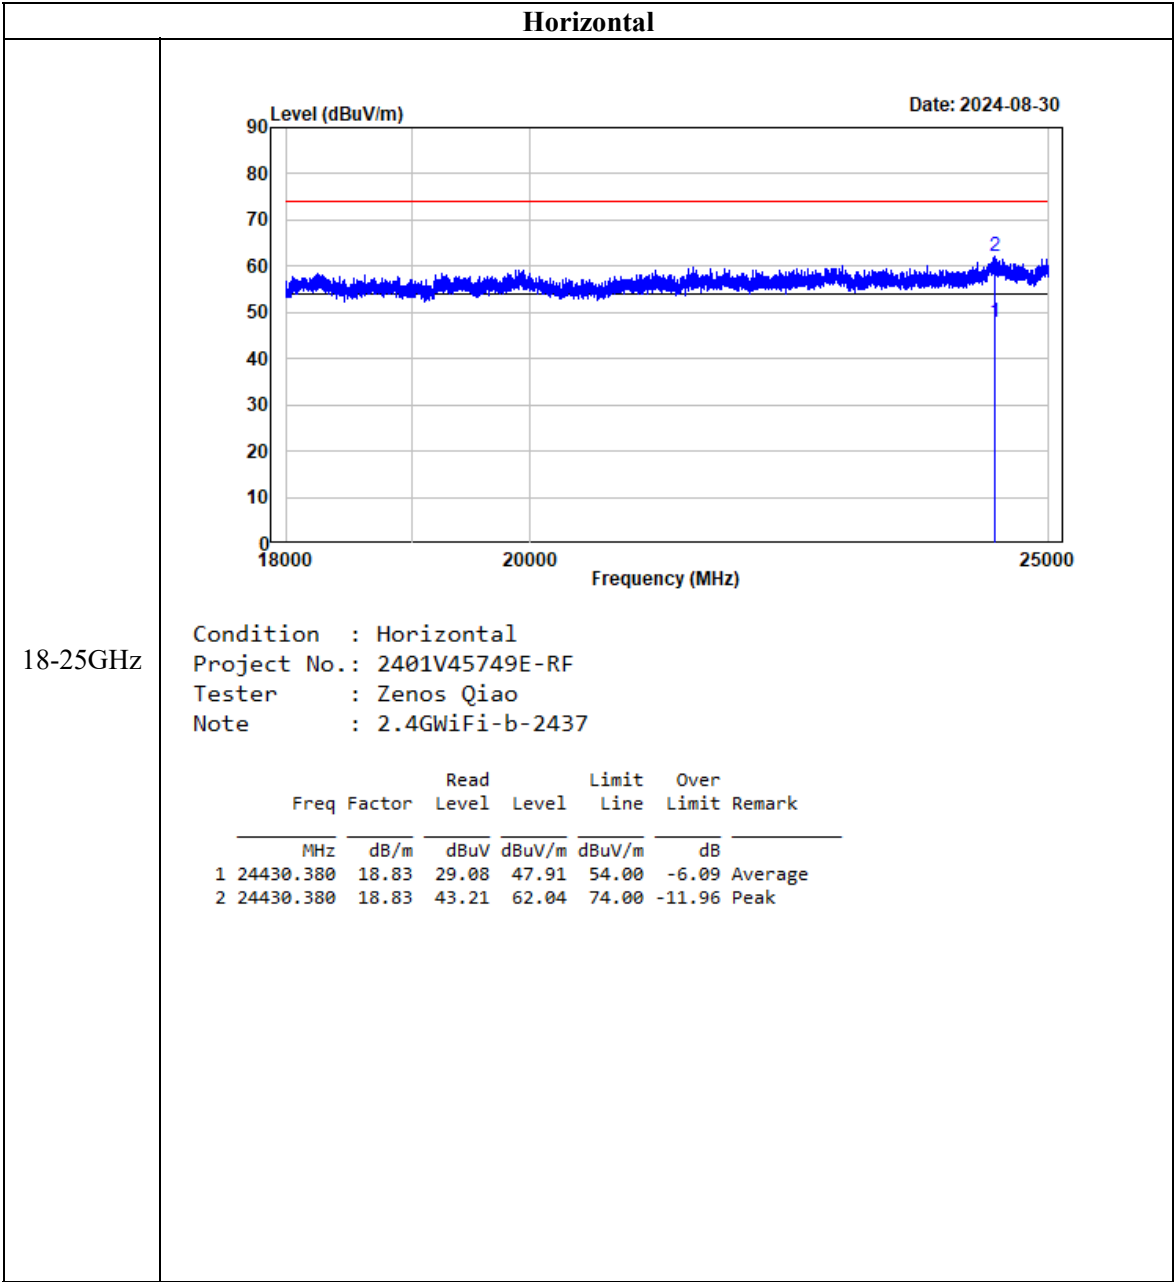

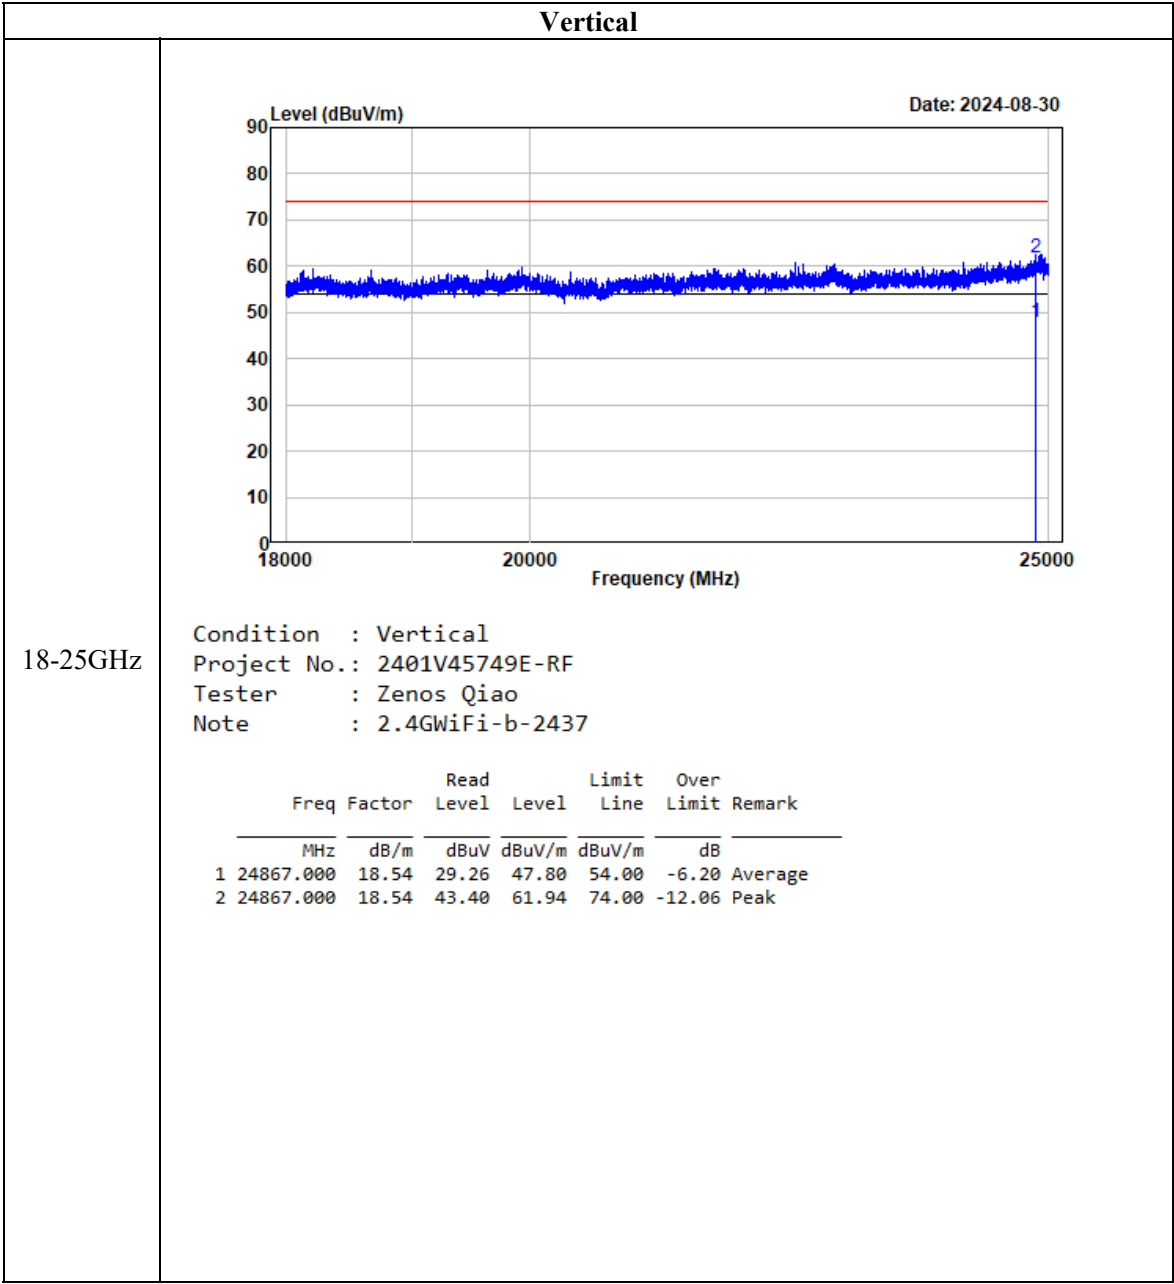

FCC §15.247(a) (2) - 6 dB EMISSION BANDWIDTH

Applicable Standard


According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

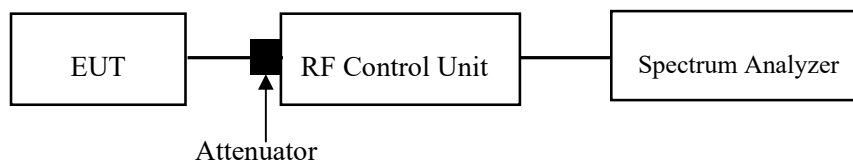

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	49~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Tom Tan from 2024-07-28 to 2024-07-29.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure


Test Method: ANSI C63.10-2013 Clause 11.9.1.1 for BLE & Clause 11.9.1.3 & 11.9.2.3.2 for Wi-Fi

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

For Wi-Fi mode:



For BLE mode:

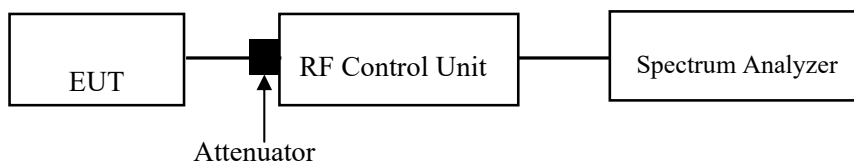

Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	49~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Tom Tan from 2024-07-28 to 2024-07-29.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


FCC §15.247(d) - 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

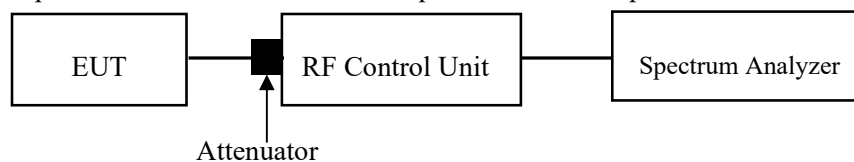**Test Data****Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	49~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Tom Tan from 2024-07-28 to 2024-07-29.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

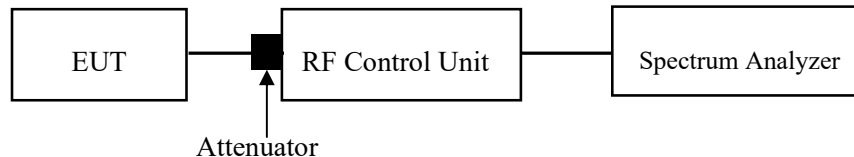

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	49~55 %
ATM Pressure:	101.0 kPa

The testing was performed by Tom Tan from 2024-07-29 to 2024-08-28.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.

EUT PHOTOGRAPHS

Please refer to the attachment 2401V45749E-RF External photo and 2401V45749E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401V45749E-RFE Test Setup photo.


Appendix - BLE


Appendix A: DTS Bandwidth


Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.66	0.5	PASS
		2440	0.66	0.5	PASS
		2480	0.66	0.5	PASS
BLE_2M	Ant1	2402	1.12	0.5	PASS
		2440	1.12	0.5	PASS
		2480	1.12	0.5	PASS

Test Graphs

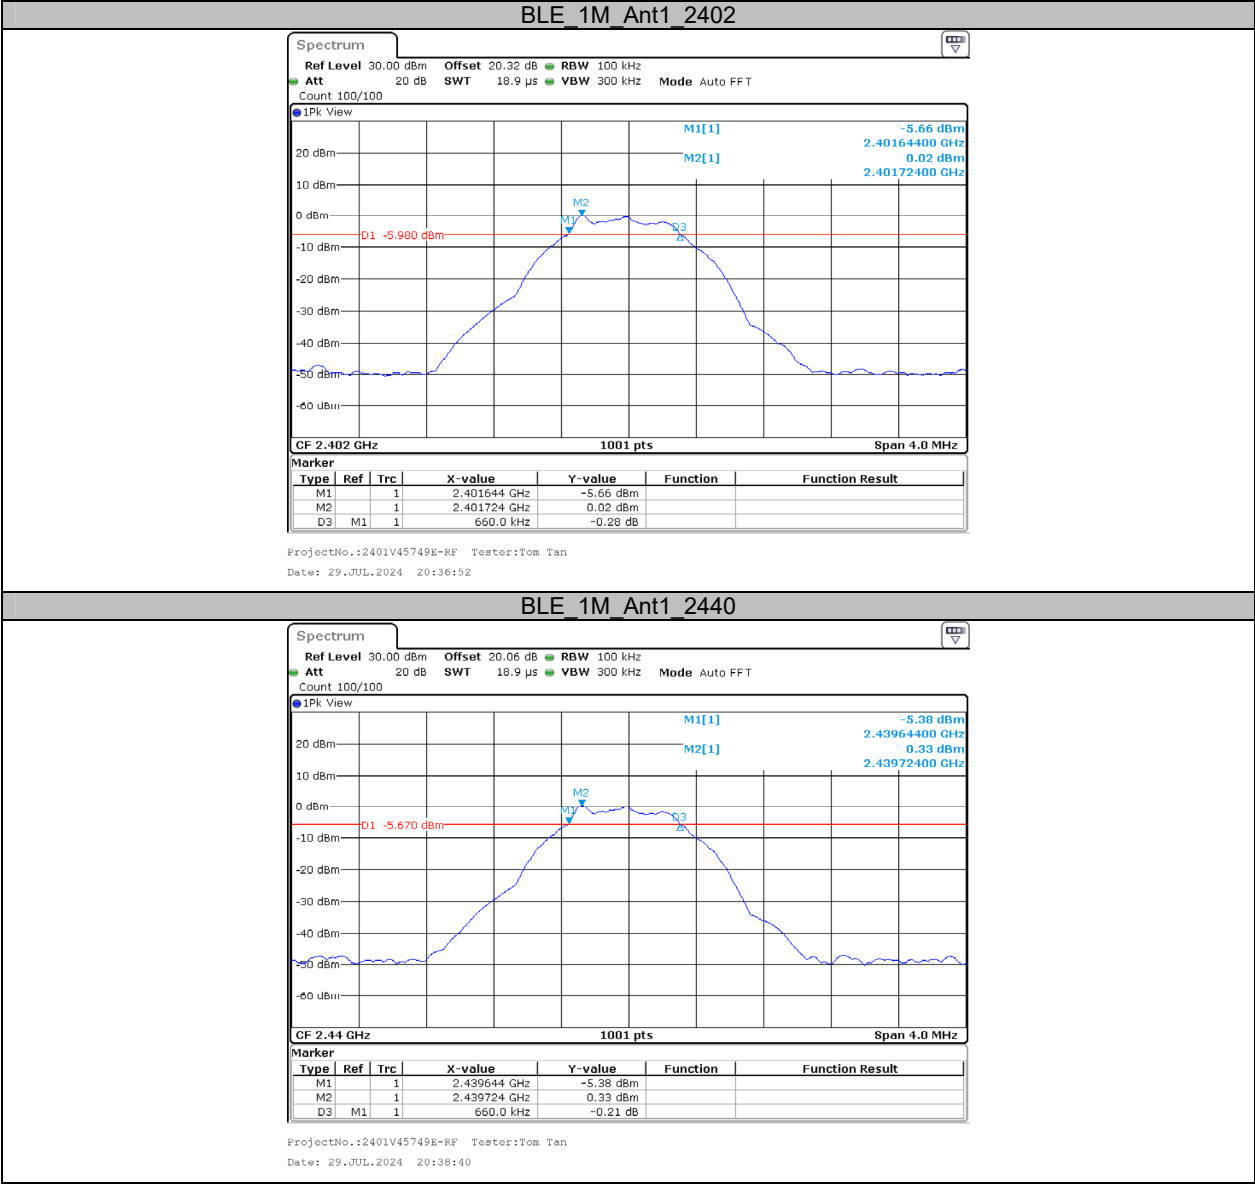

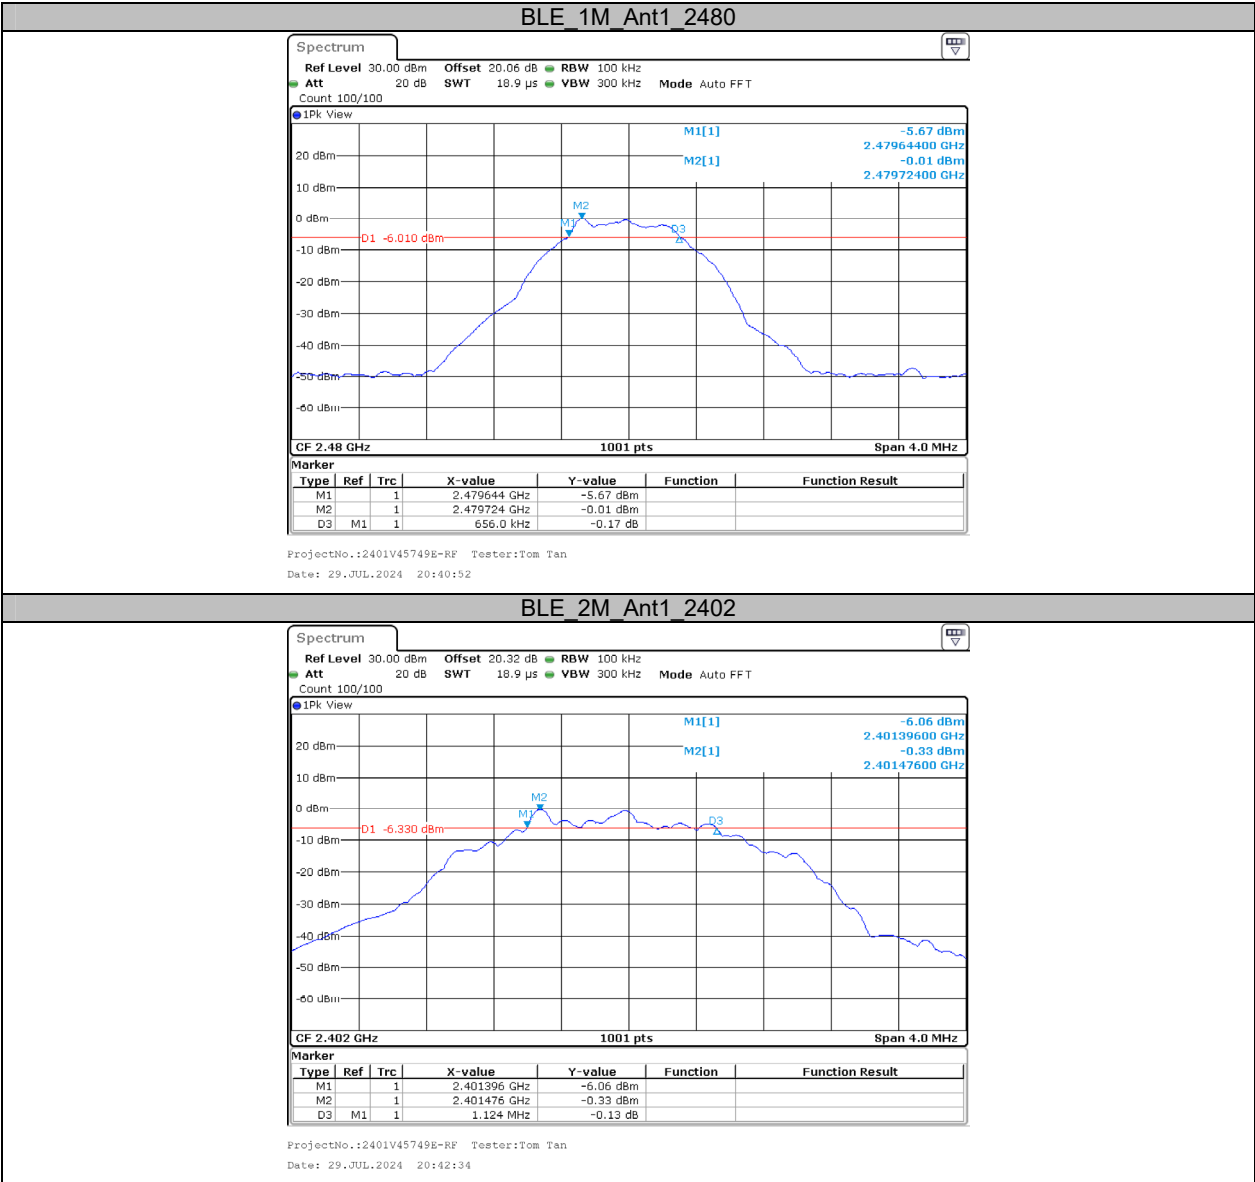


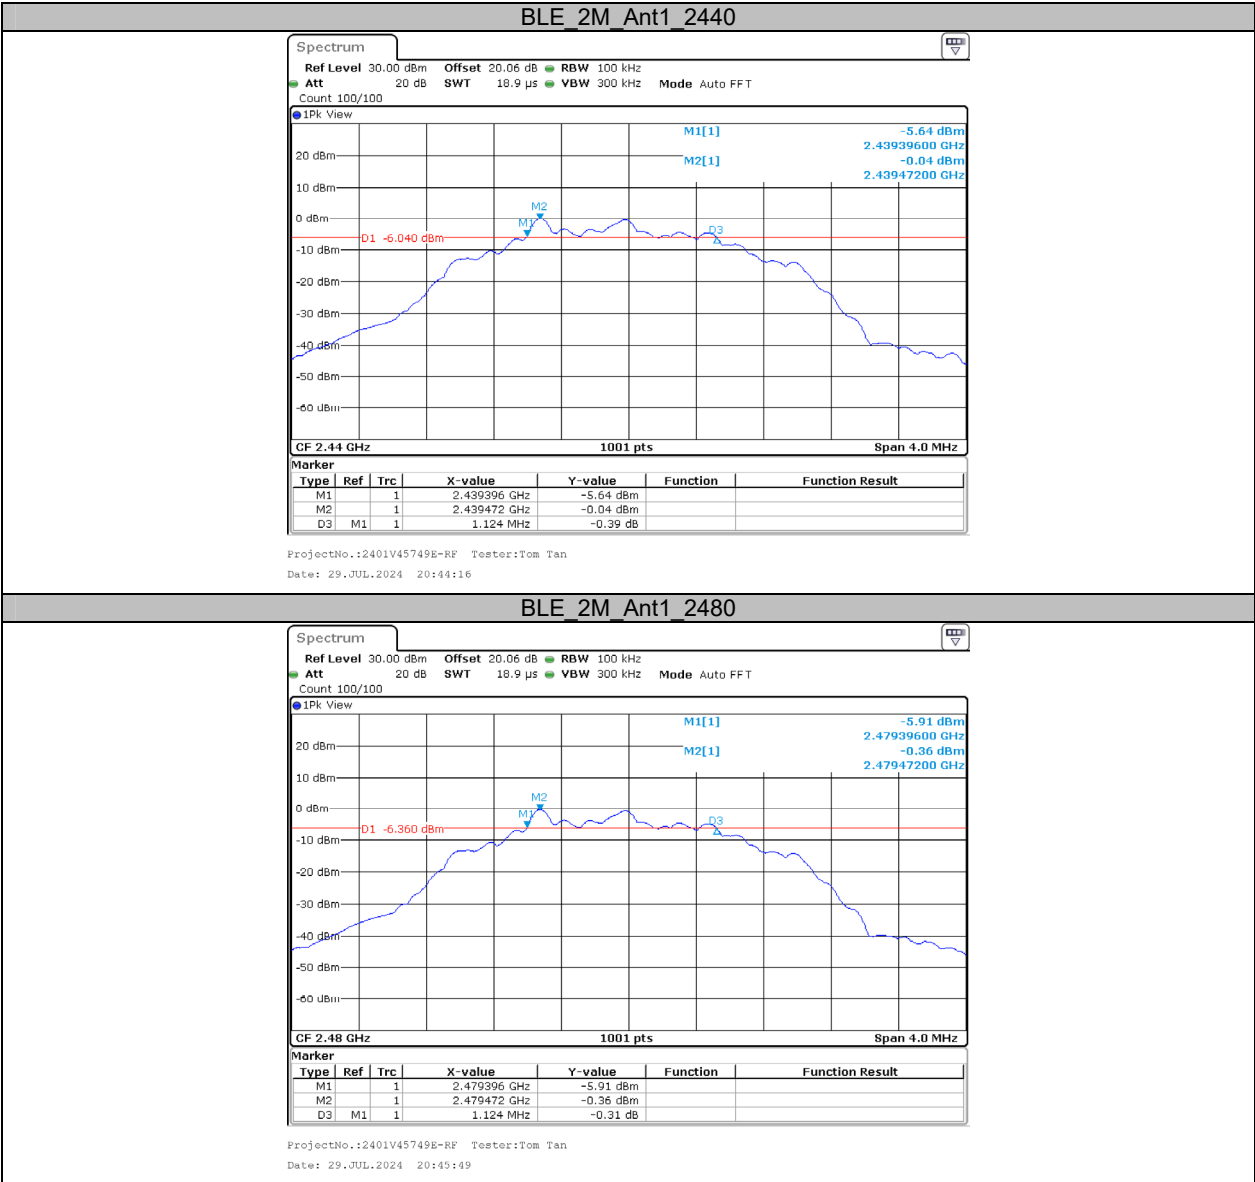



Appendix B: Occupied Channel Bandwidth**Test Result**

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.015	---	---
		2440	1.015	---	---
		2480	1.015	---	---
BLE_2M	Ant1	2402	2.026	---	---
		2440	2.026	---	---
		2480	2.026	---	---

Test Graphs

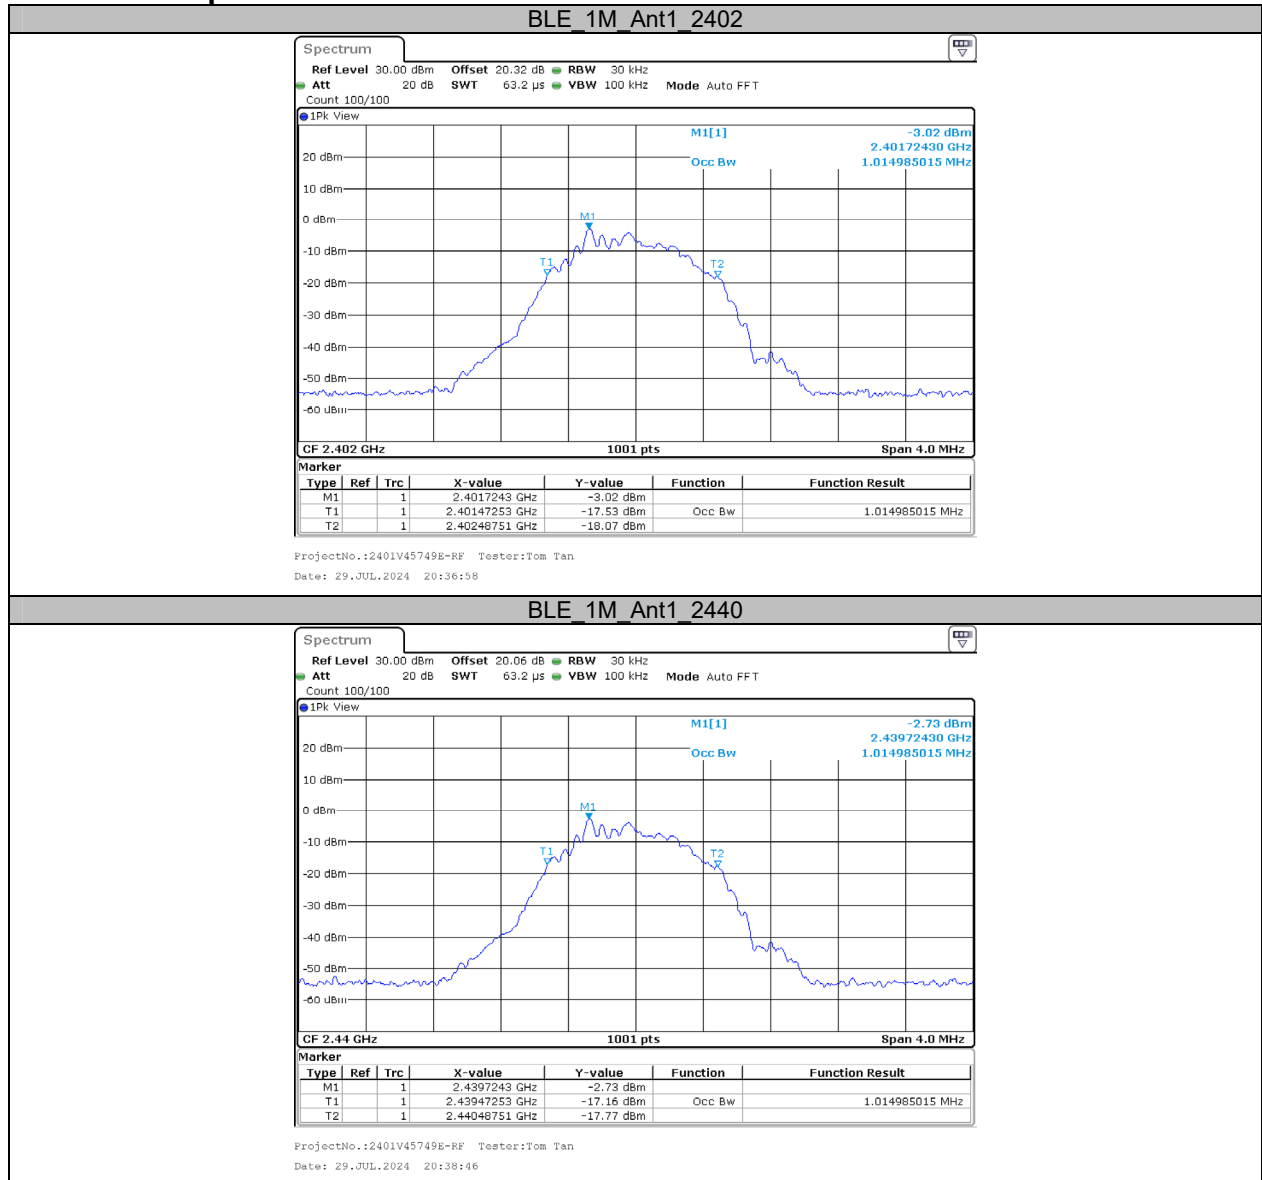


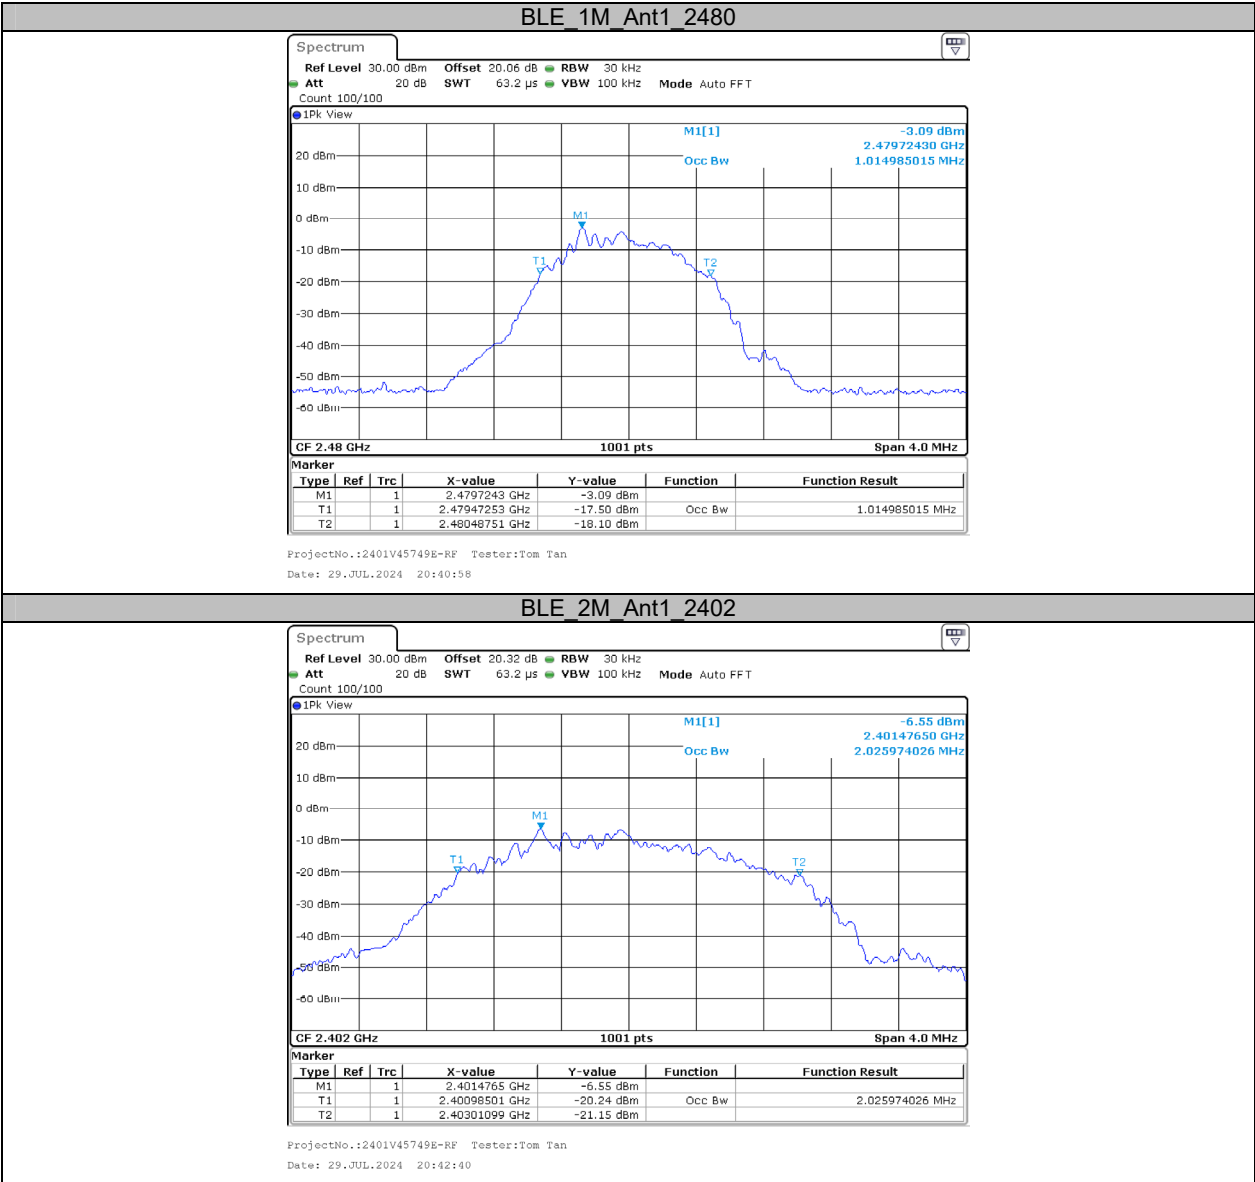


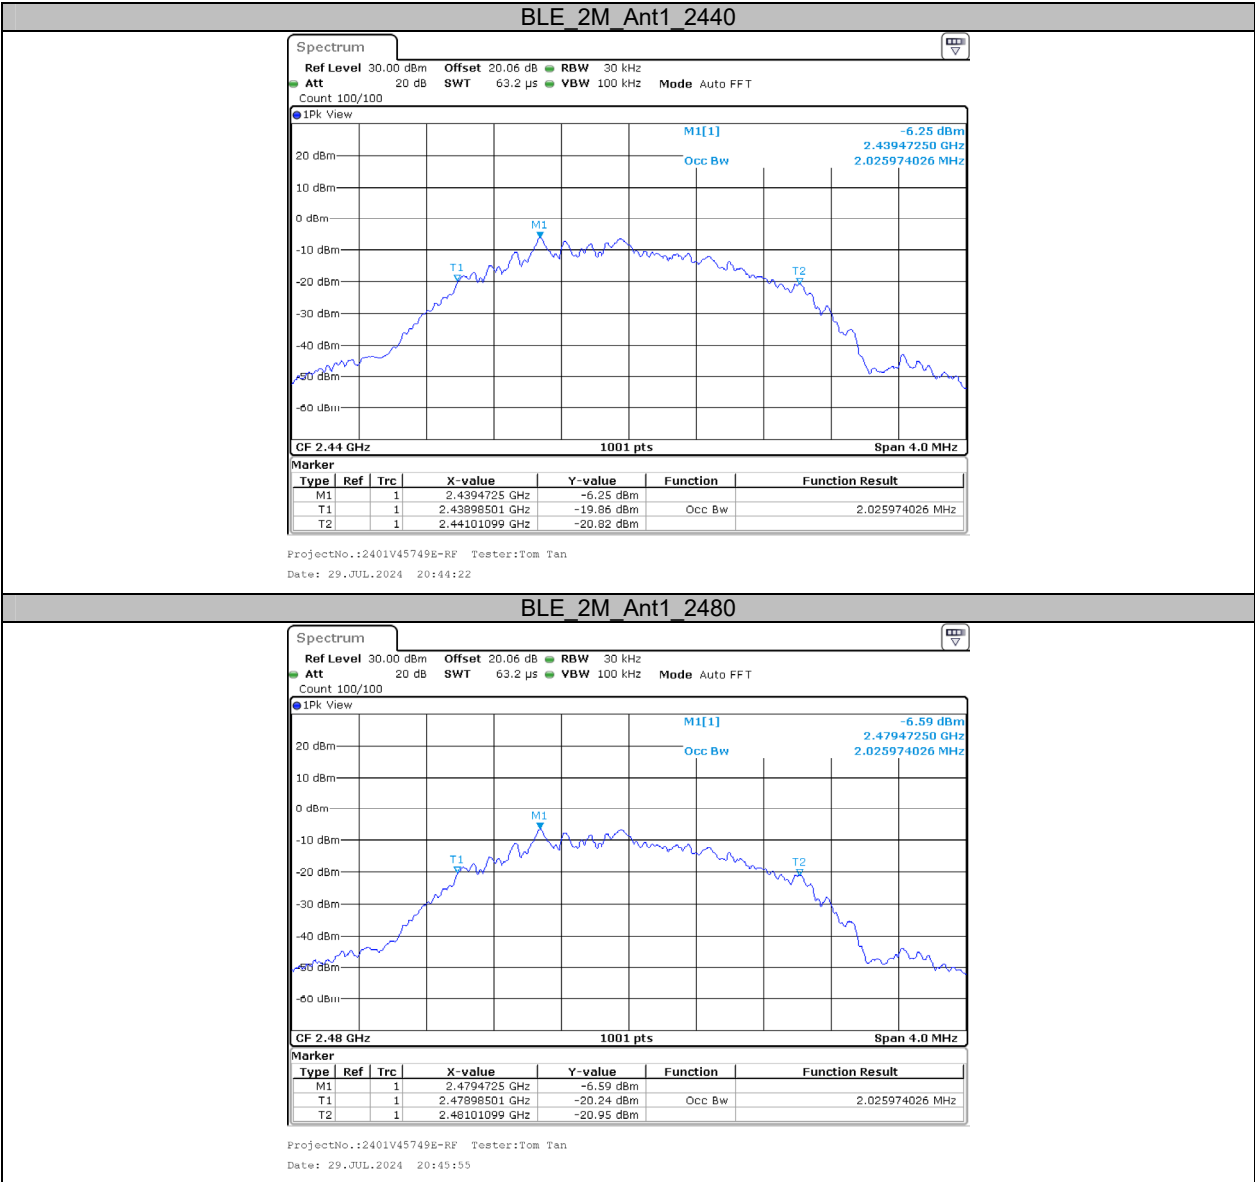


Appendix C: Maximum conducted Peak output power**Test Result Peak**

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE_1M	Ant1	2402	0.51	≤30	PASS
		2440	0.81	≤30	PASS
		2480	0.52	≤30	PASS
BLE_2M	Ant1	2402	0.37	≤30	PASS
		2440	0.67	≤30	PASS
		2480	0.39	≤30	PASS

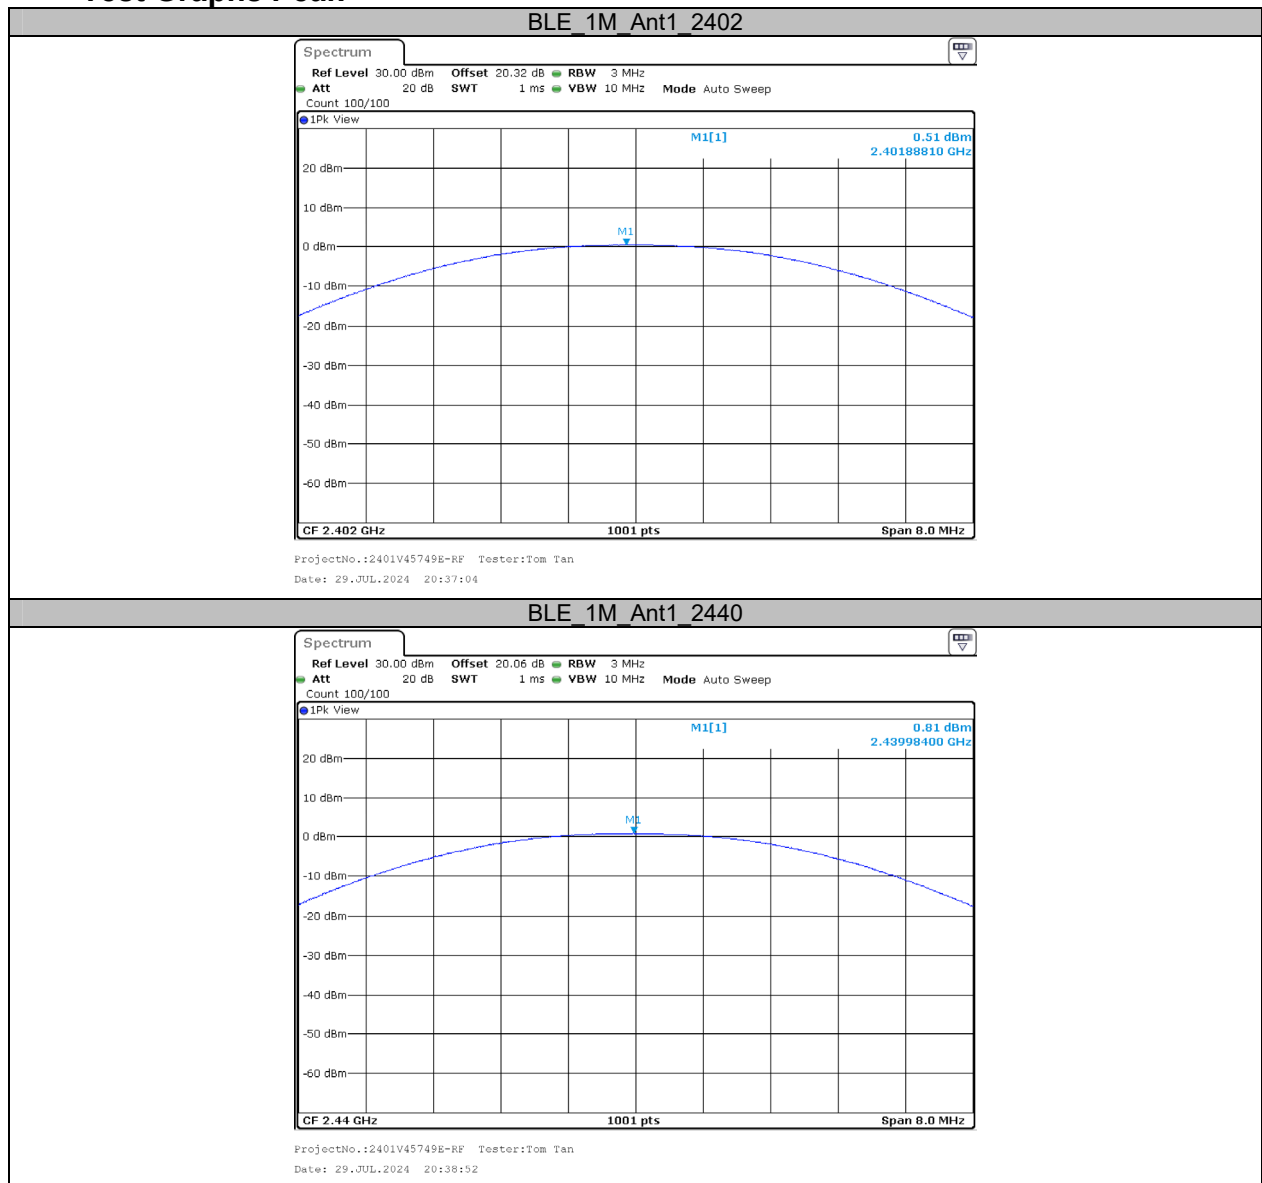Test Graphs Peak

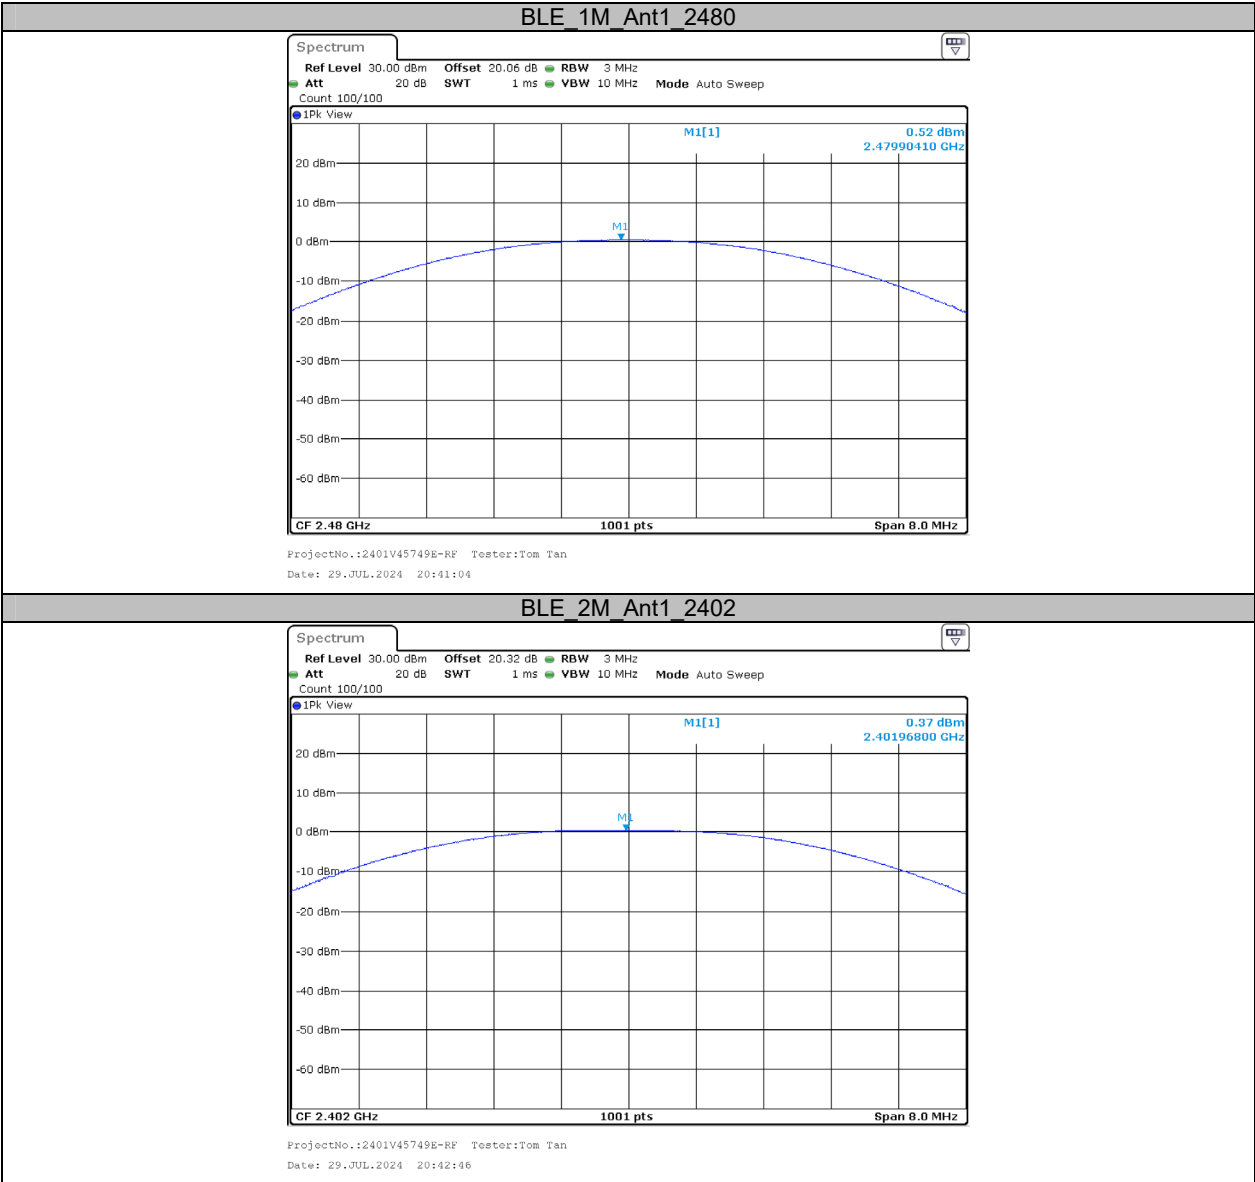


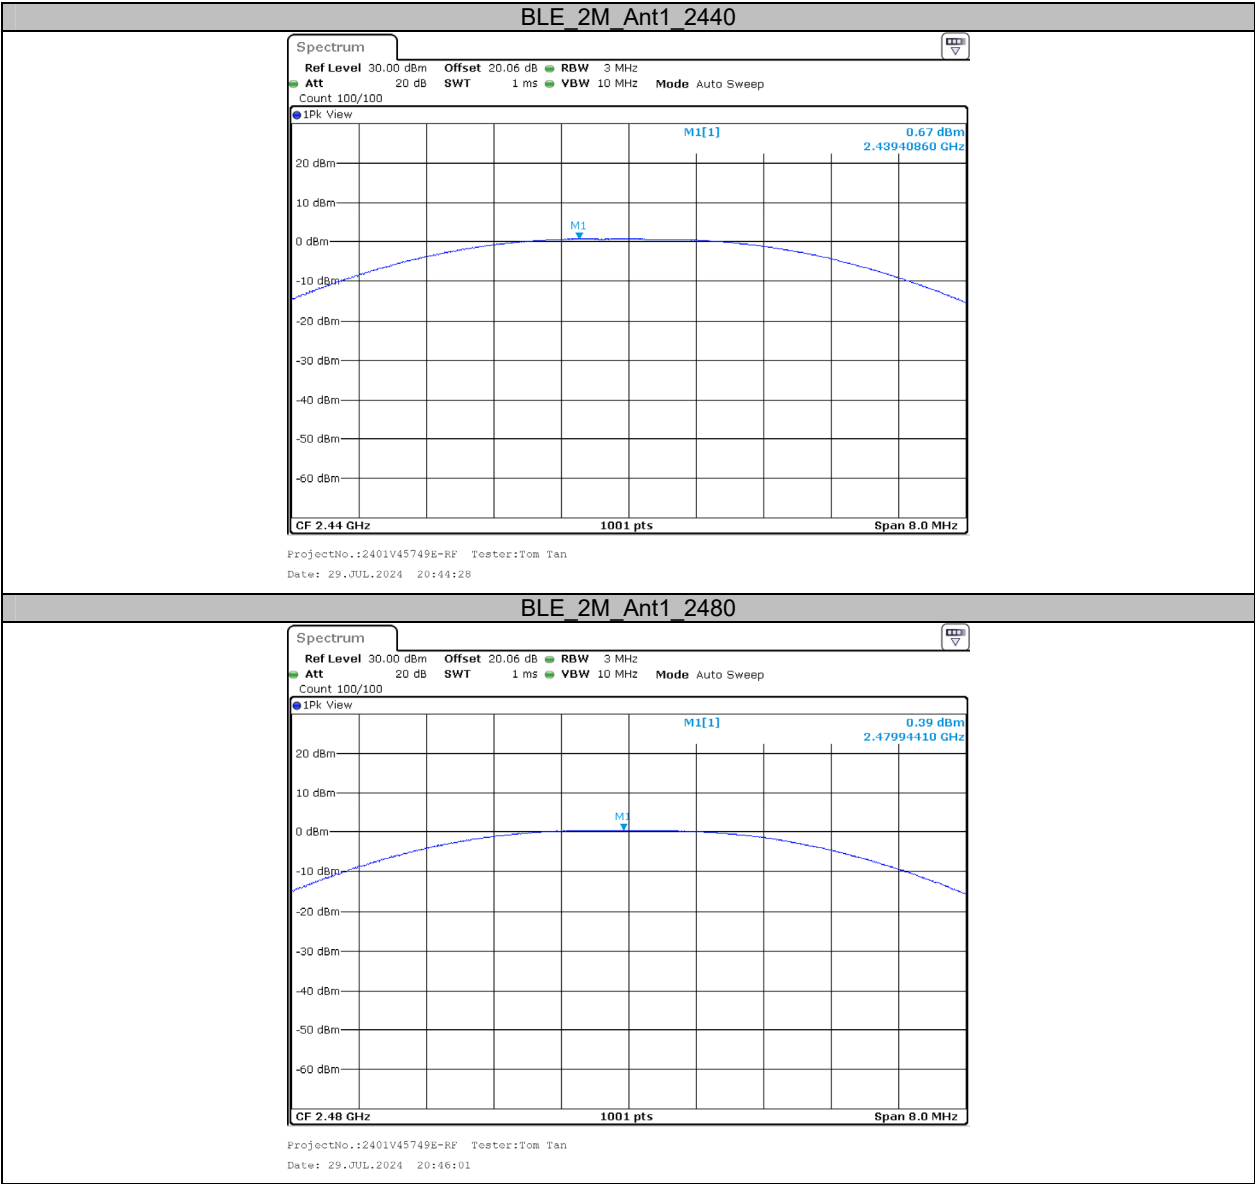



Appendix D: Maximum power spectral density**Test Result**

Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-15.28	≤8.00	PASS
		2440	-14.93	≤8.00	PASS
		2480	-15.30	≤8.00	PASS
BLE_2M	Ant1	2402	-17.97	≤8.00	PASS
		2440	-17.62	≤8.00	PASS
		2480	-17.96	≤8.00	PASS

Test Graphs

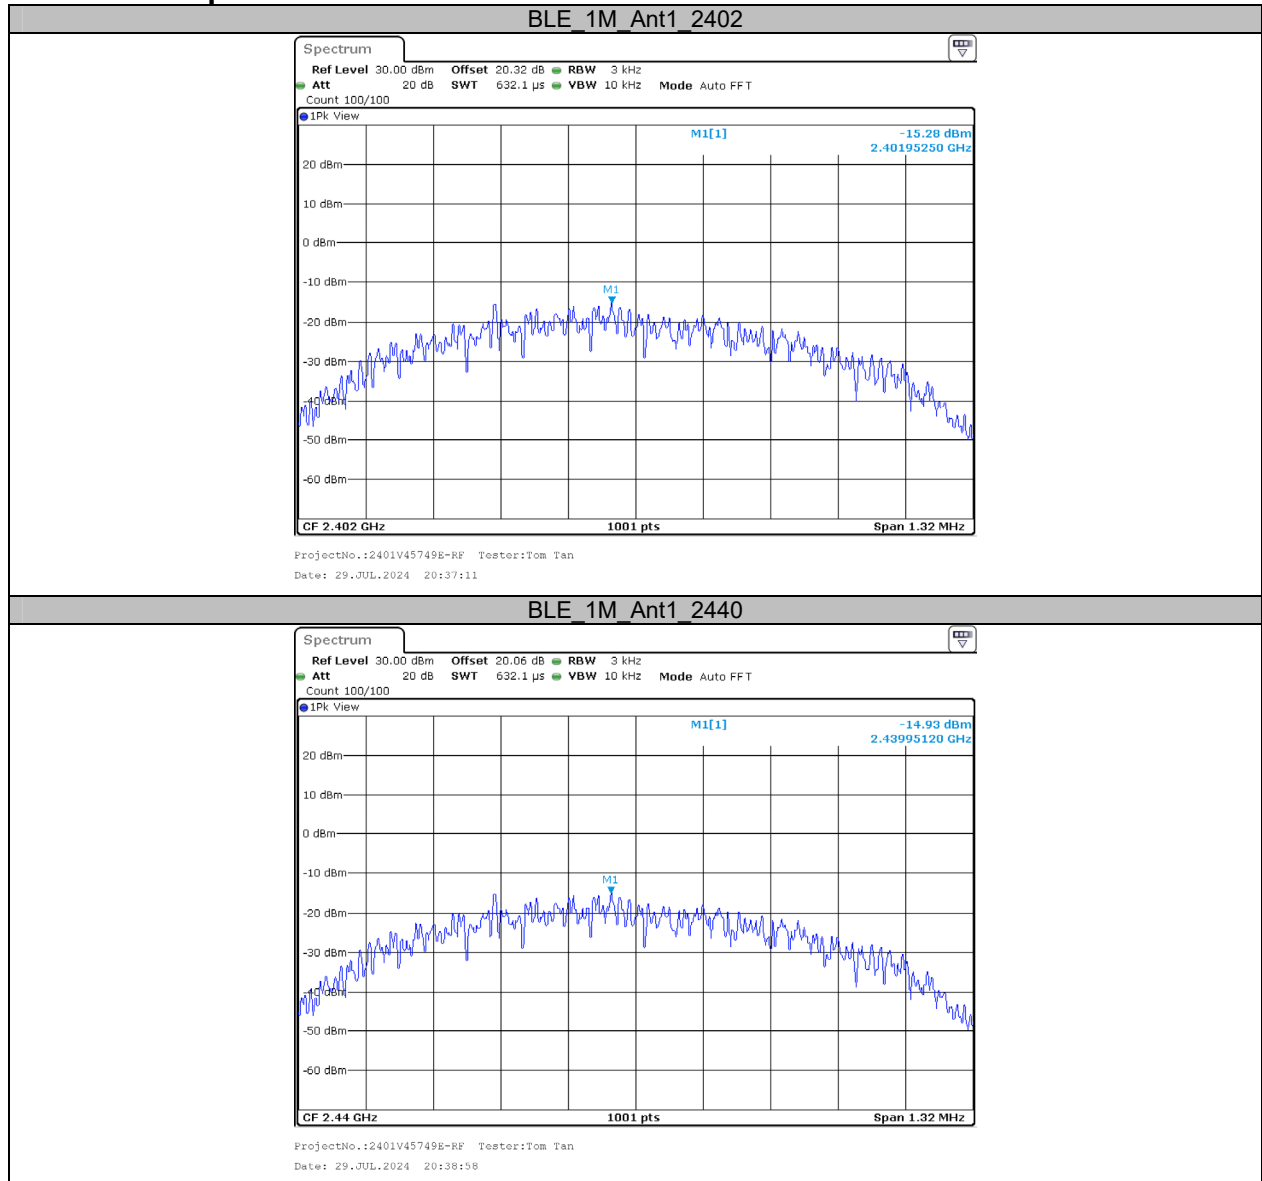


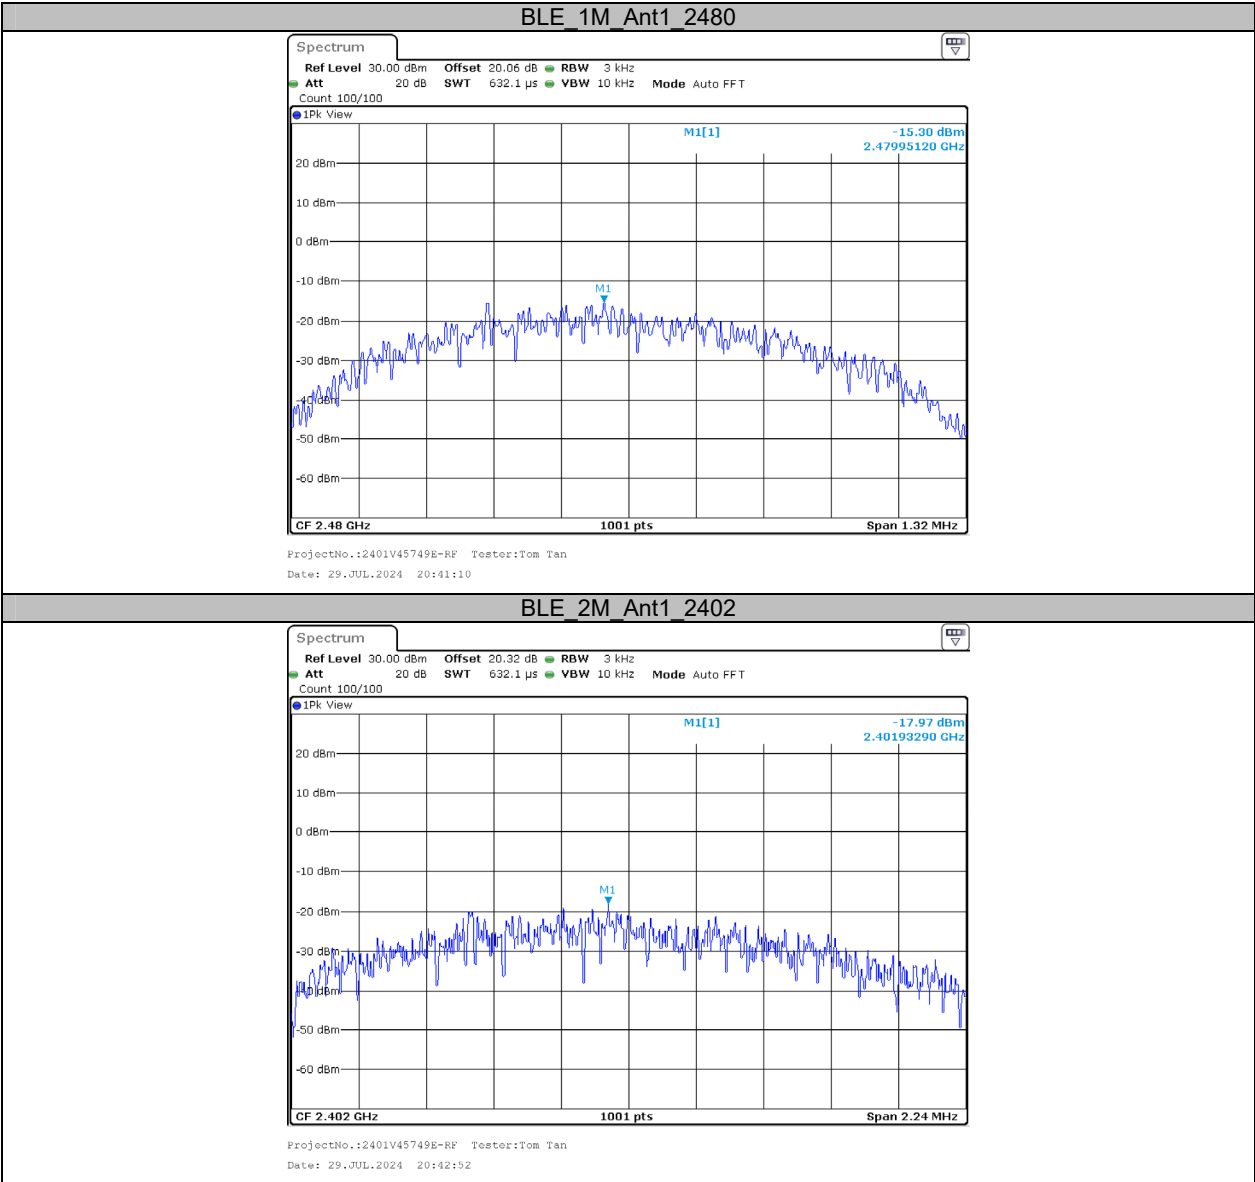

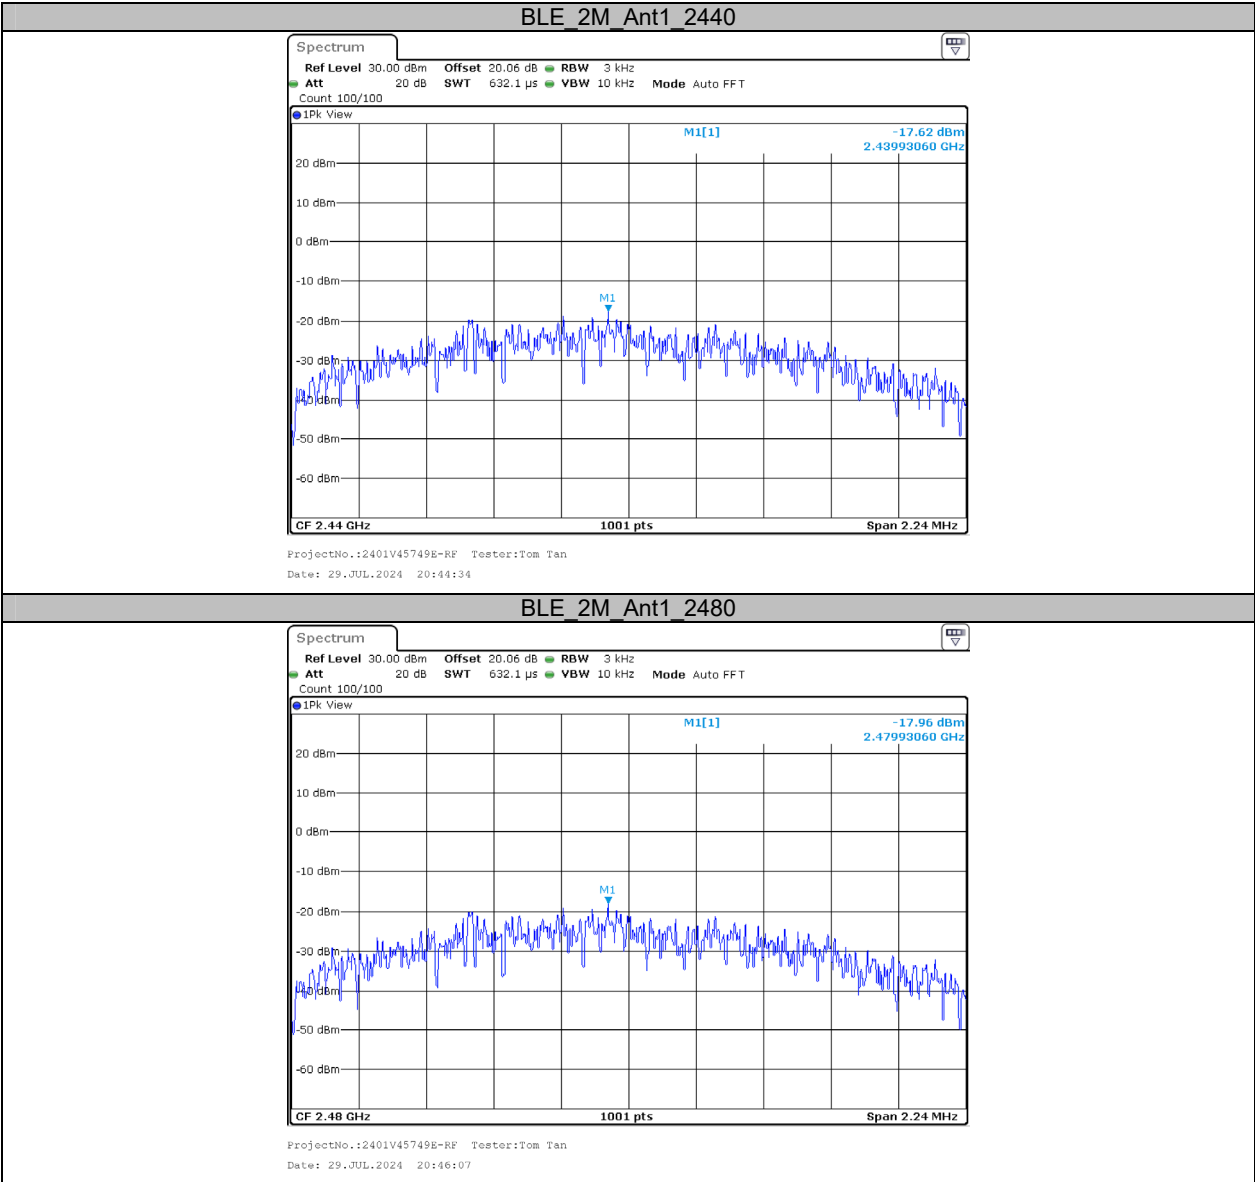


Appendix E: Band edge measurements

Test Graphs

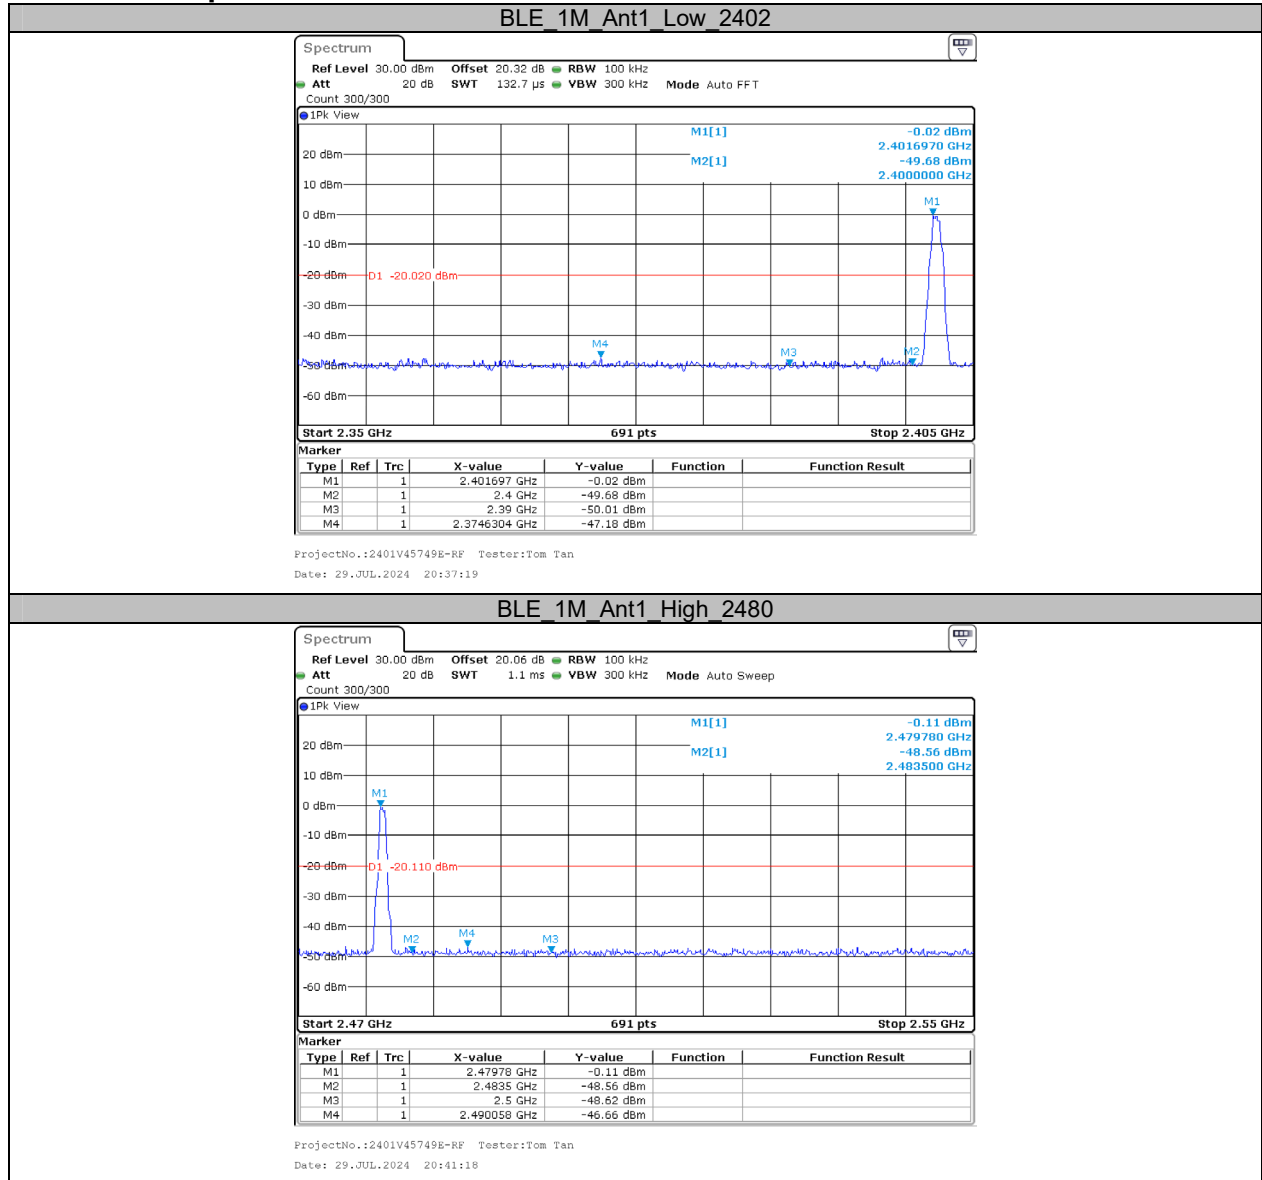


BLE 2M Ant1 Low 2402

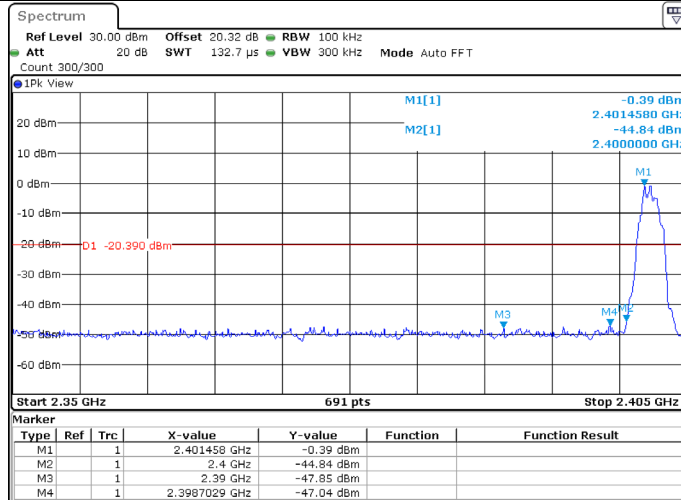

ProjectNo.:2401V45749E-RF Tester:Tom Tan
Date: 29.JUL.2024 20:43:01

BLE 2M Ant1 High 2480

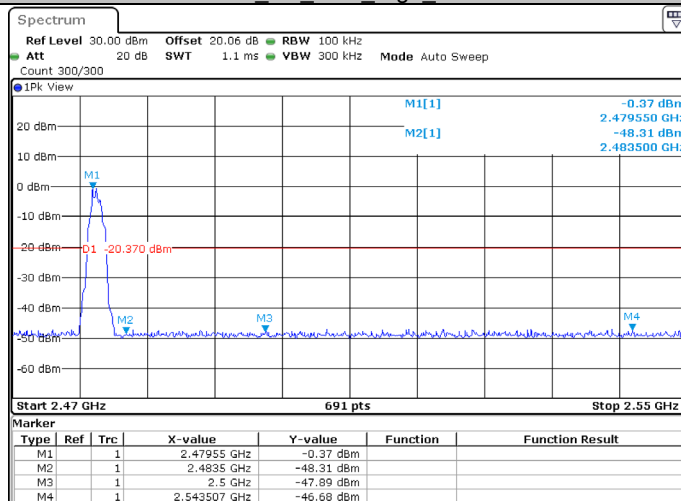


ProjectNo.:2401V45749E-RF Tester:Tom Tan
Date: 29.JUL.2024 20:46:16

Appendix F: Duty Cycle

Test Result

Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T [Hz]	VBW Setting [Hz]
BLE_1M	Ant1	2440	0.40	1.26	31.75	2500	3000
BLE_2M	Ant1	2440	0.20	0.63	31.75	5000	5000

Test Graphs

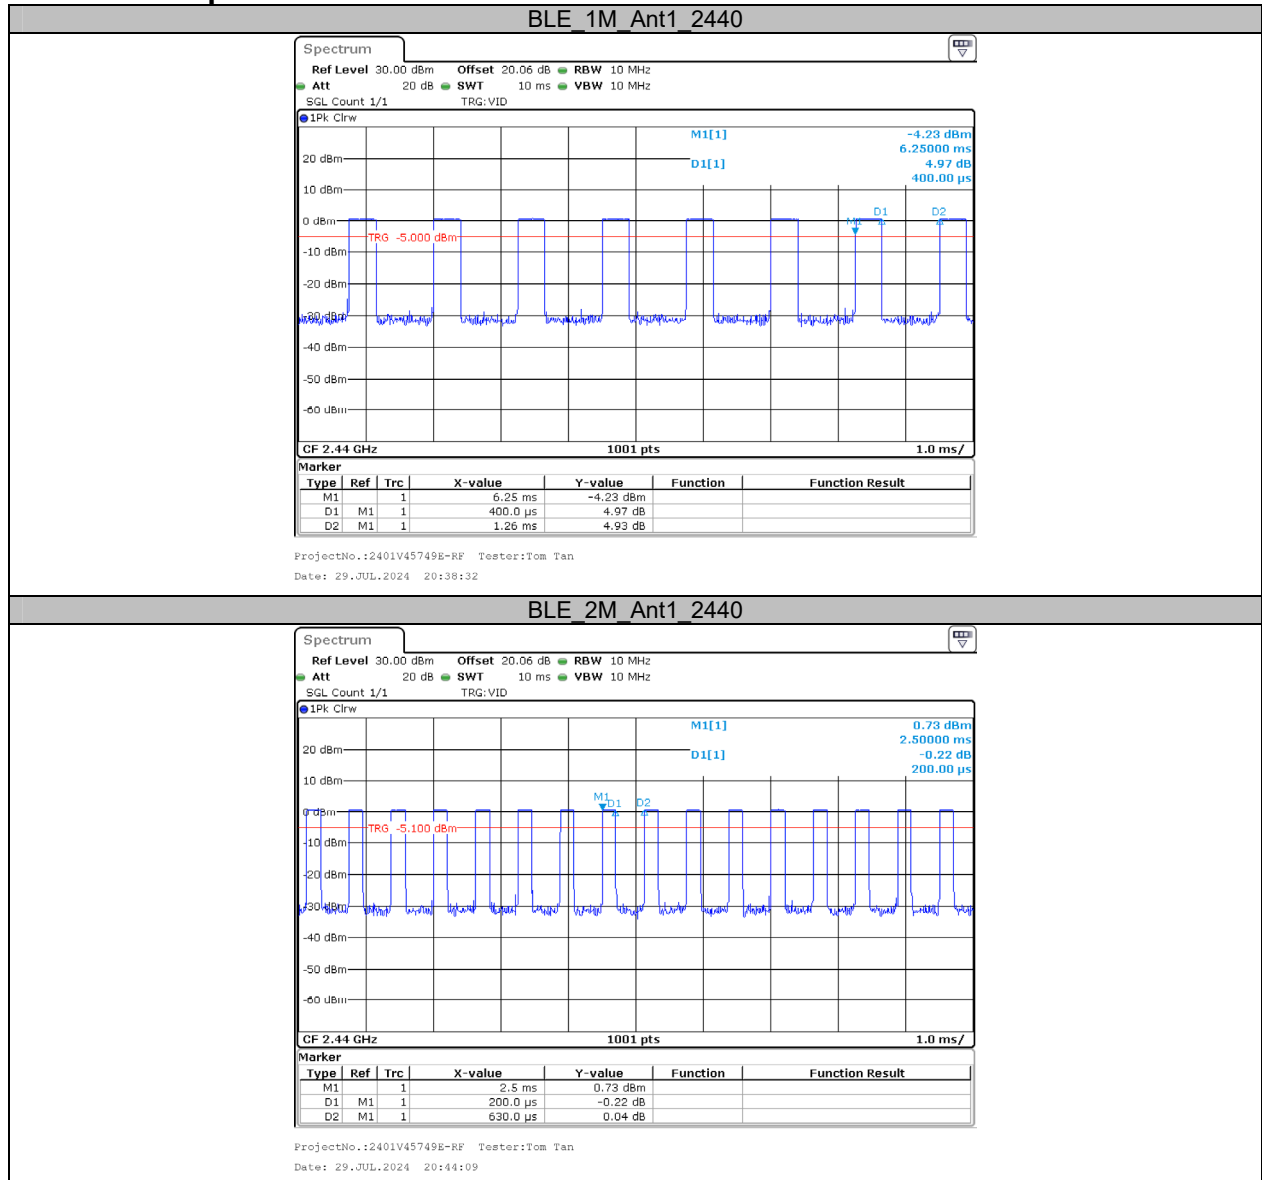


Appendix – Wi-Fi

Appendix A: DTS Bandwidth


Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.12	2408.40	2416.52	0.5	PASS
		2437	10.04	2431.96	2442.00	0.5	PASS
		2462	9.08	2457.44	2466.52	0.5	PASS
11G	Ant1	2412	16.36	2403.80	2420.16	0.5	PASS
		2437	16.36	2428.80	2445.16	0.5	PASS
		2462	16.32	2453.80	2470.12	0.5	PASS
11N20SISO	Ant1	2412	17.56	2403.20	2420.76	0.5	PASS
		2437	17.56	2428.20	2445.76	0.5	PASS
		2462	16.72	2453.80	2470.52	0.5	PASS

Test Graphs

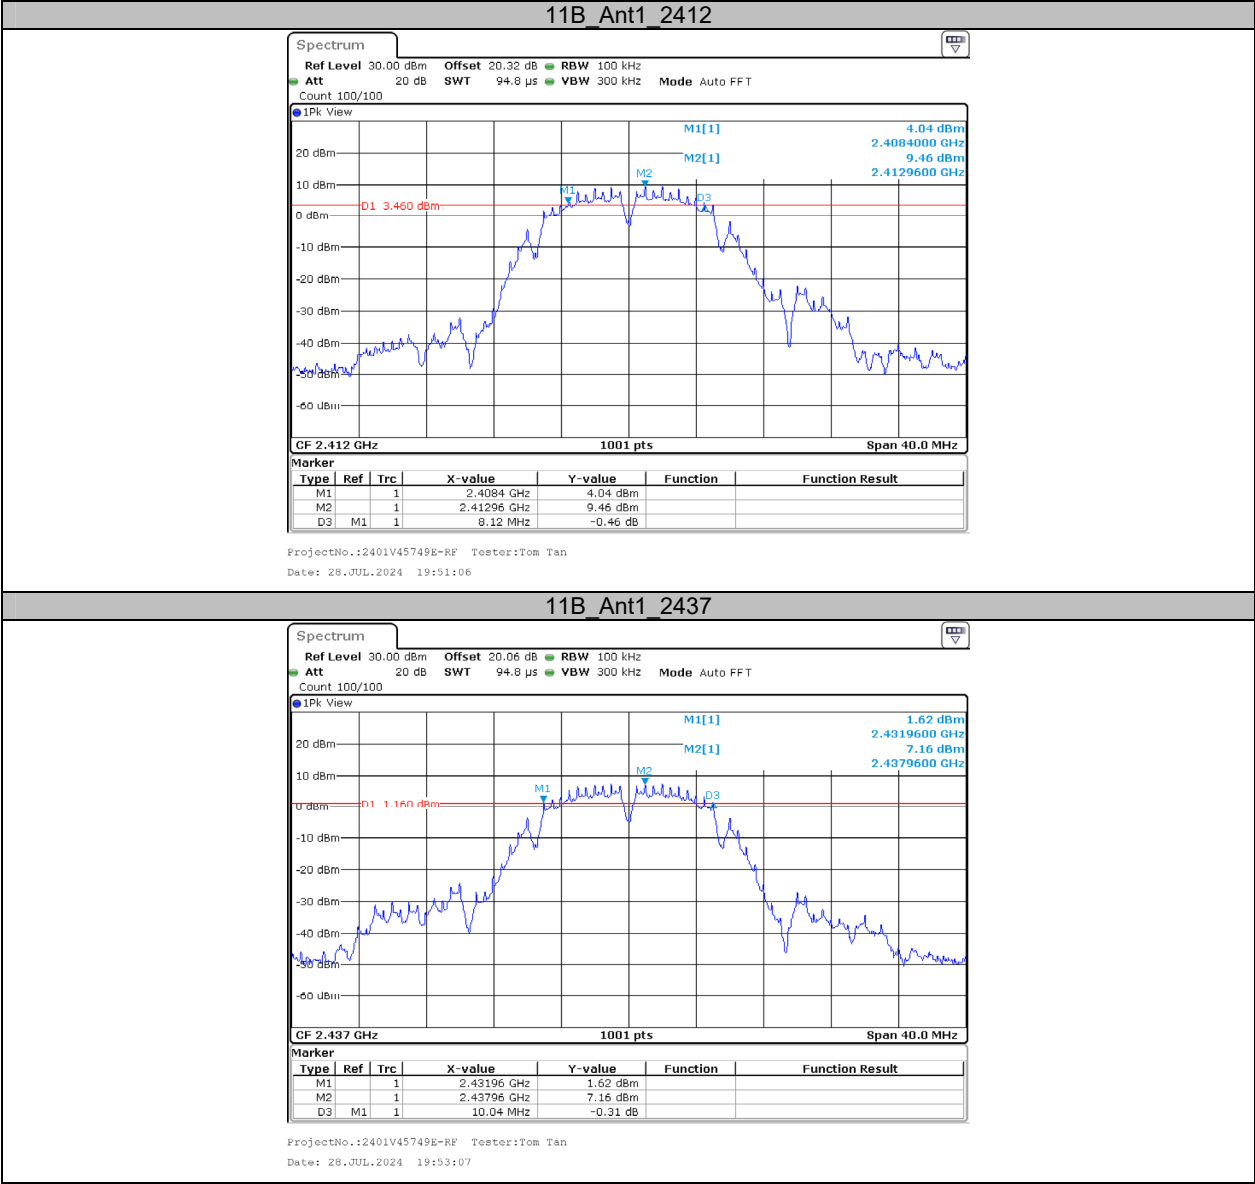


11B_Ant1_2462

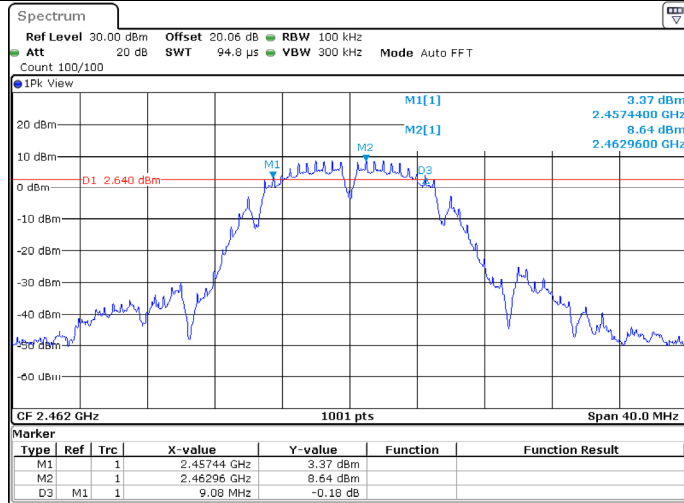



ProjectNo.:2401V45749E-RF Tester:Tom Tan
Date: 28.JUL.2024 19:54:09


11G_Ant1_2412

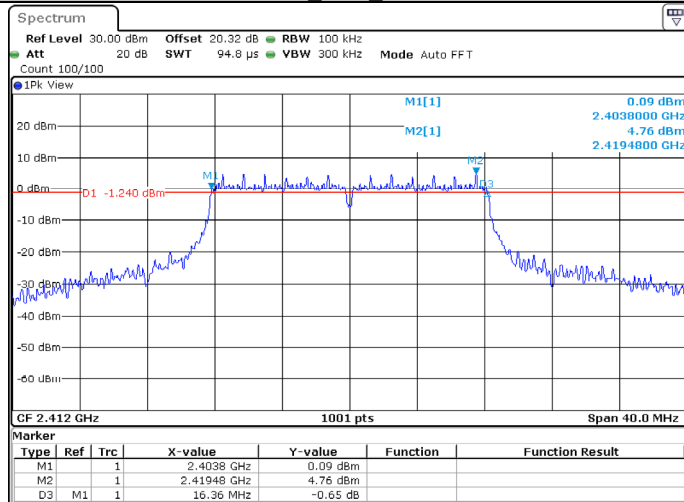

ProjectNo.:2401V45749E-RF Tester:Tom Tan
Date: 28.JUL.2024 19:56:42

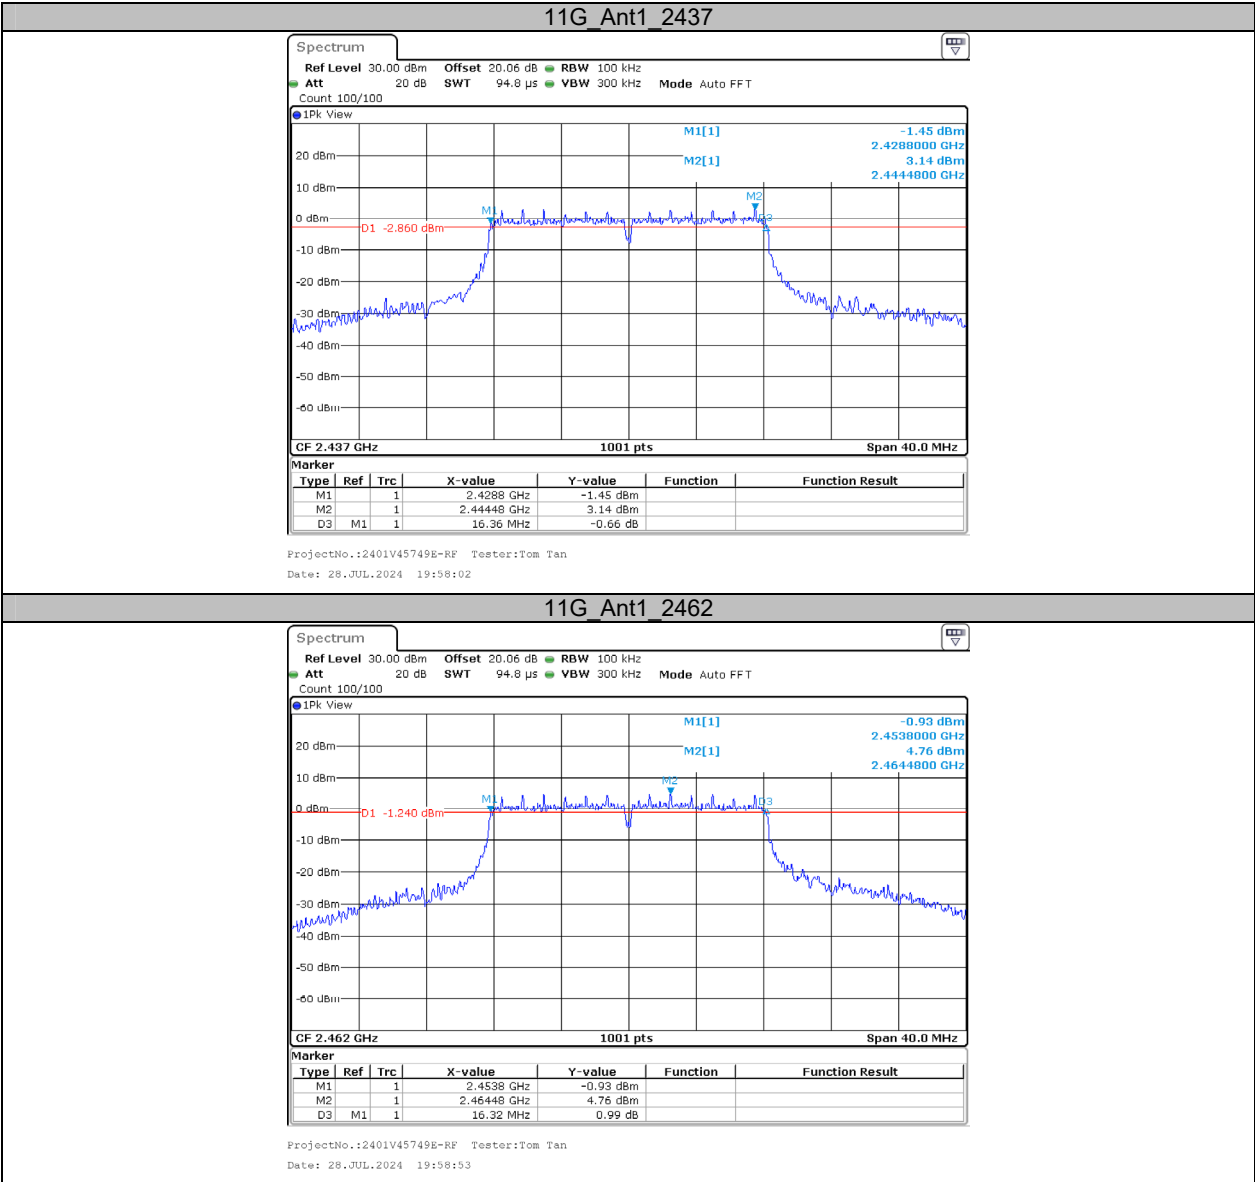

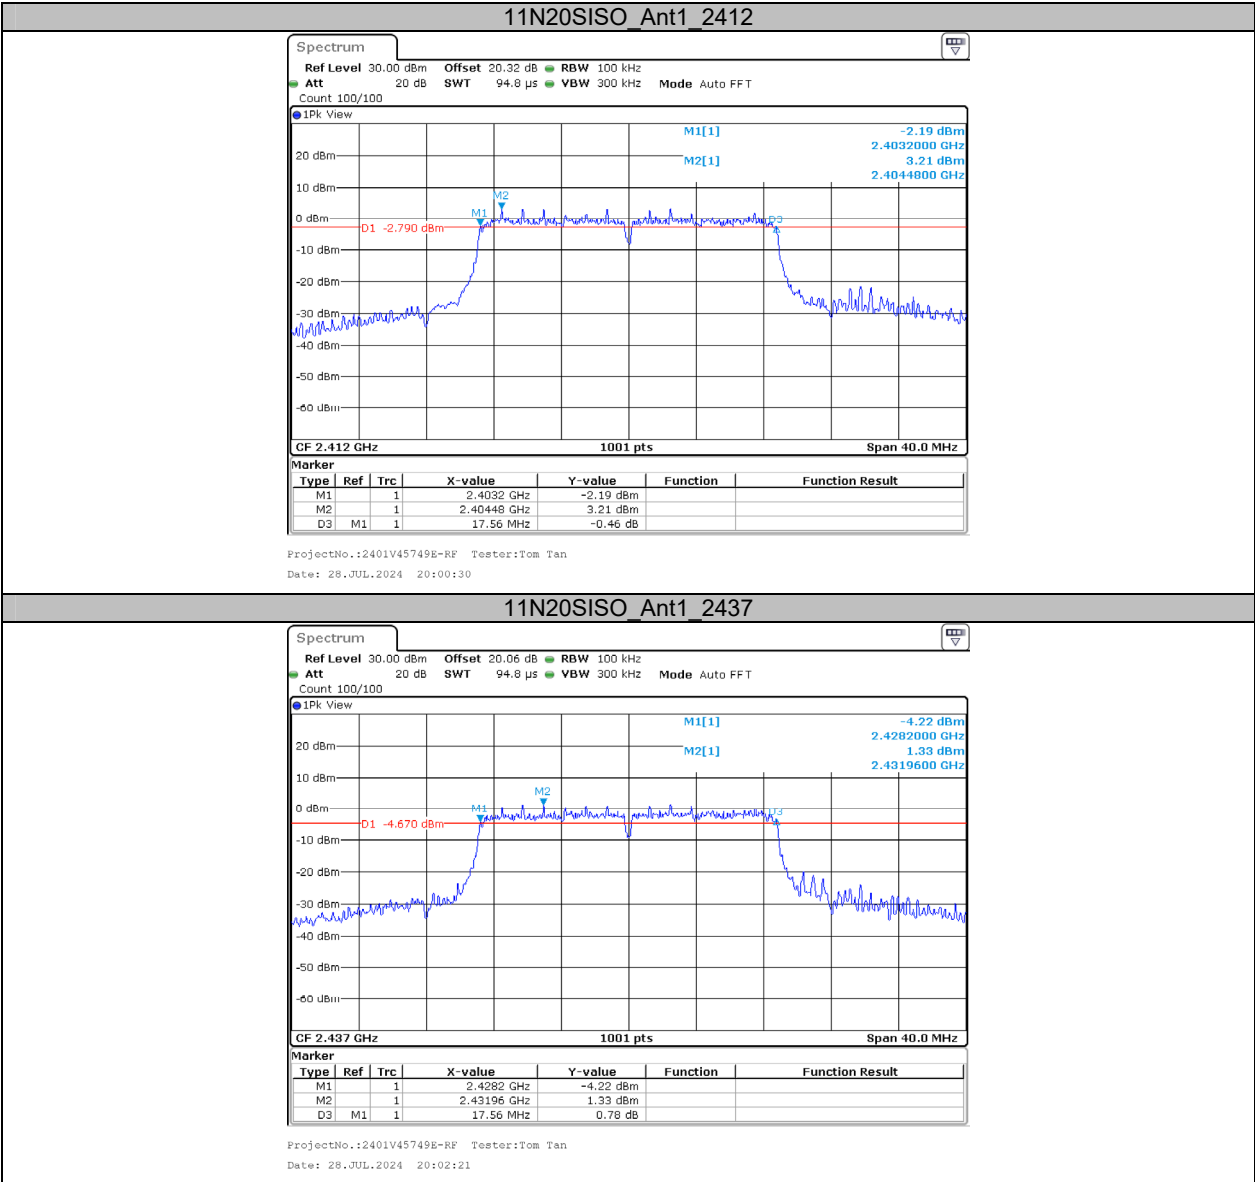


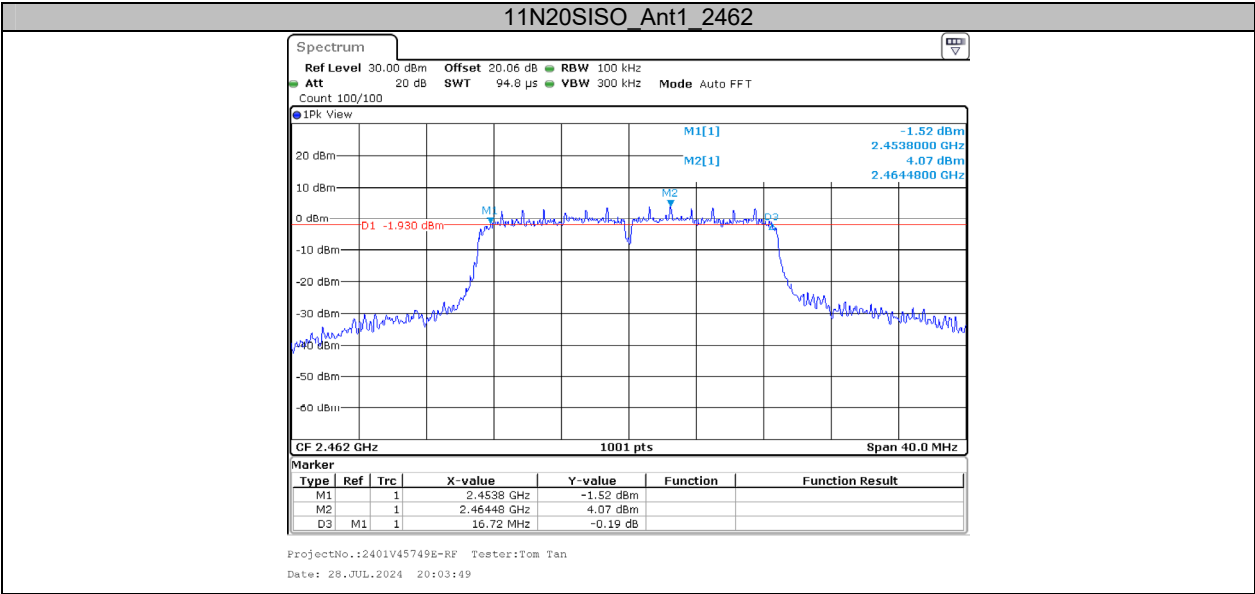



Appendix B: Occupied Channel Bandwidth**Test Result**


Test Mode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	11.788	2406.3257	2418.1139	---	---
		2437	12.188	2430.8861	2443.0739	---	---
		2462	11.908	2456.0859	2467.9940	---	---
11G	Ant1	2412	17.582	2403.2088	2420.7912	---	---
		2437	17.582	2428.2488	2445.8312	---	---
		2462	17.343	2453.4086	2470.7512	---	---
11N20SISO	Ant1	2412	18.342	2402.8492	2421.1908	---	---
		2437	18.302	2427.9291	2446.2308	---	---
		2462	17.942	2453.0889	2471.0310	---	---


Test Graphs

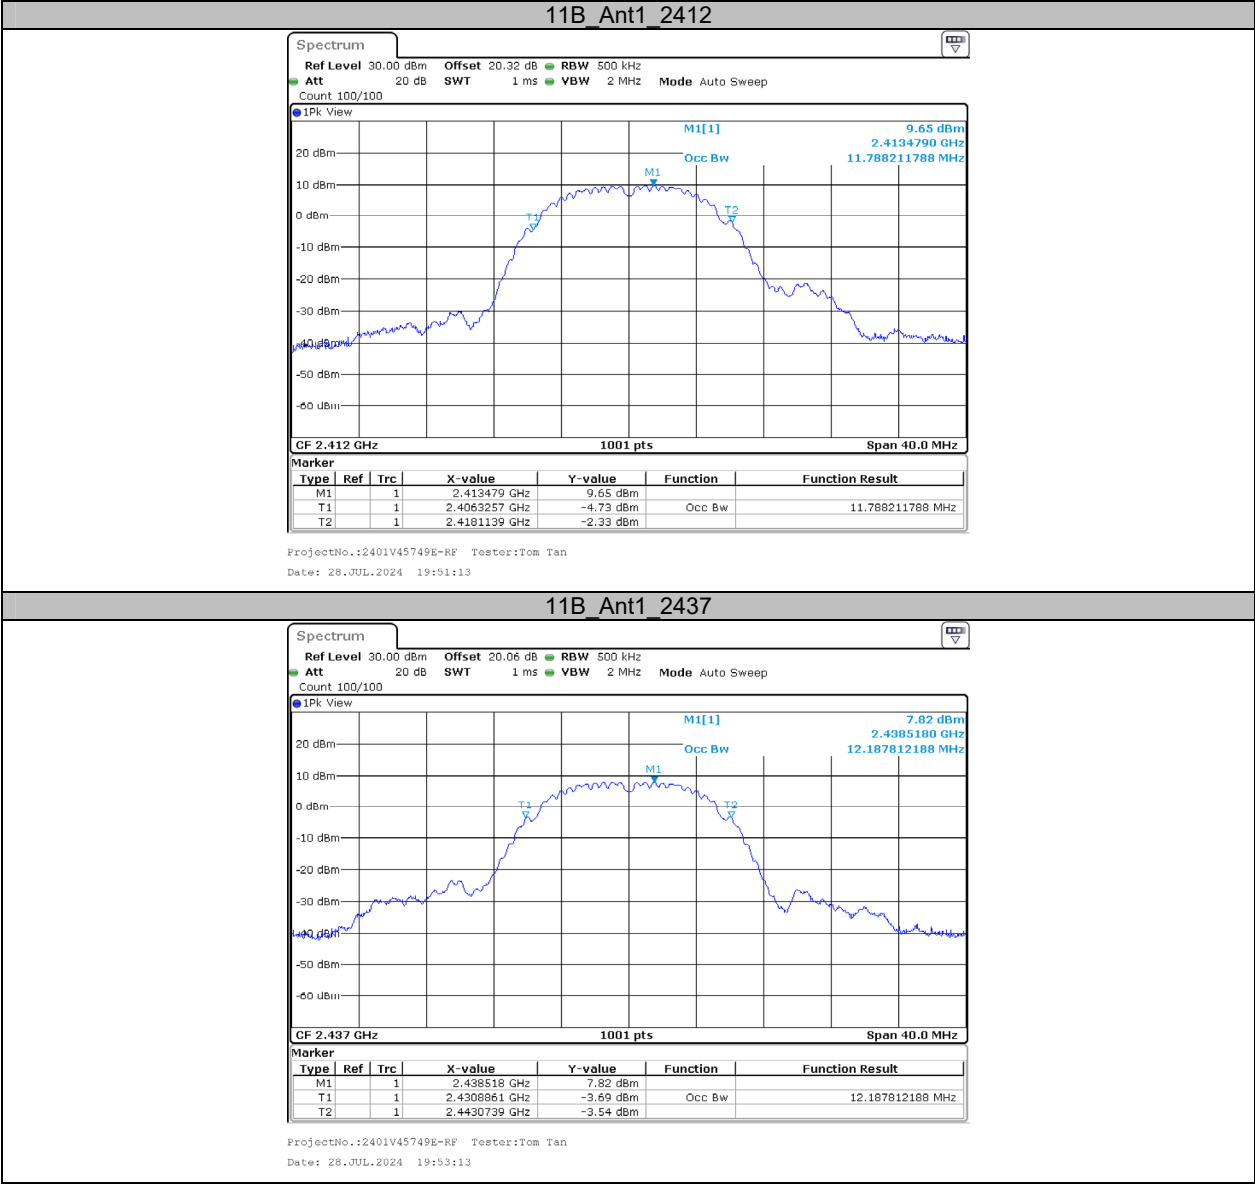

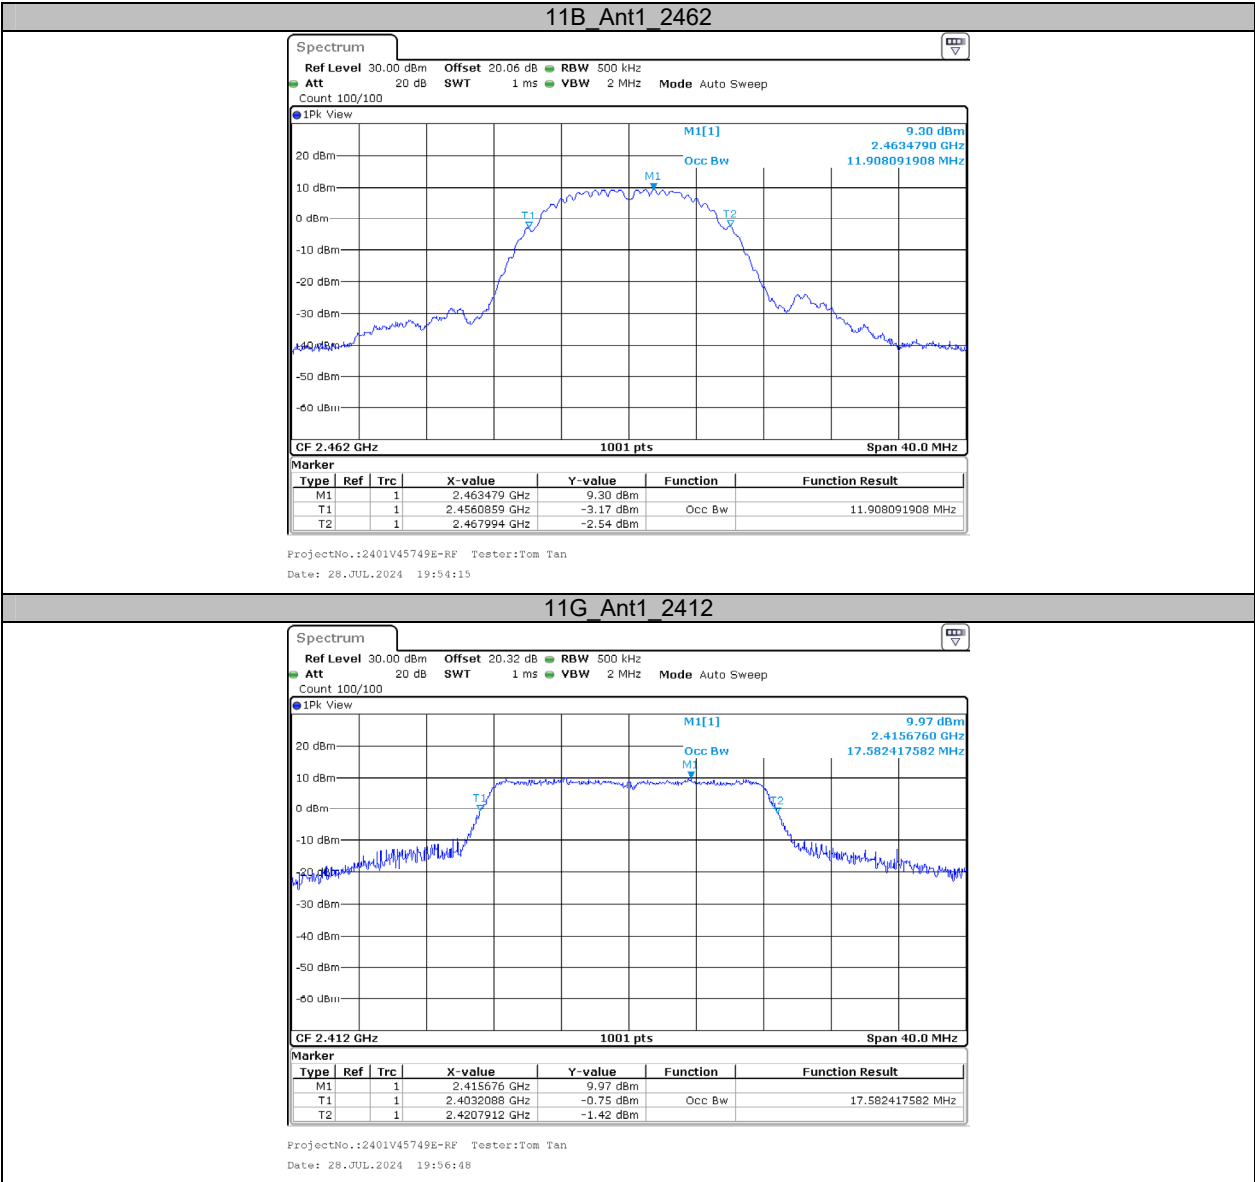

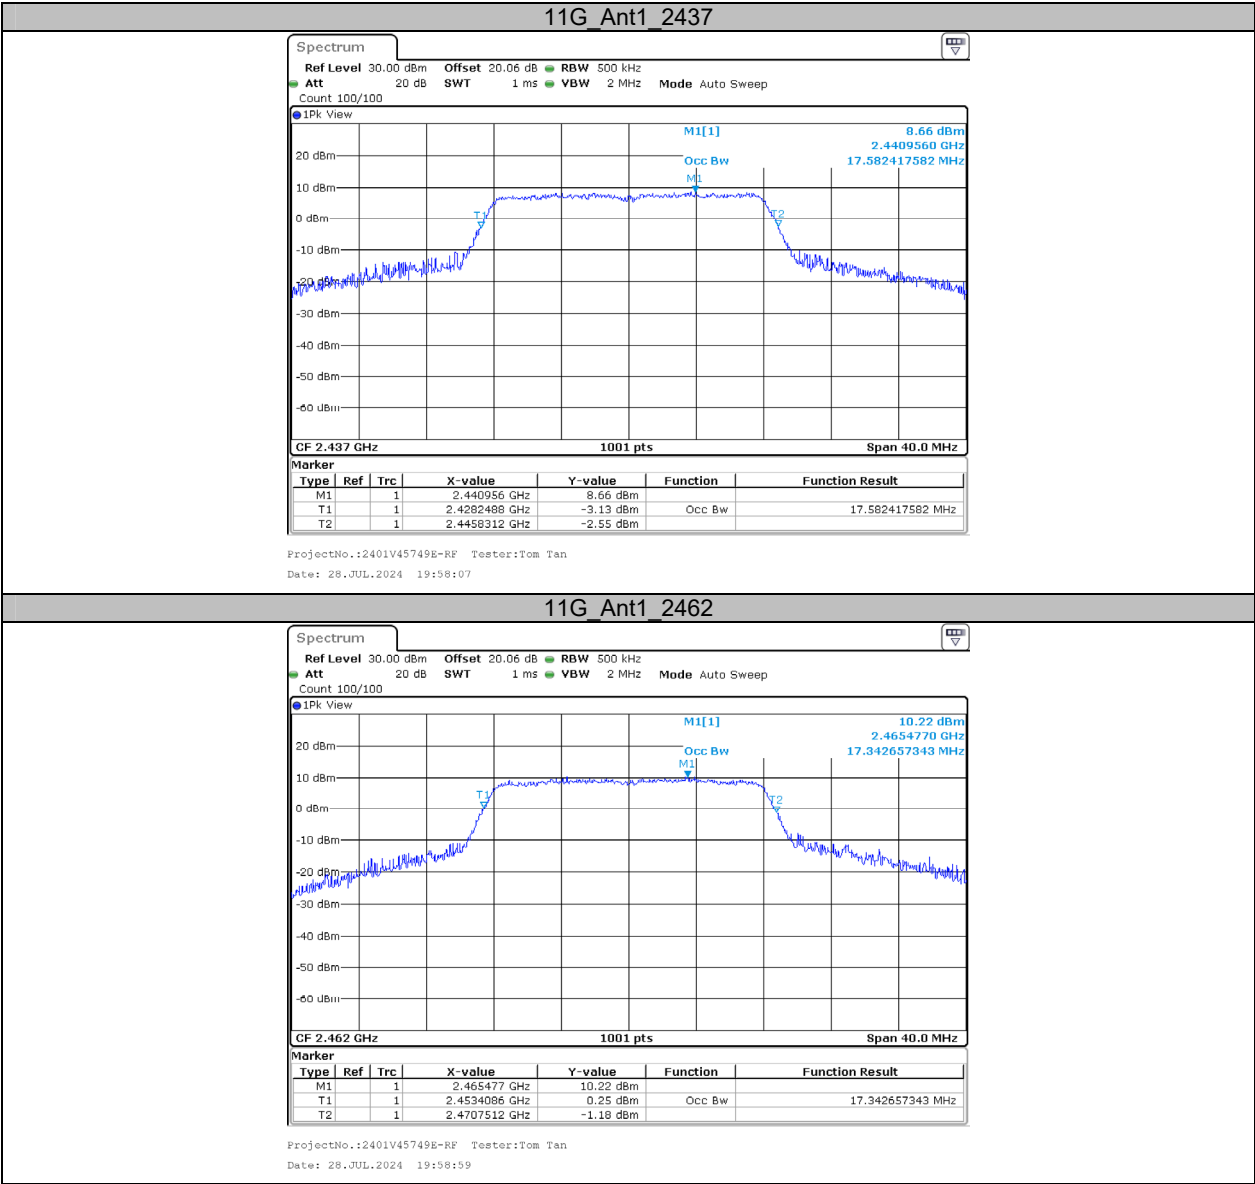

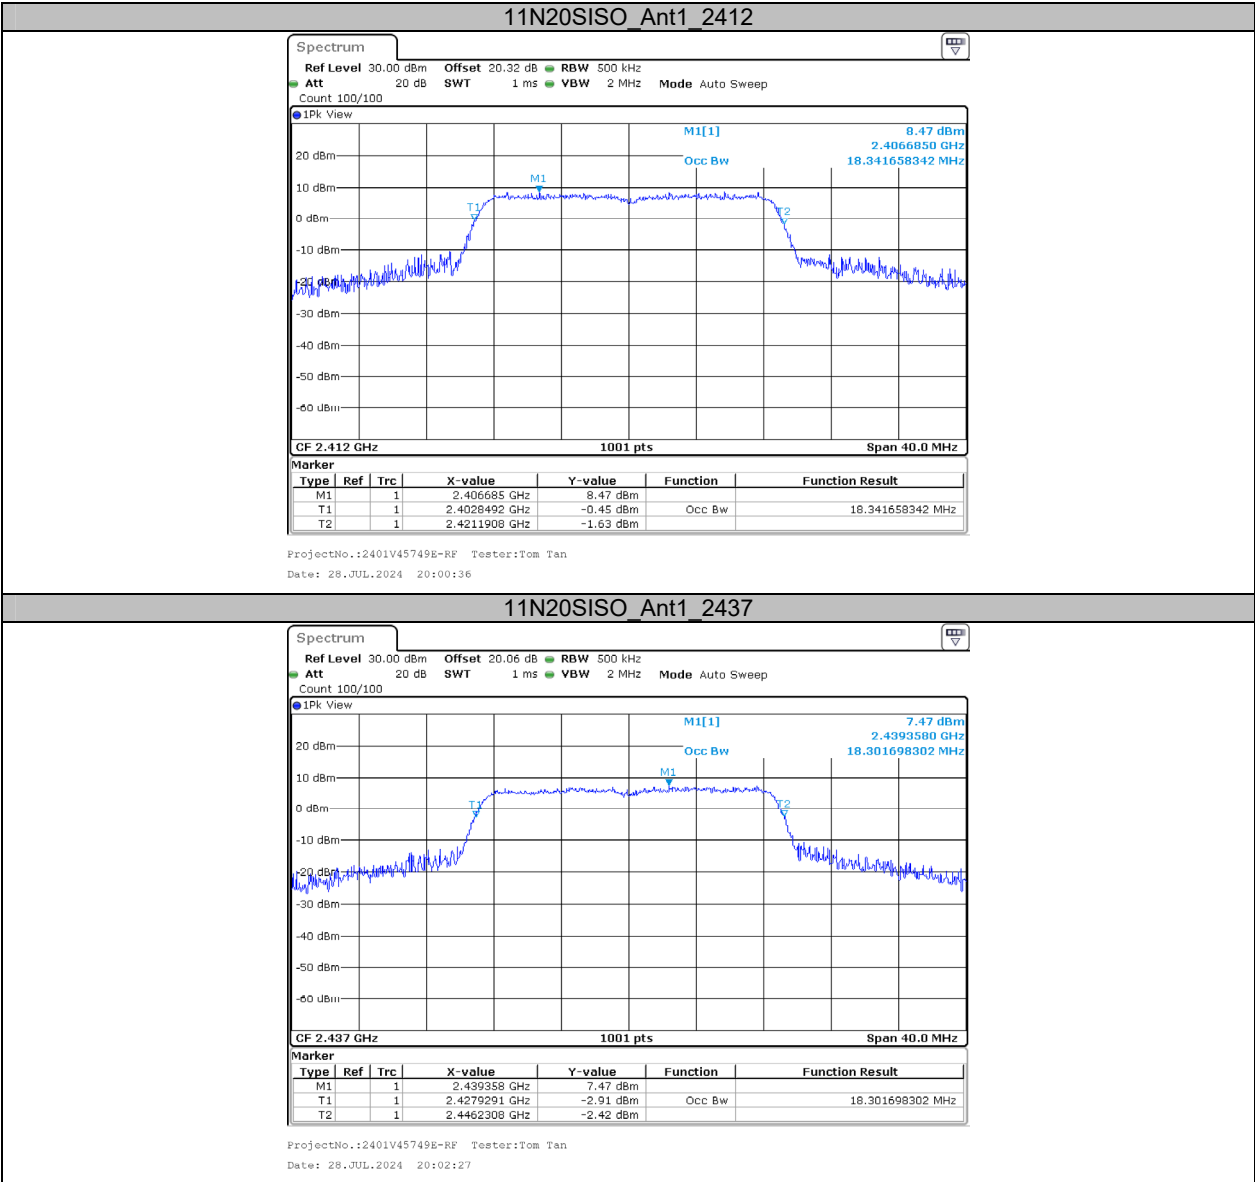

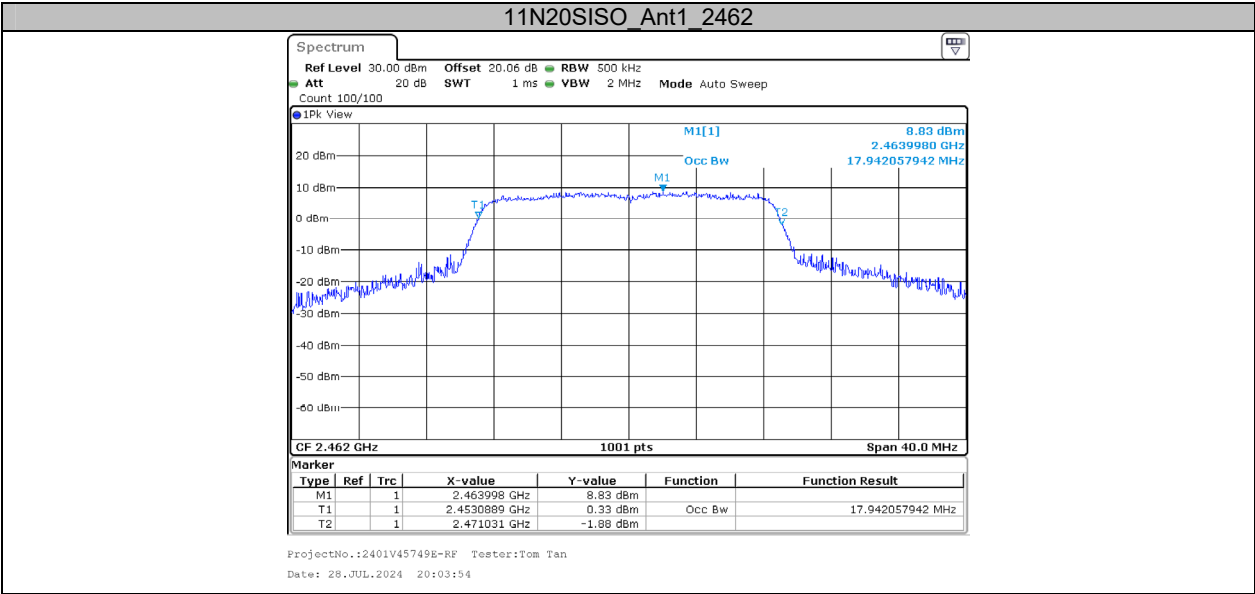

Appendix C: Maximum conducted output power**Test Result Peak**

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	15.56	≤30.00	PASS
		2437	14.69	≤30.00	PASS
		2462	16.02	≤30.00	PASS
11G	Ant1	2412	19.22	≤30.00	PASS
		2437	18.31	≤30.00	PASS
		2462	19.21	≤30.00	PASS
11N20SISO	Ant1	2412	19.19	≤30.00	PASS
		2437	18.30	≤30.00	PASS
		2462	19.15	≤30.00	PASS


Test Result Average


Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	12.69	≤30.00	PASS
		2437	11.78	≤30.00	PASS
		2462	13.09	≤30.00	PASS
11G	Ant1	2412	11.64	≤30.00	PASS
		2437	10.70	≤30.00	PASS
		2462	11.60	≤30.00	PASS
11N20SISO	Ant1	2412	11.59	≤30.00	PASS
		2437	10.68	≤30.00	PASS
		2462	11.54	≤30.00	PASS


Appendix D: Maximum power spectral density**Test Result**


Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-7.18	≤8.00	PASS
		2437	-7.97	≤8.00	PASS
		2462	-6.64	≤8.00	PASS
11G	Ant1	2412	-13.30	≤8.00	PASS
		2437	-13.85	≤8.00	PASS
		2462	-13.54	≤8.00	PASS
11N20SISO	Ant1	2412	-12.47	≤8.00	PASS
		2437	-13.38	≤8.00	PASS
		2462	-12.84	≤8.00	PASS


Test Graphs

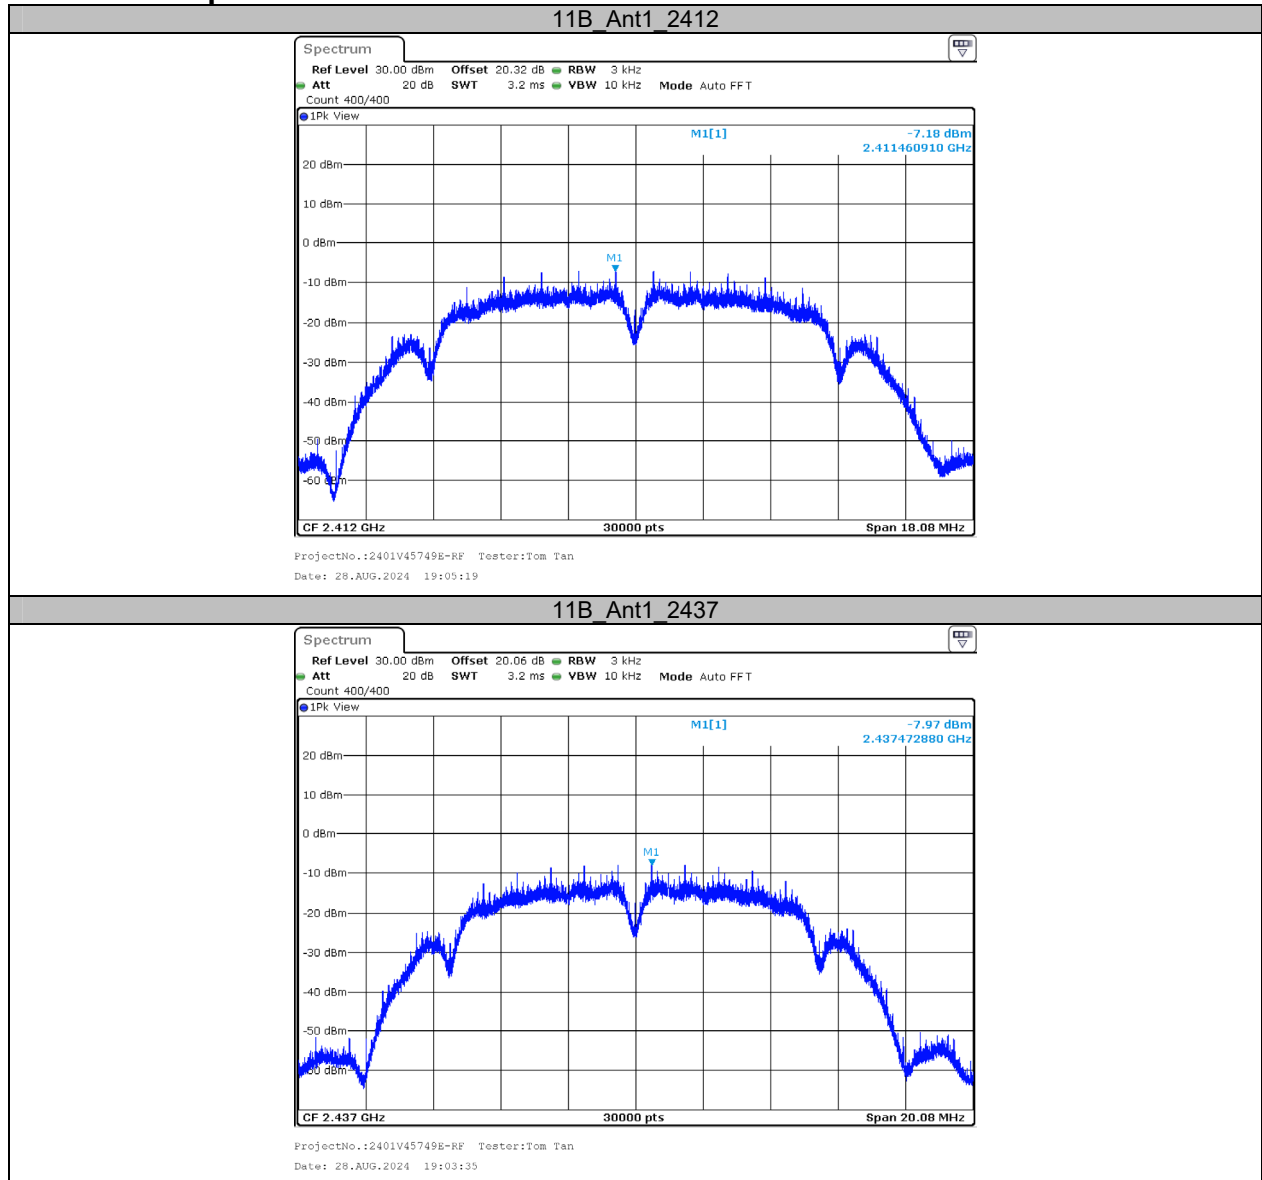

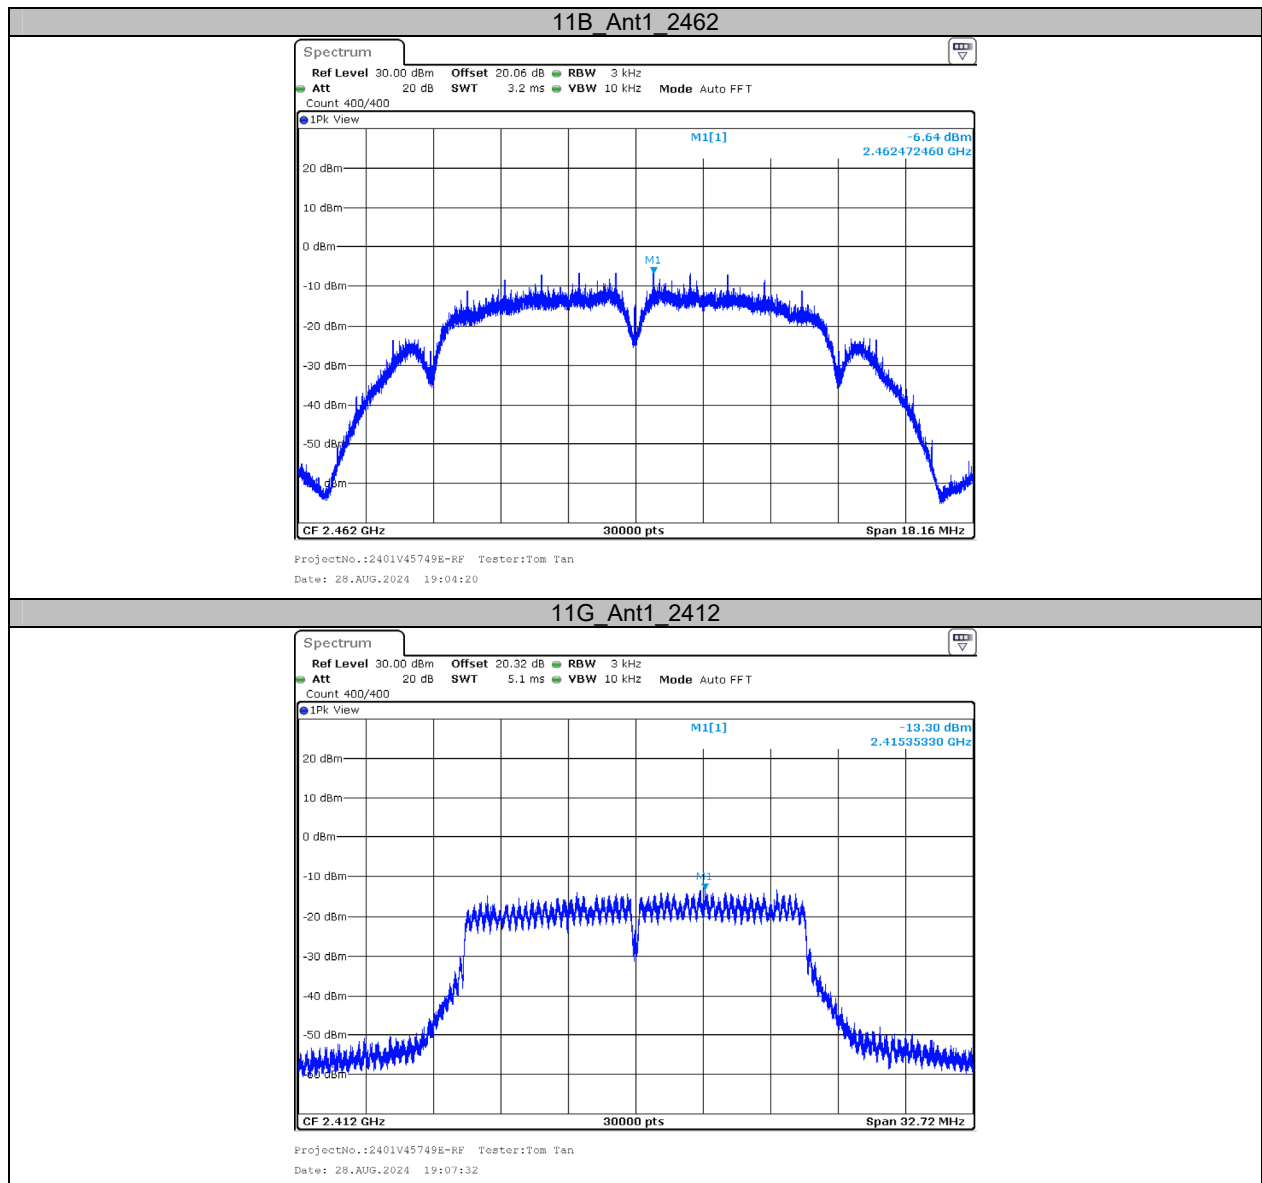

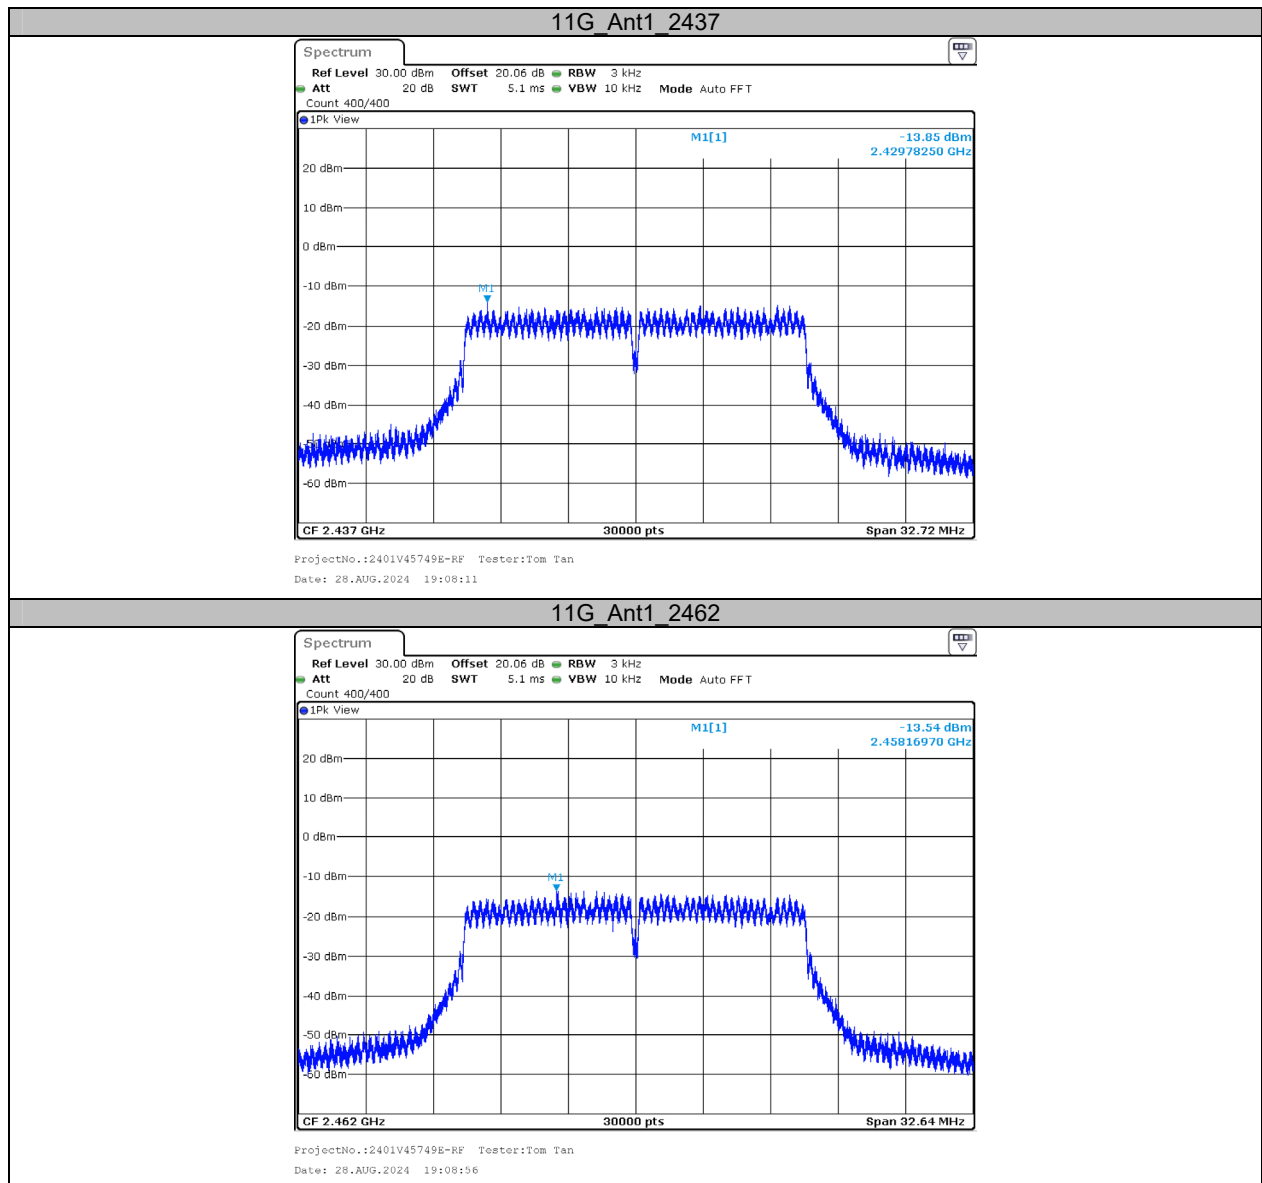


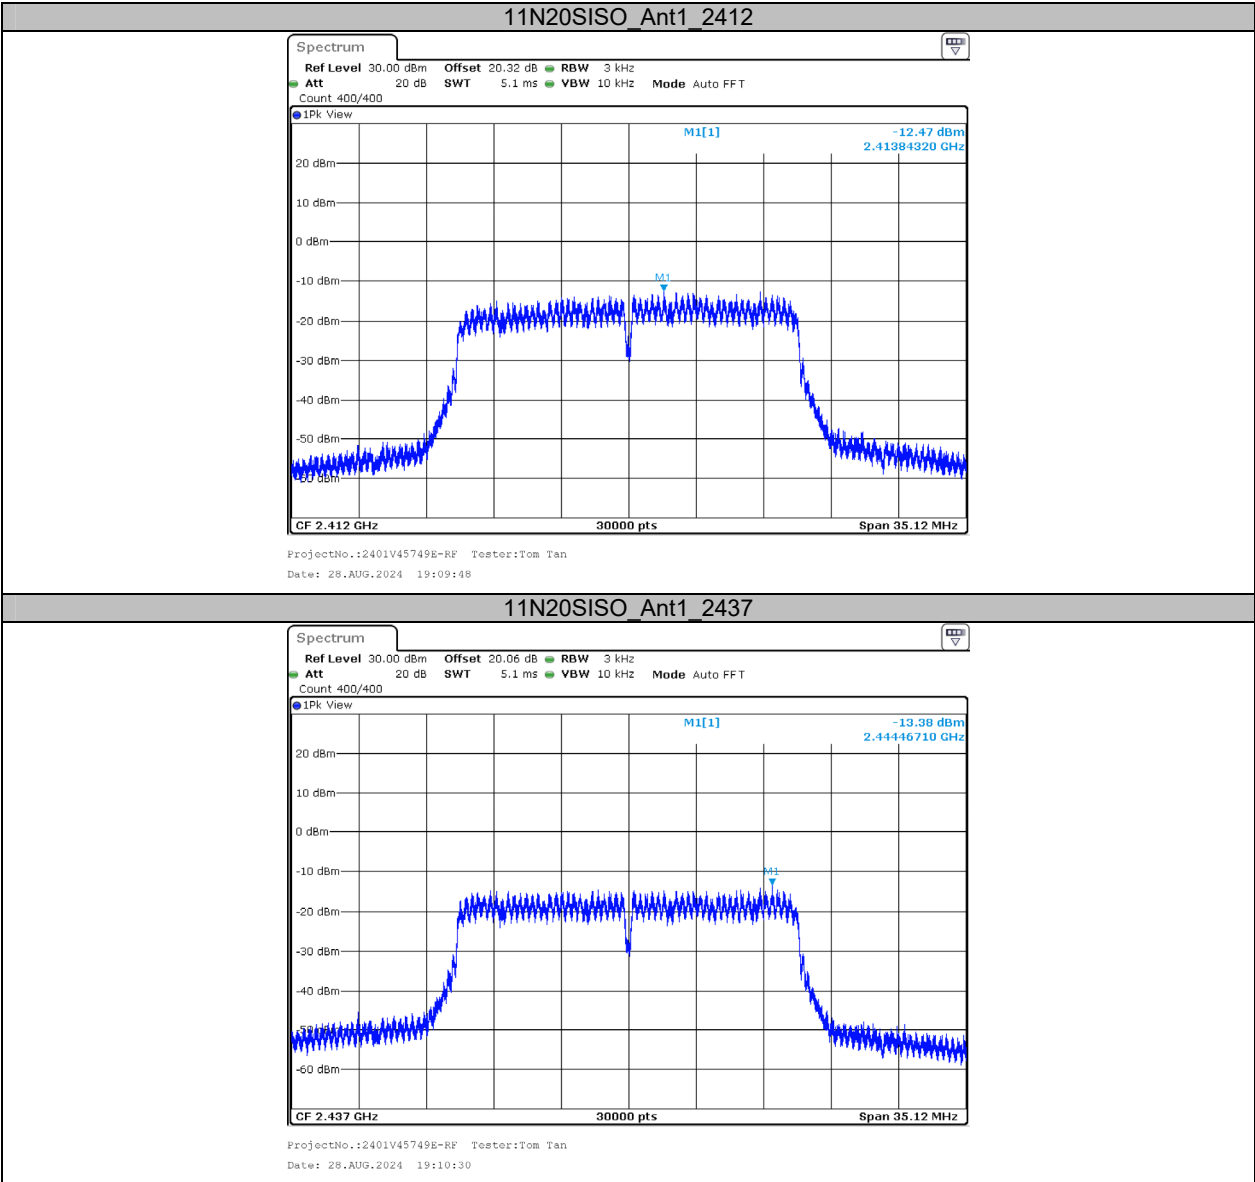

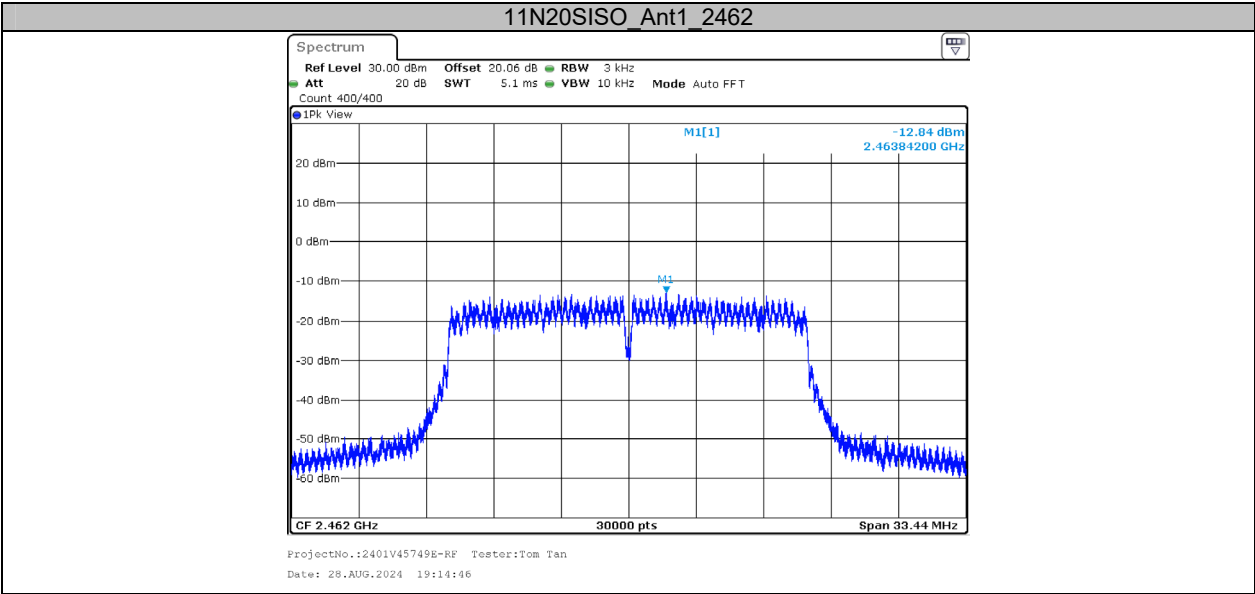


Appendix E: Band edge measurements

Test Graphs

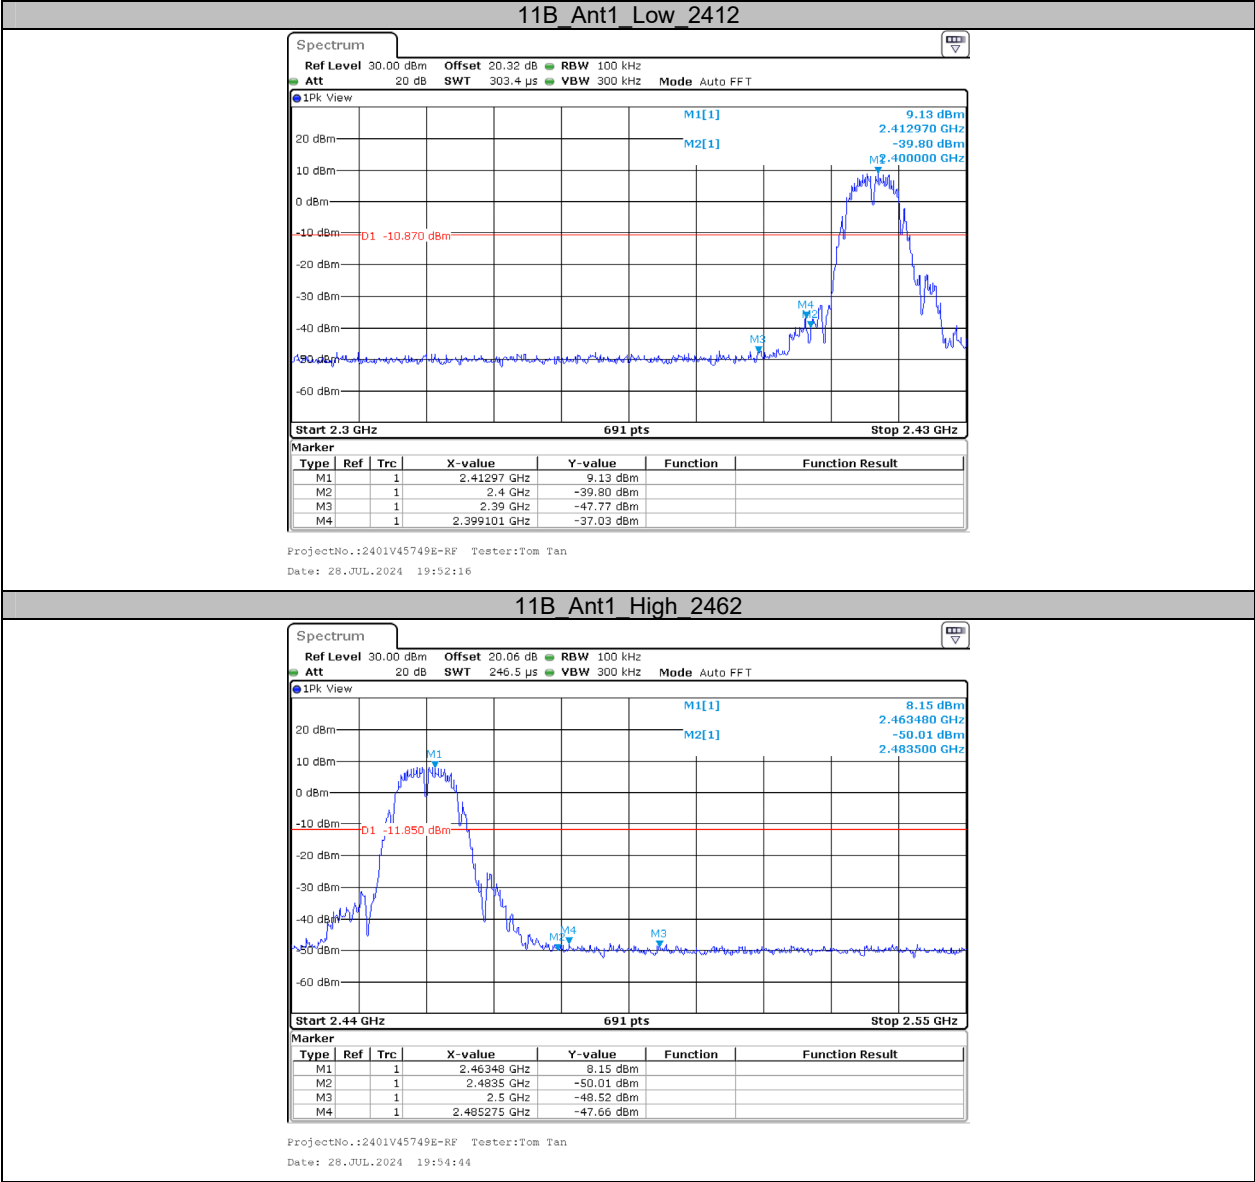


11G Ant1 Low 2412

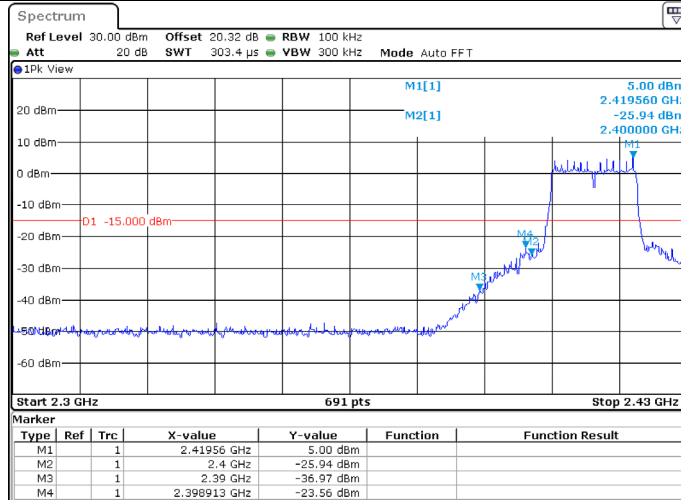


ProjectNo.:2401V45749E-RF Tester:Tom Tan
Date: 28.JUL.2024 19:57:17

11G Ant1 High 2462

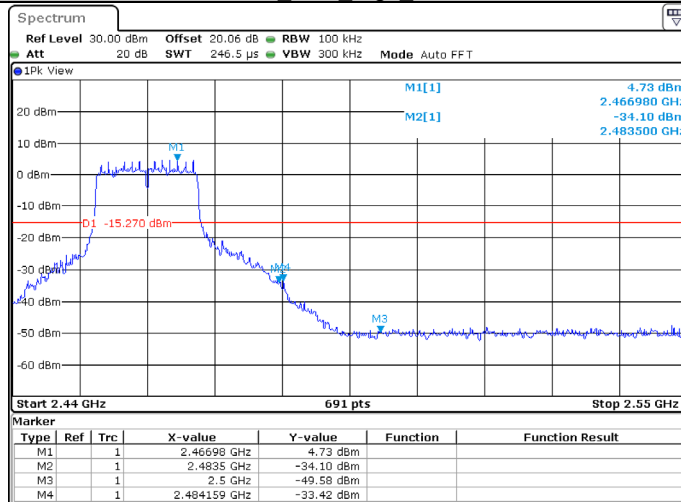



ProjectNo.:2401V45749E-RF Tester:Tom Tan
Date: 28.JUL.2024 19:59:27

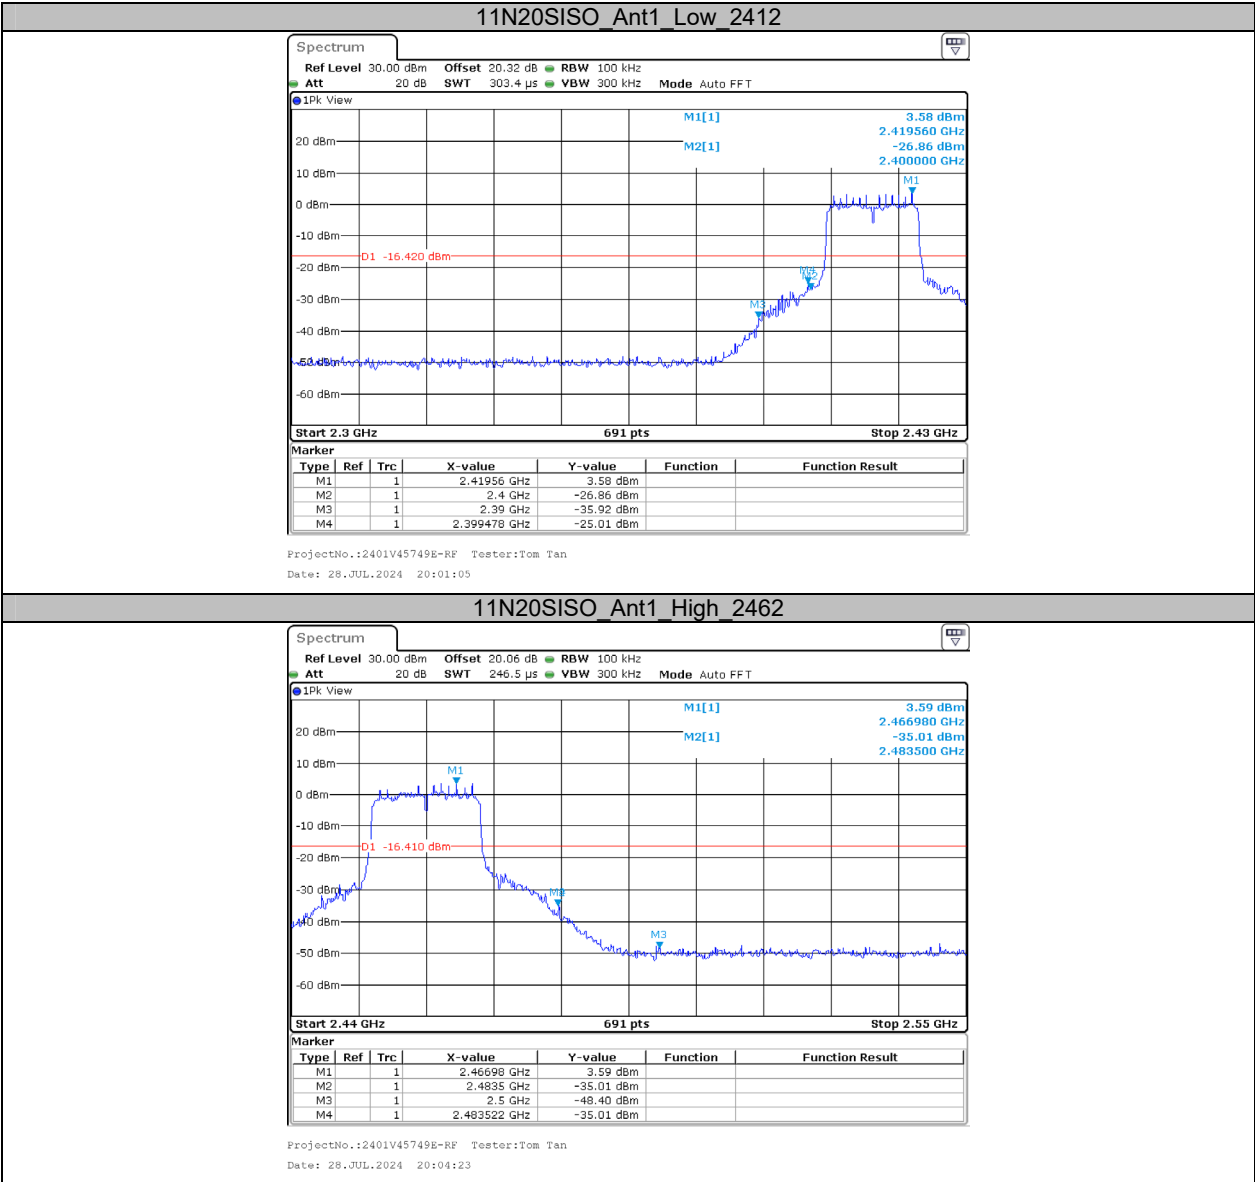

Appendix F: Duty Cycle**Test Result**

Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T [Hz]	VBW Setting [Hz]
11B	Ant1	2437	8.42	8.51	98.94	119	500
11G	Ant1	2437	1.40	1.50	93.33	714	1000
11N20SISO	Ant1	2437	1.31	1.41	92.91	763	1000

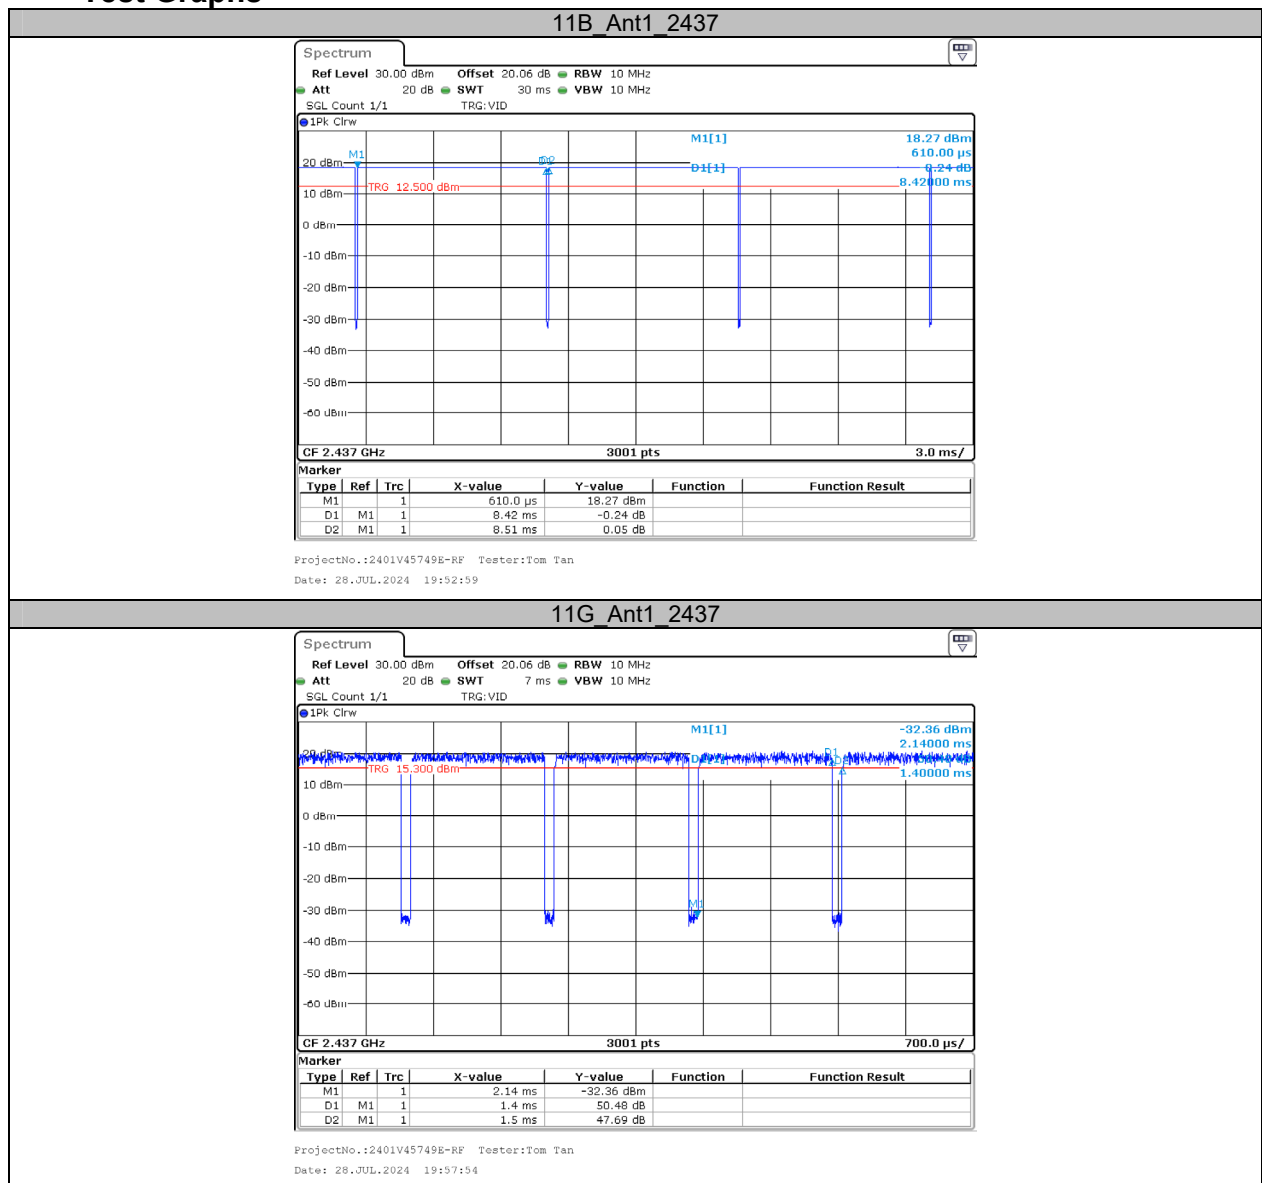Test Graphs

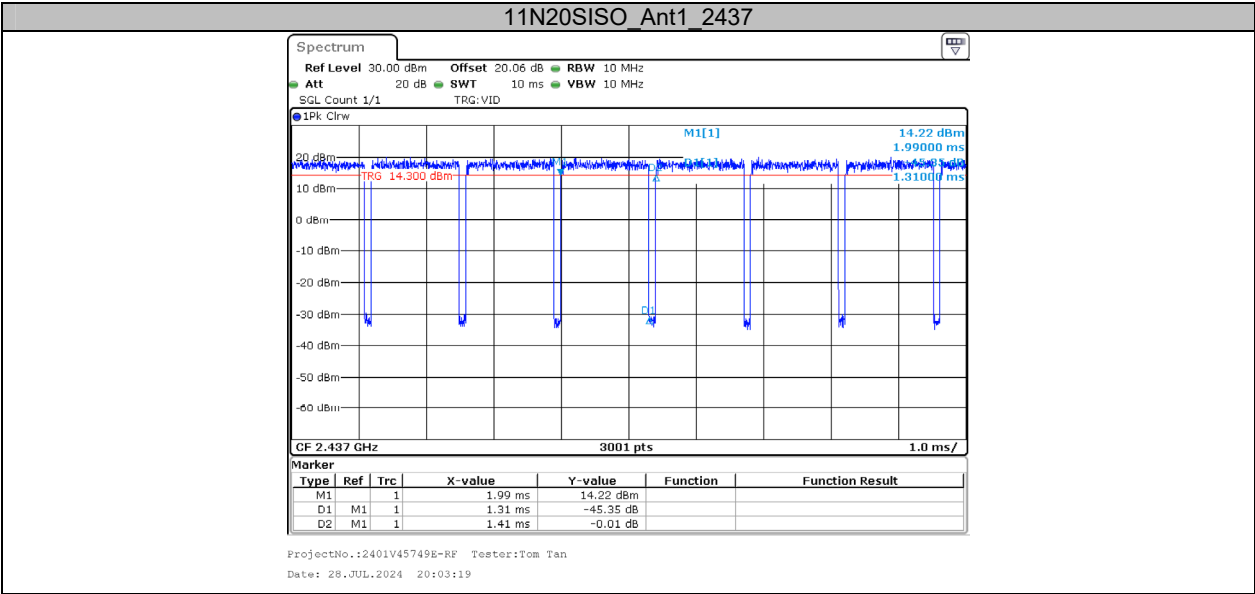

***** END OF REPORT *****