



Report No.: SUCR260800079101
Page: 1 of 3

Appendix B

Detailed Test Results

1. WIFI
WIFI 2.4G

Test Laboratory: SAR Lab

WiFi 2.4G 802.11b Ch11 Top side 0mm

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2462 MHz;Duty Cycle: 1:1.011

Medium: HSL2450;Medium parameters used: $f = 2462$ MHz; $\sigma = 1.827$ S/m; $\epsilon_r = 38.706$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.13, 7.13, 7.13); Calibrated: 2026/04/08
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1374; Calibrated: 2026/02/02
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x22x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.500 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 13.80 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 0.657 W/kg
SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.111 W/kg
Smallest distance from peaks to all points 3 dB below = 6.7 mm
Ratio of SAR at M2 to SAR at M1 = 47.9%
Maximum value of SAR (measured) = 0.519 W/kg

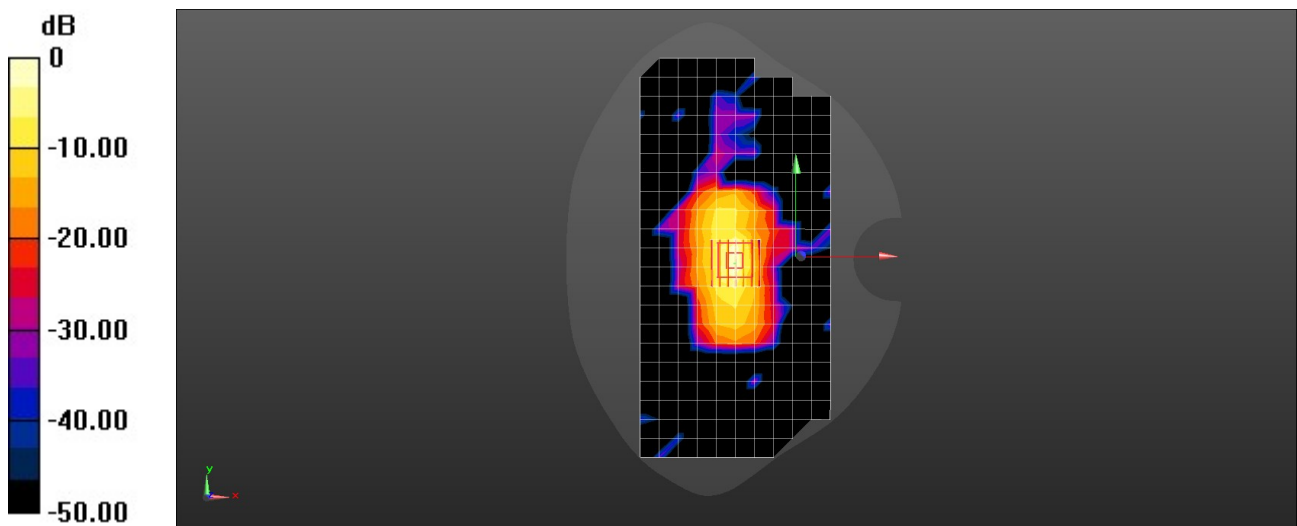



Report No.: SUCR260800079101
Page: 3 of 3

- End of the Appendix -