

FCC TEST REPORT

(Part 15, Subpart C)

Applicant:	SHENZHEN MOTTO ELECTRONICS CO., LTD
Address:	501, No.71-5 of XinTian Road, XinTian Community, Fuhai Street, BaoAn District, Shenzhen, China



Manufacturer or Supplier:	SHENZHEN MOTTO ELECTRONICS CO., LTD
Address:	501, No.71-5 of XinTian Road, XinTian Community, Fuhai Street, BaoAn District, Shenzhen, China
Product:	Tag
Model Name:	TAG1
FCC ID:	2BHYW-TAG
Date of tests:	Dec. 01, 2025 ~ Apr. 08, 2026

The tests have been carried out according to the requirements of the following standard:

☒ FCC Part 15, Subpart C, Section 15.247

☒ ANSI C63.10-2020

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Carl Xie Engineer / Mobile Department	Approved by Simon Wang Manager / Mobile Department
	
Date: Jan. 19, 2026	Date: Jan. 19, 2026

BOOMWAVE TEST (SHENZHEN) CO., LTD. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of the model are manufactured with identical electrical and mechanical components. All sample tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. Without written approval of BOOMWAVE TEST (SHENZHEN) CO., LTD., the test report shall not be reproduced except in full.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1. SUMMARY OF TEST RESULTS.....	6
1.1 MEASUREMENT UNCERTAINTY	7
2 GENERAL INFORMATION	8
2.2 GENERAL DESCRIPTION OF EUT	8
2.3 DESCRIPTION OF TEST MODES	9
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST	10
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	10
2.4 DUTY CYCLE OF TEST SIGNAL	12
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	12
2.6 DESCRIPTION OF SUPPORT UNITS	13
3 TEST TYPES AND RESULTS.....	14
3.1 RADIATED EMISSION MEASUREMENT	14
3.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
3.1.2 TEST INSTRUMENTS.....	15
3.1.3 TEST PROCEDURES	16
3.1.4 DEVIATION FROM TEST STANDARD	16
3.1.5 TEST SETUP	17
3.1.6 EUT OPERATING CONDITIONS	18
3.1.7 TEST RESULTS	19
3.2 6 DB BANDWIDTH MEASUREMENT	41
3.2.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT	41
3.2.2 TEST INSTRUMENTS.....	41
3.2.3 TEST PROCEDURE.....	42
3.2.4 DEVIATION FROM TEST STANDARD	43
3.2.5 TEST SETUP	43
3.2.6 EUT OPERATING CONDITIONS	43
3.2.7 TEST RESULTS	43
3.3 CONDUCTED OUTPUT POWER	44
3.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	44
3.3.2 TEST SETUP	44
3.3.3 TEST INSTRUMENTS.....	44
3.3.4 TEST PROCEDURES	44
3.3.5 DEVIATION FROM TEST STANDARD	44
3.3.6 EUT OPERATING CONDITIONS	44
3.3.7 TEST RESULTS	45

Test Report No.: RF260416B001

3.4.7.1	MAXIMUM PEAK OUTPUT POWER	45
3.4.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE).....	46
3.4	POWER SPECTRAL DENSITY MEASUREMENT	47
3.4.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	47
3.4.2	TEST SETUP	47
3.4.3	TEST INSTRUMENTS.....	47
3.4.4	TEST PROCEDURE.....	47
3.4.5	DEVIATION FROM TEST STANDARD	47
3.4.6	EUT OPERATING CONDITION	47
3.4.7	TEST RESULTS	48
3.5	OUT OF BAND EMISSION MEASUREMENT	49
3.5.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	49
3.5.2	TEST SETUP	49
3.5.3	TEST INSTRUMENTS.....	49
3.5.4	TEST PROCEDURE.....	49
3.5.5	DEVIATION FROM TEST STANDARD	50
3.5.6	EUT OPERATING CONDITION	50
3.5.7	TEST RESULTS	50
3.6	ANTENNA REQUIREMENTS	51
3.6.1	STANDARD APPLICABLE	51
3.6.2	ANTENNA CONNECTED CONSTRUCTION	51
3.6.3	ANTENNA GAIN	51
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	52
5	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	53
6	APPENDIX :BLE	54
	DTS BANDWIDTH	54
	TEST RESULT	54
	TEST GRAPHS.....	55
	OCCUPIED CHANNEL BANDWIDTH	58
	TEST RESULT	58
	TEST GRAPHS.....	59
	MAXIMUM CONDUCTED OUTPUT POWER	62
	TEST RESULT	62
	MAXIMUM POWER SPECTRAL DENSITY.....	63
	TEST RESULT	63
	TEST GRAPHS.....	64

Test Report No.: RF260416B001

BAND EDGE MEASUREMENTS	67
TEST RESULT	67
TEST GRAPHS.....	69
CONDUCTED SPURIOUS EMISSION.....	71
TEST RESULT	71
TEST GRAPHS.....	72
DUTY CYCLE	81
TEST RESULT	81
TEST GRAPHS.....	82

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF260416B001	Original release	Jan. 19, 2026

1. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	TEST LAB*
15.207	AC Power Conducted Emission	N/A(Note)	-
15.205 15.209	Radiated Emissions	Compliance	A
15.247(d)	Out of band Emission Measurement	Compliance	A
15.247(a)(2)	6dB bandwidth	Compliance	A
15.247(b)	Conducted Output power	Compliance	A
15.247(e)	Power Spectral Density	Compliance	A
15.203	Antenna Requirement	Compliance	A

NOTE: Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

*Test Lab Information Reference

Lab A:

Boomwave Test (Shenzhen) Co., Ltd.

Lab Address:

Rm B38, Warehouse A5(Chiwan #1), #3 Chiwan 4th Rd, Chiwan Comm, Zhaoshang St, Nanshan Dist, Shenzhen, Guangdong, Shenzhen, China

Accredited Test Lab Cert 7607.01


The FCC Site Registration No. is 646781; The Designation No. is CN1429.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	$\pm 2.70\text{dB}$
Radiated emissions (9KHz~30MHz)	$\pm 2.68\text{dB}$
Radiated emissions (30MHz~1GHz)	$\pm 4.98\text{dB}$
Radiated emissions (1GHz ~6GHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GHz ~18GHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GHz ~40GHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Power Spectral Density	$\pm 0.85\text{ dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

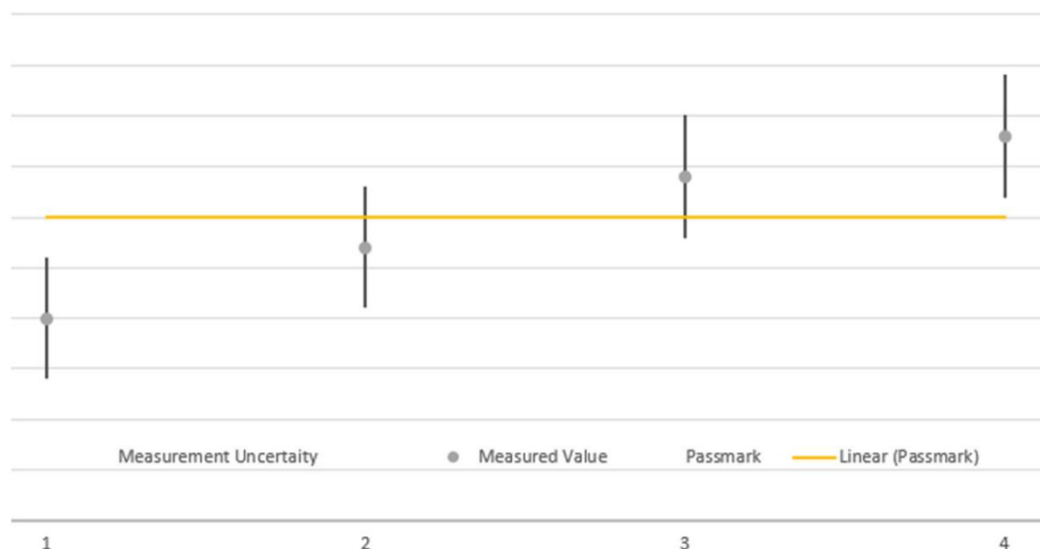

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.

2 GENERAL INFORMATION

2.2 GENERAL DESCRIPTION OF EUT

PRODUCT*	Tag	
MODEL NAME*	TAG1	
NOMINAL VOLTAGE*	3.0Vdc	
MODULATION *	BLE	GFSK
TRANSMISSION RATE*	BT_LE: 1 Mbps/2 Mbps	
OPERATING FREQUENCY	2402-2480MHz for BT-LE(GFSK)	
MAX. OUTPUT POWER	BT-LE: 12.33mW (Maximum)	
ANTENNA GAIN*	☒ Provided by client	
	BLE	-3.43dBi
ANTENNA TYPE*	BLE	PCB Antenna
HW VERSION*	V0.2	
SW VERSION*	V1.0.0	
I/O PORTS*	Refer to user's manual	
CABLE SUPPLIED*	N/A	

NOTE:

- *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
BT_LE(1MHz)	1TX/1RX
BT_LE(2MHz)	1TX/1RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
- Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.

2.3 DESCRIPTION OF TEST MODES

BT-LE							
CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 4 photographs of the test configuration for reference.

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.
The worst case was found when positioned on X-axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where **RE<1G**: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
BT-LE	0 to 39	19	GFSK	0.5

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
BT-LE	0 to 39	0,19, 39	GFSK	1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
BT-LE	0 to 39	0,19, 39	GFSK	1.0
BT-LE	1 to 38	1,19, 38	GFSK	2.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
BT-LE	0 to 39	0,19, 39	GFSK	1
BT-LE	1 to 38	1,19, 38	GFSK	2.0

TEST CONDITION			
APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	23deg. C, 70%RH	DC 3.0V By Adapter	Hanwen Xu
RE≥1G	23deg. C, 70%RH	DC 3.0V By Adapter	Hanwen Xu
PLC	25deg. C, 52%RH	DC 3.0V By Adapter	Hanwen Xu
APCM	25deg. C, 60%RH	DC 3.0V By Adapter	Hanwen Xu

2.4 DUTY CYCLE OF TEST SIGNAL

Please Refer to Appendix Of this test report..

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10-2020

Note :

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

2.6 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Laptop	Lenovo	Thinkpad E14	SL10W47313	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	USB: 10cm

3 TEST TYPES AND RESULTS

3.1 RADIATED EMISSION MEASUREMENT

3.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Test Report No.: RF260416B001

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	2025/7/3	2026/7/2
BiConiLog Antenna	ETS-LINDGREN	3143B	161965	2025/7/17	2026/7/16
Horn Antenna	SCHWARZBECK	BBHA9120D	3297	2025/9/27	2026/9/26
Horn Antenna	STEATITE	QWH-SL-18-40-K-SG QMS-00361	15433	2025/7/19	2026/7/18
Preamplifier	Tonscend	TPA184045	AP24L8060388	2025/7/3	2026/7/2
MXE EMI Receiver	keysight	N9038B	MY50018017	2025/7/1	2026/6/30
MXG Vector Signal Generator	Keysight	N5183B	MY59100137	2025/6/30	2026/6/29
Preamplifier	Tonscend	TPA001330	806JSAPO40804251015	2025/6/30	2026/6/29
Preamplifier	Tonscend	TPA011845	AP24L8060392	2025/6/30	2026/6/29
Attenuator 6DB	SHX	TS2-6-6-A	230927166	2025/6/30	2026/6/29
Attenuator 6DB	SHX	TS2-6-6-A	230927165	2025/6/30	2026/6/29
Active Receive Loop Antenna	SCHWARZBECK	FMZB 1519 B	00173	2025/6/30	2026/6/29
Temp. & Humi. Recorder	Kejian	HTC-01	157246	2025/7/2	2026/7/1
HIGH pass FILTER_1-18	EWT	EWT-57-0222	EWT-57-0222	2025/6/30	2026/6/29
HIGH pass FILTER_7-18	EWT	EWT-57-0223	EWT-57-0223	2025/6/30	2026/6/29
HIGH pass FILTER_3-18	EWT	EWT-57-0221	EWT-57-0221	2025/6/30	2026/6/29
DC~1GHz Lowpass Filter	EWT	EWT-56-0649	EWT-56-0649	2025/7/3	2026/7/2
Cable 1	N/A	N/A	N/A	2025/9/28	2026/9/27
Cable 2	N/A	N/A	N/A	2025/9/28	2026/9/27
Cable 3	N/A	N/A	N/A	2025/9/28	2026/9/27

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Chamber.
3. The FCC Site Registration No. is 646781; The Designation No. is CN1429.

3.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

3.1.4 DEVIATION FROM TEST STANDARD


No deviation

3.1.5 TEST SETUP


<Frequency Range 9KHz~30MHz >

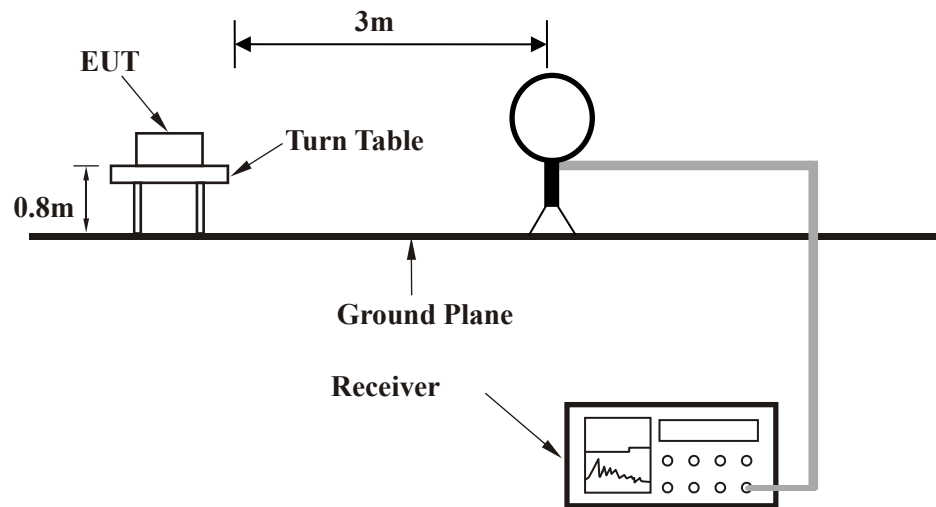

< Frequency Range 30MHz~1GHz >

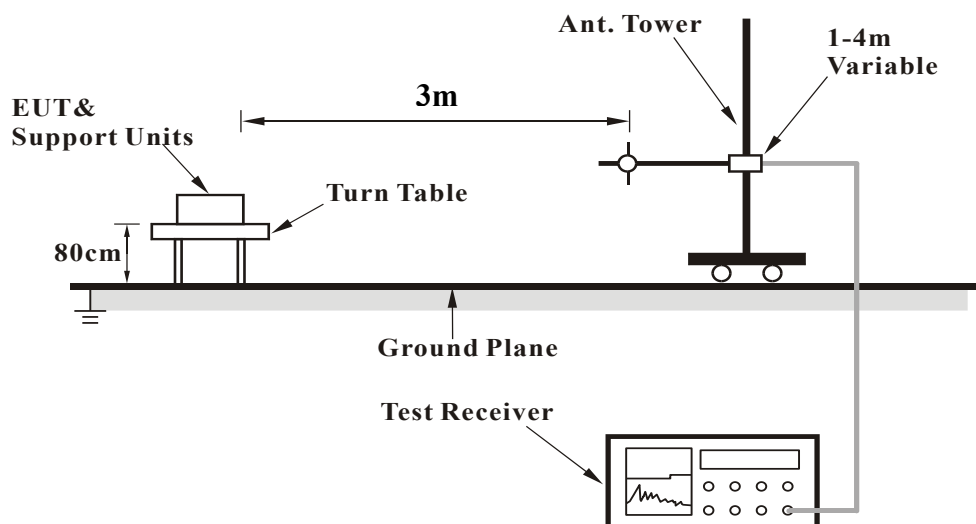

<Frequency Range above 1GHz>

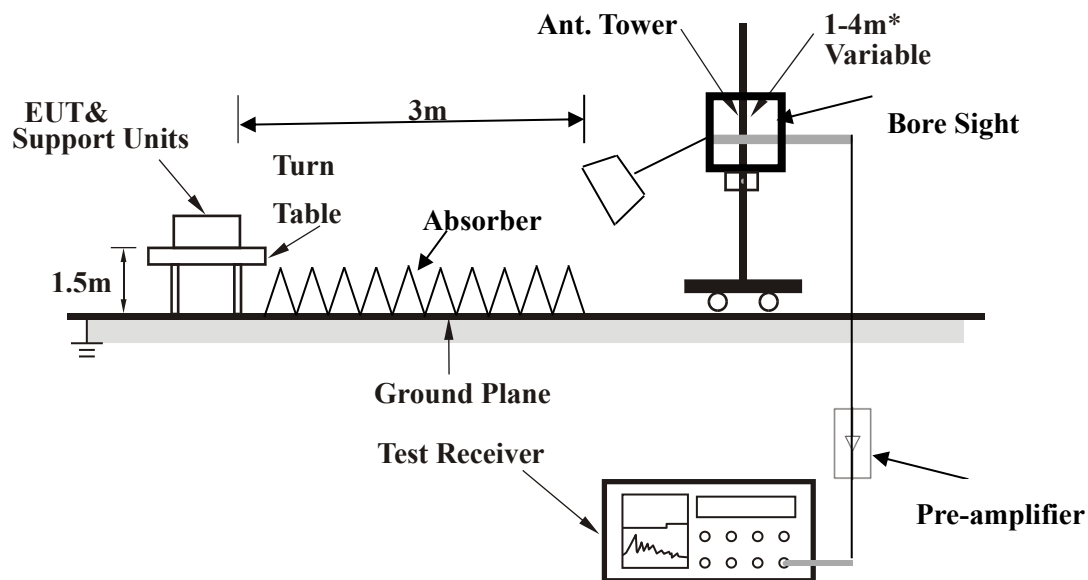

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.


3.1.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

BT-LE_1M									
CHANNEL		TX Channel 19		ODETECTOR FUNCTION		Quasi-Peak (QP)			
FREQUENCY RANGE		30MHz ~ 1GHz							
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M									
Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	47.266	23.88	40.00	16.12	-10.19	H	1	2.00	120.000
1	99.598	23.13	43.50	20.37	-12.23	H	90.7	2.00	120.000
1	177.052	21.79	43.50	21.72	-13.50	H	226.9	2.00	120.000
1	270.366	31.28	46.00	14.72	-8.50	H	133.1	1.00	120.000
1	549.144	20.59	46.00	25.41	-4.12	H	4.3	1.00	120.000
1	746.976	24.95	46.00	21.05	-0.23	H	1	2.00	120.000

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Limit value – Emission Level

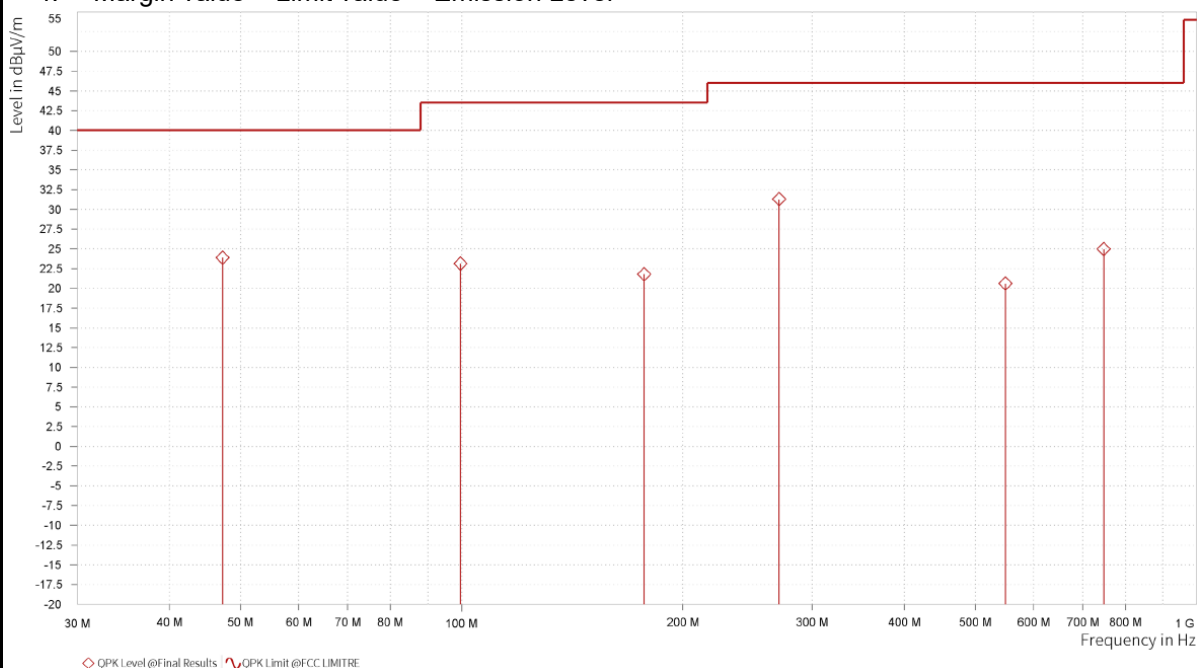

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	34.947	24.66	40.00	15.34	-12.70	V	275.3	1.00	120.000
1	76.172	18.75	40.00	21.25	-16.23	V	7	1.00	120.000
1	105.757	21.44	43.50	22.06	-12.14	V	359	1.00	120.000
1	199.896	22.11	43.50	21.39	-11.12	V	90.6	2.00	120.000
1	322.310	21.06	46.00	24.94	-6.96	V	137.8	1.00	120.000
1	597.305	23.33	46.00	22.67	-2.71	V	359	1.00	120.000

REMARKS:


- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Limit value – Emission Level





ABOVE 1GHz TEST DATA


Note:

1. For radiated emissions testing , the full testing range of different modes have been scanned , only the worst case harmonic data is reported in the sheet.
2. All other emissions were greater than 20dB below the limit was not recorded

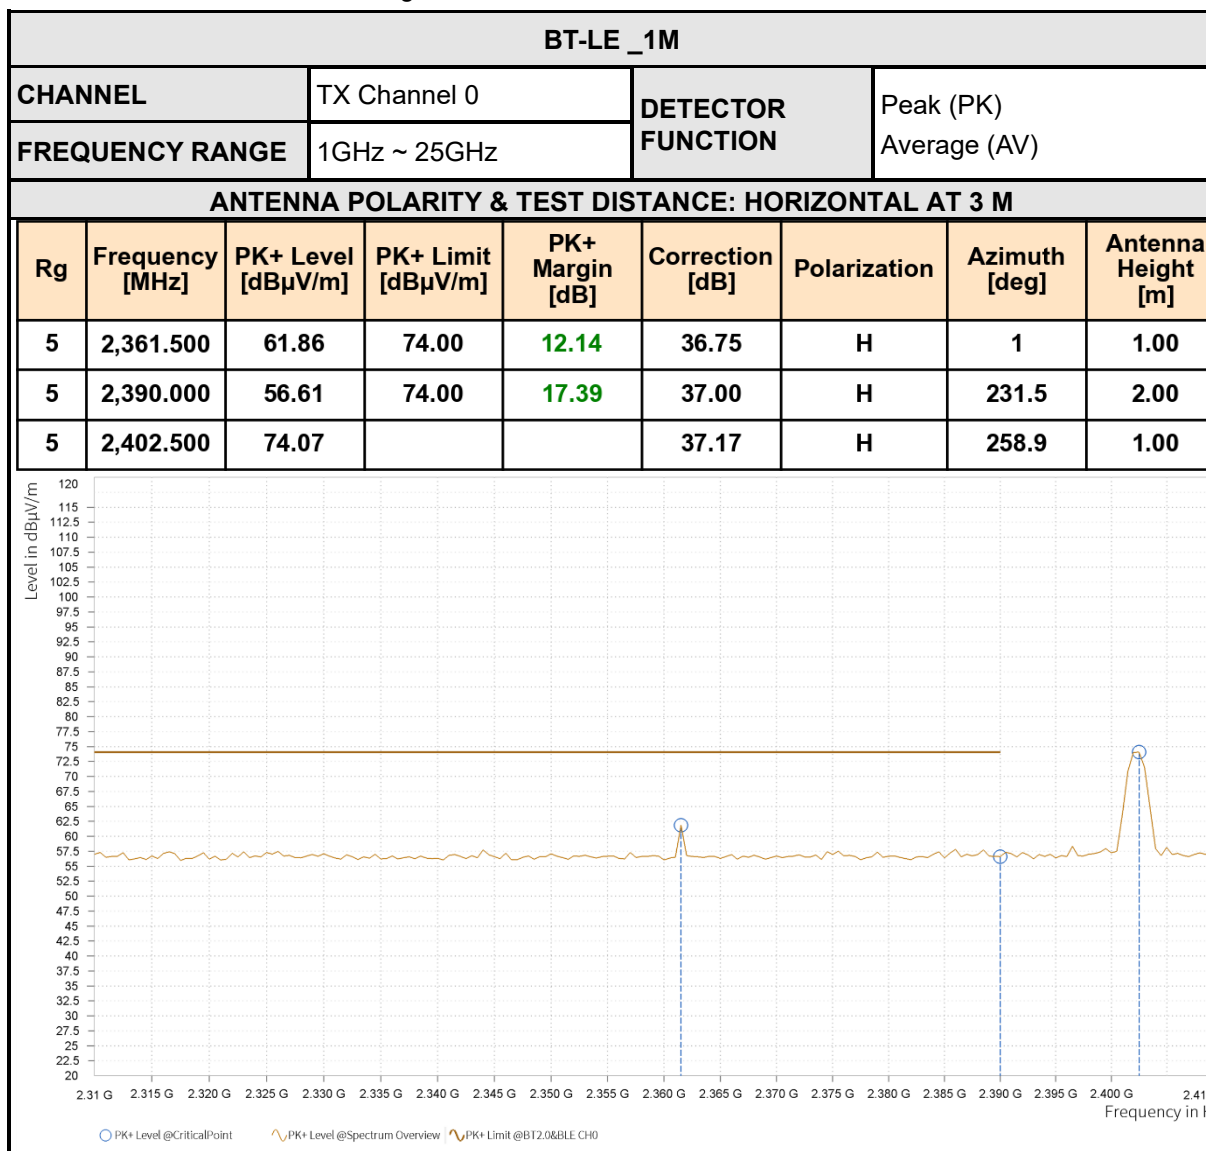

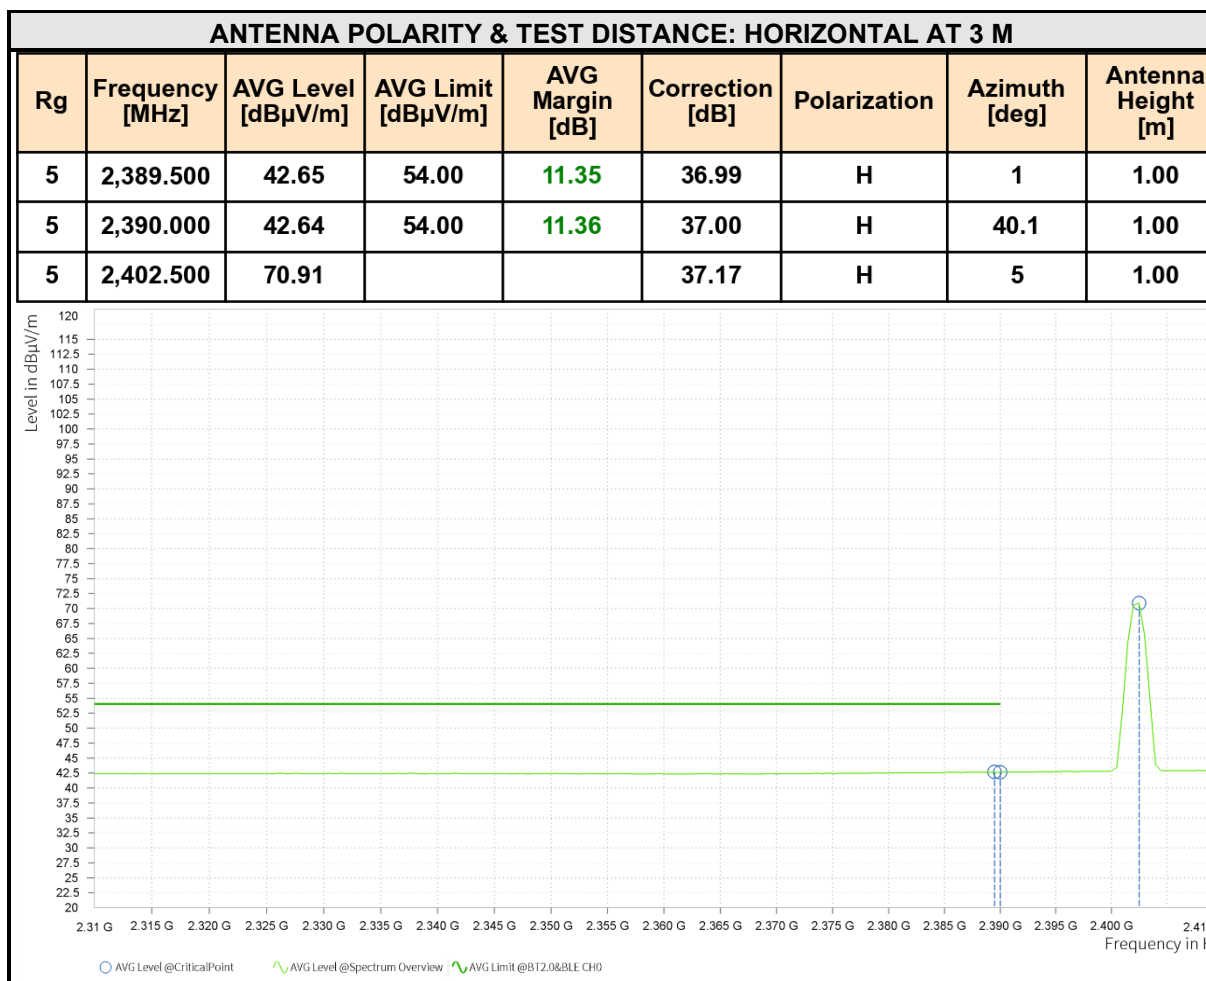


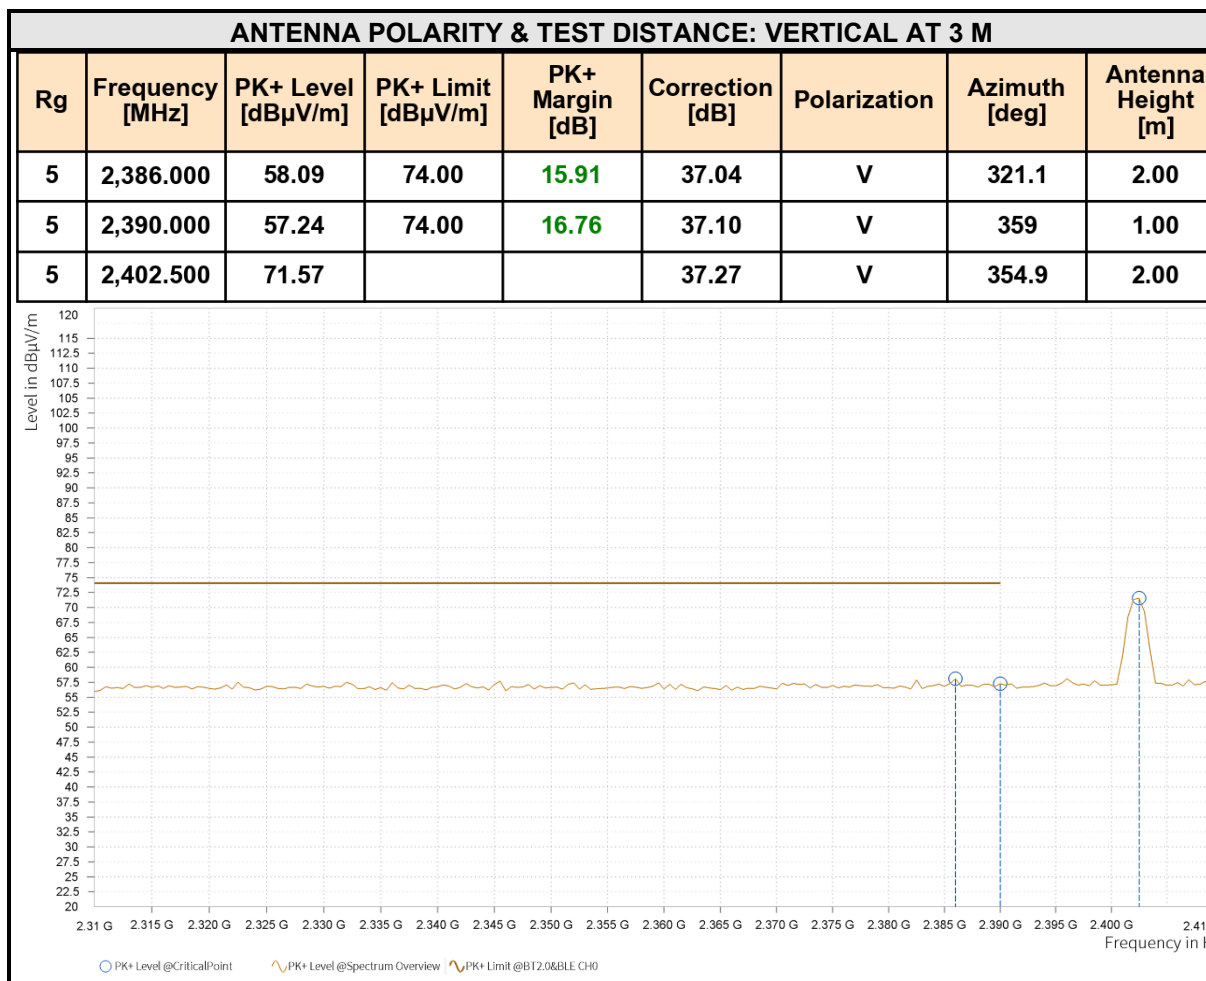


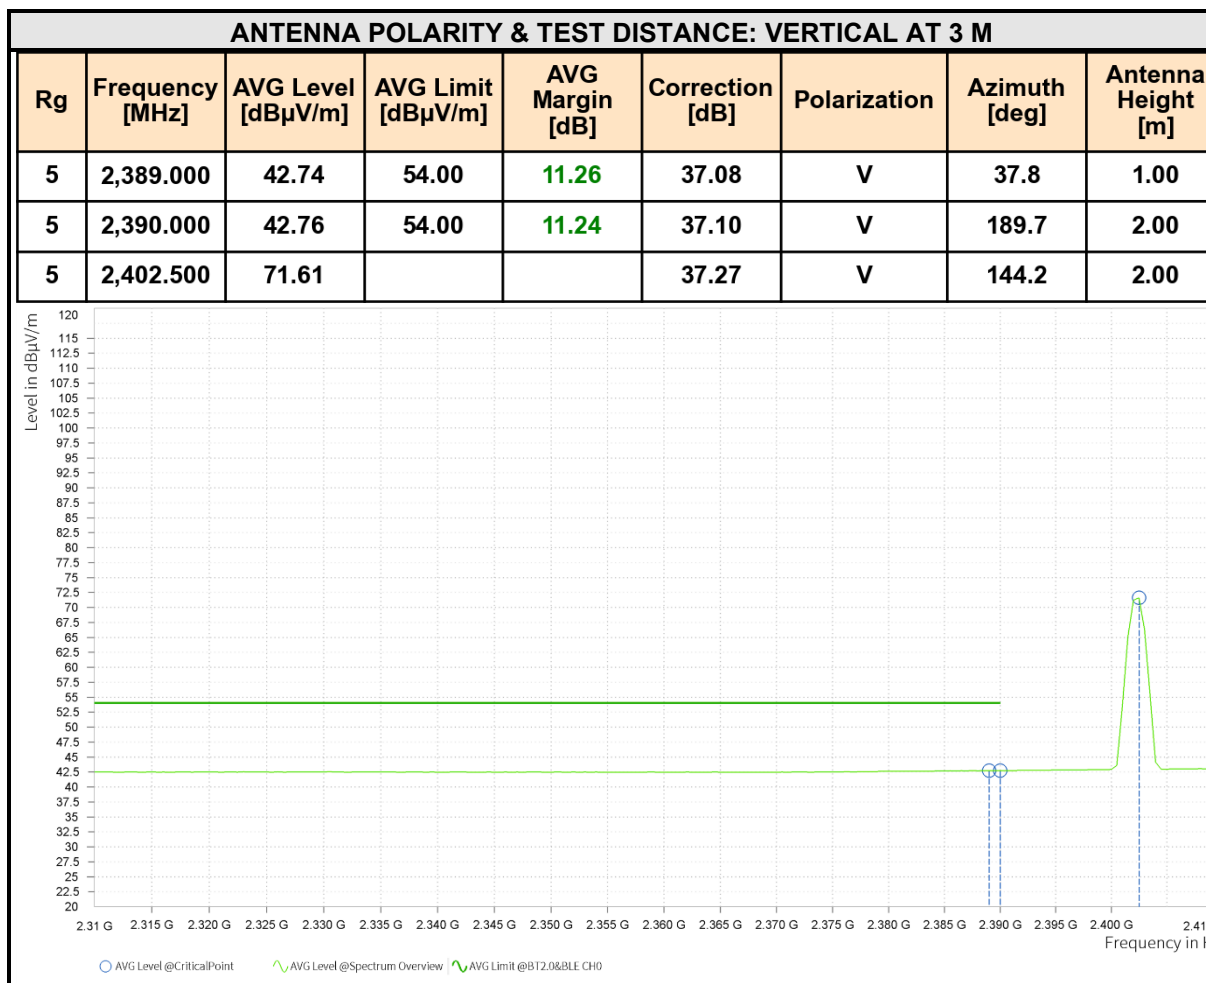

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value–Emission level.
3. 2402MHz: Fundamental frequency.

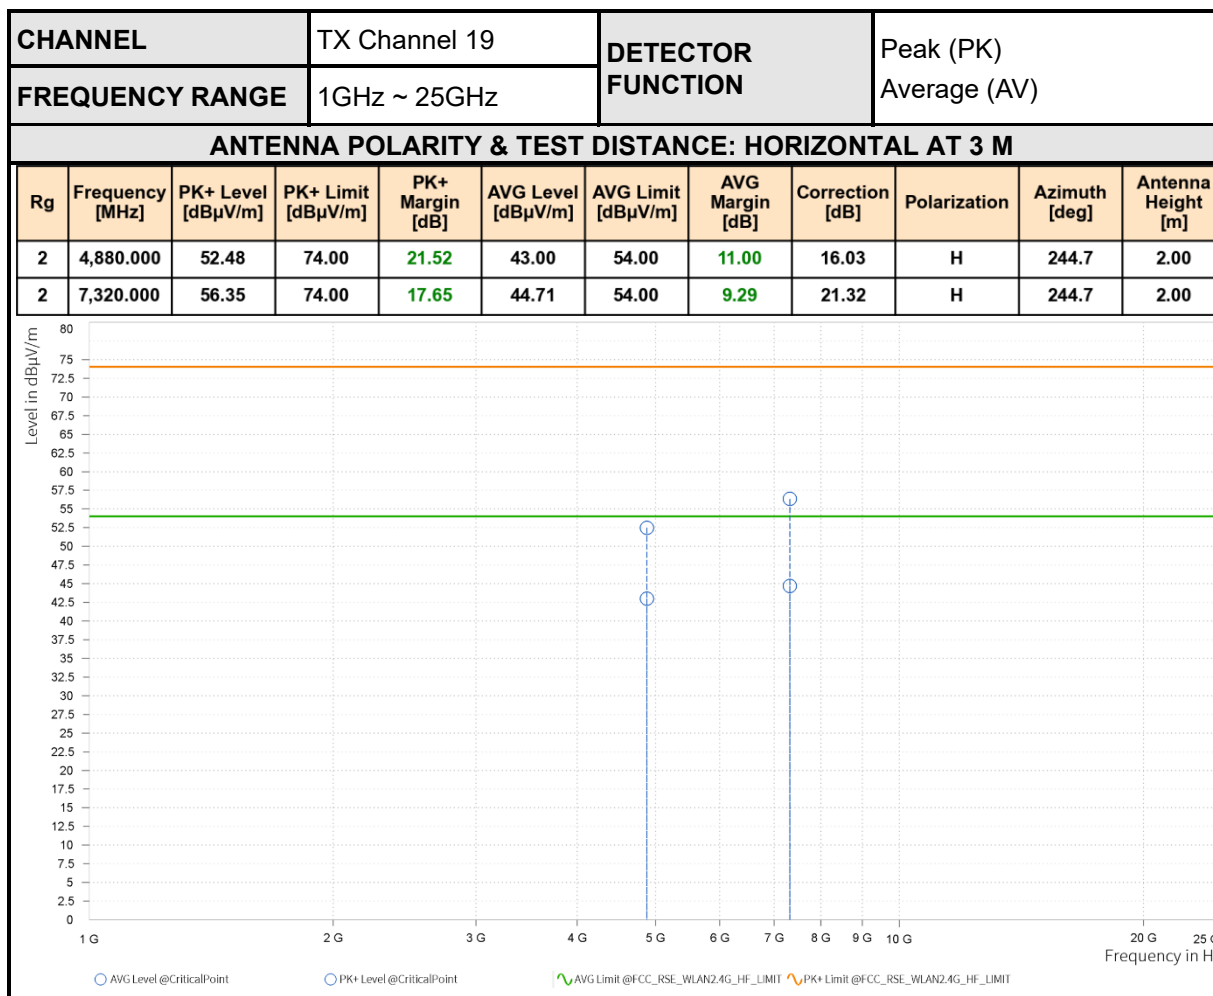


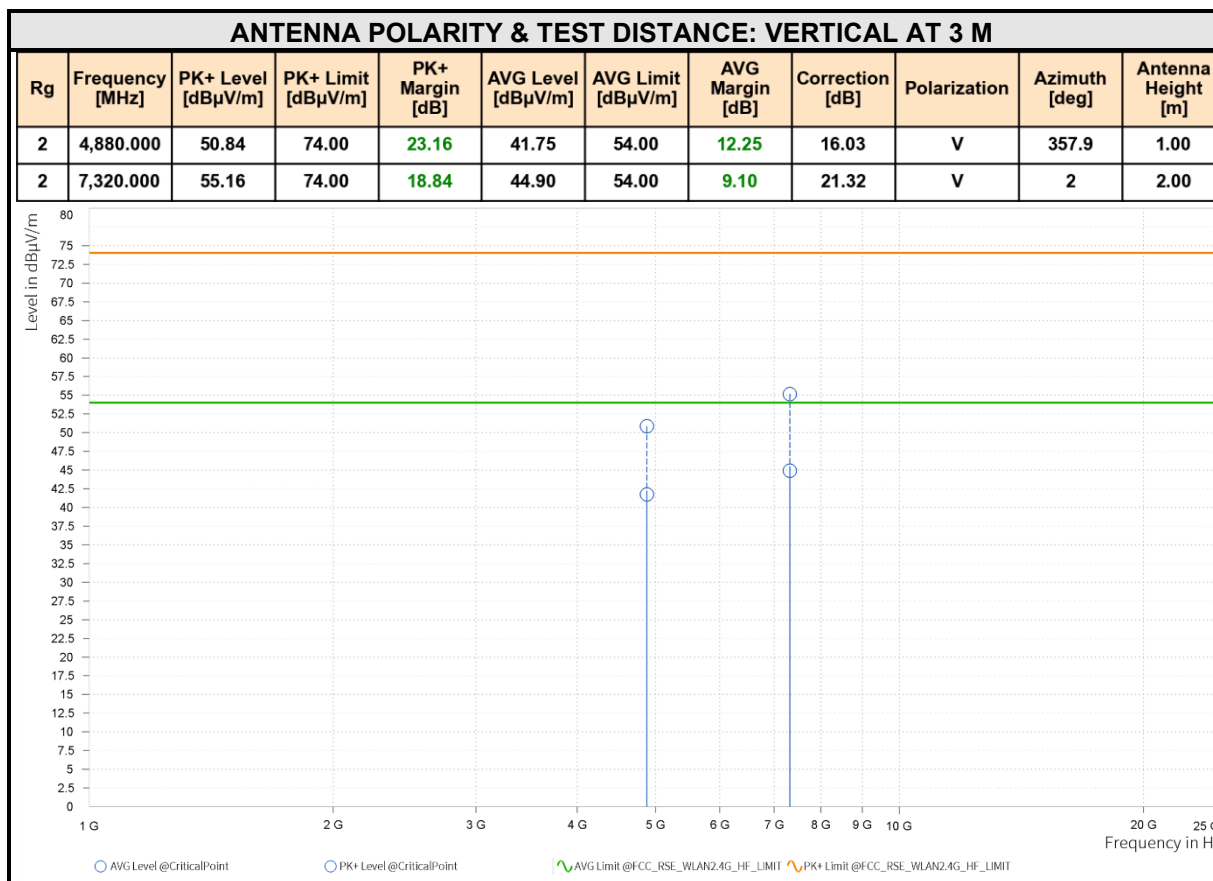



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value–Emission level.
3. 2440MHz: Fundamental frequency.

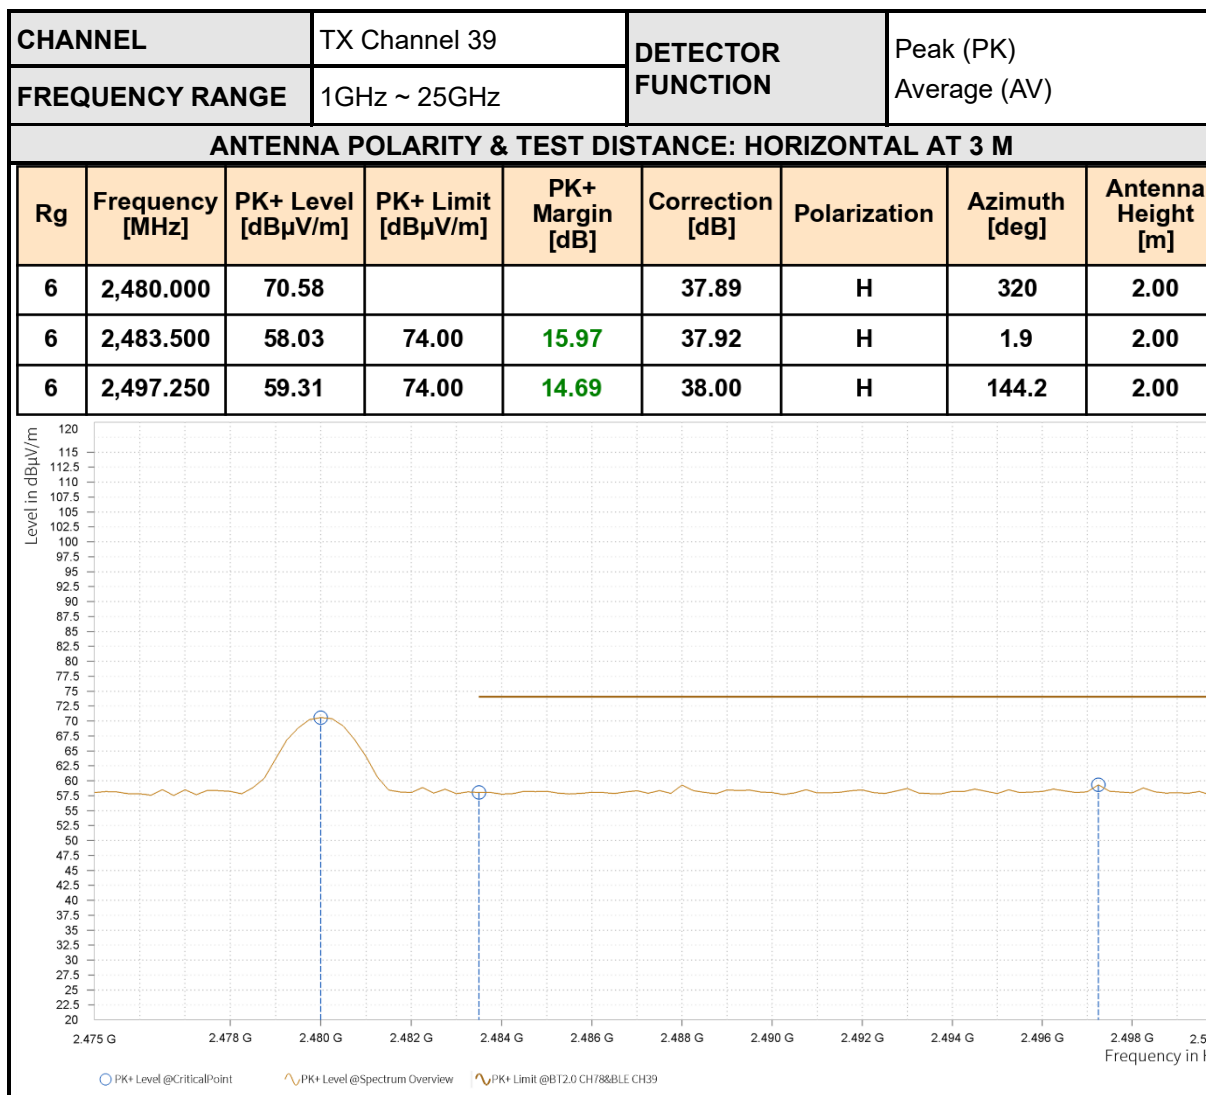

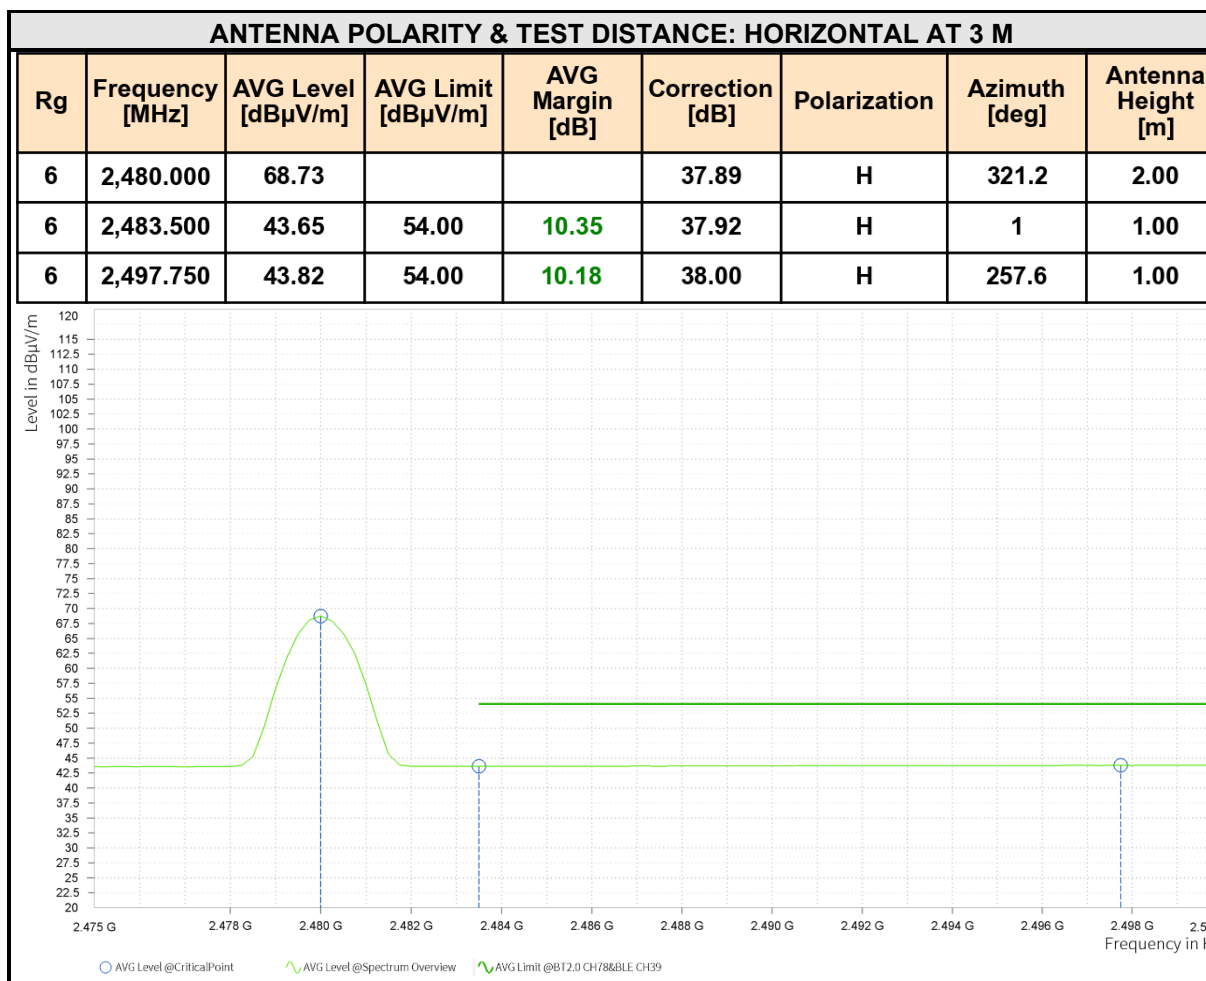


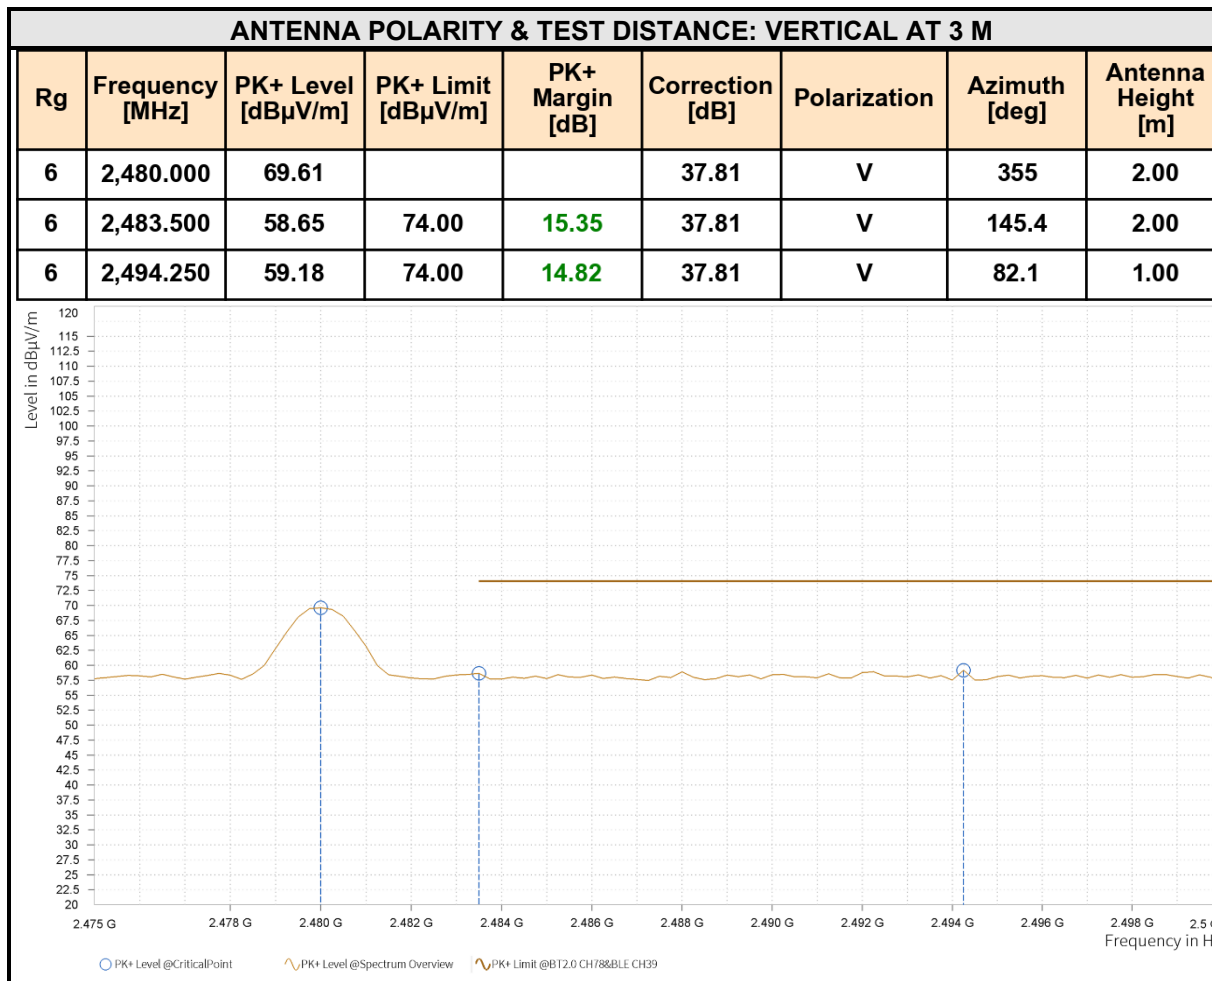


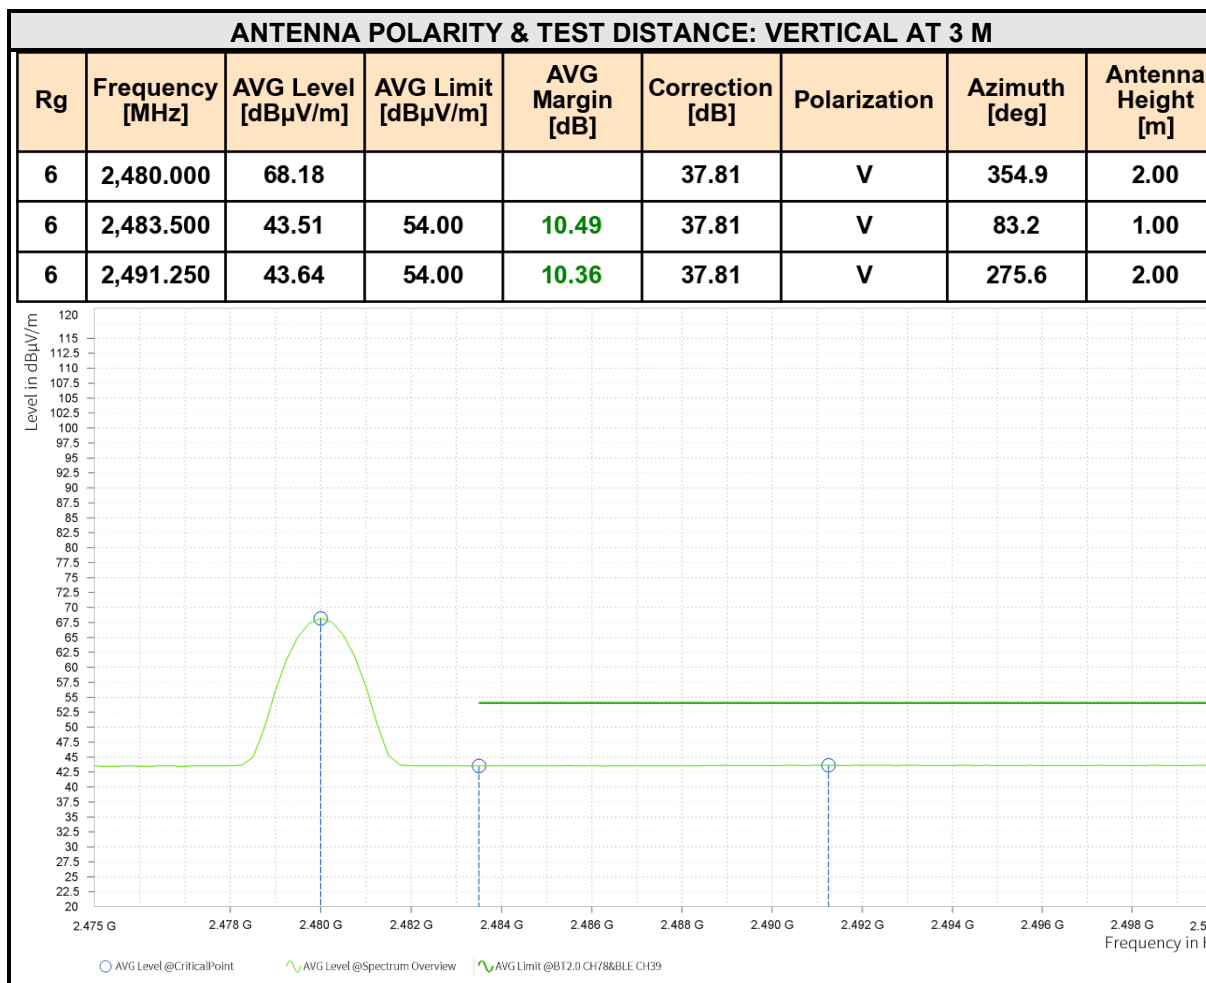



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value–Emission level.
3. 2480MHz: Fundamental frequency.

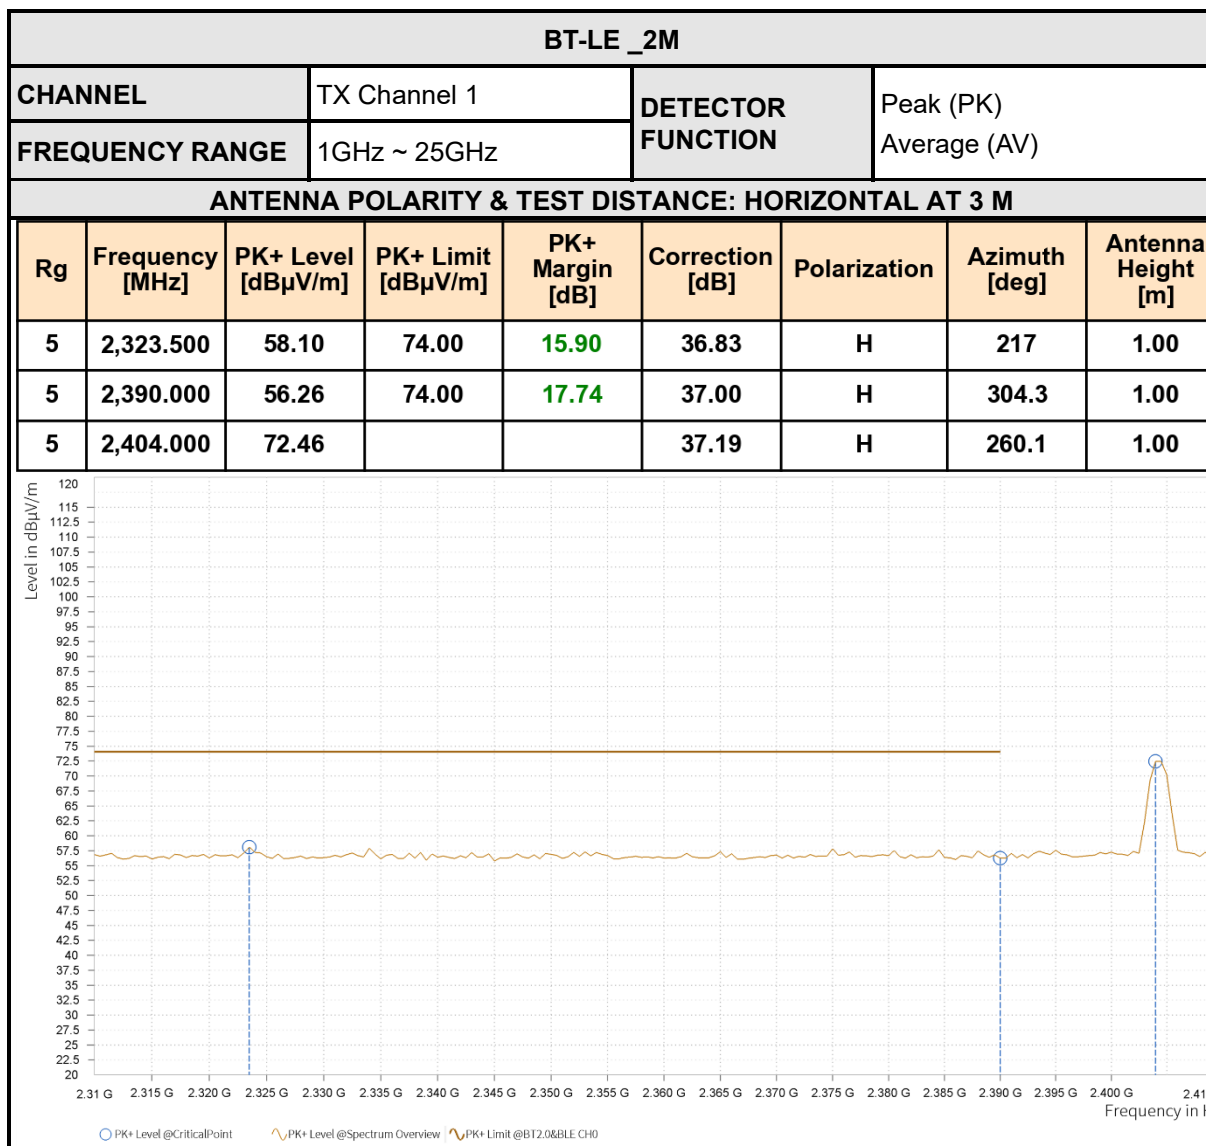

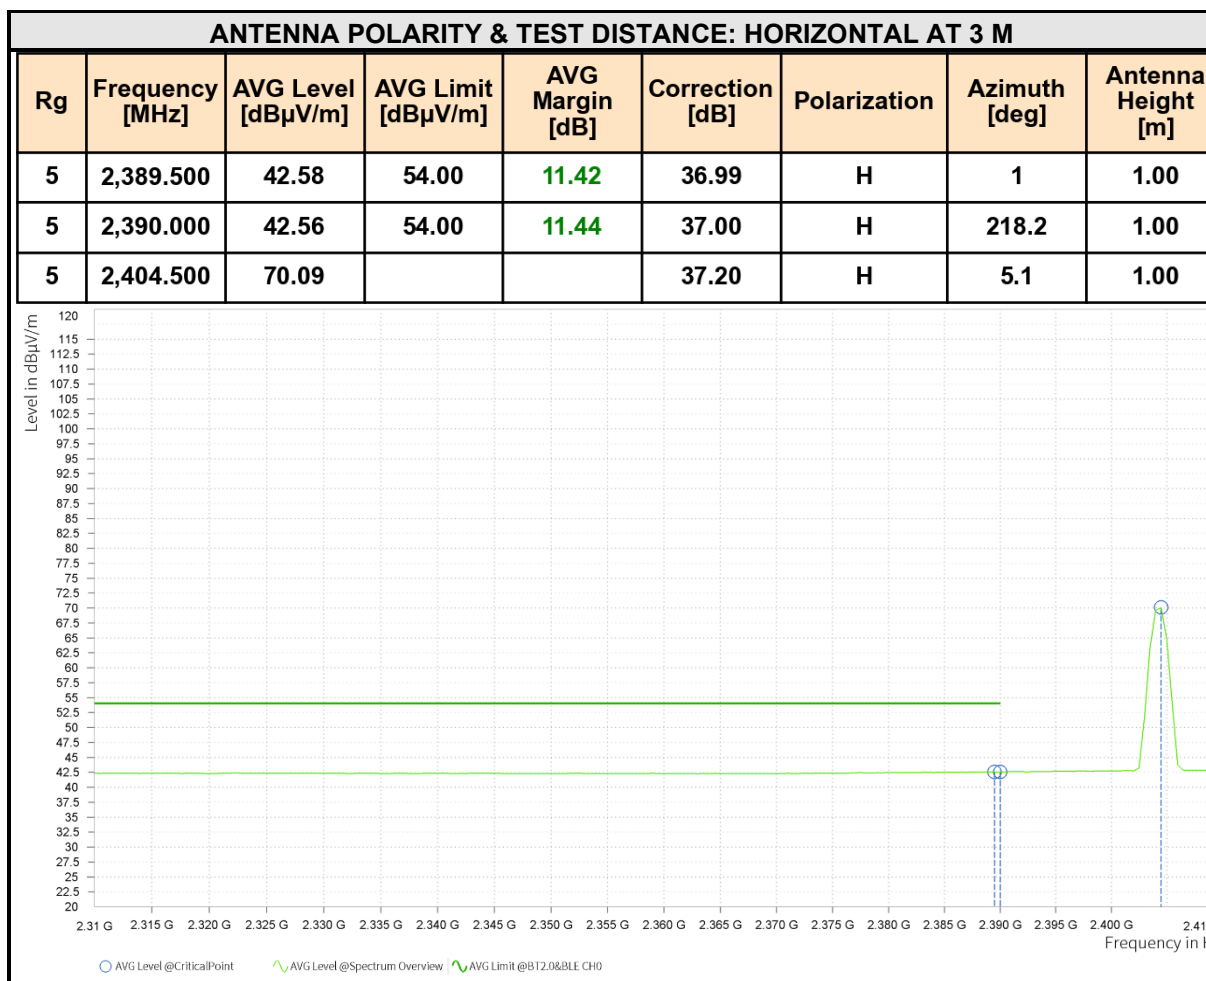


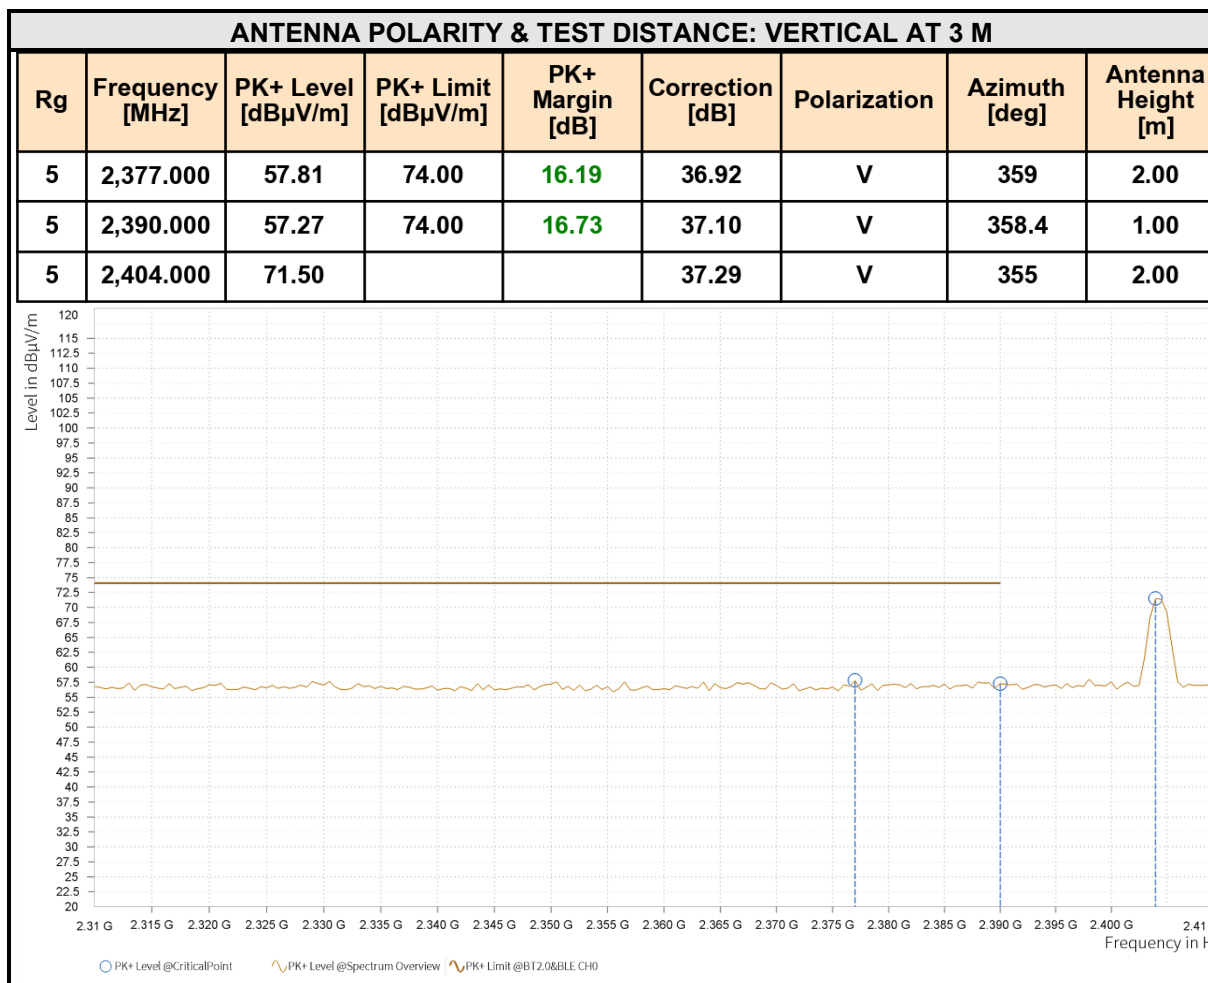


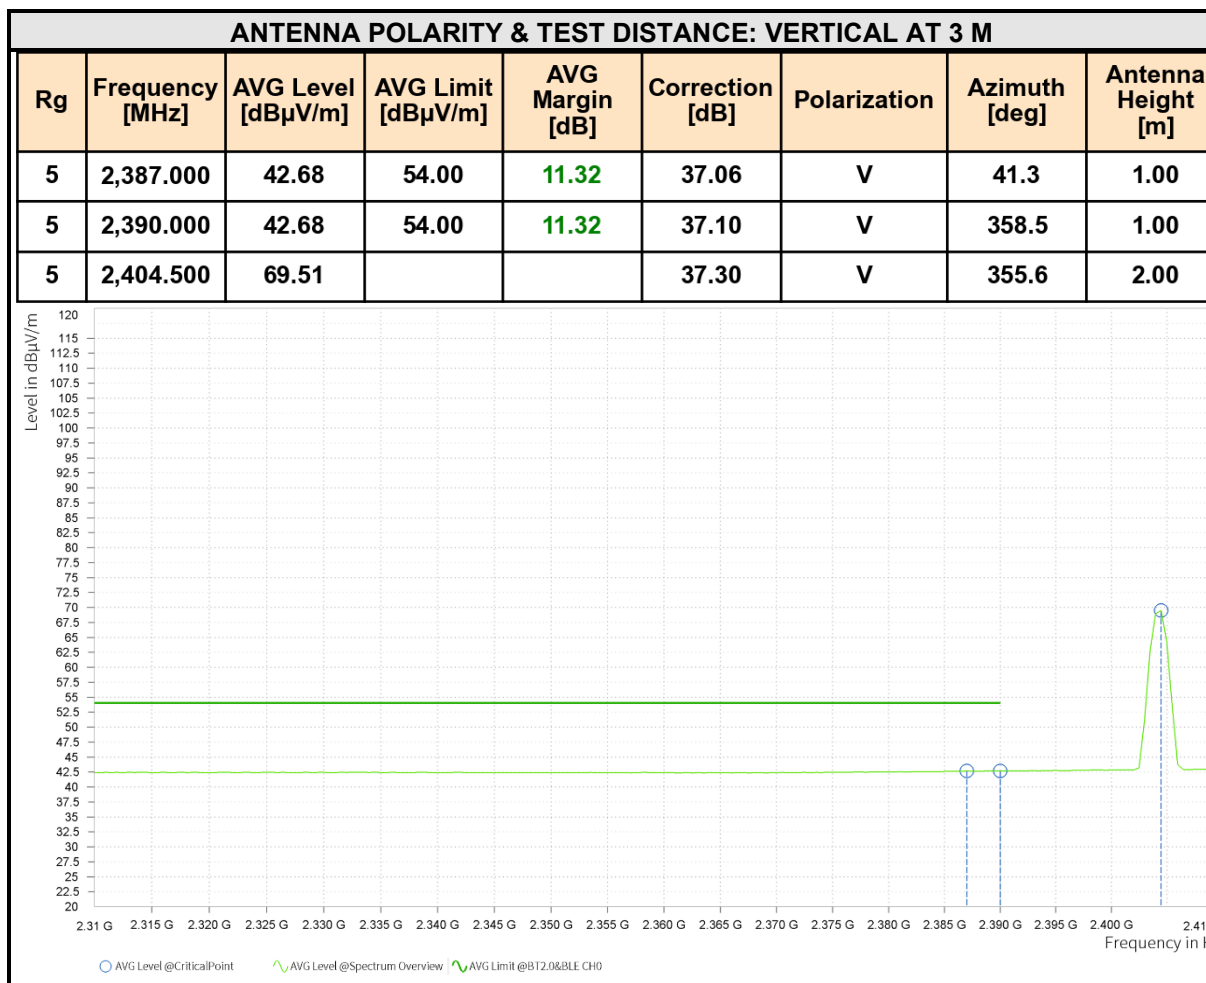

REMARKS:


1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value–Emission level.
3. 2404MHz: Fundamental frequency.

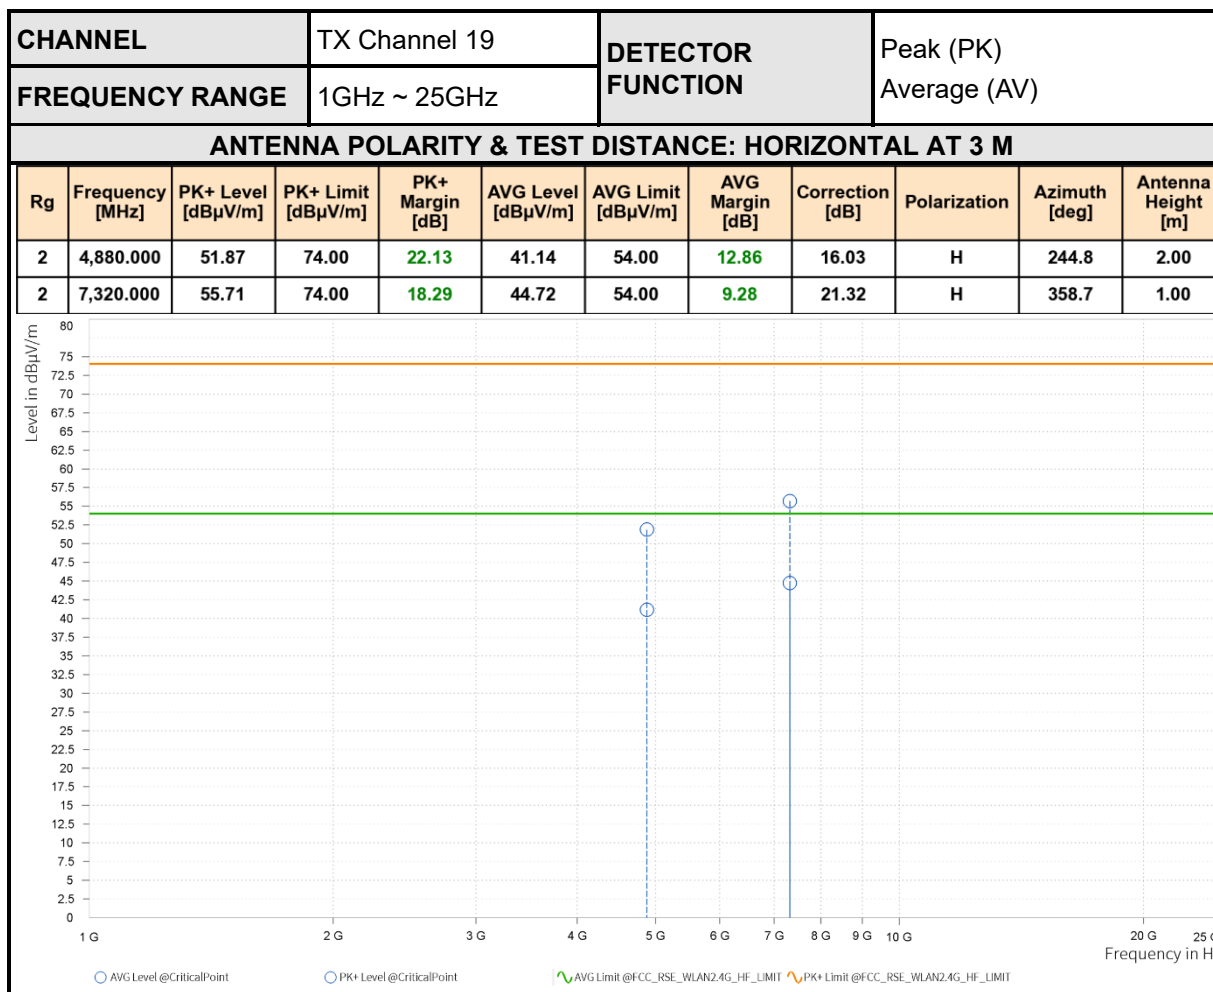


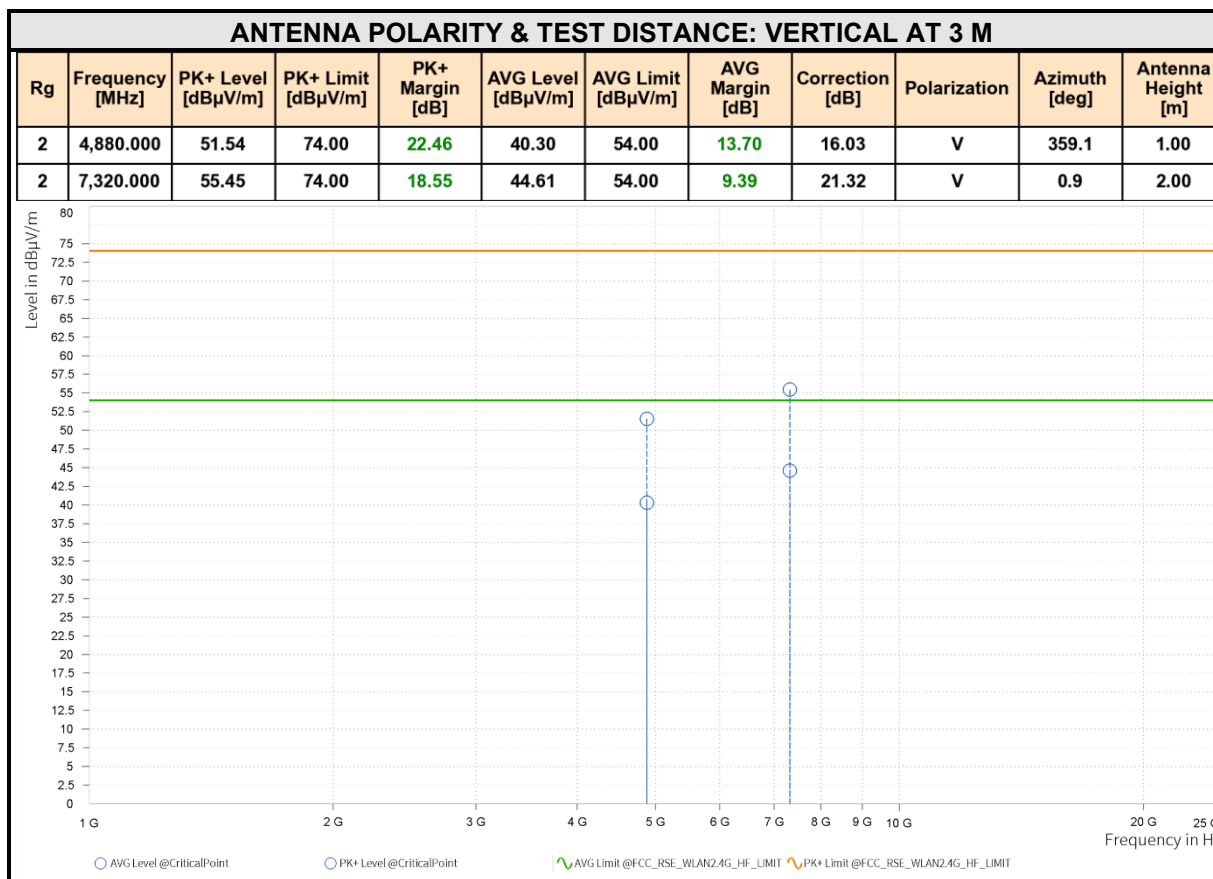



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor.
2. Margin value = Limit value–Emission level.
3. 2440MHz: Fundamental frequency.

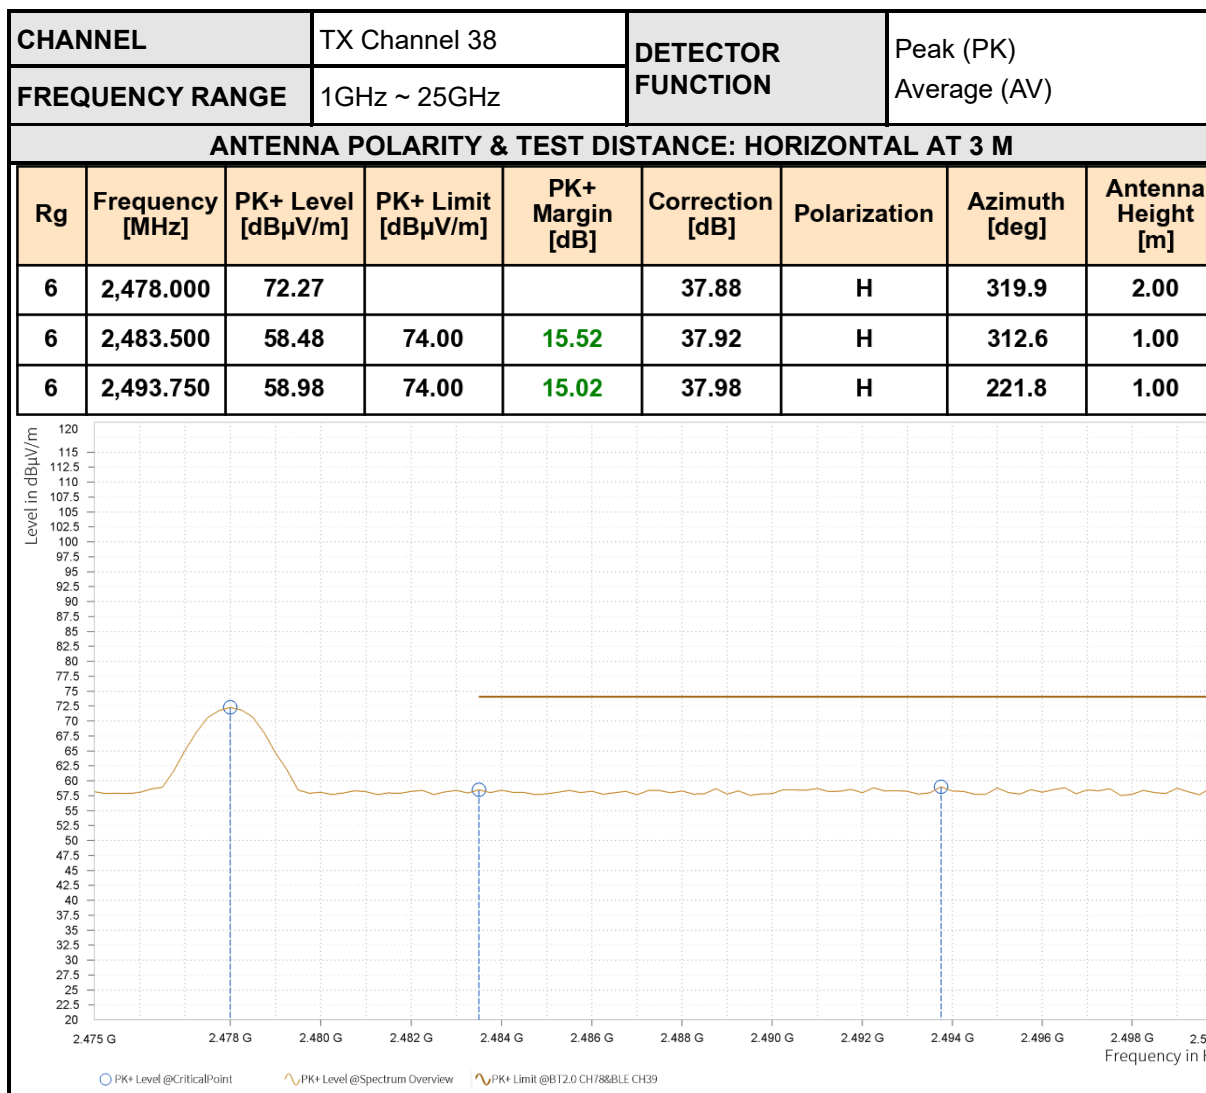

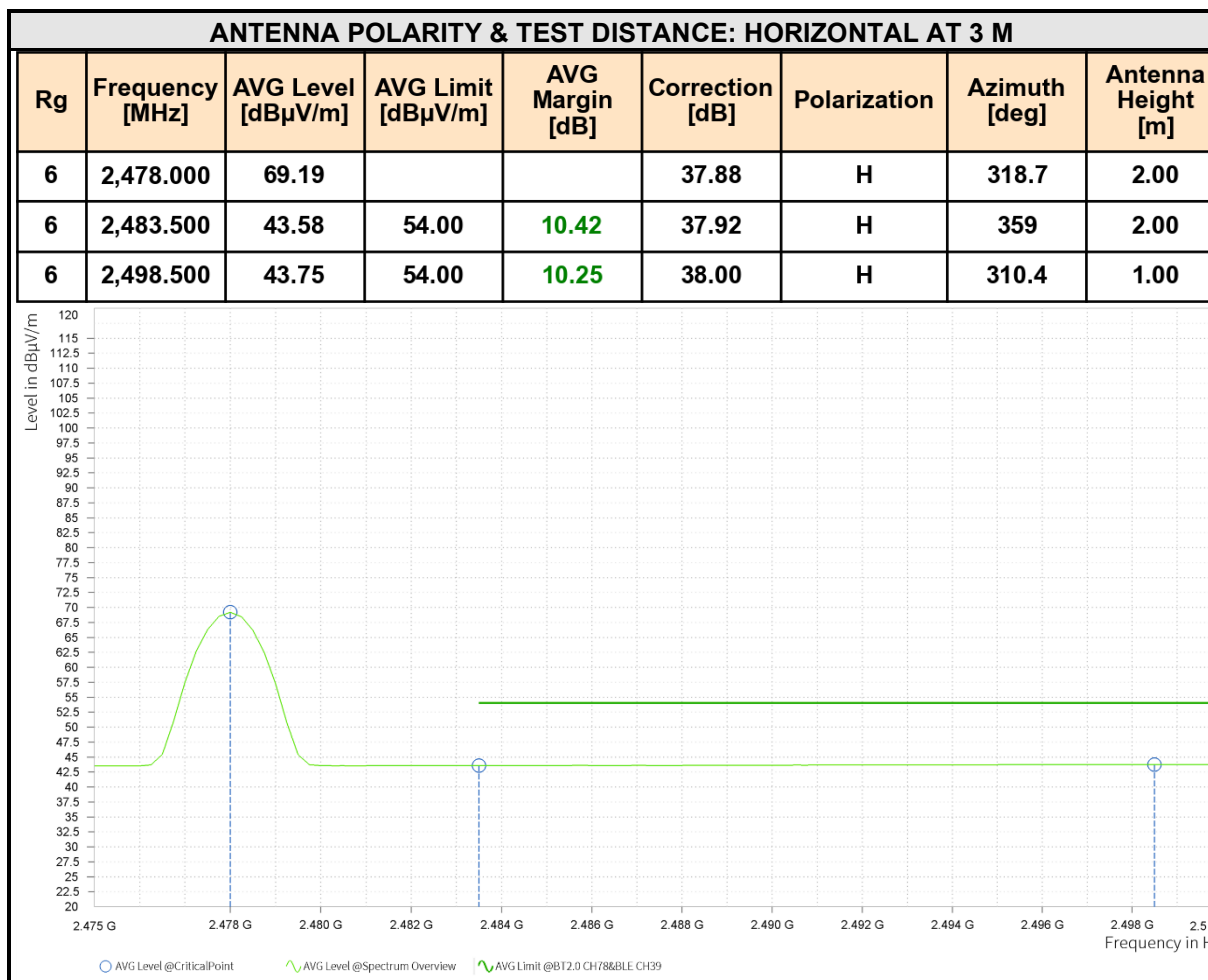

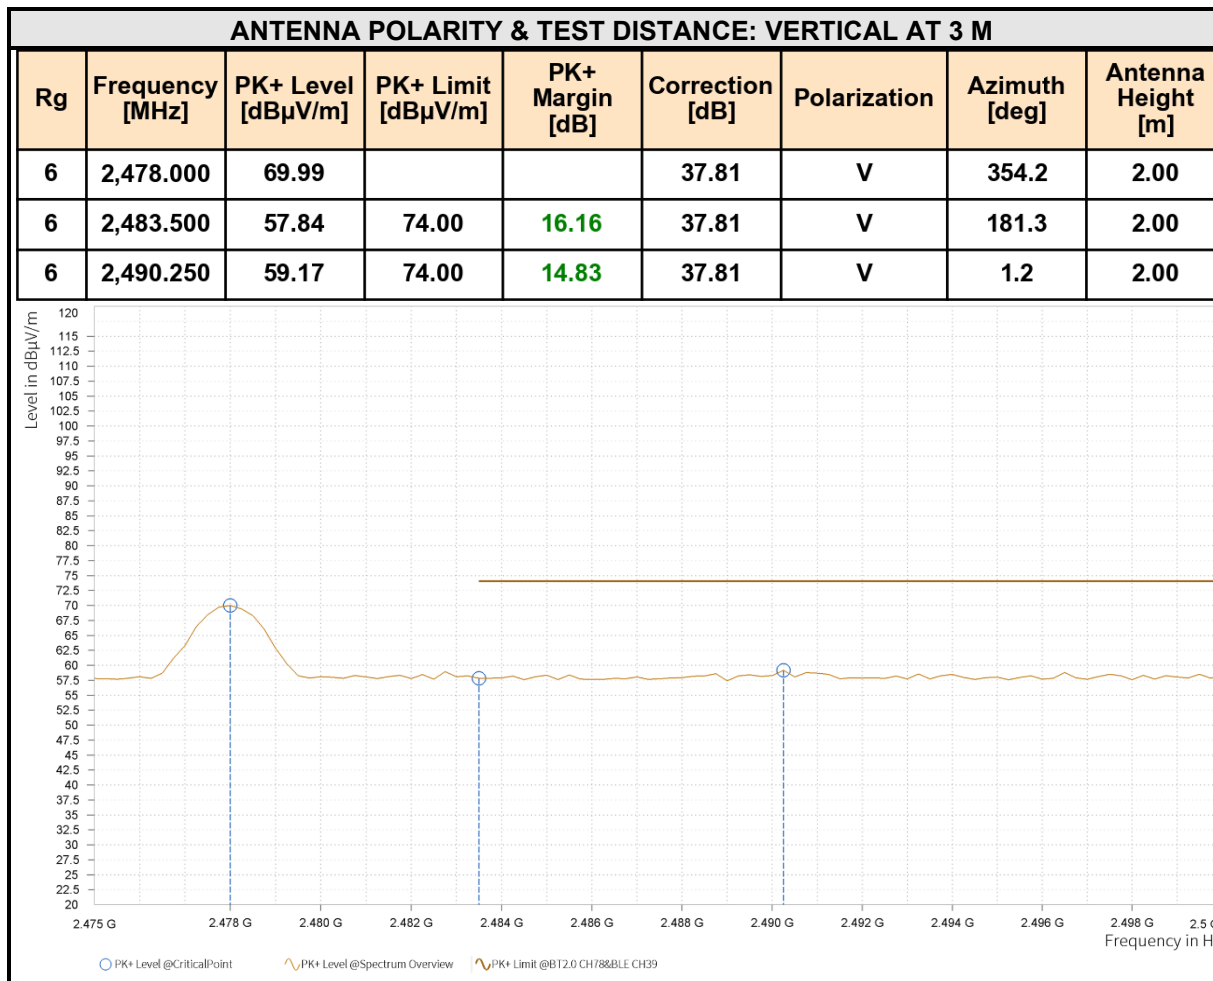

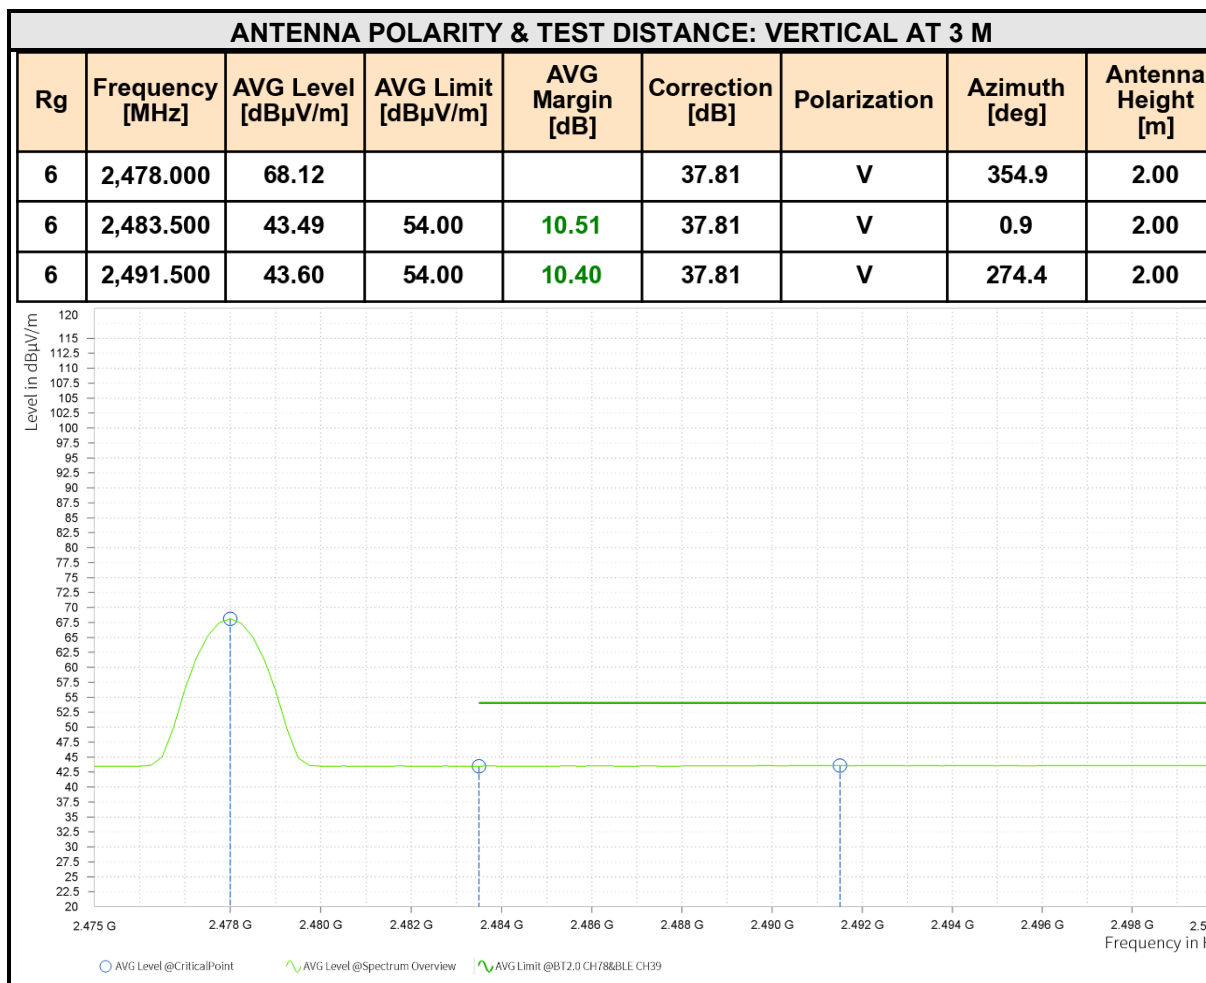

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
2. Margin value = Limit value–Emission level.
3. 2478MHz: Fundamental frequency.

3.2 6 dB BANDWIDTH MEASUREMENT

3.2.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum 6dB Bandwidth Measurement is 0.5 MHz.

3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Wireless communication integrated tester	Rohde&Schwarz	CMW500	166205	2025/6/30	2026/6/29
MXA Signal Analyzer	KEYSIGHT	N9020B	MY60112669	2025/8/27	2026/8/26
WiFi 7GHz Band Extender	Tonscend	TS-WF7U2	806WF7U003305251003	2025/1/17	2026/1/16
WiFi 7GHz Band Extender	Tonscend	TS-WF7U2		2026/1/16	2027/1/15
RF Control Unit	Tonscend	JS0806-2	806JS2X020201251002	2025/1/17	2026/1/16
RF Control Unit	Tonscend	JS0806-2	806JS2X020201251002	2026/1/16	2027/1/15
PSG Analog Signal Generator	Agilent	E8257D	MY51111397	2025/7/01	2026/6/30
MXG Vector Signal Generator	KEYSIGHT	N5182B	MY61250150	2025/1/15	2026/1/14
MXG Vector Signal Generator	KEYSIGHT	N5182B	MY61250150	2026/1/14	2027/1/13
DC Power Supply	AGILENT	HMP2020	100598	2025/7/01	2026/6/30
10dB attenuator	JFW INDUSTRIES INC	50HF-010-SMA	50HF-010-SMA-1	2025/6/30	2026/6/29
10dB attenuator	JFW INDUSTRIES INC	50HF-010-SMA	50HF-010-SMA-2	2025/6/30	2026/6/29
hygrothermograph	Anymetrers	----	TH101B	2025/7/22	2026/7/21
Temperature Box	zhongkemeiqi	MA22040172	MQ-DTH50F-2	2025/7/01	2026/6/30
power divider	WOKEN	71688	204-003180-01	2025/6/30	2026/6/29

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

3.2.3 TEST PROCEDURE


In accordance with ANSI C63.10-2020 11.8.1 Option 1:

- a) Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100kHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Trace mode = max-hold.
- e) Sweep = No faster than coupled (auto) time.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB downamplitude” value, then it shall be as close as possible to this value.

3.2.4 DEVIATION FROM TEST STANDARD

No deviation.

3.2.5 TEST SETUP

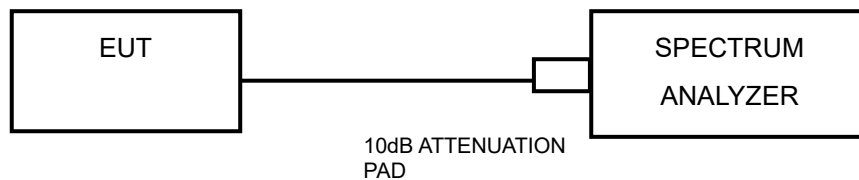

3.2.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.2.7 TEST RESULTS


Please Refer to Appendix Of this test report..

3.3 CONDUCTED OUTPUT POWER

3.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

3.3.2 TEST SETUP

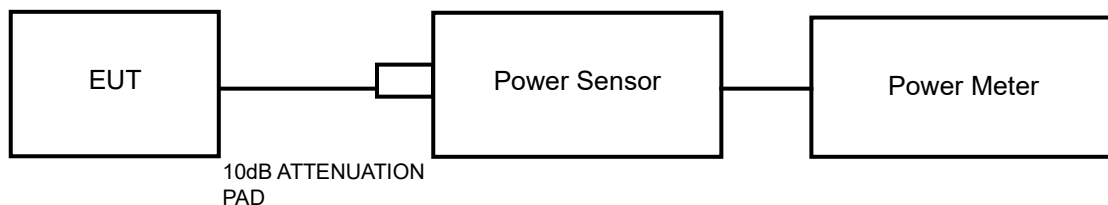

3.3.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.3.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: RF260416B001

3.3.7 TEST RESULTS

3.4.7.1 MAXIMUM PEAK OUTPUT POWER

Please Refer to Appendix Of this test report.

Test Report No.: RF260416B001

3.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.


Please Refer to Appendix Of this test report..

3.4 POWER SPECTRAL DENSITY MEASUREMENT

3.4.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.4.2 TEST SETUP



3.4.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.4.4 TEST PROCEDURE

1. Set the span > 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: RF260416B001

3.4.7 TEST RESULTS


Please Refer to Appendix Of this test report..

3.5 OUT OF BAND EMISSION MEASUREMENT

3.5.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.5.2 TEST SETUP

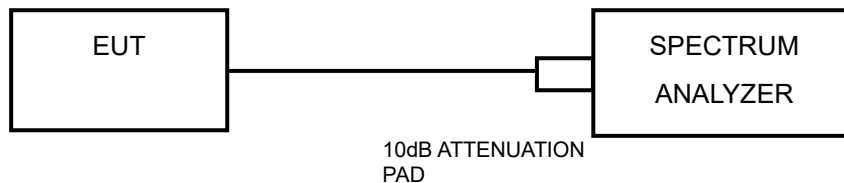

3.5.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.5.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Test Report No.: RF260416B001

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.5.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

Please Refer to Appendix Of this test report..

3.6 ANTENNA REQUIREMENTS

3.6.1 STANDARD APPLICABLE

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 ANTENNA CONNECTED CONSTRUCTION

An embedded-in antenna design is used.

3.6.3 ANTENNA GAIN

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit and PSD limit. (单天线用)

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

6 APPENDIX :BLE

DTS BANDWIDTH


TEST RESULT

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.70	2401.73	2402.43	0.5	PASS
		2440	0.70	2439.64	2440.34	0.5	PASS
		2480	0.69	2479.54	2480.23	0.5	PASS
BLE_2M	Ant1	2404	1.18	2403.38	2404.56	0.5	PASS
		2440	1.14	2439.45	2440.59	0.5	PASS
		2478	1.19	2477.38	2478.57	0.5	PASS


BLE_1M_Ant1_2402




BLE_1M_Ant1_2440

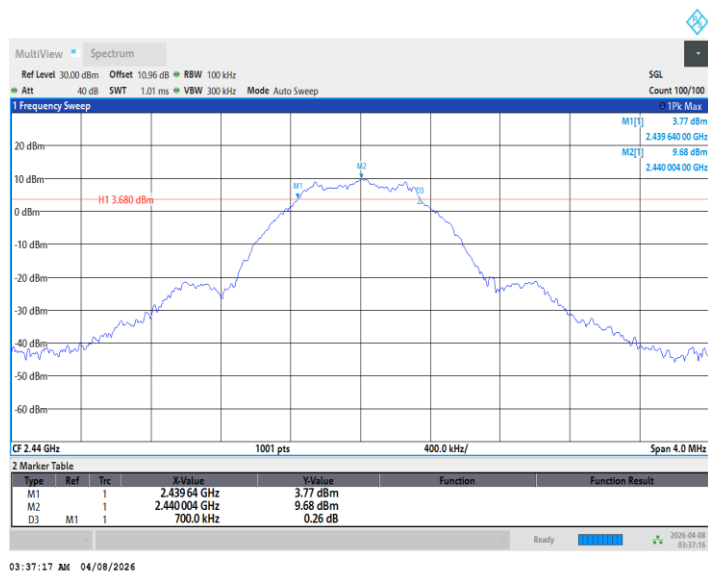


BLE_1M_Ant1_2480

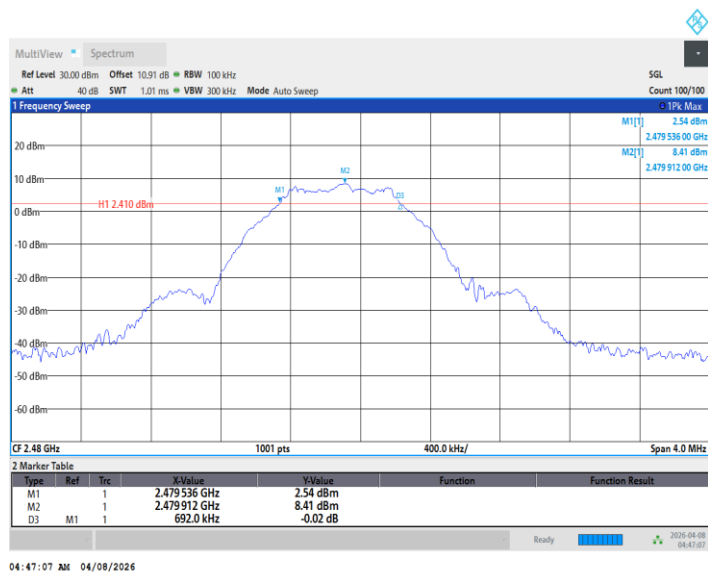


BLE_2M_Ant1_2404

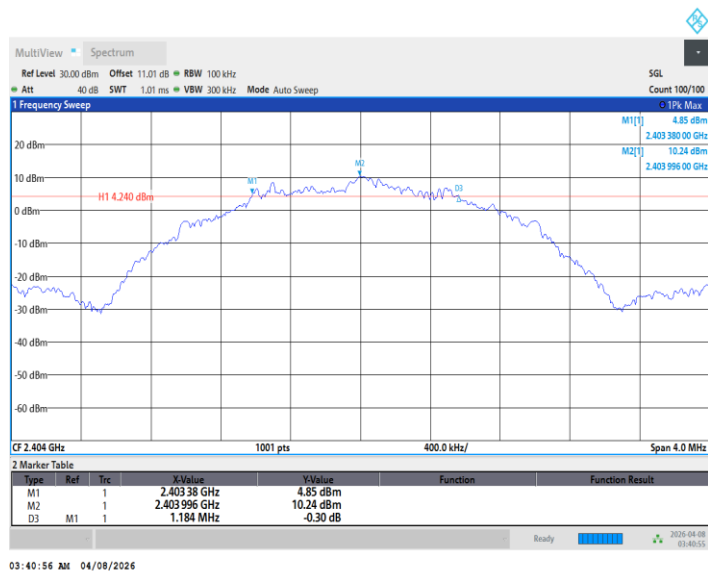

BLE_2M_Ant1_2440

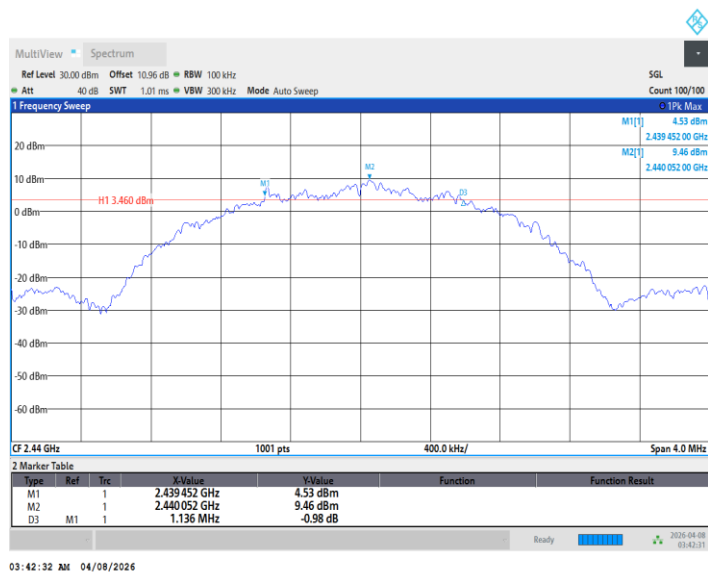

BLE_2M_Ant1_2478

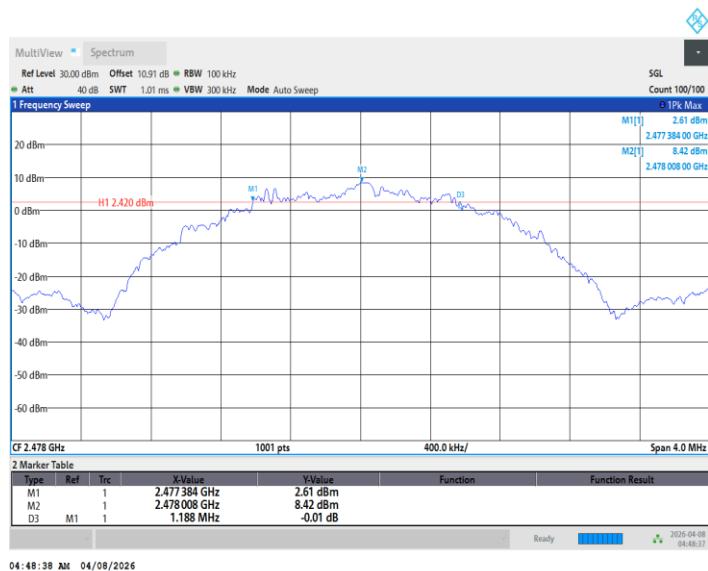


Test Report No.: RF260416B001

OCCUPIED CHANNEL BANDWIDTH


TEST RESULT

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0246	2401.5617	2402.5864	---	---
		2440	1.0363	2439.4769	2440.5132	---	---
		2480	1.0262	2479.3691	2480.3953	---	---
BLE_2M	Ant1	2404	2.0483	2402.9733	2405.0216	---	---
		2440	2.0348	2438.9705	2441.0053	---	---
		2478	2.0327	2476.9825	2479.0153	---	---


BLE_1M_Ant1_2402

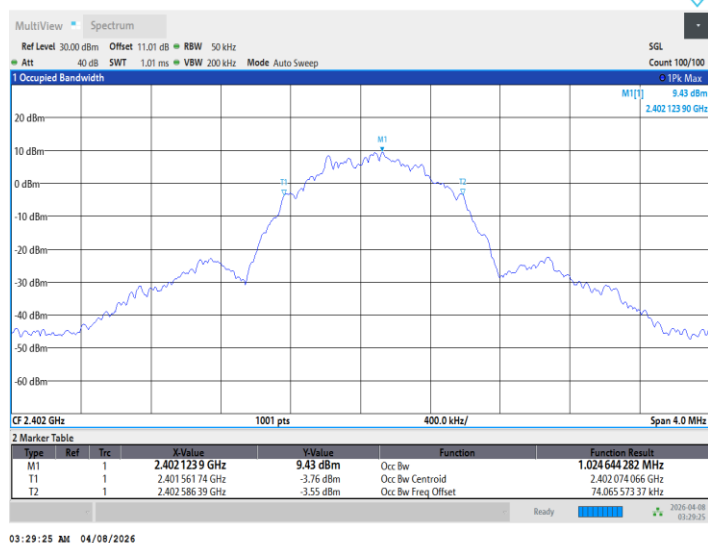


BLE_1M_Ant1_2440

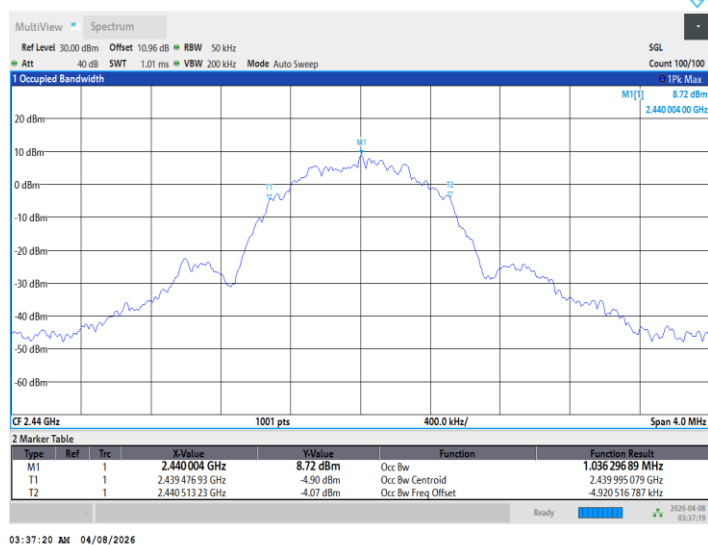


BLE_1M_Ant1_2480

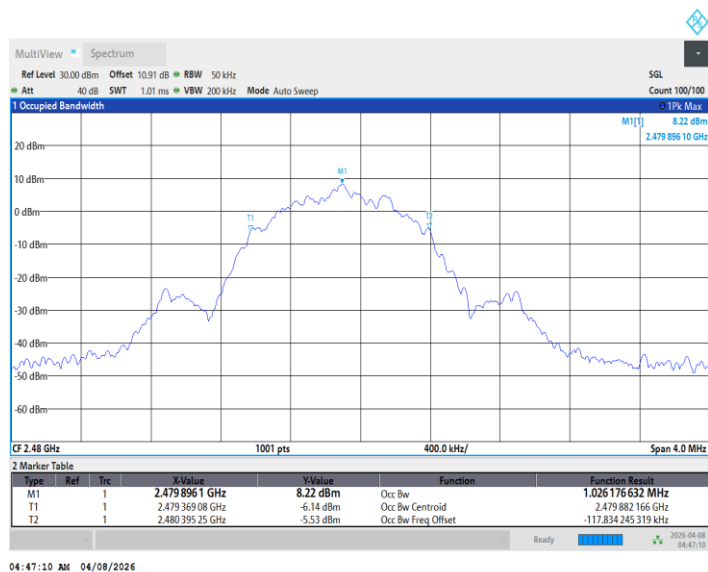


BLE_2M_Ant1_2404

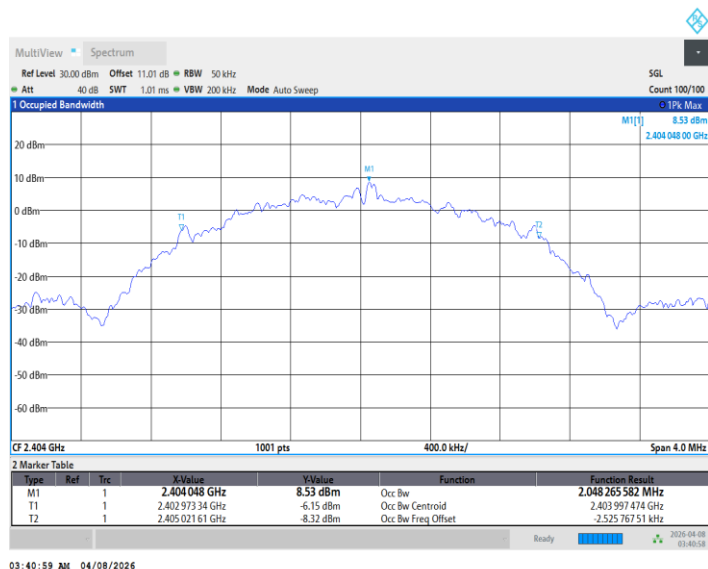

BLE_2M_Ant1_2440

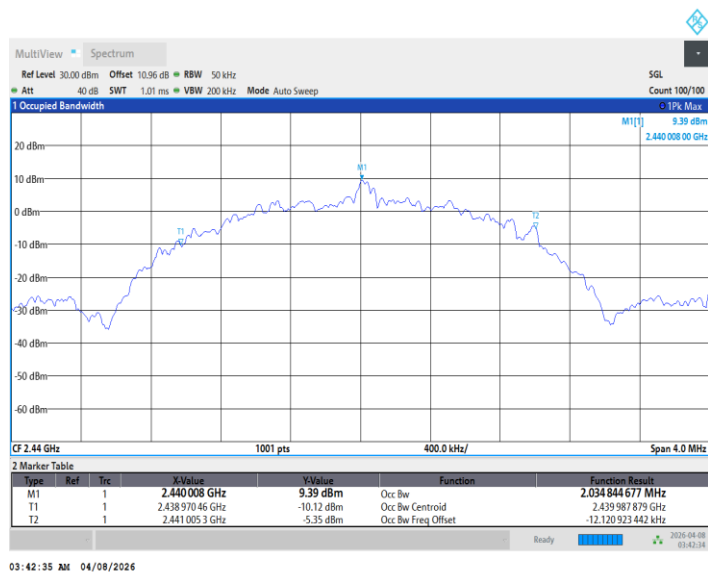

BLE_2M_Ant1_2478

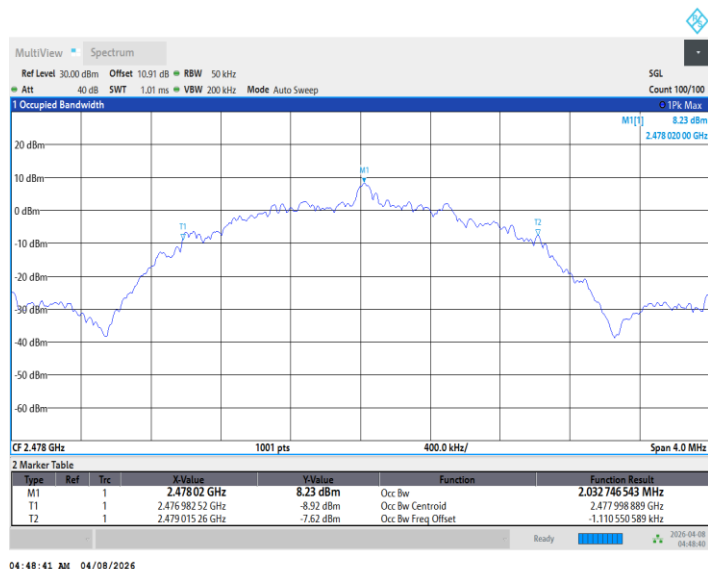

Test Report No.: RF260416B001

MAXIMUM CONDUCTED OUTPUT POWER

TEST RESULT

TestMode	Antenna	Channel	Average power [dBm]	Peak power [dBm]	Peak power [mw]	Limit [dBm]	Verdict	Power Setting
BLE_1M	Ant1	2402	9.45	10.29	10.69	≤30	PASS	4
		2440	8.95	10.09	10.21	≤30	PASS	4
		2480	8.63	9.15	8.22	≤30	PASS	4
BLE_2M	Ant1	2402	9.56	10.91	12.33	≤30	PASS	4
		2440	9.08	10.81	12.05	≤30	PASS	4
		2480	8.75	10.01	10.02	≤30	PASS	4

Test Report No.: RF260416B001


MAXIMUM POWER SPECTRAL DENSITY

TEST RESULT


TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-2.11	≤8.00	PASS
		2440	-3.46	≤8.00	PASS
		2480	-4.46	≤8.00	PASS
BLE_2M	Ant1	2404	-3.31	≤8.00	PASS
		2440	-4.20	≤8.00	PASS
		2478	-4.80	≤8.00	PASS

TEST GRAPHS


BLE_1M_Ant1_2402

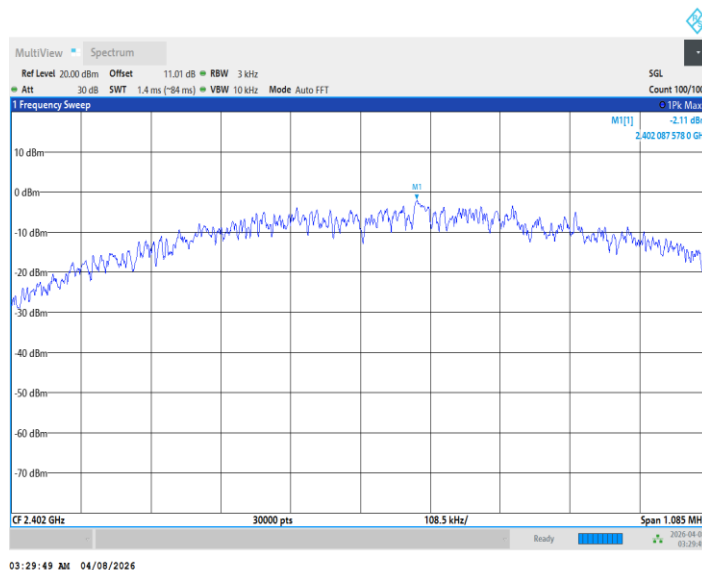


BLE_1M_Ant1_2440

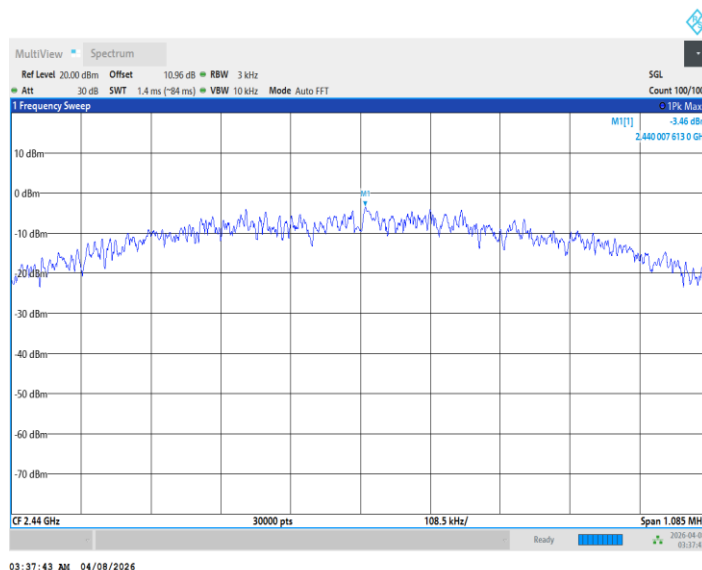

BLE_1M_Ant1_2480

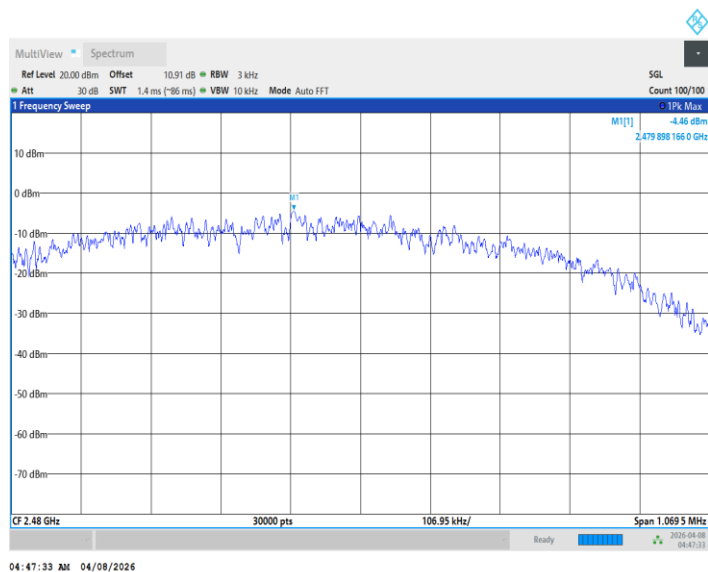

BLE_2M_Ant1_2404

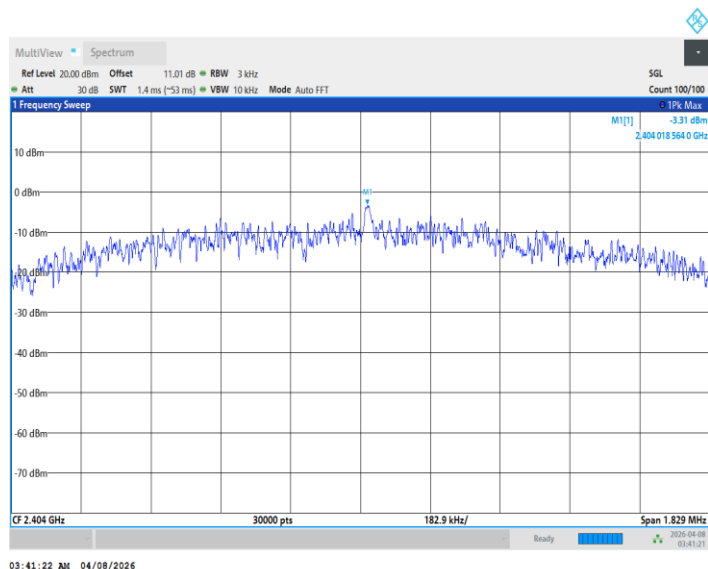

BLE_2M_Ant1_2440