

Huizhou Qitai Electronic Technology Co., LTD



SPECIFICATIONS SHEET

CUSTOMER :

金致卓

DESCRIPTION :

TX线圈

CUSTOMER P/N :

PART NUMBER :

DATE OF APPLICATION :

2024-8-1

CLASSIFICATION OF SPEC. PRESENTATION. (Tick the relevant box "✓")

- ☐ New application
- ✓ New part is added to accepted specification
- ☐ Revision of accepted specification

ACCEPTANCE STAMP

APPROVAL BY	CHECK BY	PREPARE BY
昆子奇		陈强

ADDRESS : 3rd Floor, No. 101, Mingyue 2nd Road, Shiwang Town, Boluo County, Huizhou city

TELEPHONE : 0752-6668681

E-MAIL : 839689578@qq.com

Huizhou Qitai Electronic Technology Co., LTD

History For Revised Specification

CUSTOMER P/N :

金致卓

PART NUMBER :

[illegible]

APPROVED BY

CHECKED BY

PREPARED BY

DATE

	PAGE
--	------

鬼子奇

陈骏

2024-8-1

1 of 3

Huizhou Qitai Electronic Technology Co., LTD

Specification


CUSTOMER P/N :

金致卓

PART NUMBER :

1. DIMENSIONS : (Unit: mm)

Unit: mm

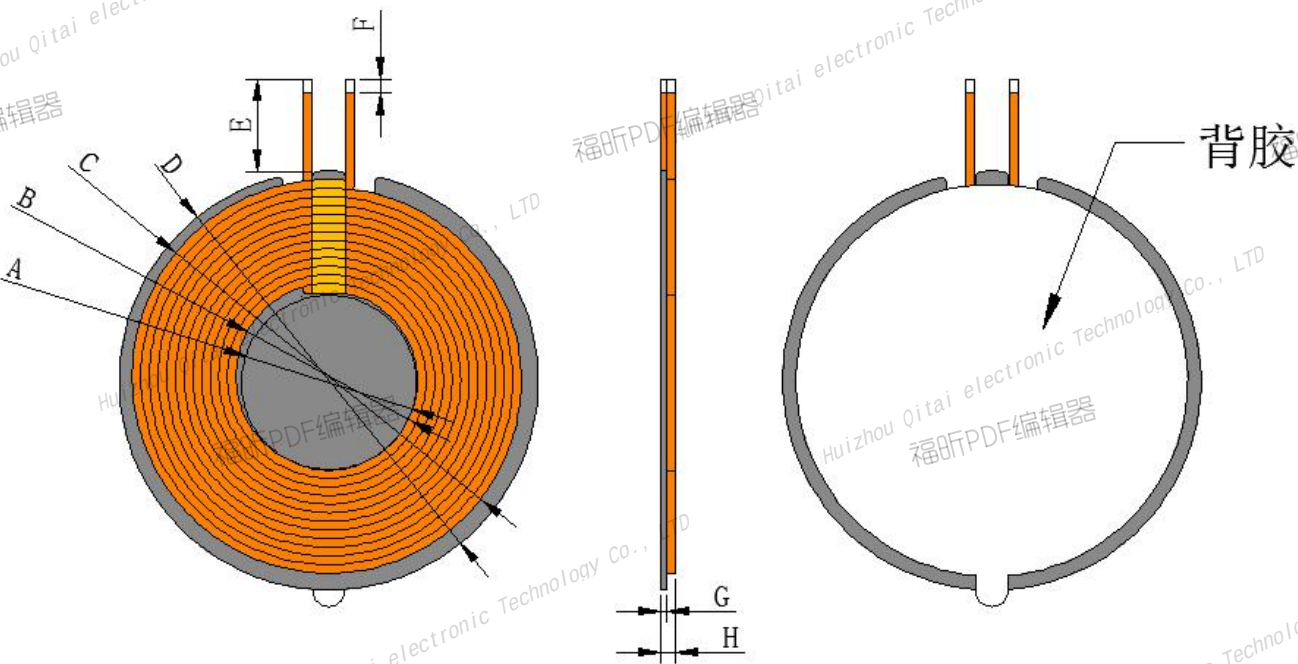

A	B	C	D	E	F	G	H
20±0.3	20.5±0.5	39.5±1	42.5±0.5	15±1	3±1	0.8±0.1	2.8max

1. The back adhesive is pure white.
2. Coil fitting position is centered.

APPROVED BY	CHECKED BY	PREPARED BY	DATE	PAGE
鬼子奇		陈强	2024-8-1	2 of 3

Huizhou Qitai Electronic Technology Co., LTD

Specification	CUSTOMER P/N :	金致卓
	PART NUMBER :	

金致卓

--

Coil1

Turns	Wire Dia	Wdg. Type Spred/Close	Wdg.Direction	Intersect Yes/Not
11TS	0.08*100P/Hot air self-adhesive wire	Close winding	backwind	Yes

TEMPERATURE:25±10℃.RELATIVE HUMIDITY:65±10%

TEMPERATURE:25±10℃.RELATIVE HUMIDITY:65±10%

NO.	ITEM	TERMINAL	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
Coil 1					
1.	IND	S-F	7.9uh±5%	100kHz/V	UC2906A
2.	Q	S-F	40Min	100kHz/V	UC2906A
3.	DCR	S-F	80mΩ Max	100kHz/V	UC2906A

Coil 1

1.

IND

S-F

7.9uh $\pm$ 5%

100kHz/V

UC2906A

2.

Q

S-F

40Min

100kHz/V

UC2906A

3.

DCR

S-F

80m Ω Max

100kHz/V

UC2906A

PAGE

3 of 3