



TEST REPORT

Test item description: Hitscan Hyperlight X
FCC ID: 2BK72-HS-WM-HLX
Trademark(s): Hitscan
Model/Type reference: HS-WM-HLX, HS-WM-HLX-MB, HS-WM-HLX-MW, HS-WM-HLX-ML, HS-WM-HLX-MP, HS-WM-HLX-MBL, HS-WM-HLX-MR, HS-WM-HLX-MG, HS-WM-HLX-MY, HS-WM-HLX-MO, HS-WM-HLX-GB, HS-WM-HLX-GW, HS-WM-HLX-GL, HS-WM-HLX-GP, HS-WM-HLX-GBL, HS-WM-HLX-GR, HS-WM-HLX-GG, HS-WM-HLX-GY, HS-WM-HLX-GO
Applicant's name: Hitscan LLC
Address: 5900 Balcones Drive STE 100 Austin TX 78731
Manufacturer: Hitscan LLC
Address: 5900 Balcones Drive STE 100 Austin TX 78731
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinxhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Apr. 09, 2026
Sample tested Date: Apr. 09, 2026 to Jun. 10, 2026
Issue Date: Jun. 10, 2026
Report No.: CTB26040902405RF01
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249
ANSI C63.10:2020
Test Results: PASS
Remark: This is 2.4GHz radio test report.

Compiled by:

Reviewed by:

Approved by:

Kai Chen

Martin Feng

Kai ChenMartin FengBin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. The tested sample(s) and the sample information are provided by the applicant. The authenticity, accuracy, and completeness of the provided information are the sole responsibility of the applicant. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The result decision rules of our laboratory are based solely on the direct comparison between the actual measured values of test results and the standard limits, without considering the measurement uncertainty. "★" indicates the testing items were fulfilled by subcontracted lab. "✖" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	6
4.3 Support Equipment	6
4.4 Channel List	7
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	23
8.1 Block Diagram Of Test Setup	23
8.2 Limit	23
8.3 Test procedure	24
8.4 Test Result	25
9. BANDWIDTH TEST	27
9.1 Block Diagram Of Test Setup	27
9.2 Limit	27
9.3 Test procedure	27
9.4 Test Result	27
10. ANTENNA REQUIREMENT	30
11. EUT TEST SETUP PHOTOGRAPHS	31

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB26040902405RF01	Jun. 10, 2026	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.215	20dB Bandwidth	PASS	
15.249	Fundamental & Radiated Spurious Emission Measurement	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:

Test according to ANSI C63.10-2020.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density, Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9kHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
Frequency	1×10 ⁻⁷
Conducted Emission(150kHz-30MHz)	3.2 dB
Radiated Emission(30MHz-1000MHz)	4.8 dB
Radiated Emission(1GHz-6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model/Type reference:	HS-WM-HLX, HS-WM-HLX-MB, HS-WM-HLX-MW, HS-WM-HLX-ML, HS-WM-HLX-MP, HS-WM-HLX-MBL, HS-WM-HLX-MR, HS-WM-HLX-MG, HS-WM-HLX-MY, HS-WM-HLX-MO, HS-WM-HLX-GB, HS-WM-HLX-GW, HS-WM-HLX-GL, HS-WM-HLX-GP, HS-WM-HLX-GBL, HS-WM-HLX-GR, HS-WM-HLX-GG, HS-WM-HLX-GY, HS-WM-HLX-GO
Model Description:	All the model are the same circuit and RF module, only the model names are different. Test sample model: HS-WM-HLX
Hardware Version:	V0.3
Software Version:	V0.0.2.3
Operation Frequency:	2402-2478MHz
Type of Modulation:	GFSK
Antenna installation:	PCB antenna
Antenna Gain:	-2.39dBi
Ratings:	DC 5V by PC or DC 5V by adapter DC 3.85V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Laptop	DELL	Vostro 5490	N/A	AE
2.	Adapter	JIIYIN	JY-05100C	/	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

1M:

Item	Channel (MHz)	Item	Channel (MHz)	Item	Channel (MHz)
1	2402	31	2432	61	2462
2	2403	32	2433	62	2463
3	2404	33	2434	63	2464
4	2405	34	2435	64	2465
5	2406	35	2436	65	2466
6	2407	36	2437	66	2467
7	2408	37	2438	67	2468
8	2409	38	2439	68	2469
9	2410	39	2440	69	2470
10	2411	40	2441	70	2471
11	2412	41	2442	71	2472
12	2413	42	2443	72	2473
13	2414	43	2444	73	2474
14	2415	44	2445	74	2475
15	2416	45	2446	75	2476
16	2417	46	2447	76	2477
17	2418	47	2448	77	2478
18	2419	48	2449		
19	2420	49	2450		
20	2421	50	2451		
21	2422	51	2452		
22	2423	52	2453		
23	2424	53	2454		
24	2425	54	2455		
25	2426	55	2456		
26	2427	56	2457		
27	2428	57	2458		
28	2429	58	2459		
29	2430	59	2460		
30	2431	60	2461		

2M:

Item	Channel (MHz)	Item	Channel (MHz)
1	2402	11	2442
2	2406	12	2446
3	2410	13	2450
4	2414	14	2454
5	2418	15	2458
6	2422	16	2462
7	2426	17	2466
8	2430	18	2470
9	2434	19	2474
10	2438	20	2478

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK)	2402MHz	2440MHz	2478MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.85V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2026/5/14	2027/5/13
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2026/5/14	2027/5/13
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2026/5/14	2027/5/13
4	Communication test set	R&S	CMW500	108058	V3.5.80	2026/5/14	2027/5/13
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2026/5/14	2027/5/13
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2026/5/14	2027/5/13
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2026/5/14	2027/5/13
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2026/5/14	2027/5/13
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	/	2026/5/16	2027/5/15
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2026/5/16	2027/5/15
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2026/5/16	2027/5/15
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/10/20	2026/10/19
14	Temperature humidity chamber	Huitai	HT-HW-1000L	/	/	2026/7/8	2027/7/7
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2026/5/15	2027/5/14
18	Amplifier	HP	8447E	2945A02747	/	2026/5/15	2027/5/14

19	Amplifier	Agilent	8449B	3008A01838	/	2026/5/14	2027/5/13
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2026/5/17	2027/5/16
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2026/5/15	2027/5/14
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2026/5/17	2027/5/16
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	Schwarzbeck	BBHA9170	/	/	2026/5/15	2027/5/14
26	Amplifier	AEROFLEX	DLNA8-18-40G-4063	03266684	/	2026/5/26	2027/5/25
27	Power Meter	KEYSIGHT	N1912AP	N/A	A.05.00	2026/5/15	2027/5/14


Continuous disturbance							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2024/6/22	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2026/5/14	2027/5/13
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2026/5/15	2027/5/14
4	Coaxial cable	ZDECL	Z302S	18091904	/	2026/5/14	2027/5/13
5	ISN	Schwarzbeck	NTFM8158	183	/	2026/5/18	2027/5/17
6	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2026/5/16	2027/5/15
7	EZ-EMC	Frad	EMC-con3A1.1	/	/	/	/
8	Current Probe	FCC	F-52B	199453	/	2026/5/22	2027/5/21
9	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2026/5/14	2027/5/13
10	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2026/5/14	2027/5/13

Radiated emission(No.1 Chamber)							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/23	2027/6/22
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2026/5/15	2027/5/14
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2026/5/17	2027/5/16
4	Amplifier	Agilent	8449B	3008A01838	/	2026/5/14	2027/5/13
5	Amplifier	HP	8447E	2945A02747	/	2026/5/15	2027/5/14

6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2026/5/17	2027/5/16
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2026/5/15	2027/5/14
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2026/5/14	2027/5/13
9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2026/5/14	2027/5/13
10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2026/5/14	2027/5/13
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2026/5/14	2027/5/13
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2026/5/14	2027/5/13
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2026/5/14	2027/5/13
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2026/5/14	2027/5/13

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

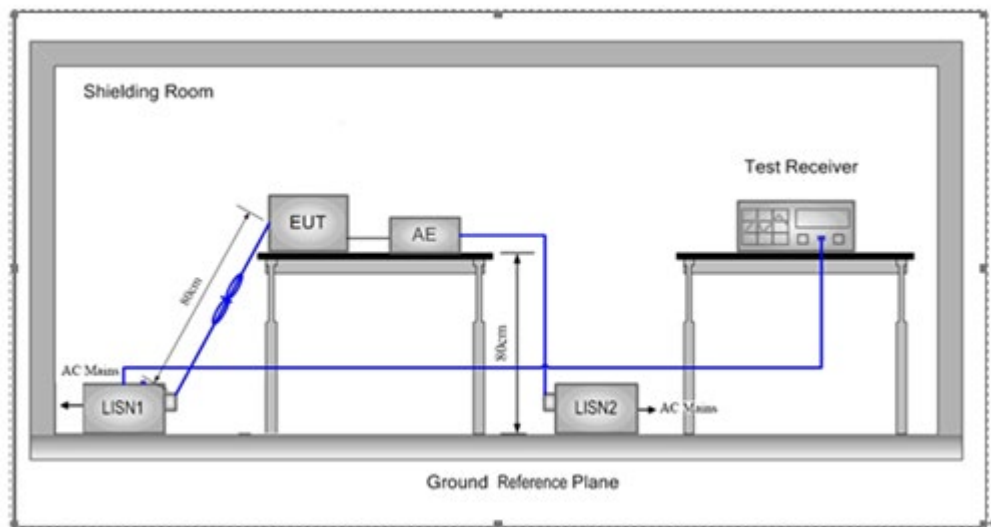

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result


L: Worst case-GFSK-1M(low channel)

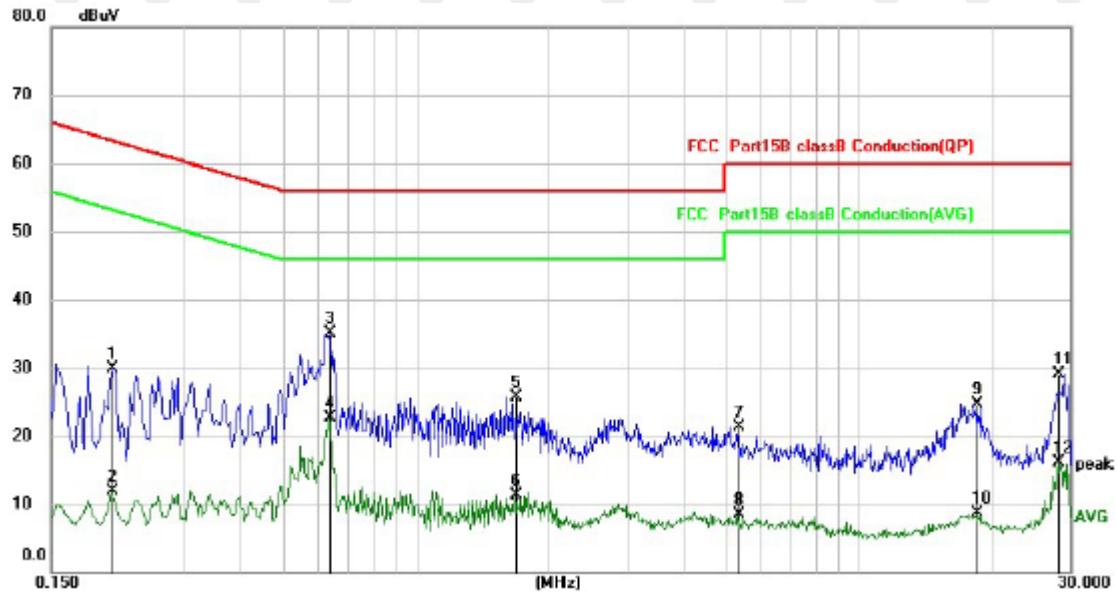

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2060	19.85	10.08	29.93	63.37	-33.44	QP
2		0.2060	1.81	10.08	11.89	53.37	-41.48	AVG
3	*	0.6380	25.03	10.10	35.13	56.00	-20.87	QP
4		0.6380	12.59	10.10	22.69	46.00	-23.31	AVG
5		1.6780	15.49	10.16	25.65	56.00	-30.35	QP
6		1.6780	1.07	10.16	11.23	46.00	-34.77	AVG
7		5.3500	11.08	10.30	21.38	60.00	-38.62	QP
8		5.3500	-1.74	10.30	8.56	50.00	-41.44	AVG
9		18.3660	13.77	10.88	24.65	60.00	-35.35	QP
10		18.3660	-2.27	10.88	8.61	50.00	-41.39	AVG
11		28.2140	17.94	11.23	29.17	60.00	-30.83	QP
12		28.2140	4.91	11.23	16.14	50.00	-33.86	AVG

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

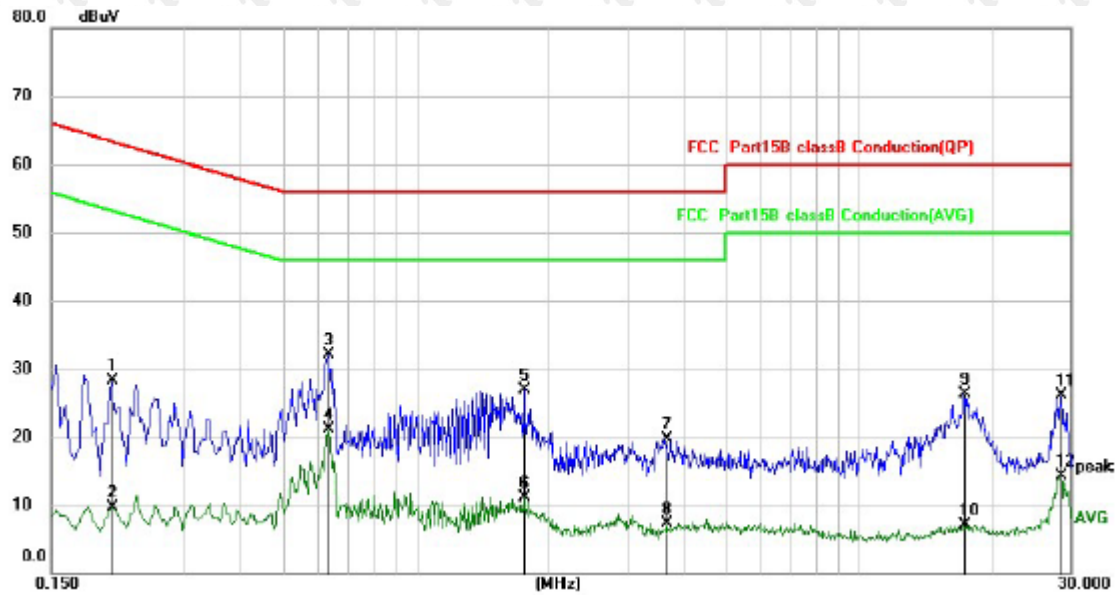

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.2060	18.28	10.08	28.36	63.37	-35.01	QP
2		0.2060	-0.35	10.08	9.73	53.37	-43.64	AVG
3	*	0.6340	21.93	10.10	32.03	56.00	-23.97	QP
4		0.6340	11.02	10.10	21.12	46.00	-24.88	AVG
5		1.7620	16.79	10.16	26.95	56.00	-29.05	QP
6		1.7620	1.02	10.16	11.18	46.00	-34.82	AVG
7		3.6900	9.41	10.23	19.64	56.00	-36.36	QP
8		3.6900	-3.00	10.23	7.23	46.00	-38.77	AVG
9		17.2340	15.39	10.83	26.22	60.00	-33.78	QP
10		17.2340	-3.68	10.83	7.15	50.00	-42.85	AVG
11		28.4860	14.86	11.23	26.09	60.00	-33.91	QP
12		28.4860	3.09	11.23	14.32	50.00	-35.68	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

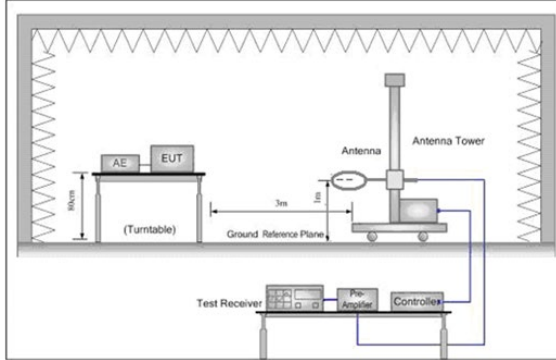


Figure 1. Below 30MHz

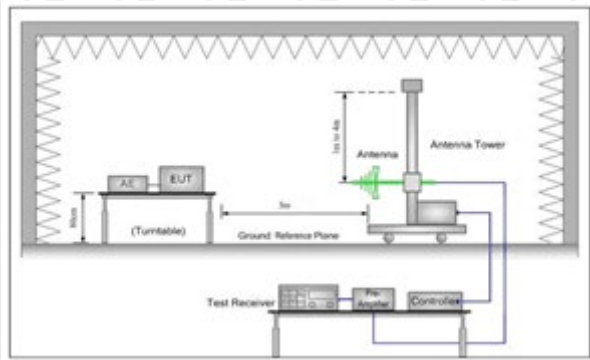


Figure 2. 30MHz to 1GHz

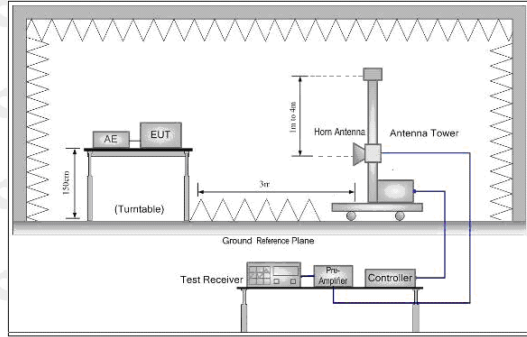


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.
- Full battery is used during test.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	1/T	Average

Remark: If the EUT D is < 98%, then set VBW 1/ T, where T is defined in item a) of 12.2.

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		45.2960	26.45	-6.17	20.28	40.00	-19.72	QP
2		51.6616	26.80	-6.58	20.22	40.00	-19.78	QP
3		140.3421	35.69	-5.35	30.34	43.50	-13.16	QP
4	*	217.5443	41.13	-5.86	35.27	46.00	-10.73	QP
5		295.6648	37.16	-2.71	34.45	46.00	-11.55	QP
6		650.7997	25.34	5.20	30.54	46.00	-15.46	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V

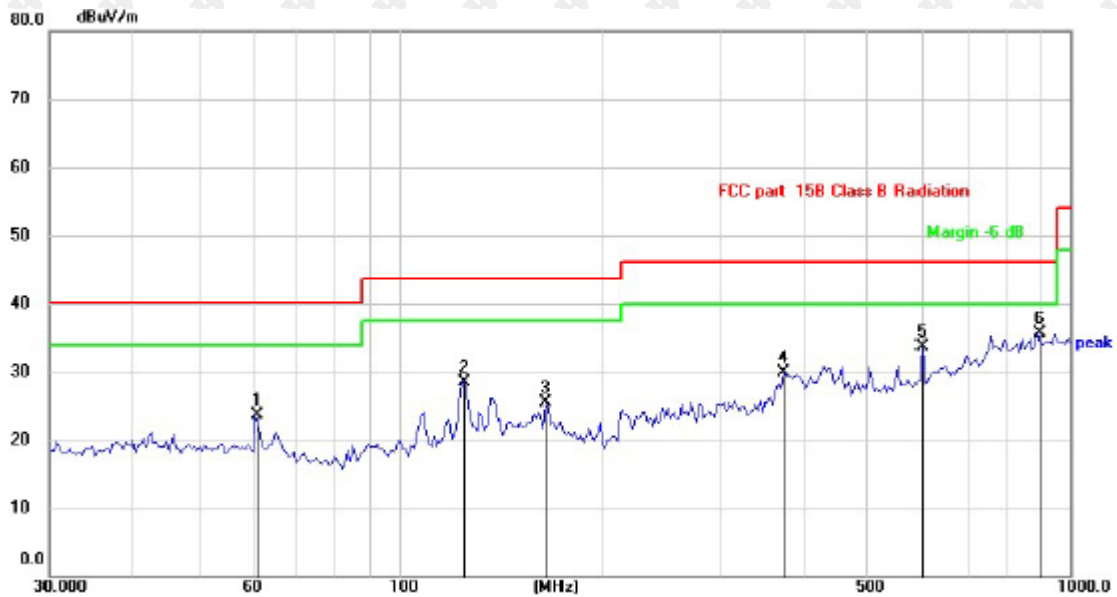

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		61.0245	31.05	-7.31	23.74	40.00	-16.26	QP
2		124.1330	34.45	-5.93	28.52	43.50	-14.98	QP
3		165.7771	28.88	-3.39	25.49	43.50	-18.01	QP
4		374.6225	31.26	-1.31	29.95	46.00	-16.05	QP
5		601.4265	29.69	4.02	33.71	46.00	-12.29	QP
6	*	892.2909	26.18	9.44	35.62	46.00	-10.38	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

CH Low (2402MHz)
Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2402.00	106.61	-5.84	100.77	114	-13.23	peak
2402.00	94.78	-5.84	88.94	94	-5.06	AVG
4804.00	56.79	-3.64	53.15	74	-20.85	peak
4804.00	48.50	-3.64	44.86	54	-9.14	AVG
7206.00	61.06	-0.95	60.11	74	-13.89	peak
7206.00	49.92	-0.95	48.97	54	-5.03	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2402.00	107.54	-5.84	101.70	114	-12.30	peak
2402.00	93.38	-5.84	87.54	94	-6.46	AVG
4804.00	57.01	-3.64	53.37	74	-20.63	peak
4804.00	47.22	-3.64	43.58	54	-10.42	AVG
7206.00	60.68	-0.95	59.73	74	-14.27	peak
7206.00	50.99	-0.95	50.04	54	-3.96	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH Middle (2440MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440.00	106.47	-5.71	100.76	114	-13.24	peak
2440.00	92.38	-5.71	86.67	94	-7.33	AVG
4880.00	54.61	-3.51	51.10	74	-22.90	peak
4880.00	45.76	-3.51	42.25	54	-11.75	AVG
7320.00	56.44	-0.82	55.62	74	-18.38	peak
7320.00	46.19	-0.82	45.37	54	-8.63	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2440.00	106.54	-5.71	100.83	114	-13.17	peak
2440.00	92.83	-5.71	87.12	94	-6.88	AVG
4880.00	55.11	-3.51	51.60	74	-22.40	peak
4880.00	45.47	-3.51	41.96	54	-12.04	AVG
7320.00	56.47	-0.82	55.65	74	-18.35	peak
7320.00	47.42	-0.82	46.60	54	-7.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

CH High (2478MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2478.00	105.38	-5.65	99.73	114	-14.27	peak
2474.00	91.32	-5.65	85.67	94	-8.33	AVG
4956.00	56.23	-3.43	52.80	74	-21.20	peak
4948.00	46.63	-3.43	43.20	54	-10.80	AVG
7434.00	56.09	-0.75	55.34	74	-18.66	peak
7422.00	46.99	-0.75	46.24	54	-7.76	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2478.00	105.17	-5.65	99.52	114	-14.48	peak
2474.00	93.12	-5.65	87.47	94	-6.53	AVG
4956.00	54.35	-3.43	50.92	74	-23.08	peak
4948.00	45.63	-3.43	42.20	54	-11.80	AVG
7434.00	56.69	-0.75	55.94	74	-18.06	peak
7422.00	47.34	-0.75	46.59	54	-7.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark:

- (1). Measuring frequencies from 9kHz to the 25GHz.
- (2). All modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported for below 1GHz test.
- (3). For 2.4G above 1GHz test all modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported.
- (4). By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5). Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

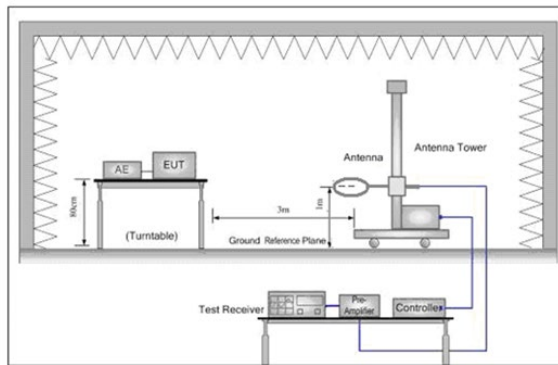


Figure 1. Below 30MHz

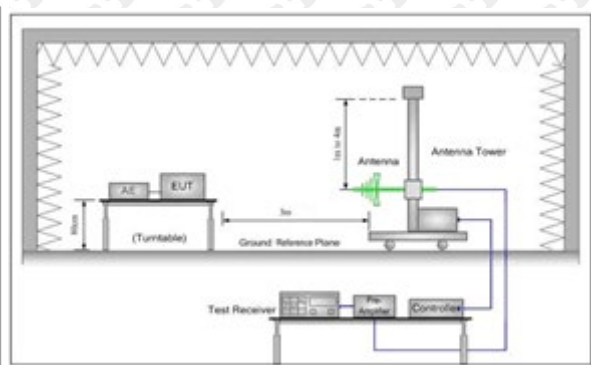


Figure 2. 30MHz to 1GHz

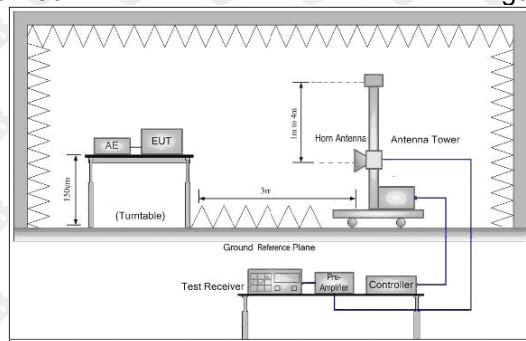


Figure 3. Above 1GHz

8.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

8.3 Test procedure

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Frequency	Detector	RBW	VBW	Remark
2310MHz-2400MHz	peak	1MHz	3MHz	peak
2483.5MHz-2500MHz	peak	1MHz	3MHz	peak

8.4 Test Result

1M:

CH Low:

Horizontal:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.2661	30.53	-4.34	26.20	54	-27.80	peak
2	2343.778	29.76	-4.28	25.47	54	-28.53	peak
3	2378.3633	29.00	-4.47	24.53	54	-29.47	peak
4	2390.0768	28.31	-4.93	23.38	54	-30.62	peak
5	2439.7064	25.73	-3.95	21.78	54	-32.22	peak

Vertical:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.0882	27.51	-4.33	23.18	54	-30.82	peak
2	2343.7	30.14	-4.31	25.83	54	-28.17	peak
3	2378.3895	28.48	-4.50	23.98	54	-30.02	peak
4	2390.0368	30.06	-4.96	25.10	54	-28.90	peak
5	2439.9095	29.37	-3.92	25.44	54	-28.56	peak

CH High:

Horizontal:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2484.1475	31.91	-4.28	27.63	54	-26.37	peak
2	2488.9771	31.90	-4.31	27.58	54	-26.42	peak
3	2490.0848	33.51	-4.44	29.07	54	-24.93	peak
4	2493.547	33.01	-4.89	28.12	54	-25.88	peak
5	2495.7616	27.08	-3.97	23.11	54	-30.89	peak

Vertical:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2484.0703	31.67	-4.35	27.32	54	-26.68	peak
2	2488.8733	32.17	-4.33	27.84	54	-26.16	peak
3	2490.3211	30.80	-4.50	26.30	54	-27.70	peak
4	2493.4445	31.74	-4.91	26.83	54	-27.17	peak
5	2495.7649	27.22	-3.95	23.28	54	-30.72	peak

2M:
CH Low:
Horizontal:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.0474	29.45	-4.34	25.10	54	-28.90	peak
2	2343.9777	27.74	-4.28	23.47	54	-30.53	peak
3	2378.0082	27.63	-4.42	23.21	54	-30.79	peak
4	2390.0033	27.03	-4.91	22.12	54	-31.88	peak
5	2440.1656	28.42	-3.97	24.44	54	-29.56	peak

Vertical:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.1241	28.05	-4.29	23.76	54	-30.24	peak
2	2343.987	31.60	-4.31	27.29	54	-26.71	peak
3	2378.3583	26.96	-4.41	22.55	54	-31.45	peak
4	2390.0671	25.90	-4.91	20.99	54	-33.01	peak
5	2440.1528	30.42	-3.94	26.48	54	-27.52	peak

CH High:
Horizontal:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2484.0861	30.57	-4.34	26.22	54	-27.78	peak
2	2489.0916	31.69	-4.31	27.38	54	-26.62	peak
3	2490.4934	33.10	-4.48	28.62	54	-25.38	peak
4	2493.4599	29.10	-4.92	24.17	54	-29.83	peak
5	2495.8331	28.13	-3.91	24.22	54	-29.78	peak


Vertical:

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2484.0938	32.48	-4.36	28.12	54	-25.88	peak
2	2489.0556	33.97	-4.27	29.69	54	-24.31	peak
3	2490.114	29.36	-4.43	24.93	54	-29.07	peak
4	2493.4204	33.74	-4.95	28.79	54	-25.21	peak
5	2495.83	30.59	-3.95	26.65	54	-27.35	peak

Remark: When the peak value is smaller than the AVG limit, AVG is not reflected.

9. BANDWIDTH TEST

9.1 Block Diagram Of Test Setup

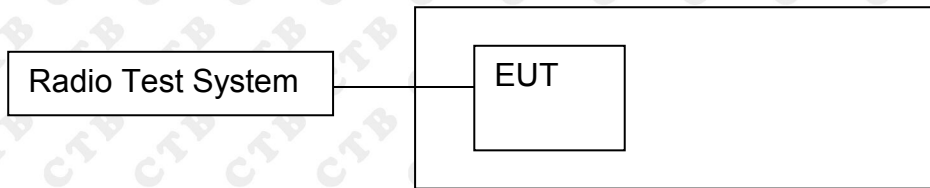

9.2 Limit

FCC Part15 (15.249) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.249	Bandwidth	2402-2483.5	PASS

9.3 Test procedure

1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

9.4 Test Result

1M:

Test Mode	Frequency (MHz)	20dB Bandwidth (MHz)	Result
GFSK	Low channel	1.036	PASS
	Mid channel	0.9485	PASS
	High channel	0.946	PASS


2M:

Test Mode	Frequency (MHz)	20dB Bandwidth (MHz)	Result
GFSK	Low channel	2.039	PASS
	Mid channel	2.027	PASS
	High channel	2.039	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.


1M:

Test Graph:

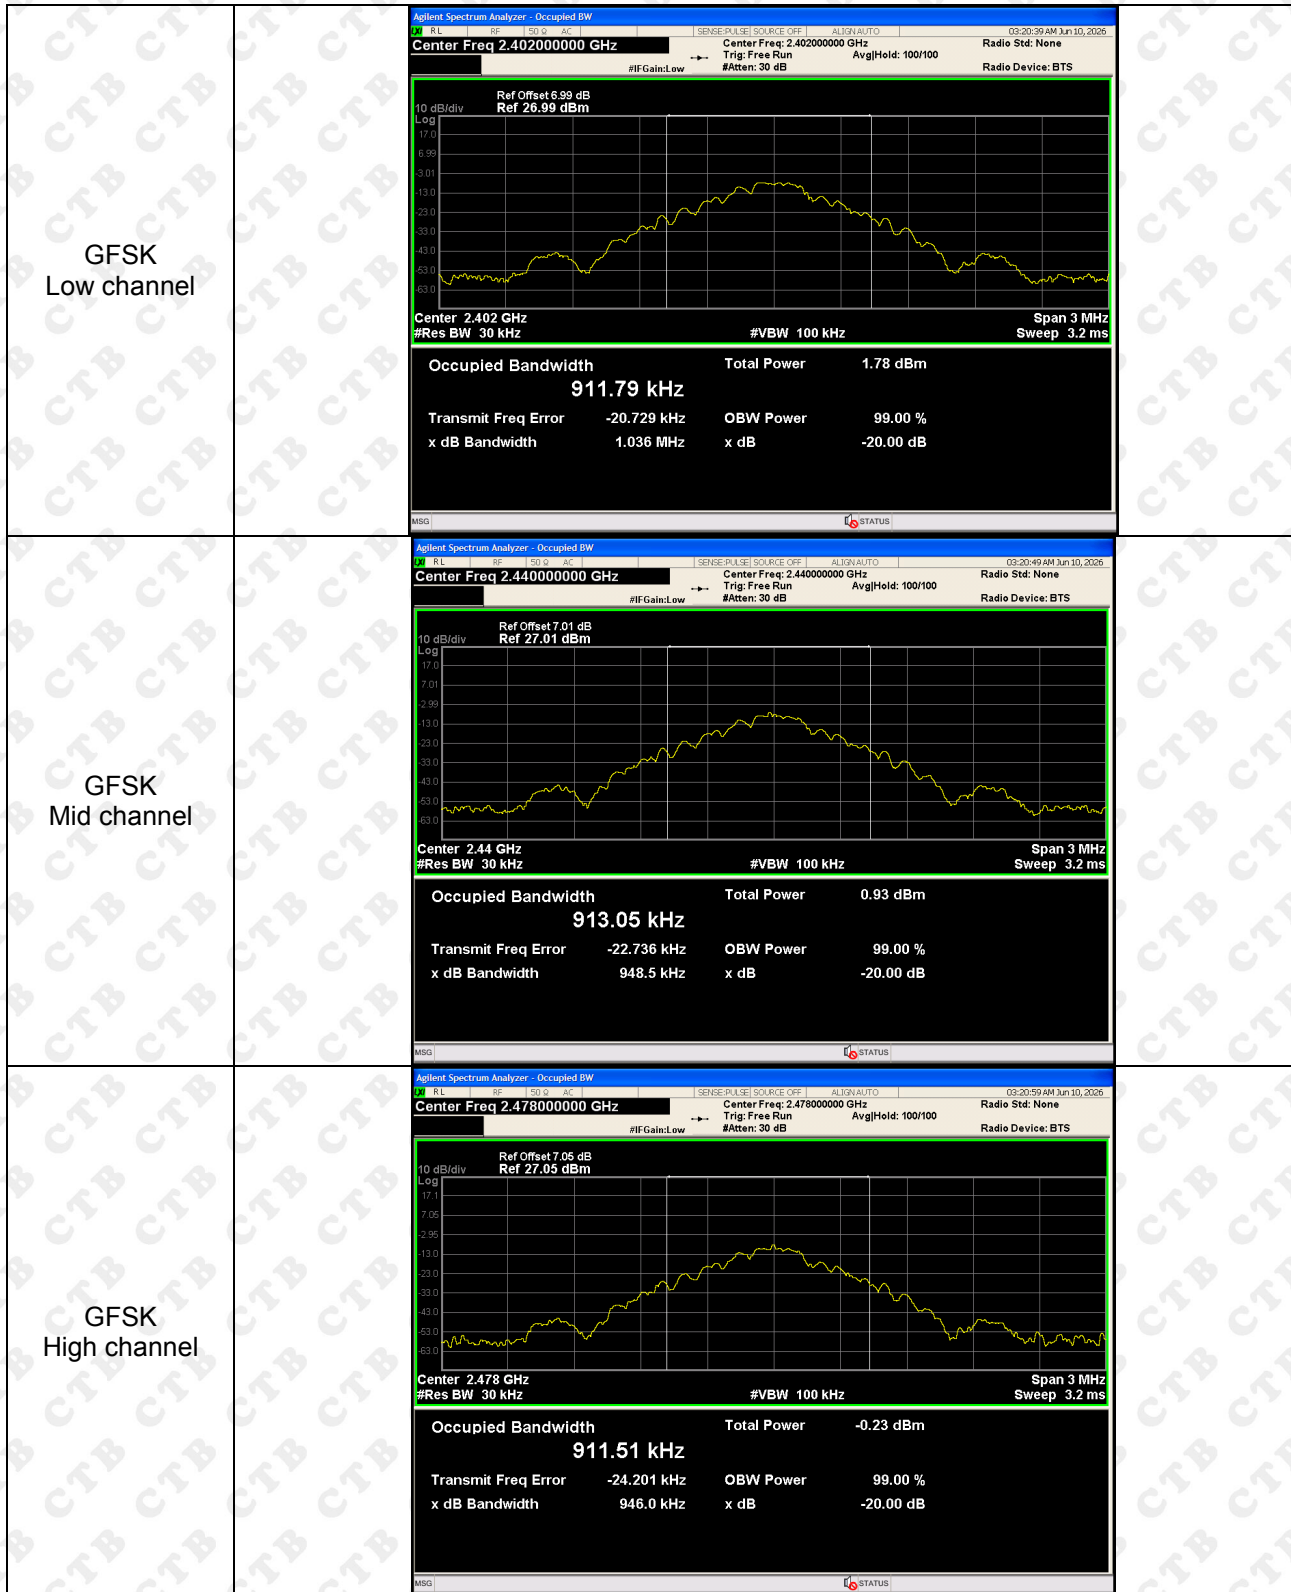

2M:

Test Graph:

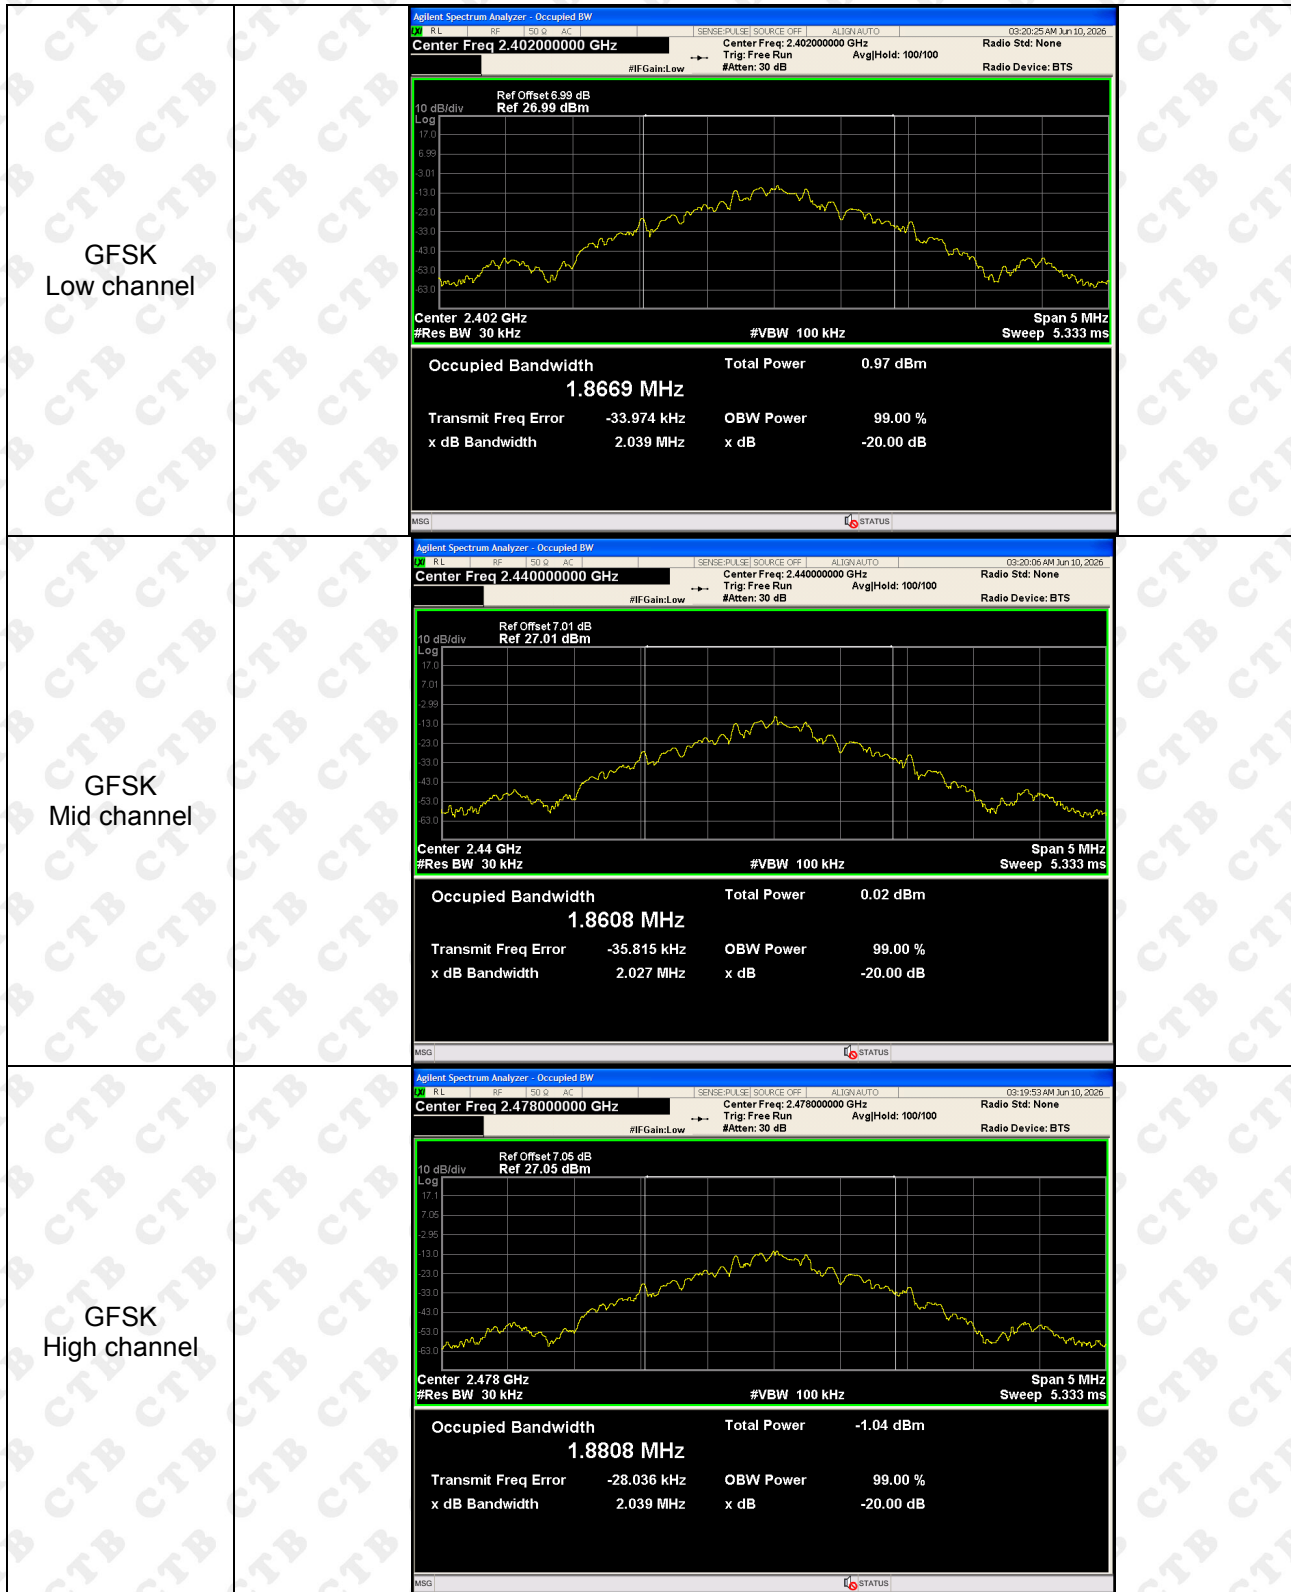

10. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PCB antenna. The best case gain of the antenna is -2.39dBi.

11. EUT TEST SETUP PHOTOGRAPHS

Radiated Emissions

Below 1G




Above 1G



Conducted emission



RF Conducted

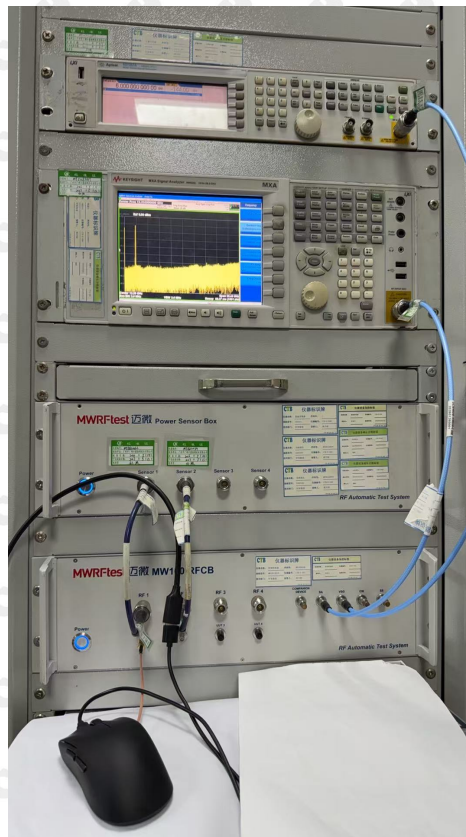

***** END OF REPORT *****