


Antenna Specification

Specifications

Summary

ITEM	SPEC.	
Model Name	IBM 2.4 GHz	
Center Frequency	2403MHz 2442 MHz 2480 MHz	-2.52dBi -2.39dBi -2.95 dBi
MAX. GAIN	-2.39 dBi	
Polarization	Horizontal	
Azimuth Beam Pattern	Omni-directional	
Impedance	50 Ω	
Antenna Type	PCB Antenna	
Antenna manufacturer	Eagle Driver Electronic Limited	
Address	A611, Block B, West Silicon valley, No.5010, bao 'an Blvd, CaoWei Community, Bao 'an District, ShenZhen,China	

Antenna Photo & Length (mm)

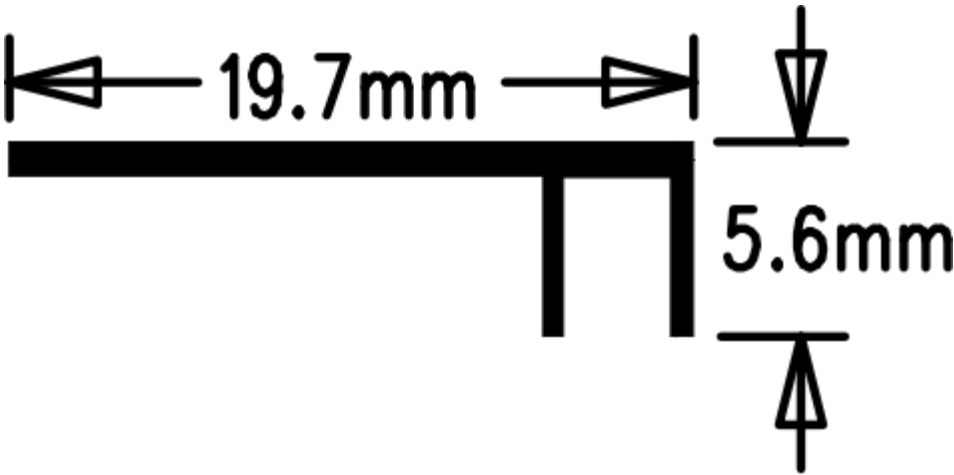


Test Address	Unictron Technologies Corporation , Nanshan Science and Technology Park North Languang Science and Technology Park A511 shenzhen
Test Date	2026-08-04
Test Instrument	vector network analyzer - R&S ZVB20

1.
Main antenna : 2403 MHz

1.1 Horizontal

◆XY-plane

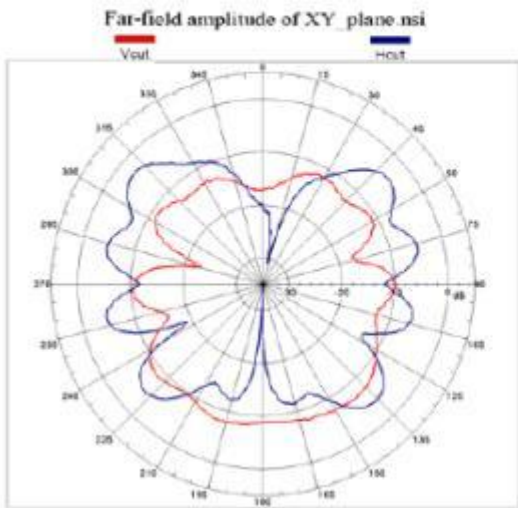


Unit : dBi

	Peak gain	Avg. gain
H cut	-3.04	-8.82
V cut	-7.19	-11.29
Total	-2.52	-6.53

1.2 Vertical

◆XZ-plane

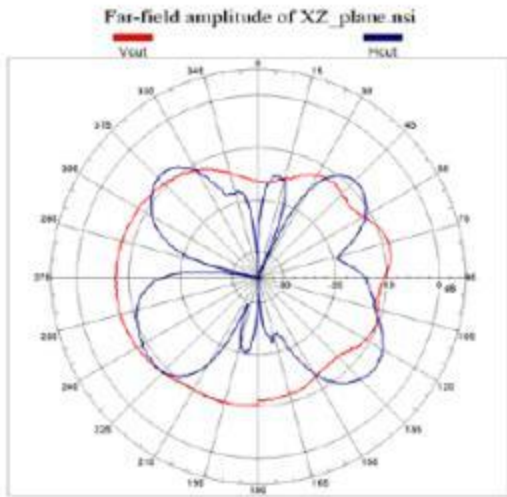


	Peak gain	Avg. gain
H cut	-6.44	-13.24
V cut	-7.34	-10.57
Total	-5.38	-8.35

1.
Main antenna : 2442 MHz

2.1 Horizontal

◆XY-plane

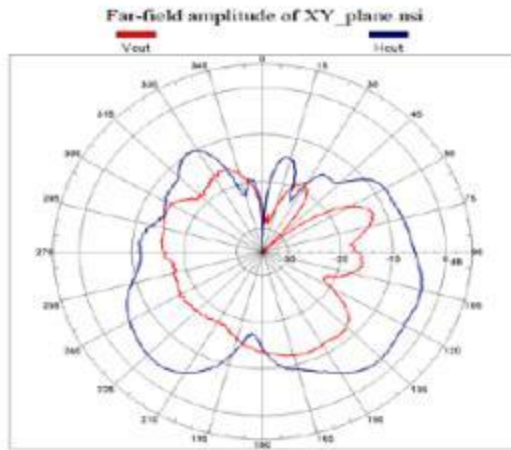


Unit : dBi

	Peak gain	Avg. gain
H cut	-2.89	-8.89
V cut	-11.81	-16.63
Total	-2.39	-8.05

2.2

Vertica

◆XZ-plane

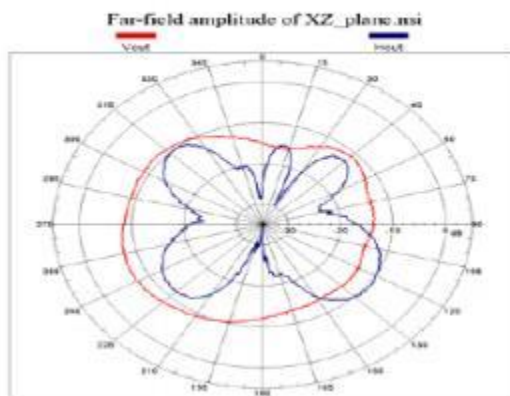


	Peak gain	Avg. gain
H cut	-9.56	-15.85
V cut	-7.29	-11.21
Total	-6.27	-9.66

3. Main antenna : 2480 MHz

3.1 Horizontal


◆YZ-plane

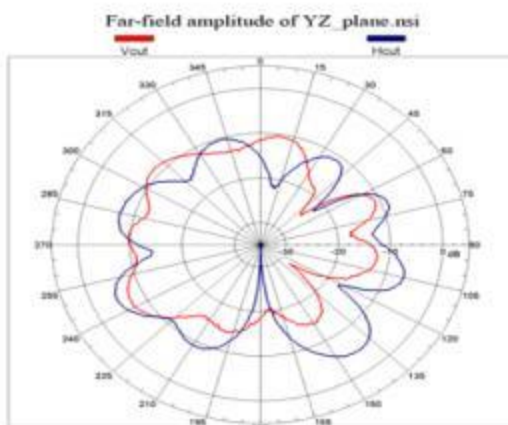

	Peak gain	Avg. gain
H cut	-4.74	-10.75
V cut	-7.09	-13.11
Total	-2.95	-8.49

3.2 Vertical

◆YZ-plane

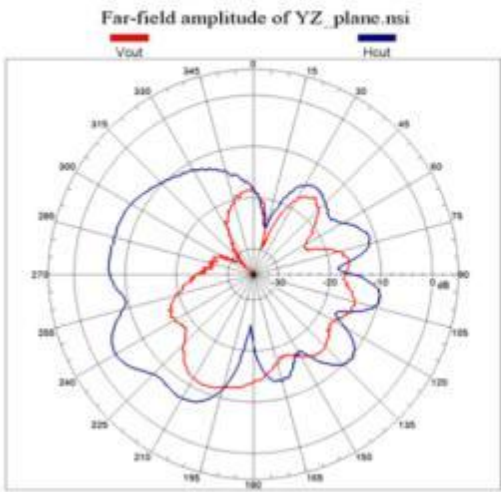

	Peak gain	Avg. gain
H cut	-3.99	-11.25
V cut	-11.31	-18.08
Total	-3.79	-10.11

4. Result

Center Frequency	Maximum Ant Gain	
2403MHz	H	-2.52 dBi
	V	-5.38 dBi
2442MHz	H	-2.39dBi
	V	-6.27 dBi
2480 MHz	H	-2.95 dBi
	V	-3.79dBi