

Product specification

Quick Reference


	Antenna model information	
Antenna Type	PCB	
Frequency	2.44GHz	
Ant. Port Input Pwr.(dBm)	0(Typ.BT class 2 output power)	
Tot.Rad.Pwr.(dBm)	-5.8(Input pwr-loss pwr)	
Peak EIRP(dBm)	-2.9	
Directivity(dBi)	1(all direction antenna)	
Efficiency(dB)	-5.8(26.03%)	
Gain(dBi)	-2.9(Peak Gain XY-plane)	
Maximum Power(dBm)	-2.9(XY-plane)	
Minimum Power(dBm)	-7.9(XY-plane)	
Average Power(dBm)	-4.5(XY-plane)	
Max/Min Ratio(dB)	5(XY-plane)	
Max/Avg Ratio(dB)	1.6(XY-plane)	
Min/Avg Ratio(dB)	-3.4(XY-plane)	

Manufacturer: Chengdu Mingyu Xinchuan E-commerce Co., Ltd.

Address: Room 506, 5th Floor, Block 3, Section 2, Fuhe Road, Huayang Subdistrict, Tianfu New Area, Chengdu, Sichuan Province, 610213, CN

Average Gain(dB)	-4.5(Avg Gain XY-plane)	
------------------	-------------------------	--

Antenna module & Size

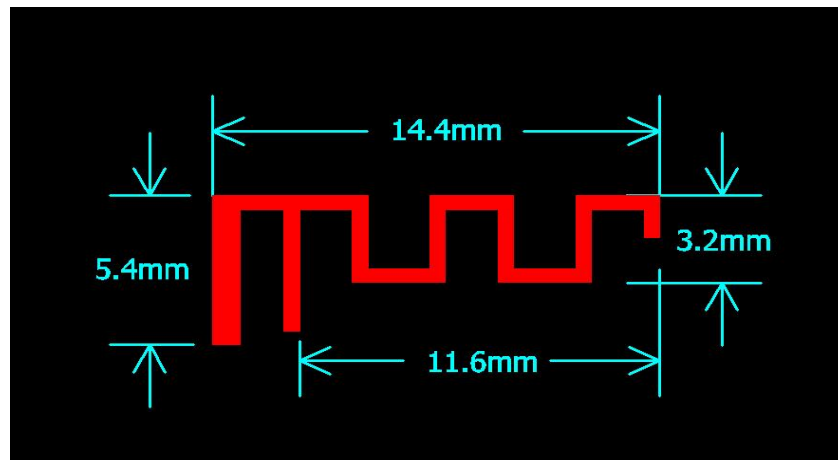


Antenna Gain



Gain Table

Unit in dB@ 2.44GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg	Peak	Avg	Peak	Avg	
	-2.9	-4.5	-3.7	-6.9	-2.9	-6.1	
							26.03%


Return Loss

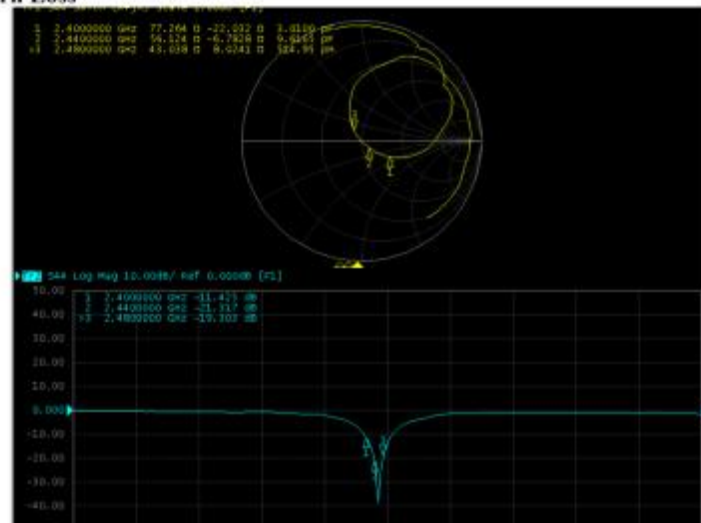


The Environment of Antenna Radiation Pattern

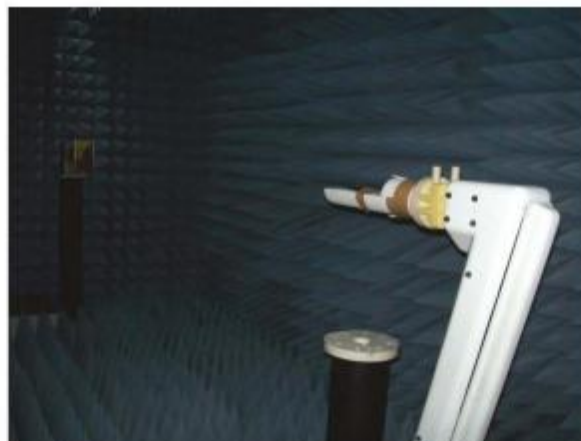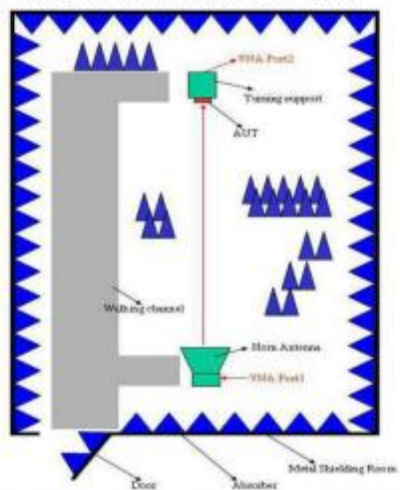


3D radiation pattern diagram

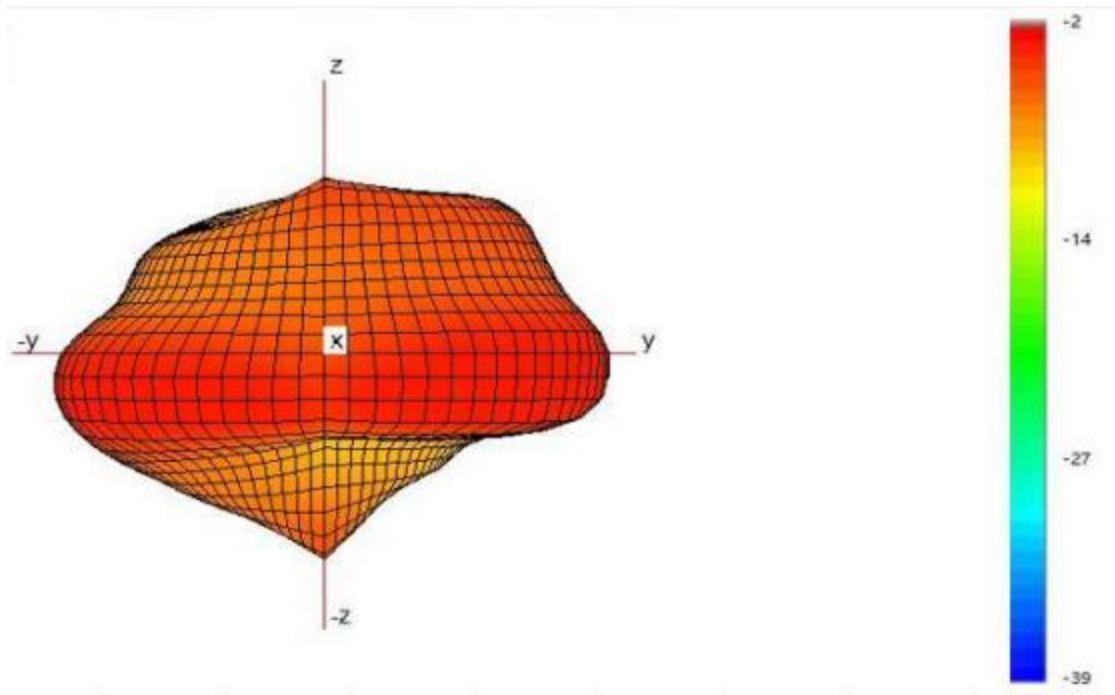

XY-plane

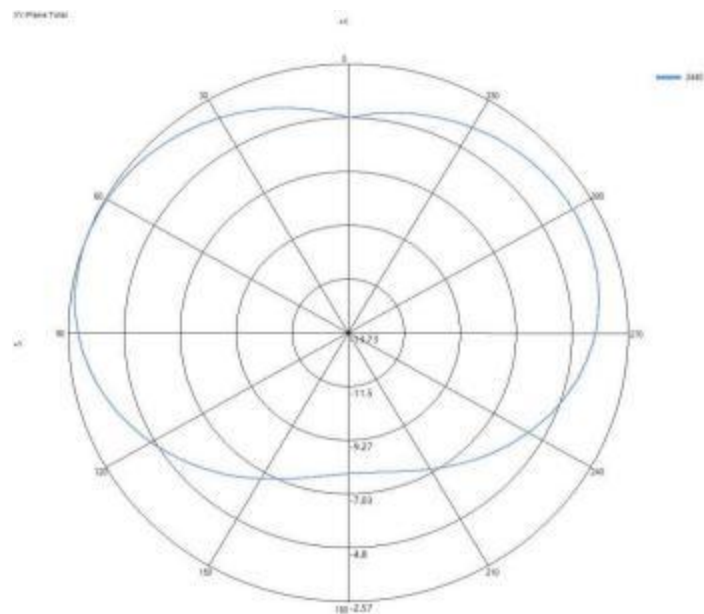

XZ-plane

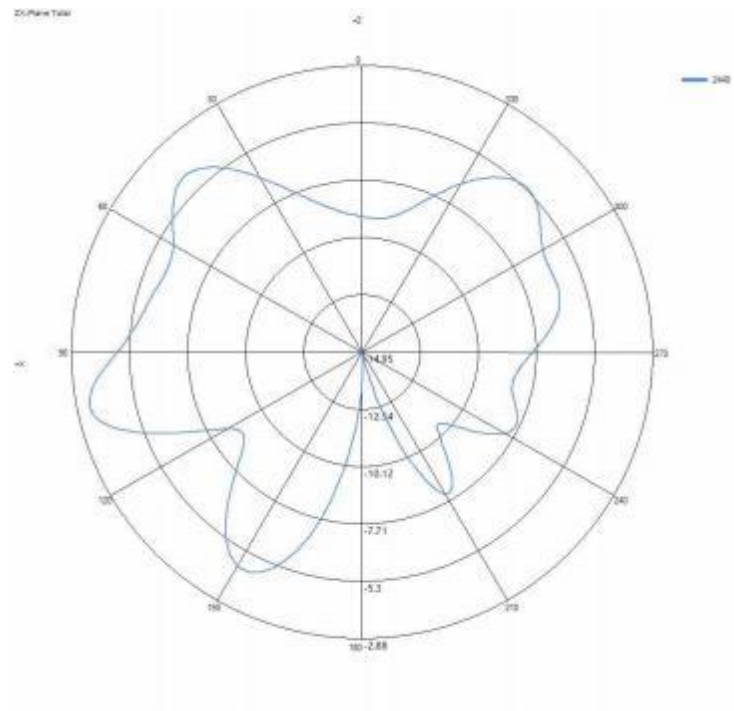

YZ-plane

