





Test Report No.:  
FCCSZ2024-0057-RF

## RF Test Report

FCC ID : 2BKFC-LSRCR3P0  
EUT : Millimeter Wave Corner Radar Sensor  
MODEL : SRR3.0  
BRAND NAME :   
APPLICANT : Lisheng Intelligent Technology (Shanghai) Co.,Ltd.  
Classification of Test : Commission Test

CVC Testing Technology (Shenzhen) Co., Ltd.



|                                                                                                                                                                           |                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                      |                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| <b>Applicant</b>                                                                                                                                                          |                                                                                                                                                                                                                                                          | Name : Lisheng Intelligent Technology (Shanghai) Co.,Ltd.                                                                                                                                                            |                       |
|                                                                                                                                                                           |                                                                                                                                                                                                                                                          | Address : Room 702-5, No. 4811 Caoan Road, Anting Town, Jiading District, Shanghai                                                                                                                                   |                       |
| <b>Manufacturer</b>                                                                                                                                                       |                                                                                                                                                                                                                                                          | Name : Lisheng Intelligent Technology (Shanghai) Co.,Ltd.                                                                                                                                                            |                       |
|                                                                                                                                                                           |                                                                                                                                                                                                                                                          | Address : Room 702-5, No. 4811 Caoan Road, Anting Town, Jiading District, Shanghai                                                                                                                                   |                       |
| <b>Equipment Under Test</b>                                                                                                                                               |                                                                                                                                                                                                                                                          | Name : Millimeter Wave Corner Radar Sensor<br><br>Model/Type:SRR3.0<br><br>Trade mark : <br><br>Serial NO.:N/A<br><br>Sampe NO.:2-1 |                       |
| Date of Receipt.                                                                                                                                                          | 2024.07.24                                                                                                                                                                                                                                               | Date of Testing                                                                                                                                                                                                      | 2024.07.25~2024.08.05 |
| <b>Test Specification</b>                                                                                                                                                 |                                                                                                                                                                                                                                                          | <b>Test Result</b>                                                                                                                                                                                                   |                       |
| 47 CFR Part 95M                                                                                                                                                           |                                                                                                                                                                                                                                                          | PASS                                                                                                                                                                                                                 |                       |
| <b>Evaluation of Test Result</b>                                                                                                                                          | The equipment under test was found to comply with the requirements of the standards applied. <div style="text-align: right;">  <p>Issue Date: 2024-08-07</p> </div> |                                                                                                                                                                                                                      |                       |
| Tested by:<br><br><br>Liang Jiatong<br><br>Name                      Signature         | Reviewed by:<br><br><br>Mo Xianbiao<br><br>Name                      Signature                                                                                        | Approved by:<br><br><br>Dong Sanbi<br><br>Name                      Signature                                                   |                       |
| <b>Other Aspects: NONE.</b>                                                                                                                                               |                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                      |                       |
| Abbreviations:OK,    Pass= passed                      Fail = failed                      N/A= not applicable                      EUT= equipment, sample(s) under tested |                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                      |                       |

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.

## TABLE OF CONTENTS

|                                                         |           |
|---------------------------------------------------------|-----------|
| <b>RELEASE CONTROL RECORD .....</b>                     | <b>4</b>  |
| <b>1 SUMMARY OF TEST RESULTS .....</b>                  | <b>5</b>  |
| 1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS .....      | 6         |
| 1.2 MEASUREMENT UNCERTAINTY .....                       | 7         |
| 1.3 TEST LOCATION .....                                 | 7         |
| <b>2 GENERAL INFORMATION .....</b>                      | <b>8</b>  |
| 2.1 GENERAL PRODUCT INFORMATION .....                   | 8         |
| 2.2 GENERAL DESCRIPTION OF APPLIED STANDARDS .....      | 9         |
| 2.3 DESCRIPTION OF SUPPORT UNITS .....                  | 9         |
| 2.4 FAR FIELD CONDITION FOR FREQUENCY ABOVE 18GHZ ..... | 10        |
| 2.5 RADIATED TEST SETUP .....                           | 11        |
| <b>3 TEST TYPES AND RESULTS .....</b>                   | <b>13</b> |
| 3.1 CONDUCTED EMISSION MEASUREMENT .....                | 13        |
| 3.2 EIRP POWER MEASUREMENT .....                        | 15        |
| 3.3 MODULATION CHARACTERISTICS .....                    | 19        |
| 3.4 BANDWIDTH MEASUREMENT .....                         | 20        |
| 3.5 TRANSMITTER SPURIOUS EMISSIONS MEASUREMENT .....    | 22        |
| 3.6 FREQUENCY STABILITY .....                           | 31        |
| <b>4 PHOTOGRAPHS OF TEST SETUP .....</b>                | <b>33</b> |
| <b>5 PHOTOGRAPHS OF THE EUT .....</b>                   | <b>34</b> |

## RELEASE CONTROL RECORD

| ISSUE NO.         | REASON FOR CHANGE | DATE ISSUED |
|-------------------|-------------------|-------------|
| FCCSZ2024-0057-RF | Original release  | 2024.08.07  |

## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 95M                                                  |                                      |        |                 |
|---------------------------------------------------------------------------------|--------------------------------------|--------|-----------------|
| FCC STANDARD SECTION                                                            | TEST TYPE AND LIMIT                  | RESULT | REMARK          |
| FCC 15.207                                                                      | AC Power Conducted Emission          | N/A    | DC power supply |
| FCC 2.1046<br>FCC 95.3367 (a) (b)                                               | RF Output Power                      | PASS   | See section 3.2 |
| FCC 2.1047                                                                      | Modulation Characteristics           | PASS   | See section 3.3 |
| FCC 2.1049<br>FCC 95.3379 (b)                                                   | Occupied bandwidth (99%)             | PASS   | See section 3.4 |
| FCC 2.1053<br>FCC 95.3379 (a) (1)<br>FCC 95.3379 (a) (2)<br>FCC 95.3379 (a) (3) | Field Strength of Spurious Radiation | PASS   | See section 3.5 |
| FCC 2.1055<br>FCC 95.3379 (b)                                                   | Frequency Stability                  | PASS   | See section 3.6 |

## 1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

| Equipment                       | Manufacturer  | Model No.          | Serial Number | Cal. interval | Cal. Due  |
|---------------------------------|---------------|--------------------|---------------|---------------|-----------|
| Radiation Spurious(1GHz-40GHz)  |               |                    |               |               | /         |
| Signal&Spectrum Analyzer        | Rohde&Schwarz | FSV 40             | 101898        | 1 year        | 2025/4/28 |
| EMI Test Receiver               | Rohde&Schwarz | ESR3               | 102693        | 1 year        | 2025/4/28 |
| Antenna(30MHz~1001MHz)          | SCHWARZBECK   | VULB 9168          | 1133          | 1 year        | 2025/2/20 |
| Horn antenna(1GHz-18GHz)        | ETS           | 3117               | 227611        | 1 year        | 2025/2/04 |
| Horn antenna(18GHz-40GHz)       | QMS           | QMS-00880          | 22051         | 1 year        | 2025/3/24 |
| 3m anechoic chamber             | MORI          | 966                | CS0300011     | 3 year        | 2026/5/18 |
| Filter group(RSE-BT/WiFi)       | Rohde&Schwarz | WiFi /BT Variant 1 | 100820        | 1 year        | 2025/4/28 |
| Filter group(RSE-Cellular)      | Rohde&Schwarz | Cellular Variant 1 | 100768        | 1 year        | 2025/4/28 |
| Preamplifier(10kHz-1GHz)        | Rohde&Schwarz | SCU-01F            | 100299        | 1 year        | 2025/4/28 |
| Preamplifier(1GHz-18GHz)        | Rohde&Schwarz | SCU-18F            | 100799        | 1 year        | 2025/4/28 |
| Preamplifier(1GHz-18GHz)        | Rohde&Schwarz | SCU-18F            | 100801        | 1 year        | 2025/4/28 |
| Preamplifier(18GHz-40GHz)       | Rohde&Schwarz | SCU-40A            | 101209        | 1 year        | 2025/4/28 |
| Temperature and humidity meter  | /             | C193561517         | C193561517    | 1 year        | 2025/4/27 |
| Radiation Spurious(Below 1GHz)  |               |                    |               |               | /         |
| EMI Test Receiver               | Rohde&Schwarz | ESR 26             | 101718        | 1 year        | 2025/5/24 |
| Antenna(30MHz~1000MHz)          | SCHWARZBECK   | VULB 9168          | 01132         | 1 year        | 2025/5/27 |
| Horn antenna(1GHz-18GHz)        | ETS           | 3117               | 227634        | 1 year        | 2025/3/25 |
| Horn antenna(18GHz-40GHz)       | SCHWARZBECK   | BBHA 9170          | 01003         | 1 year        | 2025/3/25 |
| 3m anechoic chamber             | MORI          | 966                | CS0200019     | 3 year        | 2026/5/18 |
| LISN (single-phase )            | Rohde&Schwarz | ESH3-Z6            | 102152/102156 | 1 year        | 2025/4/27 |
| Preamplifier(10kHz-1GHz)        | Rohde&Schwarz | SCU-01F            | 100298        | 1 year        | 2025/4/28 |
| Attenuator                      | /             | SJ-5dB             | 607684        | 1 year        | 2025/2/04 |
| #1 control room                 | MORI          | 433                | CS0300028     | 3 year        | 2026/5/17 |
| Temperature and humidity meter  | UNI-T         | A10T               | C193561473    | 1 year        | 2025/4/27 |
| EMI Test Receiver               | Rohde&Schwarz | ESR 26             | 101718        | 1 year        | 2025/5/24 |
| Antenna(30MHz~1000MHz)          | SCHWARZBECK   | VULB 9168          | 01132         | 1 year        | 2025/5/27 |
| Radiation Spurious(Above 40GHz) |               |                    |               |               | /         |
| Equipment                       | Manufacturer  | Model No.          | Serial Number | Cal. interval | Cal. Due  |
| 3m anechoic chamber             | MORI          | 966                | CS0300011     | 3 year        | 2026/5/18 |
| Signal&Spectrum Analyzer        | keysight      | N9040B             | CS0300074     | 1 year        | 2024.9.24 |
| SA Expansion Module(40-60GHz)   | VDI           | N9029AV19          | CS0300075     | 3 year        | 2025.9.14 |
| SA Expansion Module(60-90GHz)   | VDI           | N9029AV12          | CS0300076     | 3 year        | 2025.9.14 |
| SA Expansion Module(90-140GHz)  | VDI           | N9029AV08          | CS0300077     | 3 year        | 2025.9.14 |
| SA Expansion Module(140-220GHz) | VDI           | N9029AV05          | CS0300078     | 3 year        | 2025.9.14 |
| SA Expansion Module(220-330GHz) | VDI           | N9029AV03          | CS0300079     | 3 year        | 2025.9.14 |
| Horn antenna(40-60GHz)          | CMI           | HO19R              | CS0300086     | 3 year        | 2025.9.14 |
| Horn antenna(60-90GHz)          | CMI           | HO12R              | CS0300088     | 3 year        | 2025.9.14 |
| Horn antenna(90-140GHz)         | CMI           | HO08R              | CS0300090     | 3 year        | 2025.9.14 |
| Horn antenna(140-220GHz)        | CMI           | HO05R              | CS0300092     | 3 year        | 2025.9.14 |
| Horn antenna(220-330GHz)        | CMI           | HO03R              | CS0300094     | 3 year        | 2025.9.14 |

## 1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement Uncertainty             |                                   |                            |
|-------------------------------------|-----------------------------------|----------------------------|
| No.                                 | Item                              | Measurement Uncertainty    |
| 1                                   | Occupied Channel Bandwidth        | $\pm 1.86\%$               |
|                                     | Radiated Emission (9kHz-30MHz)    | $\pm 5.6$ dB               |
| 2                                   | Radiated Emissions(30MHz-1GHz)    | $\pm 5.0$ dB               |
| 3                                   | Radiated Emissions(1GHz-18GHz)    | $\pm 4.8$ dB               |
| 4                                   | Radiated Emissions(18GHz-40GHz)   | $\pm 5.1$ dB               |
| 5                                   | Radiated Emissions(40GHz-60GHz)   | $\pm 4.8$ dB               |
| 6                                   | Radiated Emissions(60GHz-90GHz)   | $\pm 4.8$ dB               |
| 7                                   | Radiated Emissions(90GHz-140GHz)  | $\pm 5.0$ dB               |
| 8                                   | Radiated Emissions(140GHz-220GHz) | $\pm 5.1$ dB               |
| 9                                   | Radiated Emissions(220GHz-300GHz) | $\pm 4.8$ dB               |
| 10                                  | Temperature                       | $\pm 0.73^{\circ}\text{C}$ |
| 11                                  | Supply voltages                   | $\pm 0.37$ %               |
| 12                                  | Humidity                          | $\pm 3.9$ %                |
| Remark: 95% Confidence Levels, k=2. |                                   |                            |

## 1.3 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab. of CVC Testing Technology (Shenzhen) Co., Ltd.

Lab Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China  
Post Code: 518110 Tel: 0755-23763060-8805  
Fax: 0755-23763060 E-mail: sz-kf@cvc.org.cn  
FCC(Test firm designation number: CN1363)  
IC(Test firm CAB identifier number: CN0137)  
CNAS(Test firm designation number: L16091)

## 2 GENERAL INFORMATION

### 2.1 GENERAL PRODUCT INFORMATION

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| PRODUCT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Millimeter Wave Corner Radar Sensor                                               |
| BRAND                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |  |
| TEST MODEL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | SRR3.0                                                                            |
| ADDITIONAL MODEL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | N/A                                                                               |
| POWER SUPPLY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | DC 12V form host unit                                                             |
| MODULATIONTECHNOLOGY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | FMCW                                                                              |
| FREQUENCY RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 76.00 - 77.00 GHz                                                                 |
| PEAK OUTPUT POWER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 22.97dBm (Maximum)                                                                |
| ANTENNA TYPE(Note 3)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Microstrip Antenna                                                                |
| I/O PORTS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Refer to user' s manual                                                           |
| CABLE SUPPLIED                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | N/A                                                                               |
| <p>Note:</p> <ol style="list-style-type: none"><li>1. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.</li><li>2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.</li><li>3. Since the above data and/or information is provided by the client, CVC is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.</li></ol> |                                                                                   |

## 2.2 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

**FCC PART 95, Subpart M**

**ANSI C63.10-2020**

TCBC Workshop(2023.10.25) Part 15.255 Rules Amendment

Keysight Application Note 5952-1039

All test items have been performed and recorded as per the above standards.

## 2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Support Equipment |             |                   |             |                      |                    |                |             |
|-------------------|-------------|-------------------|-------------|----------------------|--------------------|----------------|-------------|
| NO                | Description | Brand             | Model No.   | Serial Number        | Supplied by        |                |             |
| 1                 | Laptop      | Lenovo            | K4e-ARE120  | MP20kshe             | Lab                |                |             |
|                   |             |                   |             |                      |                    |                |             |
| Support Cable     |             |                   |             |                      |                    |                |             |
| NO                | Description | Quantity (Number) | Length (cm) | Detachable (Yes/ No) | Shielded (Yes/ No) | Cores (Number) | Supplied by |
|                   |             |                   |             |                      |                    |                |             |
|                   |             |                   |             |                      |                    |                |             |


## 2.4 FAR FIELD CONDITION FOR FREQUENCY ABOVE 18GHZ

The equipment under test was transmitting while connected to its integral antenna and is placed on a turn table. The measurement antenna is in the far field of the EUT per formula  $2D^2/\lambda$  where D is the larger between the dimension of the measurement antenna and the transmitting antenna of the EUT. In this case, "D" is the largest dimension of the measurement antenna. The EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.


| HornAntenna | Frequency<br>(GHz) | Antenna<br>Dimension<br>A(mm) | Wavelength<br>(λ)(m) | Far field<br>R(m) $\geq 2D^2/\lambda$ | Measurement<br>Distance(D)(m) |
|-------------|--------------------|-------------------------------|----------------------|---------------------------------------|-------------------------------|
| QMS-00880   | 18                 | 0.08                          | 0.0167               | 0.77                                  | 3                             |
|             | 40                 | 0.08                          | 0.0075               | 1.71                                  |                               |
| HO19R       | 40                 | 0.046                         | 0.0075               | 0.56                                  | 1                             |
|             | 60                 | 0.046                         | 0.005                | 0.85                                  |                               |
| HO12R       | 60                 | 0.03                          | 0.005                | 0.36                                  | 1                             |
|             | 90                 | 0.03                          | 0.0033               | 0.55                                  |                               |
| HO8R        | 90                 | 0.019                         | 0.0033               | 0.22                                  | 1                             |
|             | 140                | 0.019                         | 0.0021               | 0.34                                  |                               |
| HO5R        | 140                | 0.012                         | 0.0021               | 0.14                                  | 1                             |
|             | 220                | 0.012                         | 0.0014               | 0.21                                  |                               |
| HO3R        | 220                | 0.008                         | 0.0014               | 0.09                                  | 1                             |
|             | 330                | 0.008                         | 0.0009               | 0.14                                  |                               |

## 2.5 RADIATED TEST SETUP


Below 30MHz Test Setup:

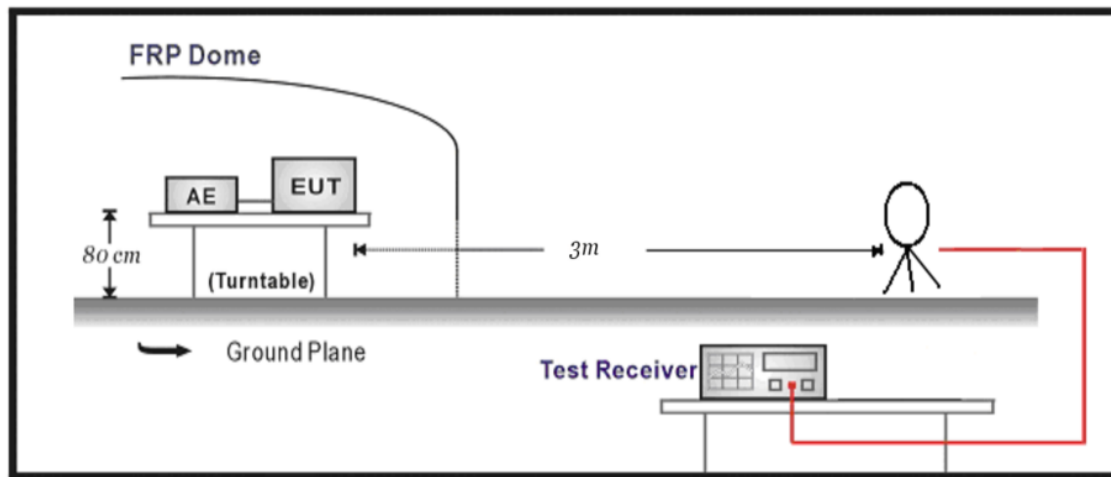


30MHz-1GHz Test Setup:

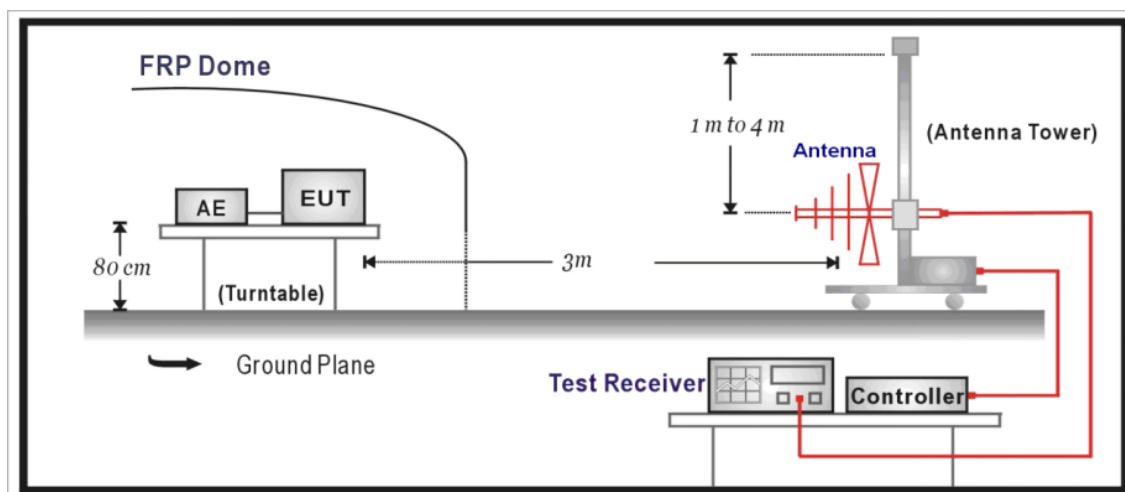

1GHz -40GHz Test Setup:

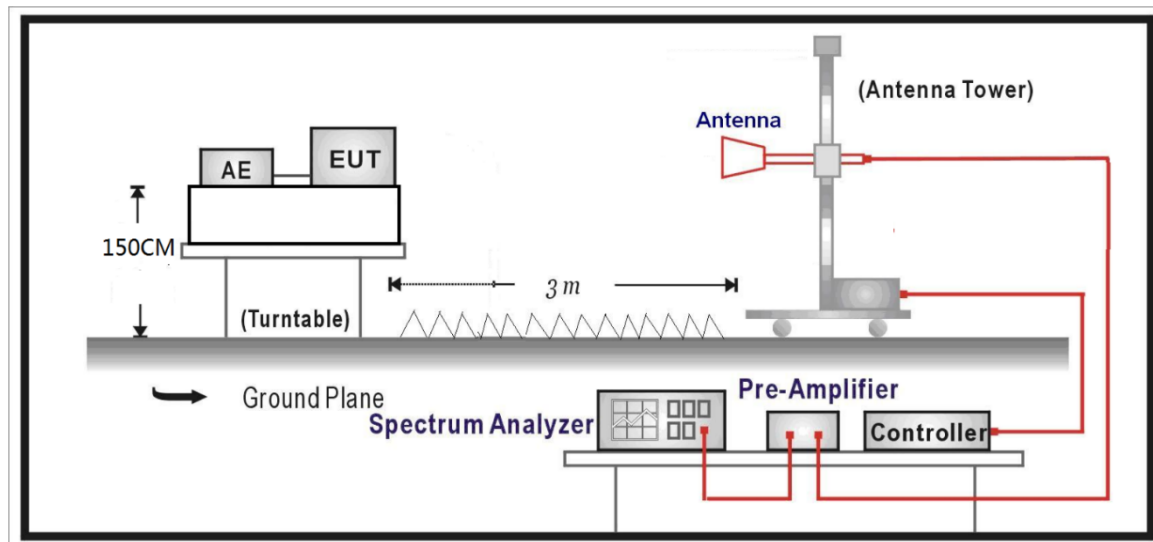

Above 40GHz Test Setup:

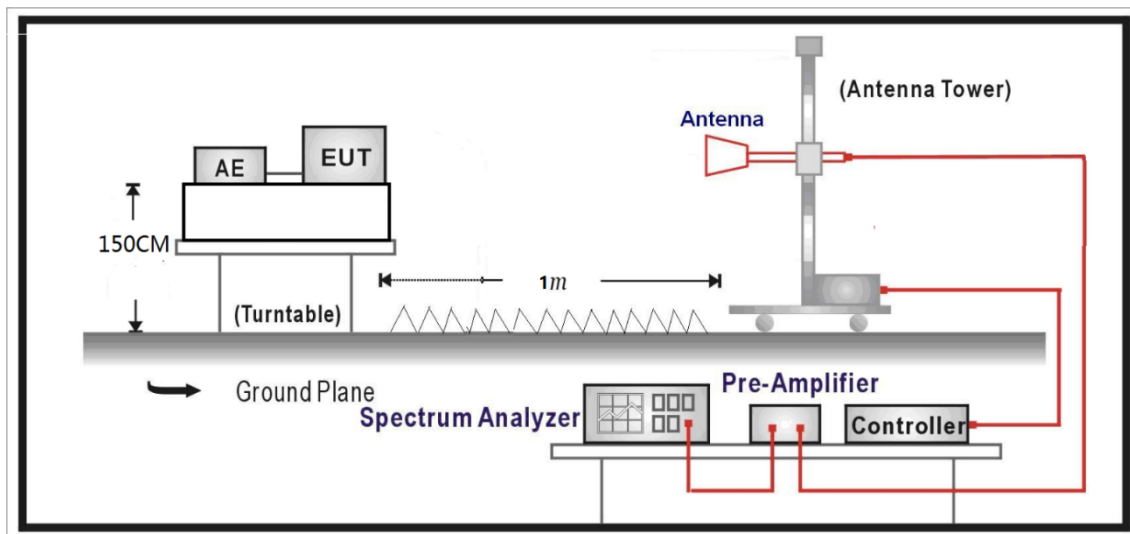

### 3 TEST TYPES AND RESULTS

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 Limit


| Frequency<br>(MHz) | Conducted Limits(dBμV) |           |
|--------------------|------------------------|-----------|
|                    | Quasi-peak             | Average   |
| 0.15 - 0.5         | 66 to 56 *             | 56 to 46* |
| 0.5 - 5            | 56                     | 46        |
| 5 - 30             | 60                     | 50        |

NOTE: 1. The lower limit shall apply at the transition frequencies.  
NOTE: 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

##### 3.1.2 Measurement procedure

- The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the Test photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The equipment under test shall be placed on a support of non-metallic material, the height of which shall be 1.5m above the ground,
- The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

##### 3.1.3 Test setup

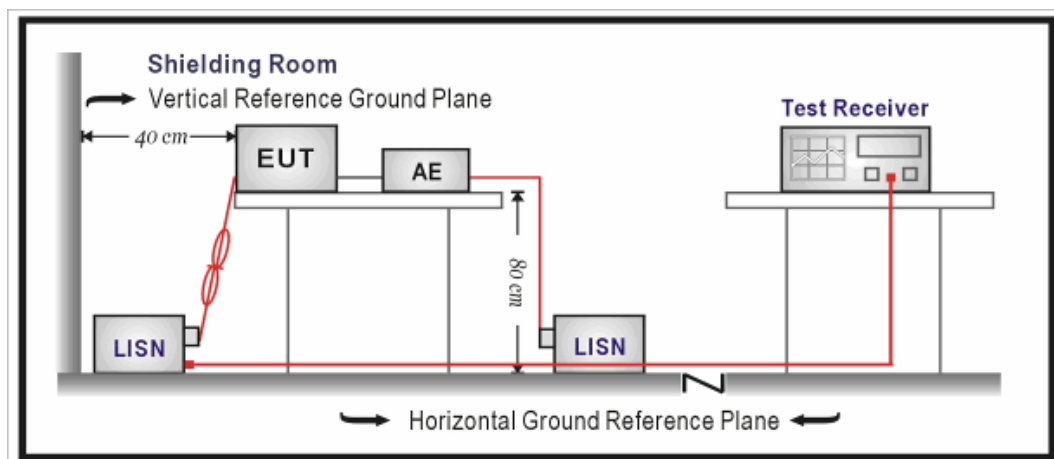

#### 3.1.4 Test results

N/A, DC power supply

## 3.2 EIRP POWER MEASUREMENT

### 3.2.1 Limits

#### According to § 95.3367: 71–81 GHz Band Radar Service Radiated Power Limits

The fundamental radiated emission limits within the 76 – 81 GHz band are expressed in terms of Equivalent Isotropically Radiated Power (EIRP) and are as follows:

- (a) The maximum power (EIRP) within the 76–81 GHz band shall not exceed 50 dBm based on measurements employing a power averaging detector with a 1 MHz Resolution Bandwidth (RBW).
- (b) The maximum peak power (EIRP) within the 76–81 GHz band shall not exceed 55 dBm based on measurements employing a peak detector with a 1 MHz RBW.

#### According to § 2.1046: Measurements required: RF Power Output

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033 (c) (8). The electrical characteristics of the radio frequency load attached to the output terminals.

| Frequency band of Operation | Average emission limit<br>(EIRP in dBm measured in 1 MHz) | Peak emission limit<br>(EIRP in dBm measured in 1MHz) |
|-----------------------------|-----------------------------------------------------------|-------------------------------------------------------|
| 77 to 81GHz                 | 50dBm                                                     | 55dBm                                                 |

### 3.2.2 Measurement procedure

#### PEAK Power Test Method

1. Radiated power measurements are performed using the signal analyzer's swept mode measurement capability for signals with continuous operation.
2. RBW = 1MHz
3. VBW  $\geq 3 \times$  RBW
4. Span as required, enough to observe the fundamental
5. No. of sweep points  $\geq 2 \times$  span / RBW
6. Detector and Trace mode = Suitable for peak and average measurements respectively over 100 sweeps
7. The trace was allowed to stabilize

**Method of measurement:**

Refer as TCBC Workshop(2023.10.25) Part 15.255 Rules Amendment

**FMCW desensitization factor:**

Desensitization factor and sweep time considerations for measurements of FMCW signals in ANSI C63.10-2020 Annex L

The derivation of the FMCW desensitization factor is given in Keysight Application Note 5952-1039 Appendix B.

#### RMS detector, channel power Test Method

A spectrum analyser with the following settings is used as measuring receiver in the test setup:

Start frequency: lower than the lower edge of the operating frequency range.

Stop frequency: higher than the upper edge of the operating frequency range.

Resolution bandwidth: 1 MHz

Video bandwidth: 3 MHz

Detector mode: RMS

Display mode: clear write

Averaging time: averaging time  $\times$  number of sweep points

Channel Power Function needs to be used to calculate the average power. Boundaries for the calculation needs to be defined. This is typically the operating frequency range.

### 3.2.3 Test setup

See section 2.5 of this report.

### 3.2.4 Test results

According to the manufacturer's declaration, the parameter of the FMCW modulation as below:

| Sweep time (T <sub>s</sub> )<br>(ms) | Sweep width(F <sub>s</sub> )<br>(MHz) | 3 dB IF bandwidth<br>(MHz) | Cycle time<br>(us) |
|--------------------------------------|---------------------------------------|----------------------------|--------------------|
| 66.28                                | 969.25                                | 10                         | 60.63              |

#### PK POWER

| Center Frequency<br>(GHz) | Power<br>(dBm) | Desensitization factor(dB) | Peak EIRP<br>(dBm) | Peak EIRP Limit(dBm) | Marin<br>(dB) | Verdict |
|---------------------------|----------------|----------------------------|--------------------|----------------------|---------------|---------|
| 76.5                      | 22.96          | 0.01                       | 22.97              | 55                   | 32.03         | PASS    |

Remark:

1. Peak EIRP = Power +desensitization factor
2. FMCW desensitization factor = -20 \* Log( α ) = 0.01dB

where



$$\alpha = \frac{1}{\sqrt[4]{1 + \left( \frac{2 \ln(2)}{\pi} \right)^2 \left( \frac{F_s}{T_s B^2} \right)^2}}$$

Remark:

1. T<sub>D</sub> = T<sub>s</sub>/F<sub>s</sub>
2. B is 3 dB IF bandwidth
3. Average factor = 10\*log[(T<sub>D</sub>) / cycle time]

#### AV POWER

| Center Frequency<br>(GHz) | RMS detector,<br>channel power | AV EIRP<br>Limit(dBm) | Marin<br>(dB) | Verdict |
|---------------------------|--------------------------------|-----------------------|---------------|---------|
| 76.5                      | 14.82                          | 50                    | 35.18         | PASS    |

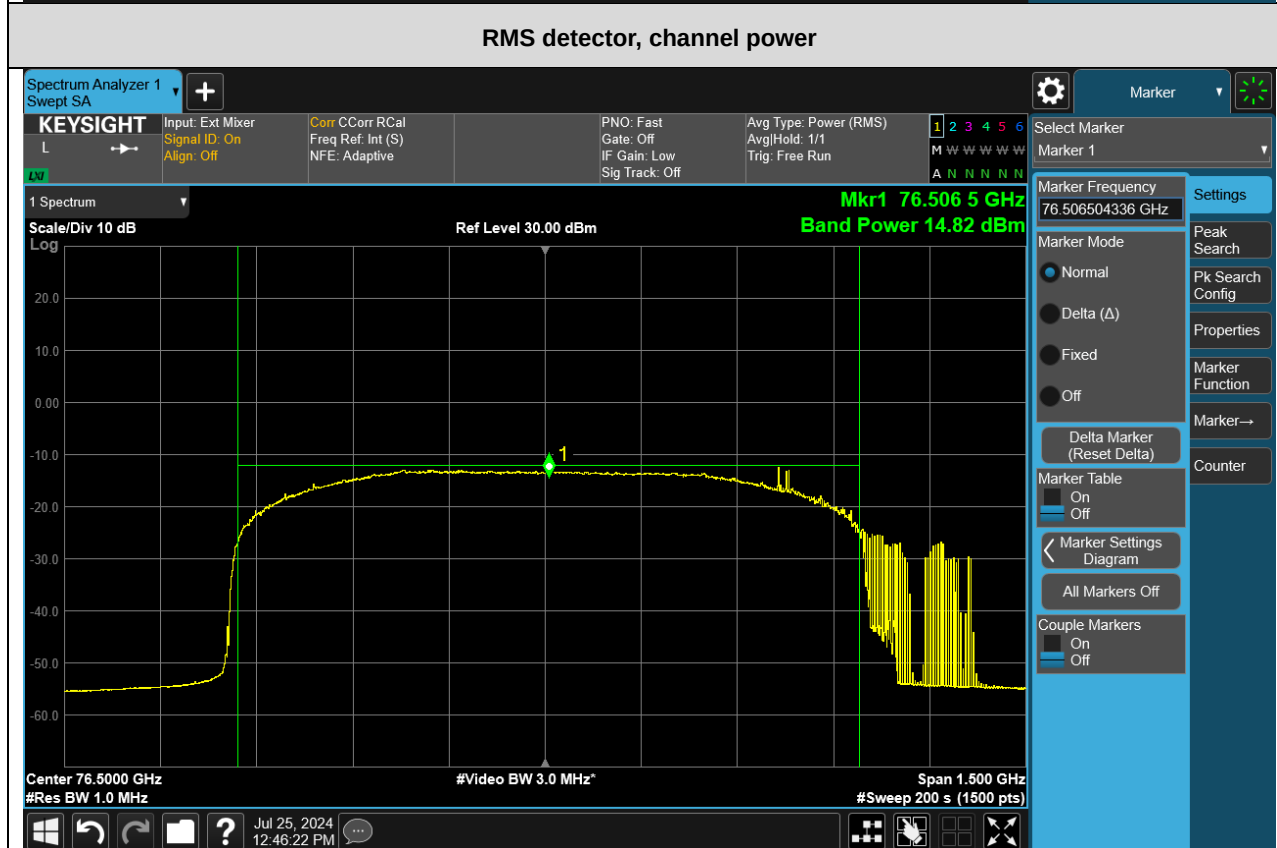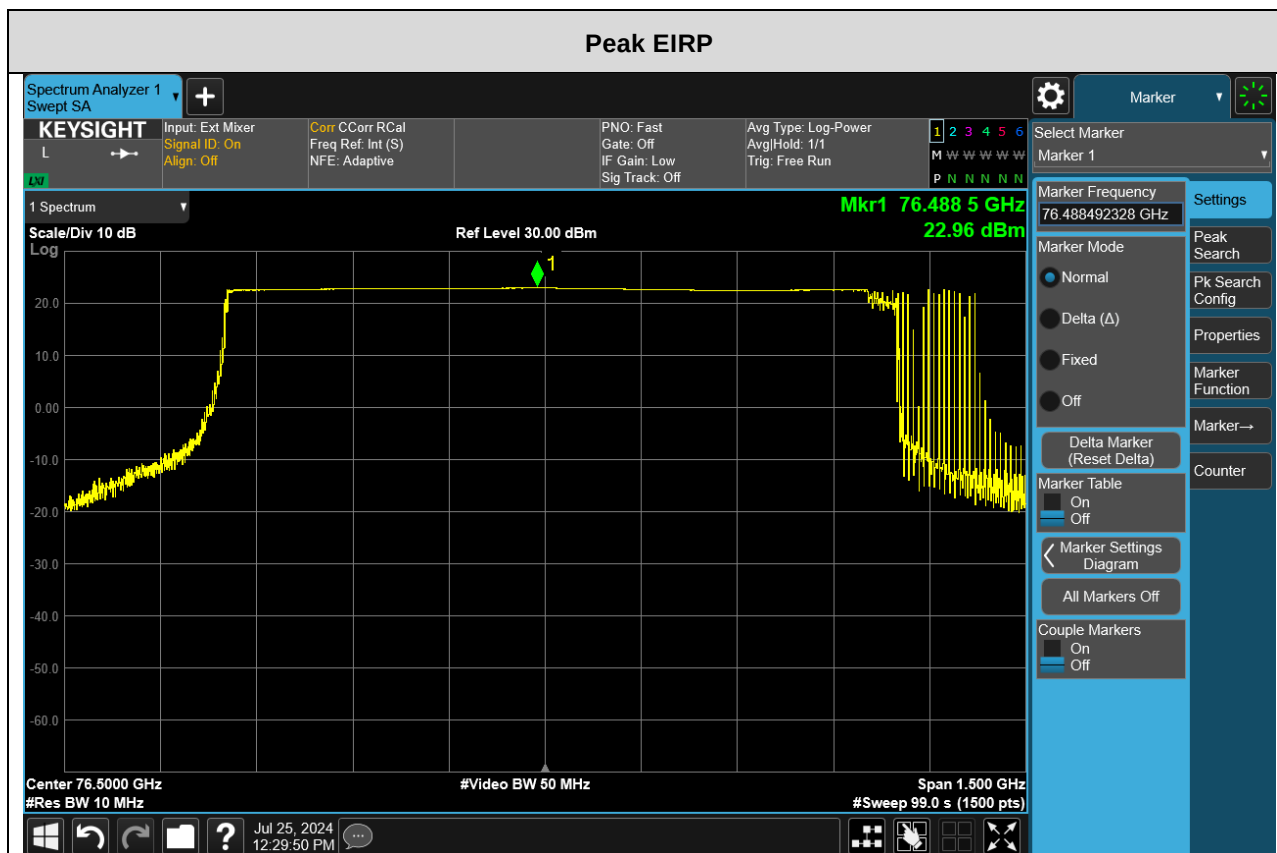

### **3.3 MODULATION CHARACTERISTICS**

#### **3.3.1 LIMITS**

##### According to §2.1047 Modulation Characteristics

Start and stop frequency was measured for all operating modes and all frequency bands with nominal conditions. Wave form and sweep characteristics were supplied by applicant

##### According to KDB 653005 D01 76 – 81 GHz Radars v01r02, 3.g)

Concerning the Section 2.1047 modulation characteristics requirement, the following information should be provided:

- 1) Pulsed radar: pulse width and pulse repetition frequency (if PRF is variable, then report maximum and minimum values).
- 2) Non-pulsed radar (e.g., FMCW): modulation type (i.e., sawtooth, sinusoid, triangle, or square wave) and sweep characteristics (sweep bandwidth, sweep rate, sweep time).

#### **3.3.2 VERDICT**

The EUT meets §2.1047 Modulation Characteristics requirement as declared by the applicant (applicant provide technical documents).

### 3.4 BANDWIDTH MEASUREMENT

#### 3.4.1 Limits

According to §95.3379 (b):

Fundamental emission (i.e. 99% emission bandwidth) must be contained within the frequency bands specified in this section during all conditions of operation.

According to §2.1049

Measurements required: Occupied bandwidth: The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

#### 3.4.2 Measurement procedure


| 99% OCCUPIED BANDWIDTH MEASUREMENT PARAMETER |                                                   |
|----------------------------------------------|---------------------------------------------------|
| Detector:                                    | Peak                                              |
| Resolution bandwidth:                        | 8 MHz (The analyzer limits maximum RBW at 8 MHz.) |
| Video bandwidth:                             | 50 MHz                                            |
| Trace-Mode:                                  | Max Hold                                          |
| Sweep                                        | Auto couple.                                      |

Measurement procedures:Bandwidth: ANSI C63.10-2020 6.9 / 9.3

Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower)

#### 3.4.3 Test setupSee section 2.5 of this report.

### 3.4.4 Test results

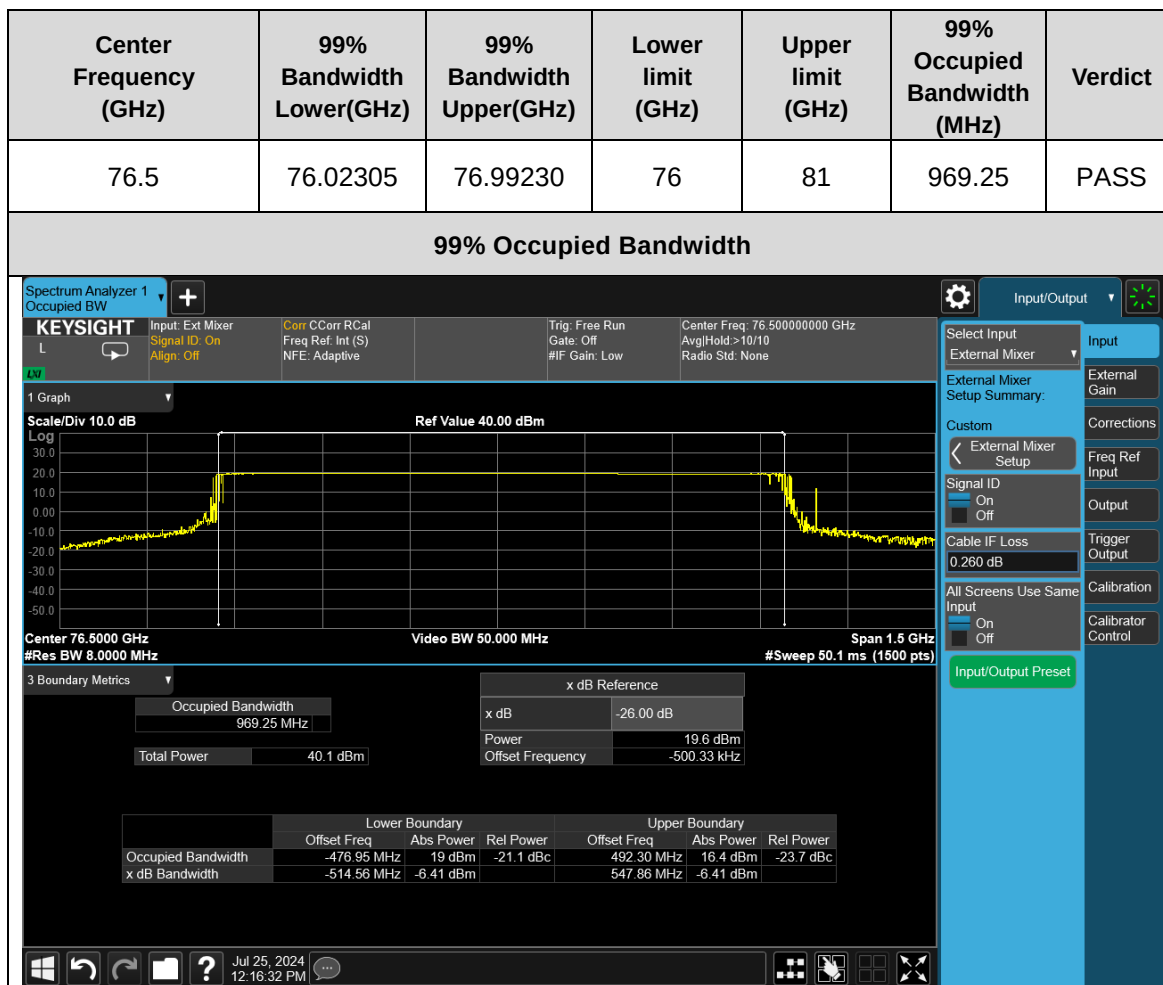

### 3.5 TRANSMITTER SPURIOUS EMISSIONS MEASUREMENT

#### 3.5.1 Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

| FREQUENCIES (MHz) | FIELD STRENGTH<br>(Microvolts/Meter) | MEASUREMENT DISTANCE<br>(Meters) |
|-------------------|--------------------------------------|----------------------------------|
| 0.009 ~ 0.490     | 2400/F(kHz)                          | 300                              |
| 0.490 ~ 1.705     | 24000/F(kHz)                         | 30                               |
| 1.705 ~ 30.0      | 30                                   | 30                               |
| 30 ~ 88           | 100                                  | 3                                |
| 88 ~ 216          | 150                                  | 3                                |
| 216 ~ 960         | 200                                  | 3                                |
| Above 960         | 500                                  | 3                                |

NOTE: 1. The lower limit shall apply at the transition frequencies.  
NOTE: 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).  
NOTE: 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

| FCC Frequency<br>[GHz]                           | FCC EIRP [dBm]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | ISED Frequency [GHz] | ISED EIRP [dBm] |
|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-----------------|
| 40 - 200                                         | 600 pW/cm <sup>2</sup> ~ -1.7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 40 - 162             | -30             |
| 200 - 240                                        | 1000 pW/cm <sup>2</sup> ~ 0.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 73.5 - 76            | 0               |
| Limit conversion<br>(pW/cm <sup>2</sup> to dBm): | $P[\text{dBm}] = 10 \cdot \log(4 \cdot \pi \cdot d^2 \cdot P[\text{W/m}^2])$ <p>d- distance of the limit defined in W/m<sup>2</sup>. Here: 3 m.</p> <hr/> <p>600 pW/cm<sup>2</sup>: <math>P[\text{dBW}] = 10 \cdot \log(4 \cdot \pi \cdot (3\text{m})^2 \cdot 6 \cdot 10^{-6} \text{W/m}^2)</math><br/> 600 pW/cm<sup>2</sup>: <math>P[\text{dBW}] = -31.7 \text{ dBW}</math><br/> <math>P[\text{dBm}] = P[\text{dBW}] + 30</math><br/> 600 pW/cm<sup>2</sup>: <math>P[\text{dBm}] = -31.7 \text{ dBW} + 30</math><br/> 600 pW/cm<sup>2</sup>: <math>P[\text{dBm}] = -1.7 \text{ dBm}</math></p> <hr/> <p>1000 pW/cm<sup>2</sup>: <math>P[\text{dBW}] = 10 \cdot \log(4 \cdot \pi \cdot (3\text{m})^2 \cdot 1 \cdot 10^{-5} \text{W/m}^2)</math><br/> 1000 pW/cm<sup>2</sup>: <math>P[\text{dBW}] = -29.5 \text{ dBW}</math><br/> <math>P[\text{dBm}] = P[\text{dBW}] + 30</math><br/> 1000 pW/cm<sup>2</sup>: <math>P[\text{dBm}] = -29.5 \text{ dBW} + 30</math><br/> 1000 pW/cm<sup>2</sup>: <math>P[\text{dBm}] = +0.5 \text{ dBm}</math></p> |                      |                 |

### 3.5.2 Measurement procedure

#### Measurement of harmonic and spurious emissions below 40 GHz

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be performed using fresh batteries. The turntable was rotated to maximize the emission level.

#### **NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

#### Measurement of harmonic and spurious emissions above 40 GHz

- a. Connect the test antenna covering the appropriate frequency range to a spectrum analyzer via an external mixer.
- b. Set spectrum analyzer RBW = 1MHz, VBW = 3MHz, peak/average detector.
- c. Maximize all observed emissions. Note the maximum power indicated on the spectrum analyzer. Adjust this reading, if necessary, by the conversion loss of the external mixer used at the frequency under investigation and the external mixer IF cable loss.
- d. Calculate the maximum field strength of the emission at the measurement distance
- e. Calculate the power density at the distance specified by the limit from the field strength at the distance specified by the limit
- f. Repeat the preceding sequence for every emission observed in the frequency band under investigation.

### 3.5.3 Test setup


See section 2.5 of this report.

#### **3.5.4 Test results(9kHz-30MHz)**

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

### 3.5.5 Test results(30MHz-1GHz)-SHOWING THE HIGHEST VALUE, “WORST CASE”

#### Radiated Emission, 30MHz to 1GHz, Horizontal / Vertical Polarization

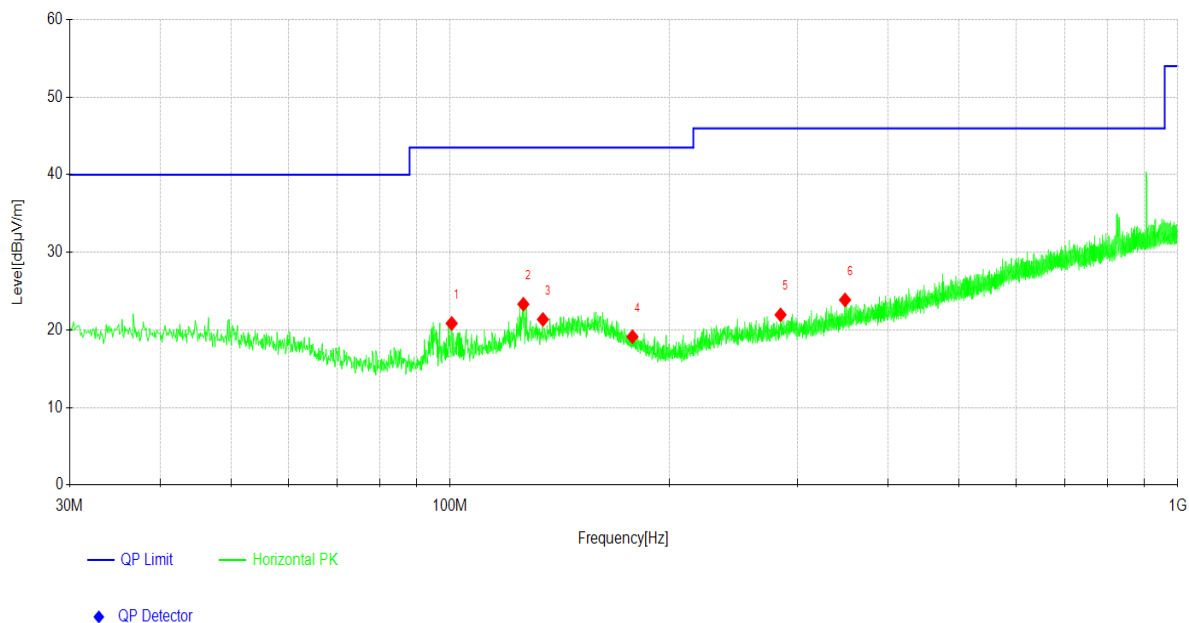

| Suspected Data List |             |                |               |                |                |             |             |           |          |
|---------------------|-------------|----------------|---------------|----------------|----------------|-------------|-------------|-----------|----------|
| NO.                 | Freq. [MHz] | Reading [dBμV] | Factor [dB/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1                   | 100.526     | 4.02           | 16.82         | 20.84          | 43.50          | 22.66       | 300         | 140       | PK       |
| 2                   | 126.137     | 4.13           | 19.19         | 23.32          | 43.50          | 20.18       | 300         | 179       | PK       |
| 3                   | 134.188     | 1.69           | 19.66         | 21.35          | 43.50          | 22.15       | 100         | 128       | PK       |
| 4                   | 178.134     | 0.76           | 18.36         | 19.12          | 43.50          | 24.38       | 200         | 106       | PK       |
| 5                   | 284.650     | 2.53           | 19.42         | 21.95          | 46.00          | 24.05       | 200         | 354       | PK       |
| 6                   | 349.065     | 2.98           | 20.89         | 23.87          | 46.00          | 22.13       | 300         | 222       | PK       |

Remark: 1. Level (dBμV/m) = Reading (dBμV) + Factor (dB/m).  
 2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
 3. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]

### 3.5.6 Test results(1GHz-40GHz)- SHOWING THE HIGHEST VALUE, “WORST CASE”

| Radiated Emission, 1GHz to 40 GHz, Horizontal / Vertical Polarization |                |                   |                  |                   |                   |                |          |
|-----------------------------------------------------------------------|----------------|-------------------|------------------|-------------------|-------------------|----------------|----------|
| NO.                                                                   | Freq.<br>[MHz] | Reading<br>[dBμV] | Factor<br>[dB/m] | Level<br>[dBμV/m] | Limit<br>[dBμV/m] | Margin<br>[dB] | Detector |
| 1                                                                     | 1465.05        | 52.25             | 3.46             | 55.71             | 74.00             | 18.29          | PK       |
| 2                                                                     | 1465.05        | 40.04             | 3.46             | 43.50             | 54.00             | 10.50          | AV       |
| 3                                                                     | 1598.46        | 50.55             | 4.14             | 54.69             | 74.00             | 19.31          | PK       |
| 4                                                                     | 1598.46        | 40.13             | 4.14             | 44.27             | 54.00             | 9.73           | AV       |
| 5                                                                     | 2747.37        | 45.95             | 10.84            | 56.79             | 74.00             | 17.21          | PK       |
| 6                                                                     | 2755.98        | 36.88             | 10.40            | 47.28             | 54.00             | 6.72           | AV       |
| 7                                                                     | 20345.43       | 46.69             | -5.27            | 41.42             | 74.00             | 32.58          | PK       |
| 8                                                                     | 20374.04       | 37.76             | -5.27            | 32.49             | 54.00             | 21.51          | AV       |
| 9                                                                     | 28818.48       | 37.18             | -2.66            | 34.52             | 54.00             | 19.48          | AV       |
| 10                                                                    | 28921.89       | 45.47             | -2.63            | 42.84             | 74.00             | 31.16          | PK       |
| 11                                                                    | 35150.72       | 49.35             | -1.20            | 48.15             | 74.00             | 25.85          | PK       |
| 12                                                                    | 35509.35       | 40.80             | -1.20            | 39.60             | 54.00             | 14.40          | AV       |

**Remark:**1. The emission levels of other frequencies were greater than 20dB margin.


2. Level (dBuV/m) = Reading (dBuV) + Factor (dB/m).

3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).


4. Margin(dB) = Limit(dBuV/m) - Level (dBuV/m)

### 3.5.7 Test results(40GHz-240GHz)-SHOWING THE HIGHEST VALUE, “WORST CASE”


#### Radiated Emission, 40 GHz to 60 GHz, Horizontal / Vertical Polarization

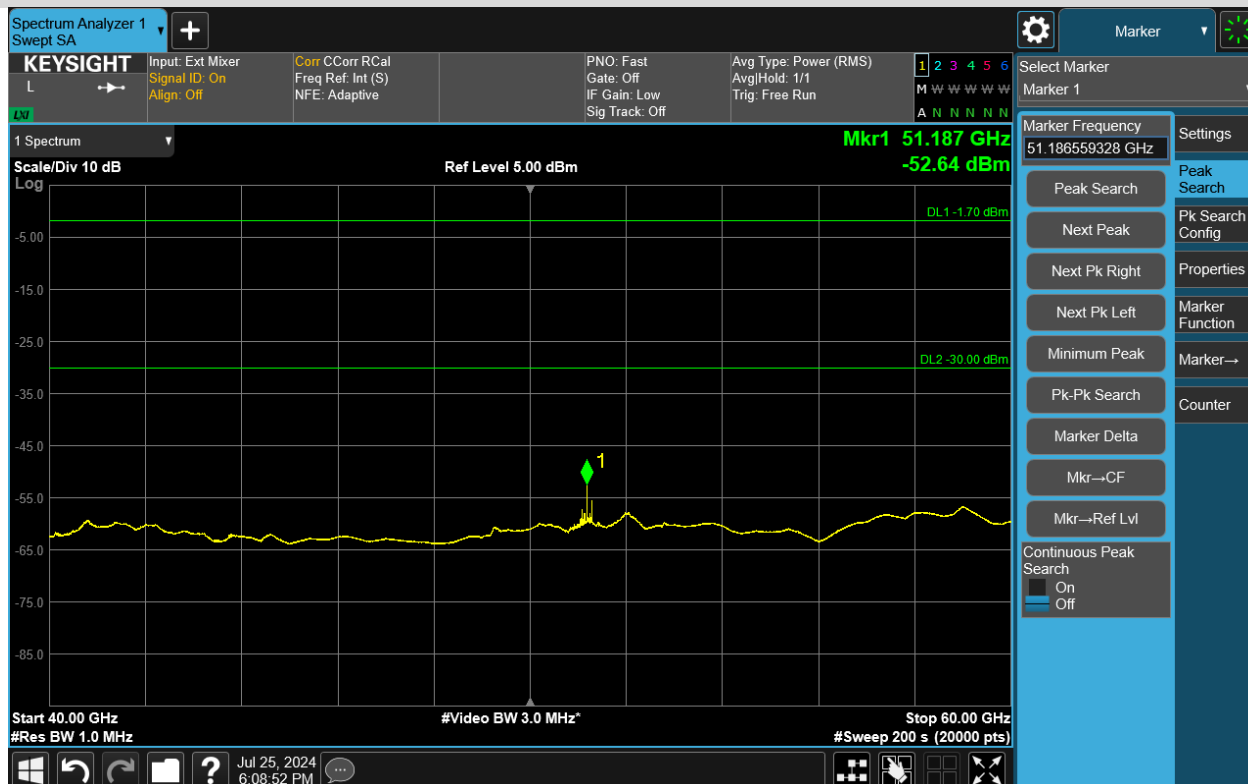


#### Radiated Emission, 60 GHz to 75 GHz, Horizontal / Vertical Polarization

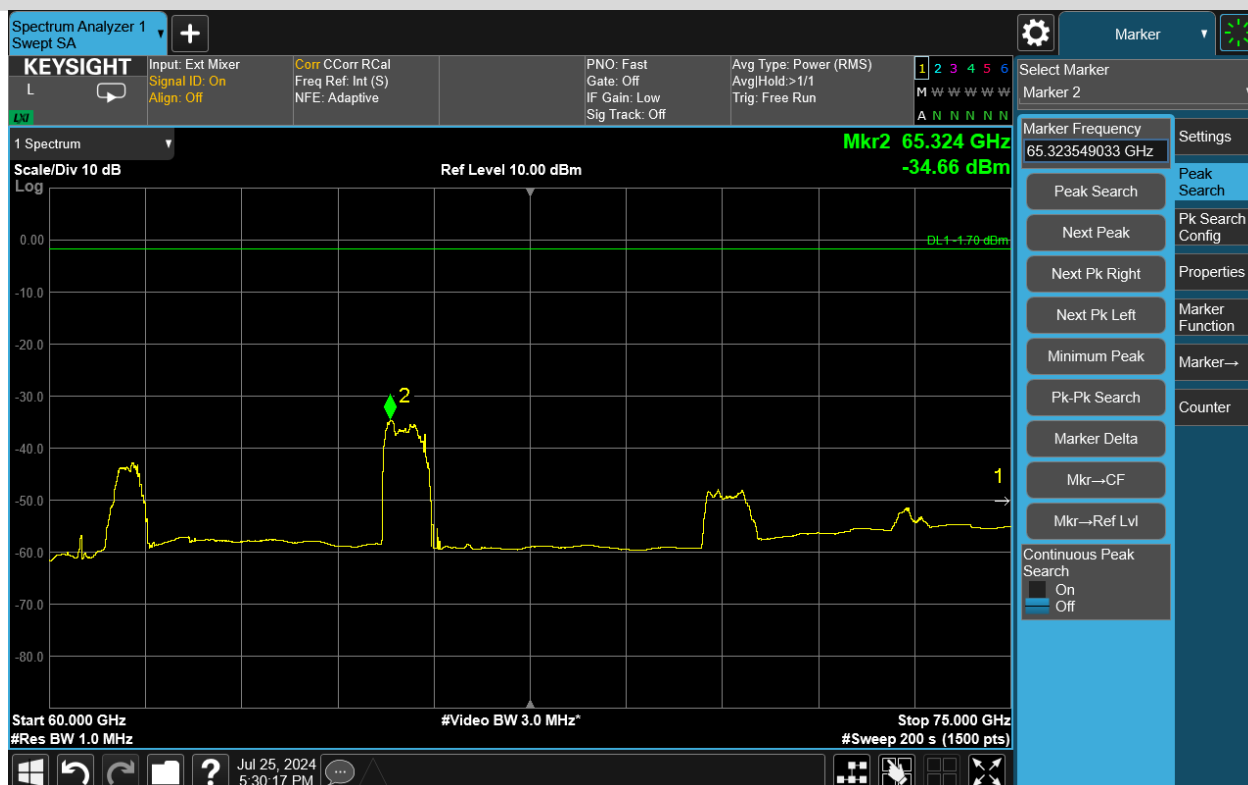


**Radiated Emission, 75 GHz to 82 GHz, Horizontal / Vertical Polarization**

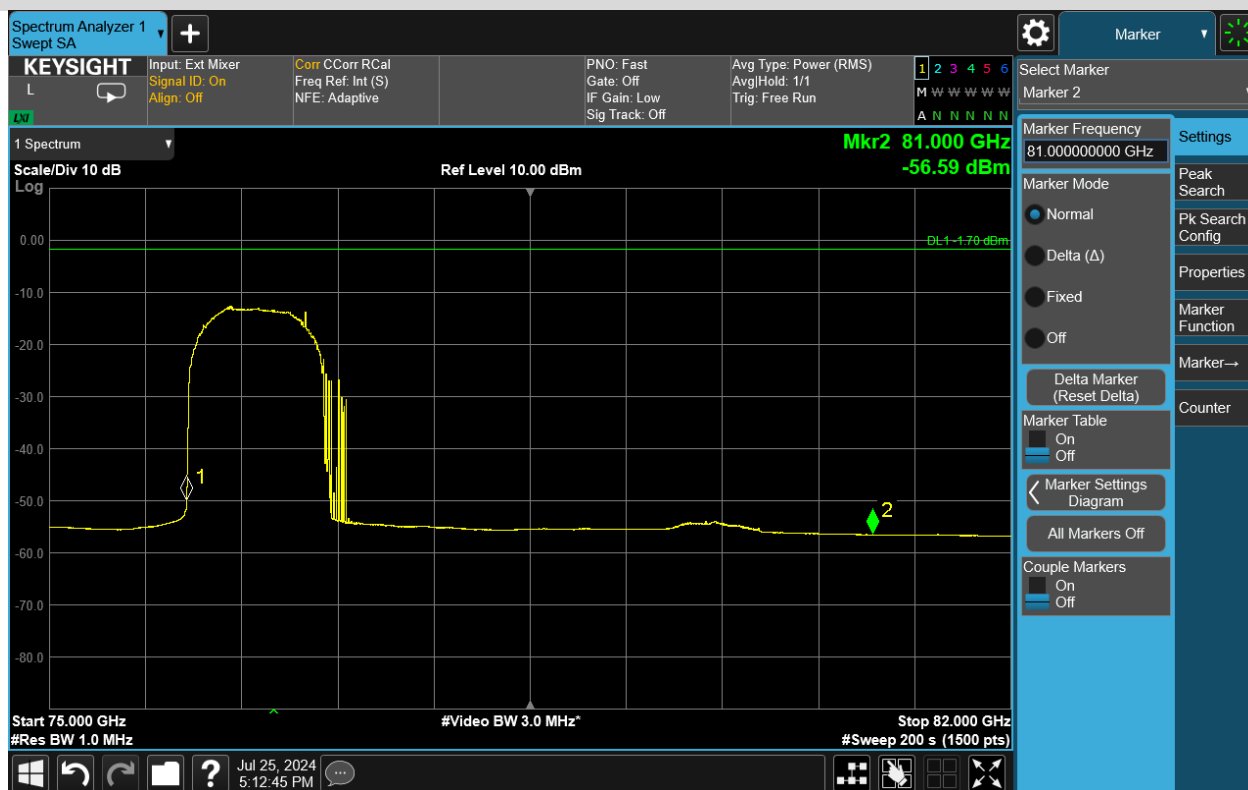


**Radiated Emission, 82 GHz to 90 GHz, Horizontal / Vertical Polarization**

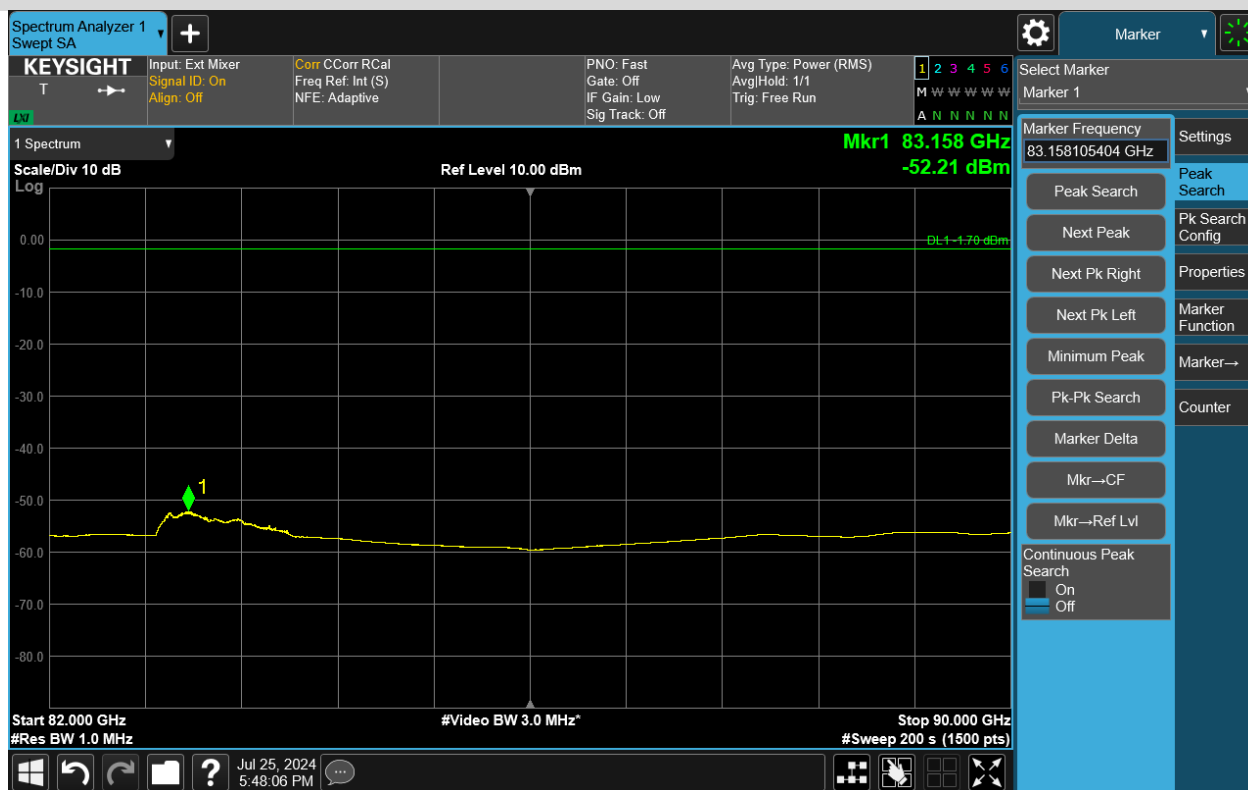


**Radiated Emission, 90 GHz to 140 GHz, Horizontal / Vertical Polarization**

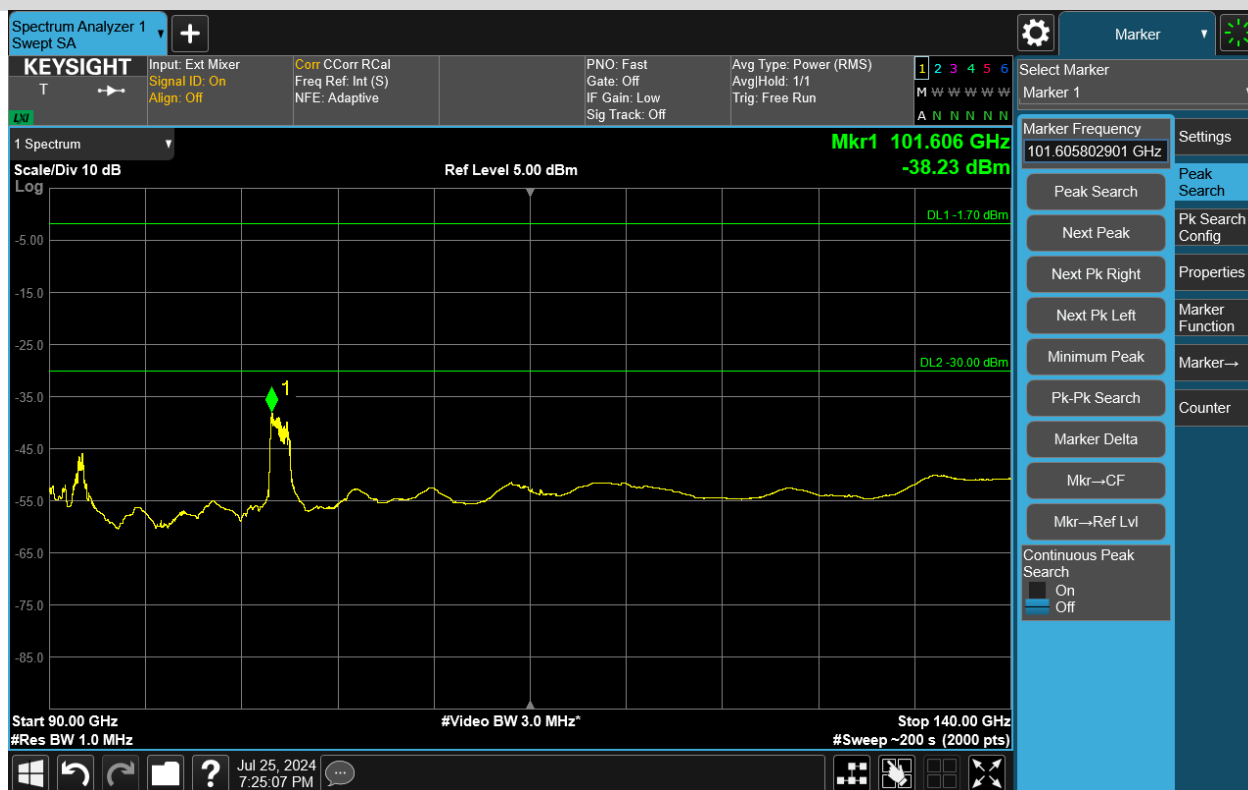


**Radiated Emission, 140 GHz to 200 GHz, Horizontal / Vertical Polarization**

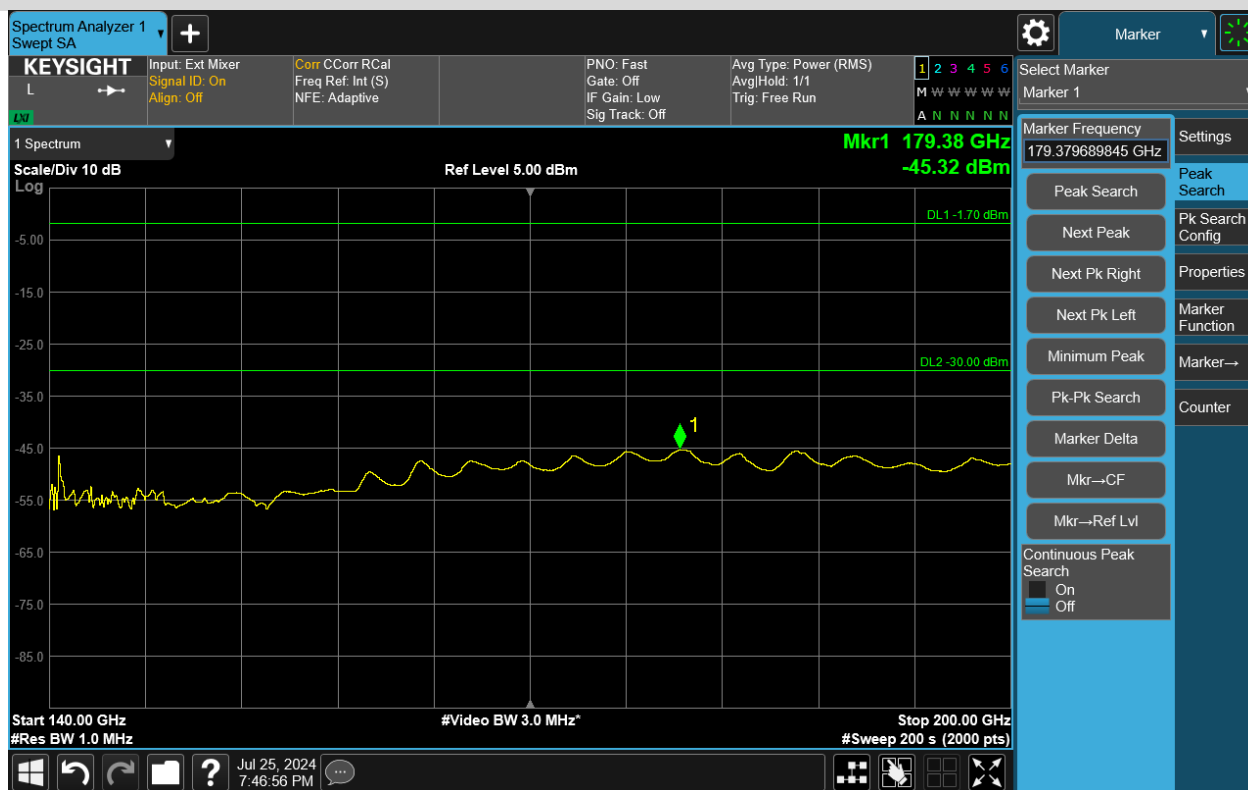

**Radiated Emission, 200 GHz to 220 GHz, Horizontal / Vertical Polarization**

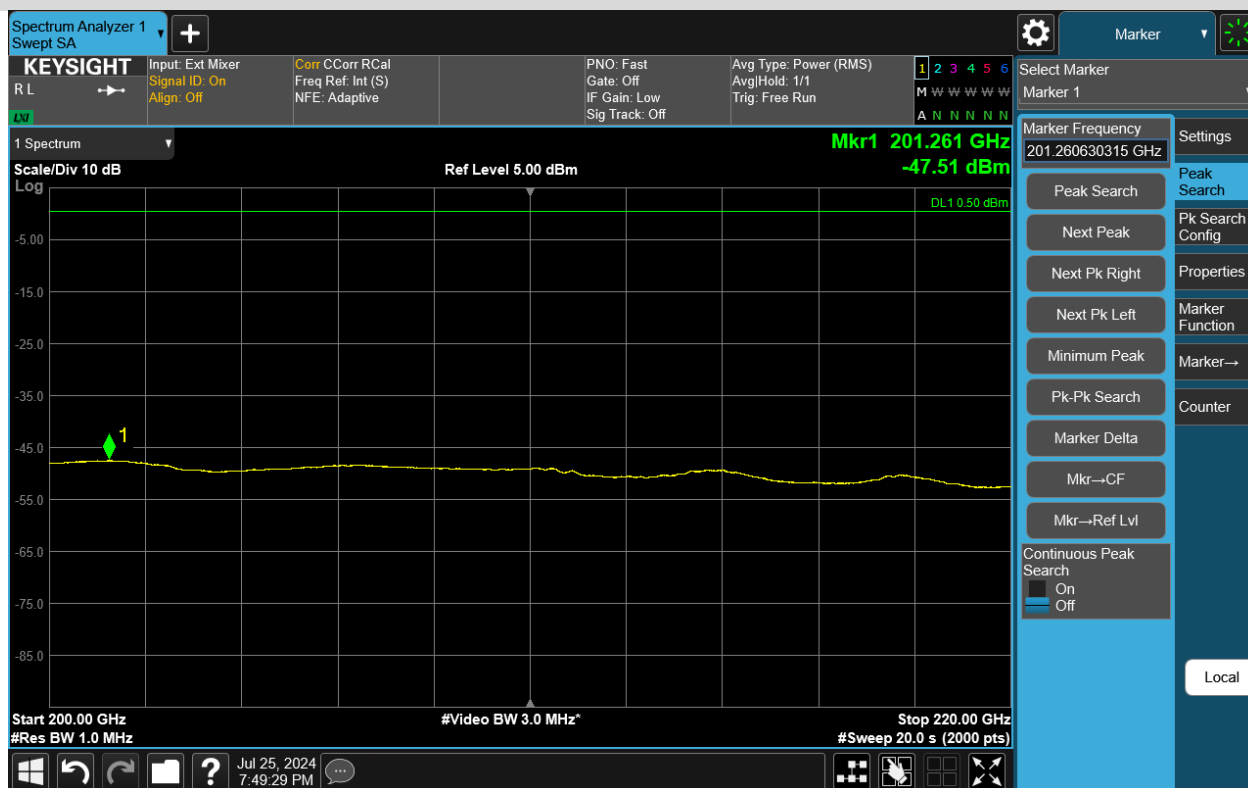

**Radiated Emission, 220 GHz to 240 GHz, Horizontal / Vertical Polarization**

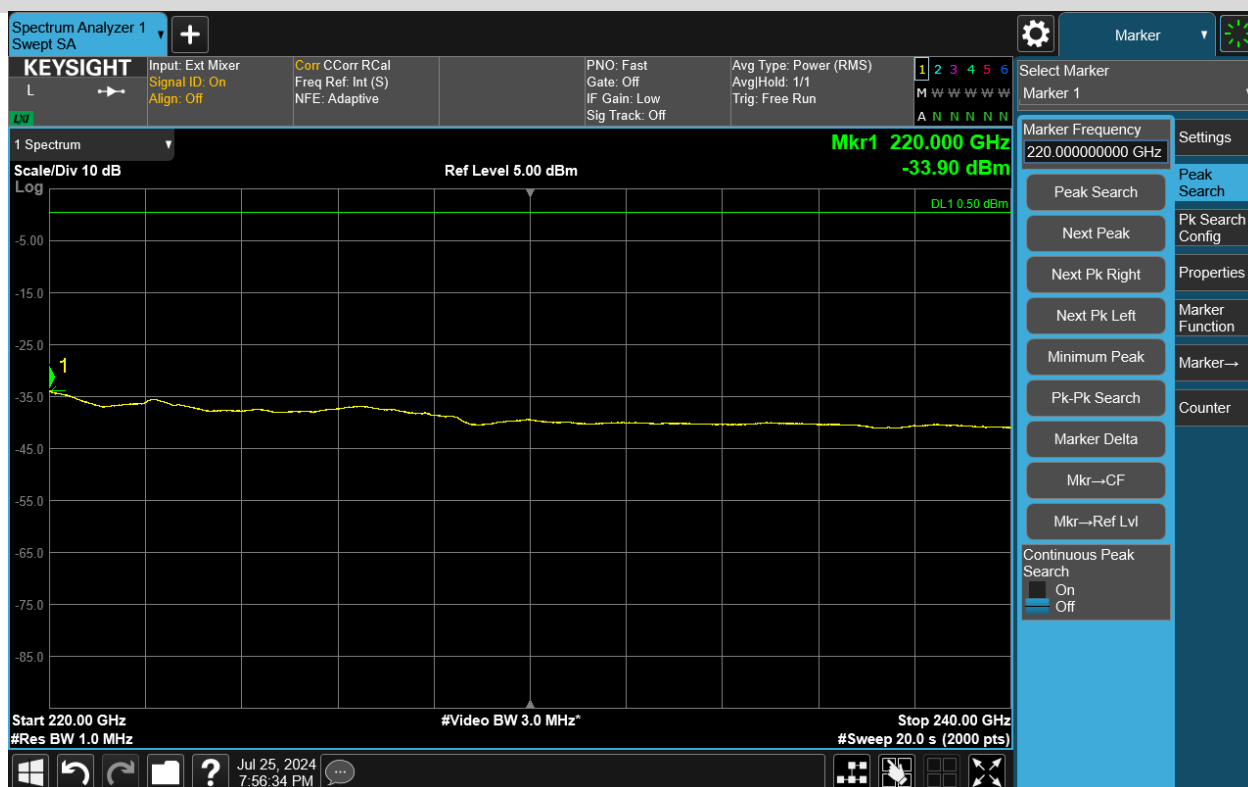

### 3.6 FREQUENCY STABILITY

#### 3.6.1 Description of Frequency Stability Measurement

According to § 95.3379 76 – 81 GHz Band Radar Service unwanted emission limits.

Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range  $-20$  to  $+50$  degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

According to §2.1055 Measurement required: Frequency Stability.

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

(1) From  $-30^{\circ}$  to  $+50^{\circ}$  centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

(2) From  $-20^{\circ}$  to  $+50^{\circ}$  centigrade for equipment to be licensed for use in the Maritime Services under part 80 of this chapter, except for Class A, B, and S Emergency Position Indicating Radiobeacons (EPIRBS), and equipment to be licensed for use above 952 MHz at operational fixed stations in all services, stations in the Local Television Transmission Service and Point-to-Point Microwave Radio Service under part 21 of this chapter, equipment licensed for use aboard aircraft in the Aviation Services under part 87 of this chapter, and equipment authorized for use in the Family Radio Service under part 95 of this chapter.

(3) From  $0^{\circ}$  to  $+50^{\circ}$  centigrade for equipment to be licensed for use in the Radio Broadcast Services under part 73 of this chapter.

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than  $10^{\circ}$  centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(c) The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

### 3.6.2 Measurement Procedure

| FREQUENCY STABILITY MEASUREMENT PARAMETER |                                                           |
|-------------------------------------------|-----------------------------------------------------------|
| Detector:                                 | Peak                                                      |
| Resolution bandwidth:                     | 1 MHz                                                     |
| Video bandwidth:                          | 3 MHz                                                     |
| Trace-Mode:                               | Max Hold                                                  |
| Sweep                                     | $\geq 2 * (\text{Span} / \text{RBW}) * \text{Cycle time}$ |

### 3.6.3 Test setup

See section 2.5 of this report.

### 3.6.4 Test results

| FREQUENCY STABILITY |                   |             |             |                |        |
|---------------------|-------------------|-------------|-------------|----------------|--------|
| Temperature<br>(°C) | Voltage<br>(Volt) | FL<br>(GHz) | FH<br>(GHz) | Limit<br>(GHz) | Result |
| 50                  | Normal<br>Voltage | 76.02305    | 76.99230    | 76-81GHz       | PASS   |
| 40                  |                   | 76.02415    | 76.99060    |                |        |
| 30                  |                   | 76.02325    | 76.99060    |                |        |
| 20                  |                   | 76.02155    | 76.99040    |                |        |
| 10                  |                   | 76.02425    | 76.99080    |                |        |
| 0                   |                   | 76.02205    | 76.99150    |                |        |
| -10                 |                   | 76.02375    | 76.99150    |                |        |
| -20                 |                   | 76.02445    | 76.99430    |                |        |
| -30                 |                   | 76.02465    | 76.99400    |                |        |
| 20                  | 115%              | 76.02395    | 76.99080    |                |        |
| 20                  | 85%               | 76.02275    | 76.99420    |                |        |

#### **4 PHOTOGRAPHS OF TEST SETUP**

Please refer to the attached file (Test Setup Photo).

## 5 PHOTOGRAPHS OF THE EUT

Please refer to the attached file (External Photos report and Internal Photos).

----- End of the Report -----

## Important

- (1) The test report is invalid without the official stamp of CVC;
- (2) Any part photocopies of the test report are forbidden without the written permission from CVC;
- (3) The test report is invalid without the signatures of Approval and Reviewer;
- (4) The test report is invalid if altered;
- (5) Objections to the test report must be submitted to CVC within 15 days.
- (6) Generally, commission test is responsible for the tested samples only.
- (7) As for the test result “-” or “N” means “not applicable”, “/” means “not test”, “P” means “pass” and “F” means “fail”

Address: No. 1301-14&16, Guanguang Road, Xinlan Community, Guanlan Subdistrict, Longhua District, Shenzhen, Guangdong, China

Post Code: 518110      Tel: 0755-23763060-8805

Fax: 0755-23763060      E-mail: sz-kf@cvc.org.cn

<http://www.cvc.org.cn>