

APPENDIX B - SAR PLOTS

Test Plot 1#: GSM 850 Mid Head Left Cheek

DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1

Communication System: UID 0, Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.996$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.9, 6.03, 5.83) @ 836.6 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Left Cheek/GSM 850 Mid/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.171 W/kg

Head Left Cheek/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.625 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.187 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.128 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 84%

Maximum value of SAR (measured) = 0.171 W/kg

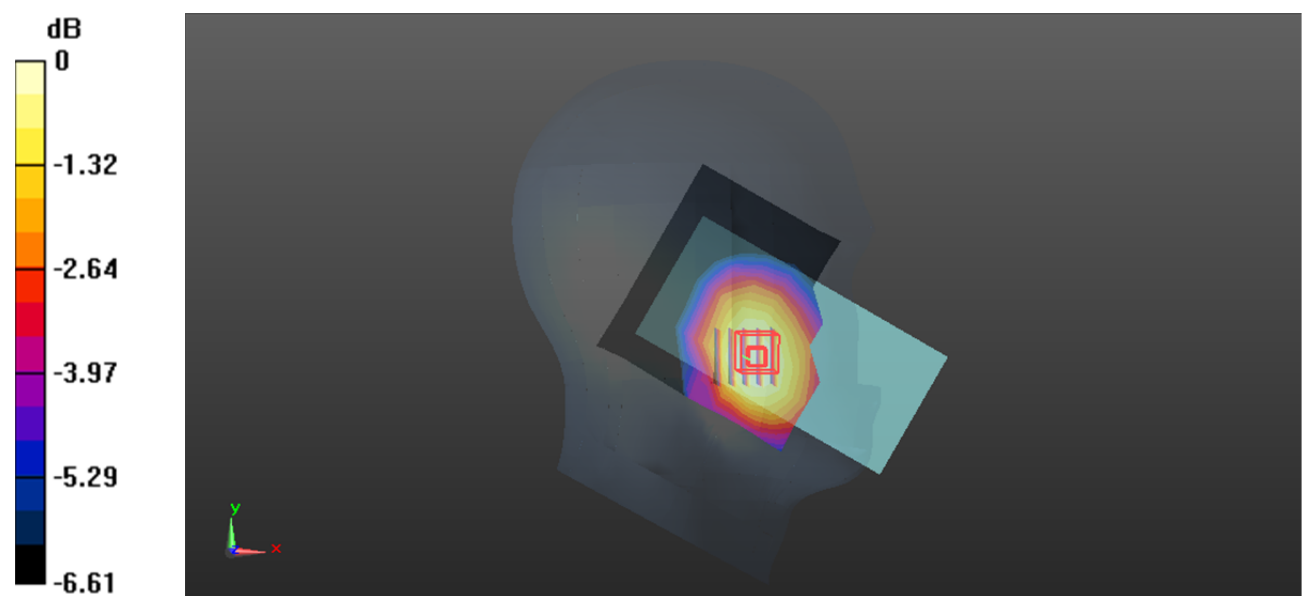

0 dB = 0.171 W/kg = -7.67 dBW/kg

Test Plot 2#: GSM 850 Mid Body Left**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.996$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.9, 6.03, 5.83) @ 836.6 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/GSM 850 Mid/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.355 W/kg

Body Left/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.18 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.237 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 71.2%

Maximum value of SAR (measured) = 0.400 W/kg

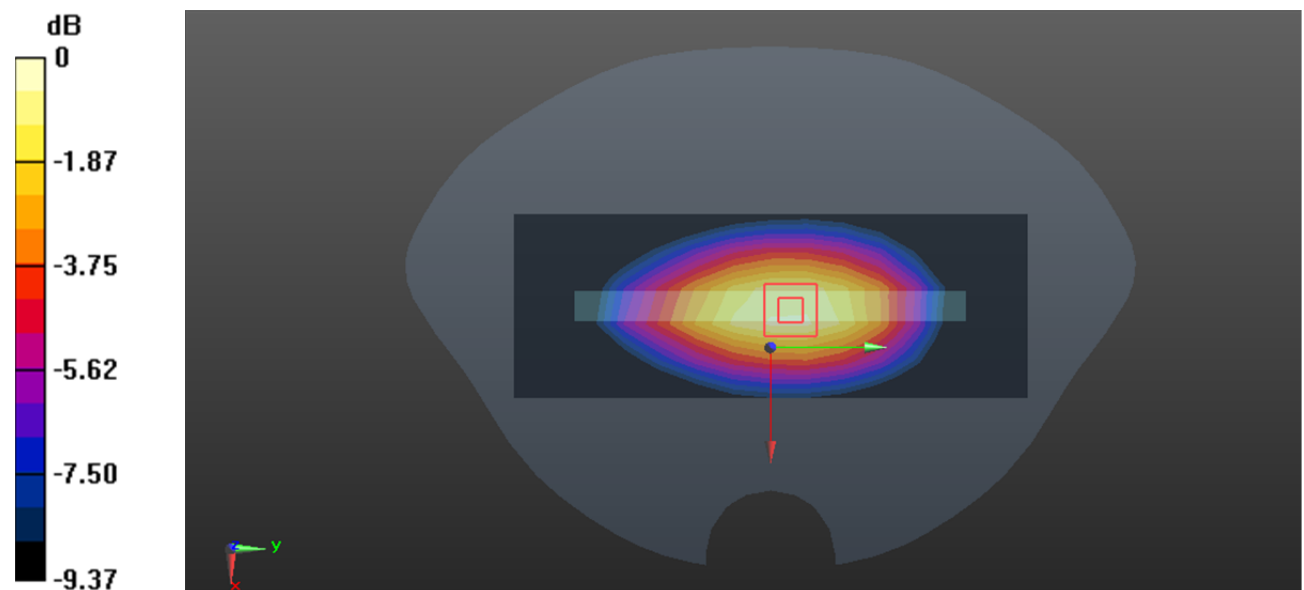

0 dB = 0.400 W/kg = -3.98 dBW/kg

Test Plot 3#: PCS 1900 Mid Head Right Cheek**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 39.409$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5, 5.12, 4.95) @ 1880 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Right Cheek/PCS 1900 Mid/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.118 W/kg

Head Right Cheek/PCS 1900 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.843 V/m; Power Drift = 0.18 dB


Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.063 W/kg

Smallest distance from peaks to all points 3 dB below = 12.3 mm

Ratio of SAR at M2 to SAR at M1 = 63%

Maximum value of SAR (measured) = 0.129 W/kg

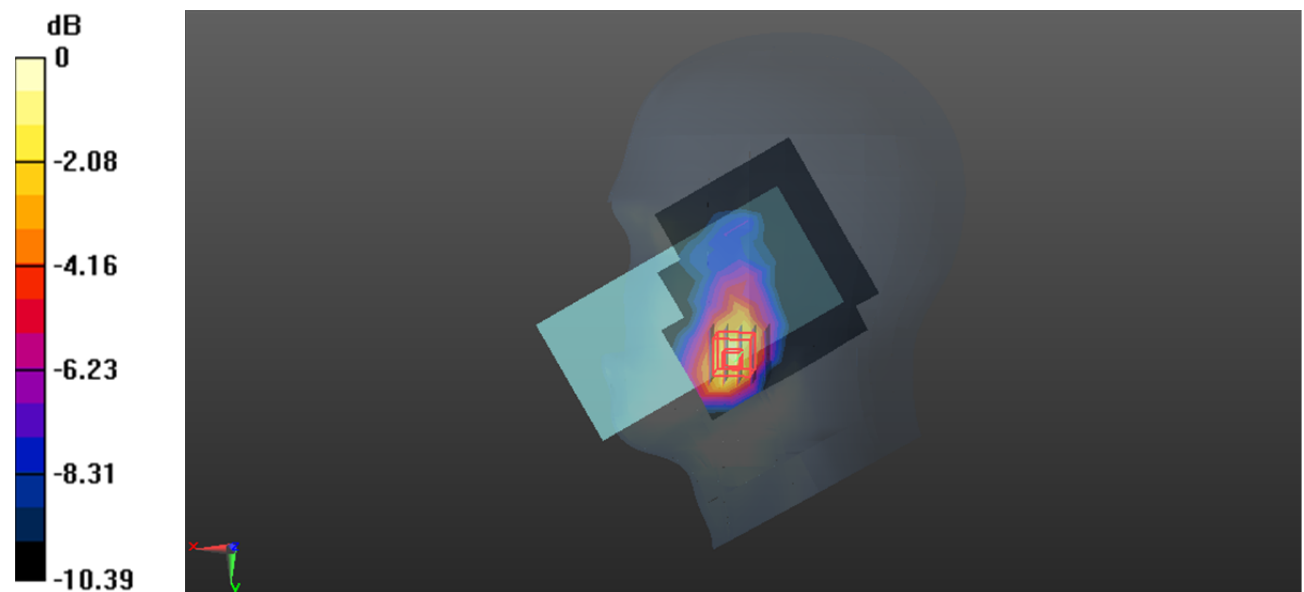

0 dB = 0.129 W/kg = -8.89 dBW/kg

Test Plot 4#: PCS 1900 Mid Body Bottom**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 39.409$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5, 5.12, 4.95) @ 1880 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Bottom/PCS 1900 Mid/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.445 W/kg

Body Bottom/PCS 1900 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.08 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.636 W/kg

SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.205 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 60.7%

Maximum value of SAR (measured) = 0.462 W/kg

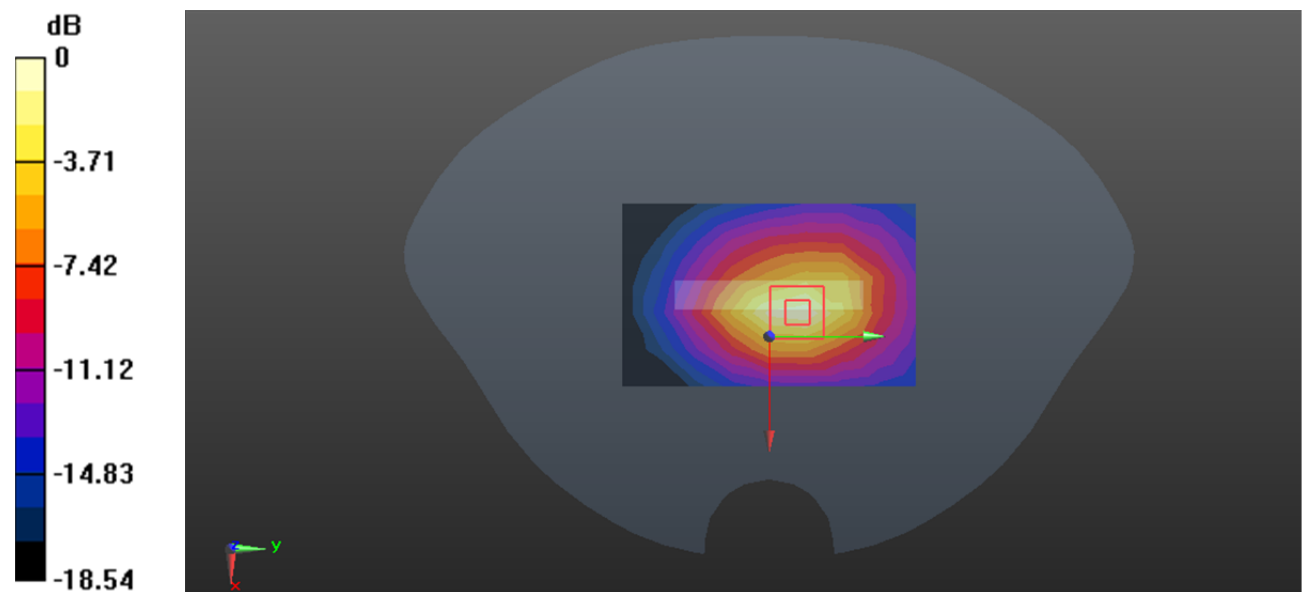

0 dB = 0.462 W/kg = -3.35 dBW/kg

Test Plot 5#: WCDMA Band 2 Mid Head Left Cheek**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 39.409$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5, 5.12, 4.95) @ 1880 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Left Cheek/WCDMA Band 2 Mid/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.113 W/kg

Head Left Cheek/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.143 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.061 W/kg

Smallest distance from peaks to all points 3 dB below = 16.8 mm

Ratio of SAR at M2 to SAR at M1 = 68.4%

Maximum value of SAR (measured) = 0.113 W/kg

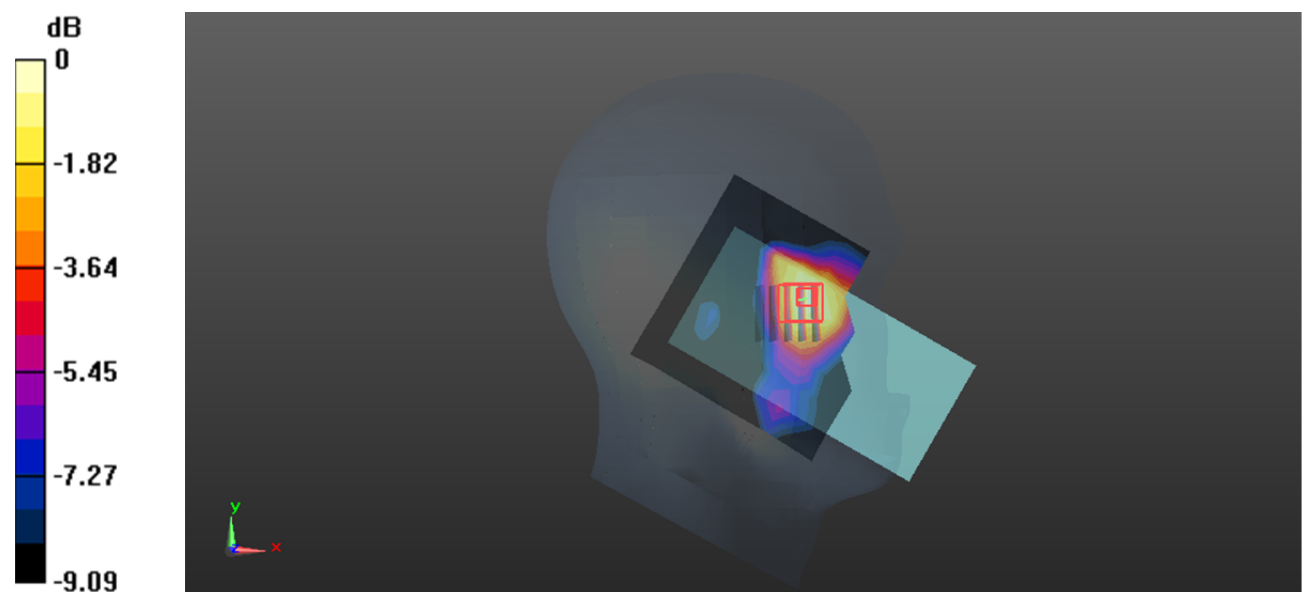

0 dB = 0.113 W/kg = -9.47 dBW/kg

Test Plot 6#: WCDMA Band 2 Mid Body Back**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 39.409$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5, 5.12, 4.95) @ 1880 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WCDMA Band 2 Mid/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.500 W/kg

Body Back/WCDMA Band 2 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.159 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.742 W/kg

SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.264 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 61.5%

Maximum value of SAR (measured) = 0.545 W/kg

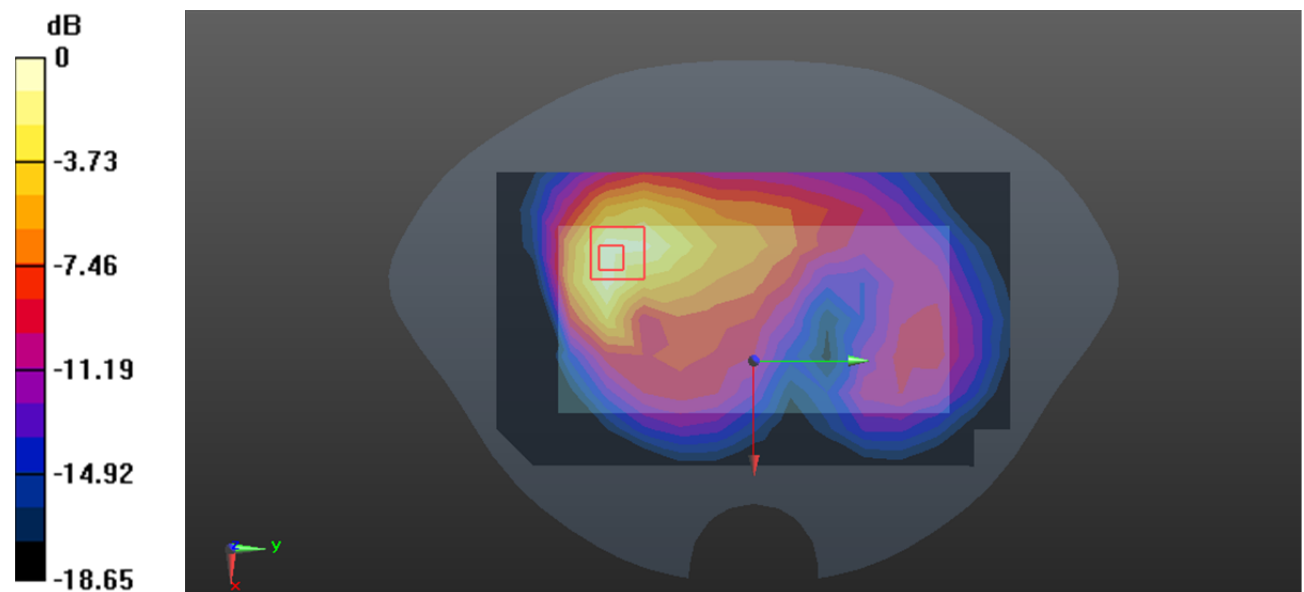

0 dB = 0.545 W/kg = -2.64 dBW/kg

Test Plot 7#: WCDMA Band 5 Mid Head Left Cheek**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.996$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.9, 6.03, 5.83) @ 836.6 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Left Cheek/WCDMA Band 5 Mid/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0422 W/kg

Head Left Cheek/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.363 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.0460 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.030 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 81.6%

Maximum value of SAR (measured) = 0.0408 W/kg

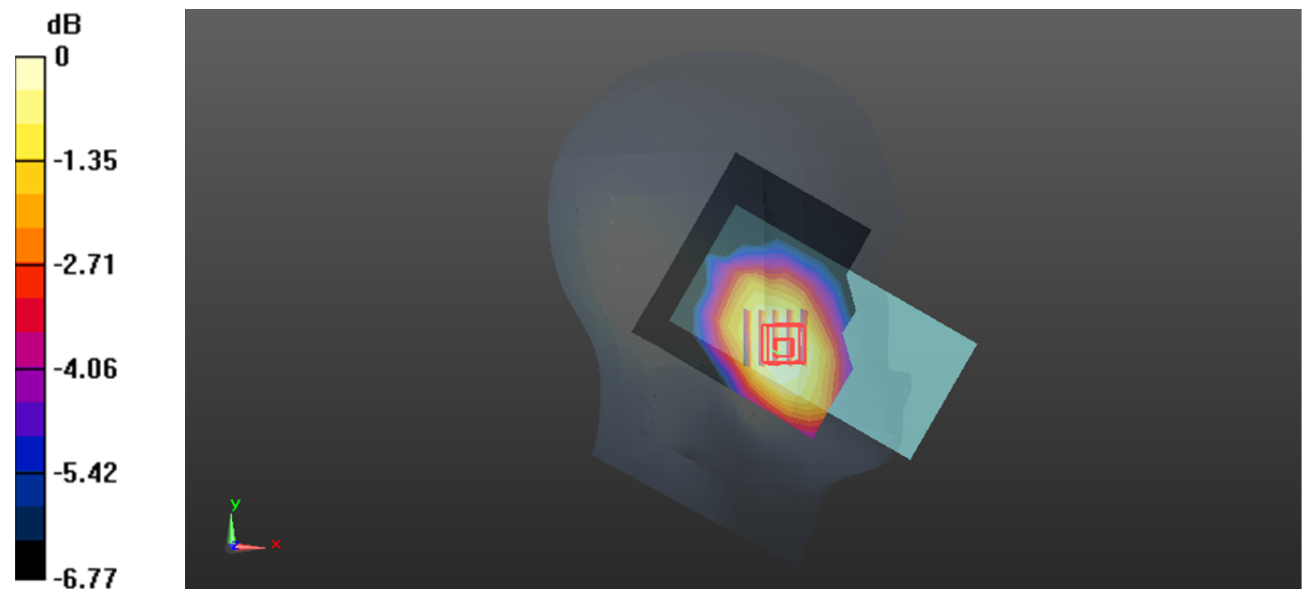

0 dB = 0.0408 W/kg = -13.89 dBW/kg

Test Plot 8#: WCDMA Band 5 Mid Body Back**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.996$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.9, 6.03, 5.83) @ 836.6 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/WCDMA Band 5 Mid/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.191 W/kg

Body Back/WCDMA Band 5 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.55 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.098 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 0.210 W/kg

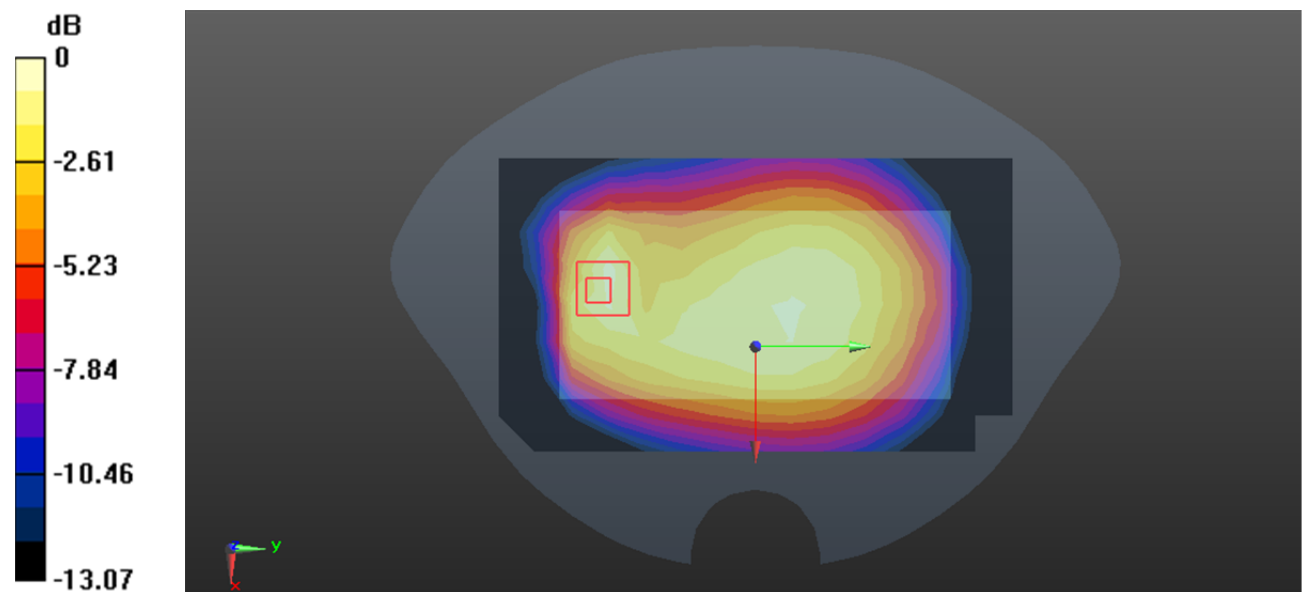

0 dB = 0.210 W/kg = -6.78 dBW/kg

Test Plot 9#: LTE Band 7 1RB Mid Head Left Tilt**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.861$ S/m; $\epsilon_r = 38.513$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.57, 4.67, 4.52) @ 2535 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Left Tilt/LTE Band 7 1RB Mid/Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.275 W/kg

Head Left Tilt/LTE Band 7 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.693 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.403 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.133 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 61.2%

Maximum value of SAR (measured) = 0.301 W/kg

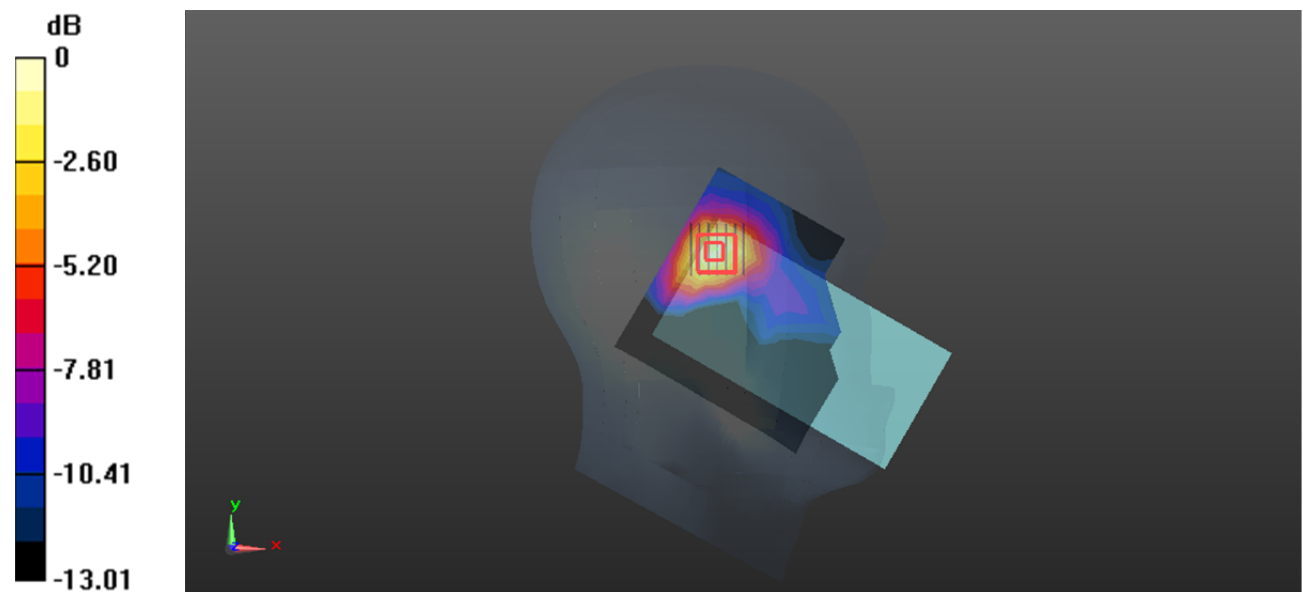

0 dB = 0.301 W/kg = -5.21 dBW/kg

Test Plot 10#: LTE Band 7 1RB Mid Body Back**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.861$ S/m; $\epsilon_r = 38.513$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.57, 4.67, 4.52) @ 2535 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 7 1RB Mid/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.783 W/kg

Body Back/LTE Band 7 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.916 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.712 W/kg; SAR(10 g) = 0.352 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 0.911 W/kg

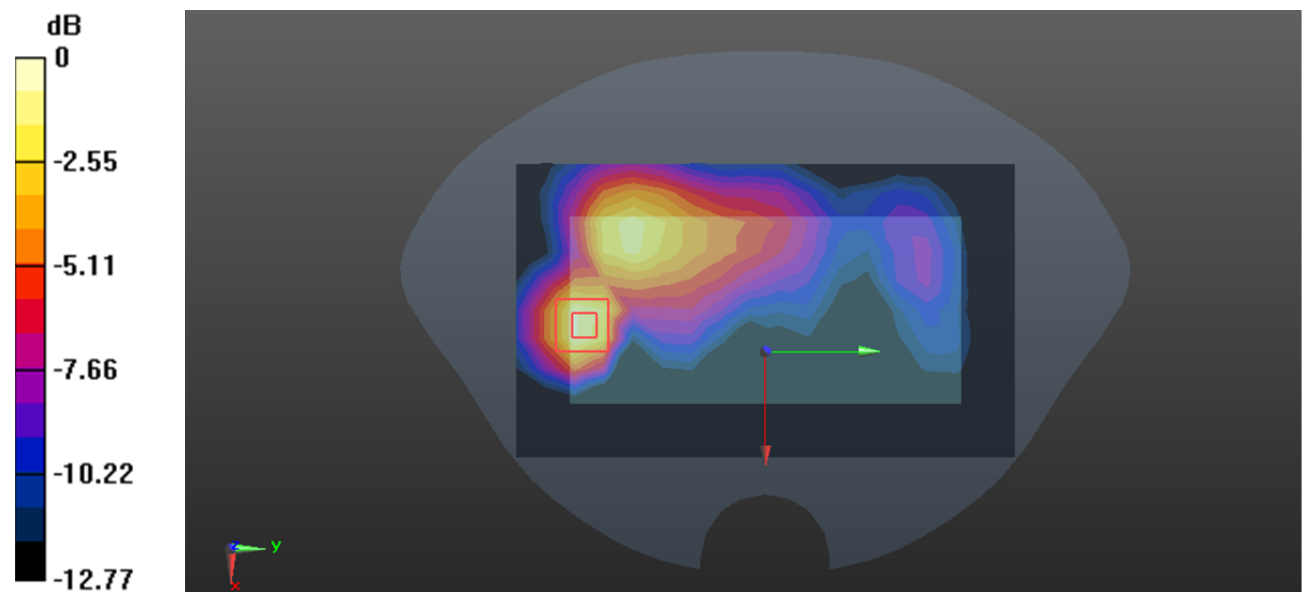

0 dB = 0.911 W/kg = -0.40 dBW/kg

Test Plot 11#: LTE Band 12 1RB Mid Head Right Cheek**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 43.538$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.14, 6.28, 6.07) @ 707.5 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Right Cheek/LTE Band 12 1RB Mid/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0159 W/kg

Head Right Cheek/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.7640 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.0170 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00977 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 83.9%

Maximum value of SAR (measured) = 0.0151 W/kg

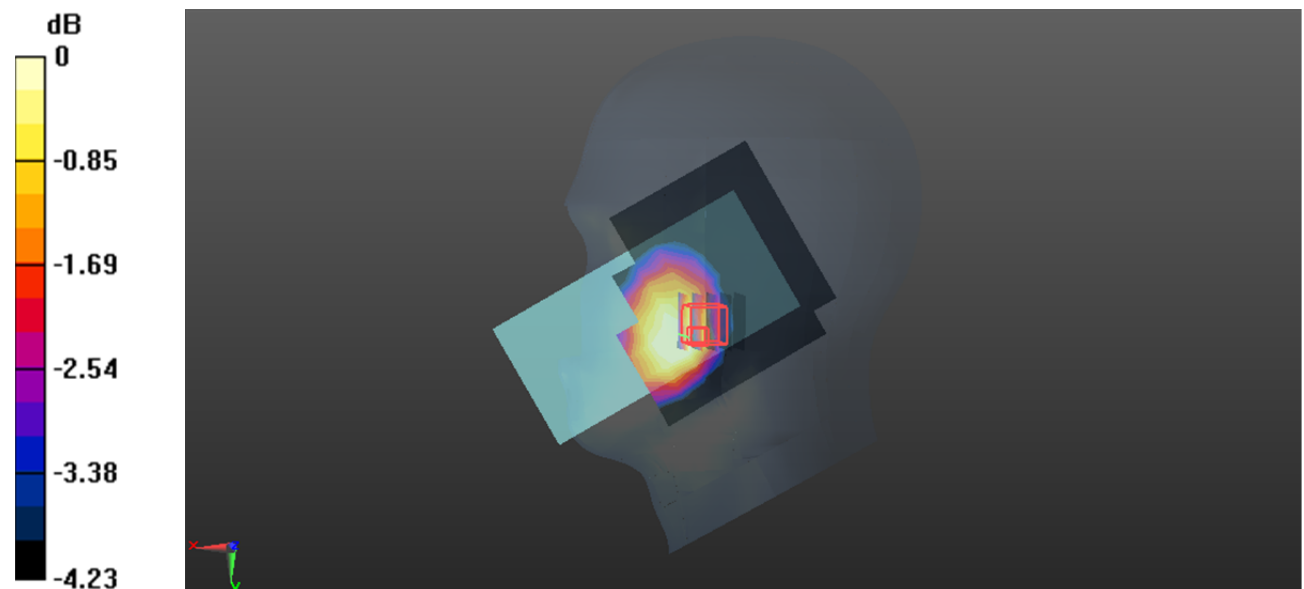

0 dB = 0.0151 W/kg = -18.21 dBW/kg

Test Plot 12#: LTE Band 12 1RB Mid Body Back**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 43.538$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(6.14, 6.28, 6.07) @ 707.5 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 12 1RB Mid/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0643 W/kg

Body Back/LTE Band 12 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.613 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.0710 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.047 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 82.2%

Maximum value of SAR (measured) = 0.0633 W/kg

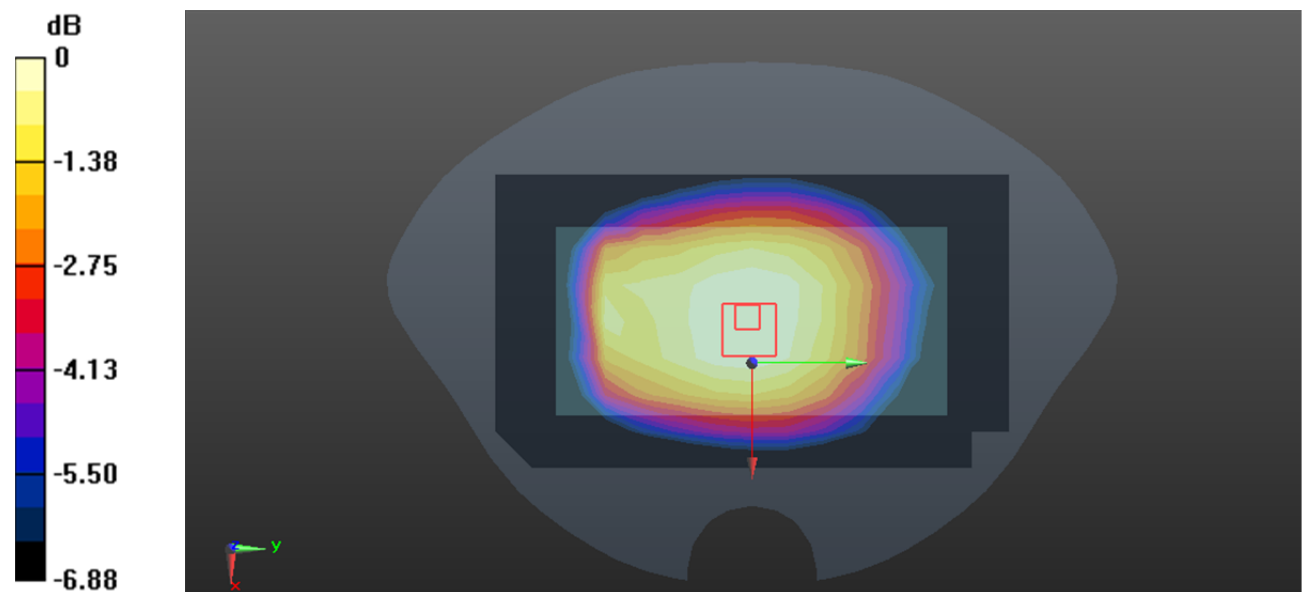

0 dB = 0.0633 W/kg = -11.99 dBW/kg

Test Plot 13#: LTE Band 25 1RB Mid Head Right Cheek**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 39.407$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5, 5.12, 4.95) @ 1882.5 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Right Cheek/LTE Band 25 1RB Mid/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.108 W/kg

Head Right Cheek/LTE Band 25 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.021 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.057 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 60.1%

Maximum value of SAR (measured) = 0.119 W/kg

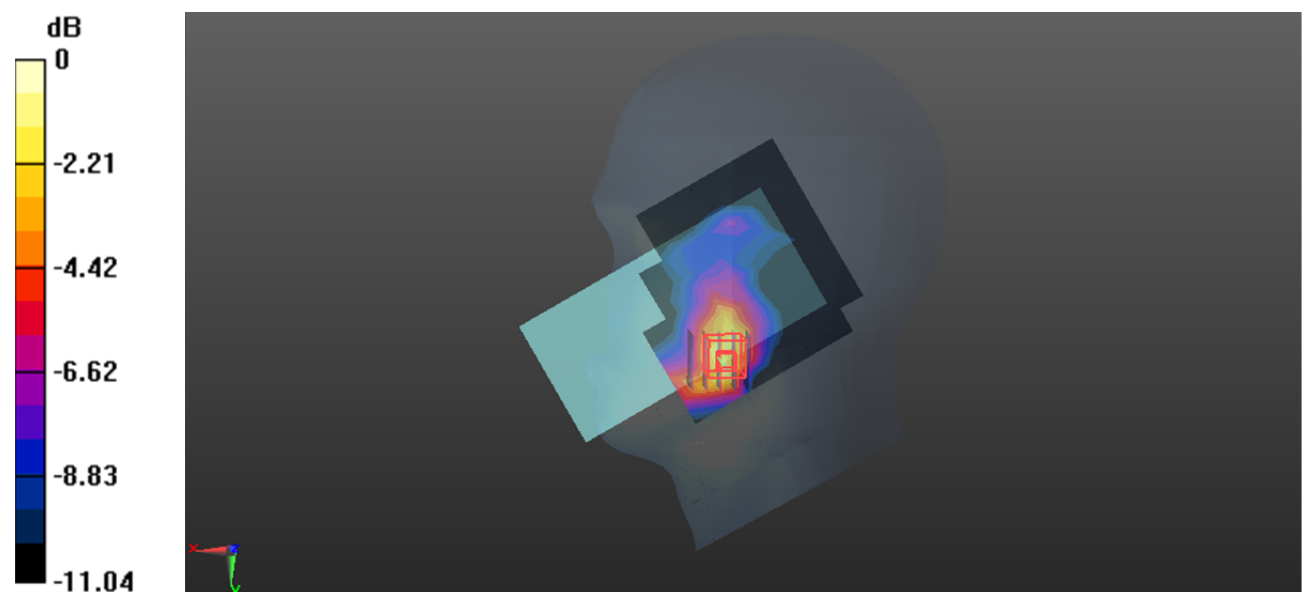

0 dB = 0.119 W/kg = -9.24 dBW/kg

Test Plot 14#: LTE Band 25 1RB Mid Body Back**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.376$ S/m; $\epsilon_r = 39.407$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5, 5.12, 4.95) @ 1882.5 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 25 1RB Mid/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.467 W/kg

Body Back/LTE Band 25 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.582 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.648 W/kg

SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.235 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 61.2%

Maximum value of SAR (measured) = 0.479 W/kg

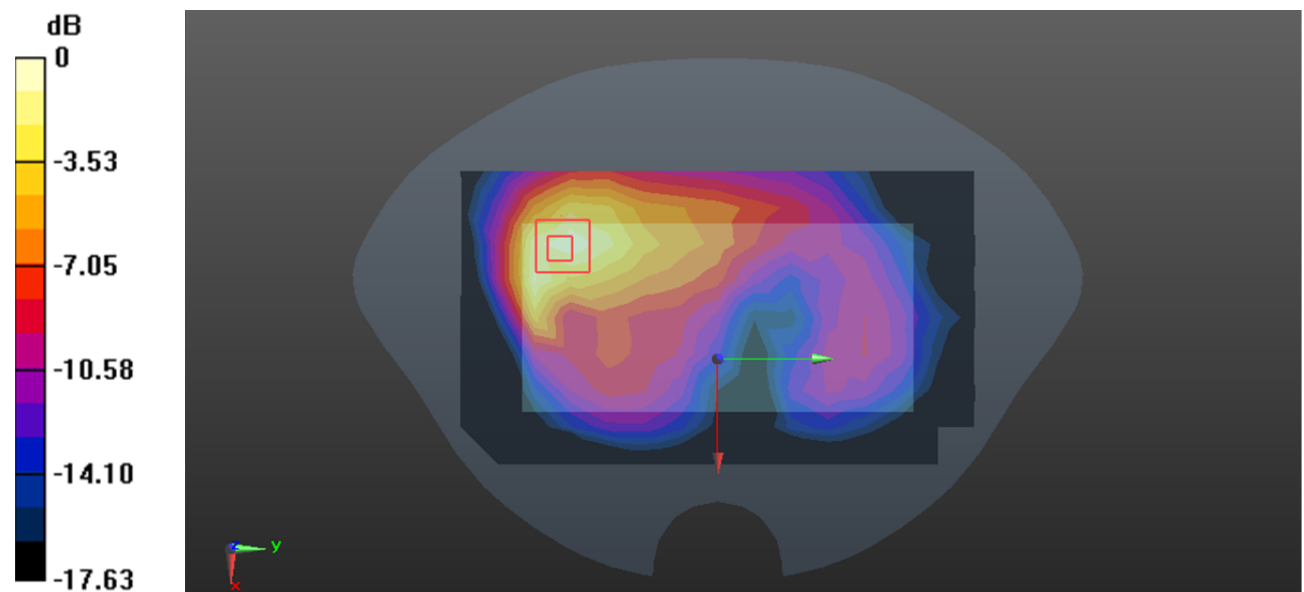

0 dB = 0.479 W/kg = -3.20 dBW/kg

Test Plot 15#: LTE Band 26 1RB Mid Head Left Cheek**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 43.04$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.9, 6.03, 5.83) @ 831.5 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Left Cheek/LTE Band 26 1RB Mid/Area Scan (9x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0655 W/kg

Head Left Cheek/LTE Band 26 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.088 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.0720 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.049 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 84.4%

Maximum value of SAR (measured) = 0.0649 W/kg

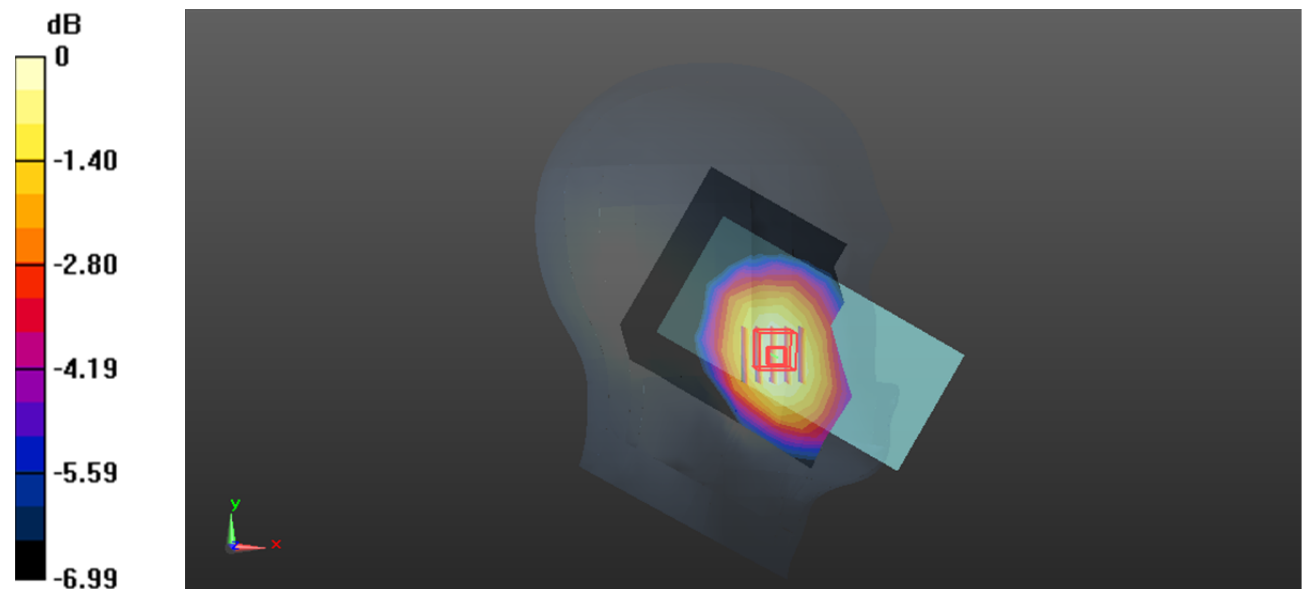

0 dB = 0.0649 W/kg = -11.88 dBW/kg

Test Plot 16#: LTE Band 26 1RB Mid Body Back**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 43.04$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.9, 6.03, 5.83) @ 831.5 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 26 1RB Mid/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.234 W/kg

Body Back/LTE Band 26 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.17 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.343 W/kg

SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.102 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 0.220 W/kg

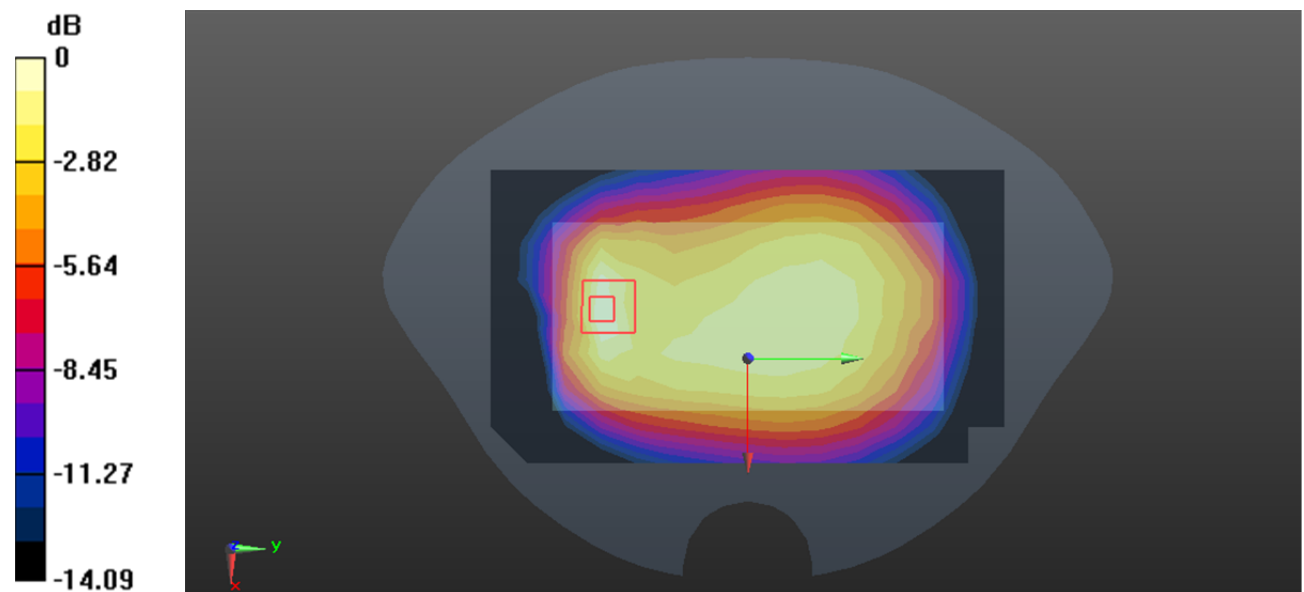

0 dB = 0.220 W/kg = -6.58 dBW/kg

Test Plot 17#: LTE Band 41 1RB Mid Head Left Tilt**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.927$ S/m; $\epsilon_r = 38.414$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.57, 4.67, 4.52) @ 2593 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Left Tilt/LTE Band 41 1RB Mid/Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.156 W/kg

Head Left Tilt/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.085 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.075 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.8%

Maximum value of SAR (measured) = 0.173 W/kg

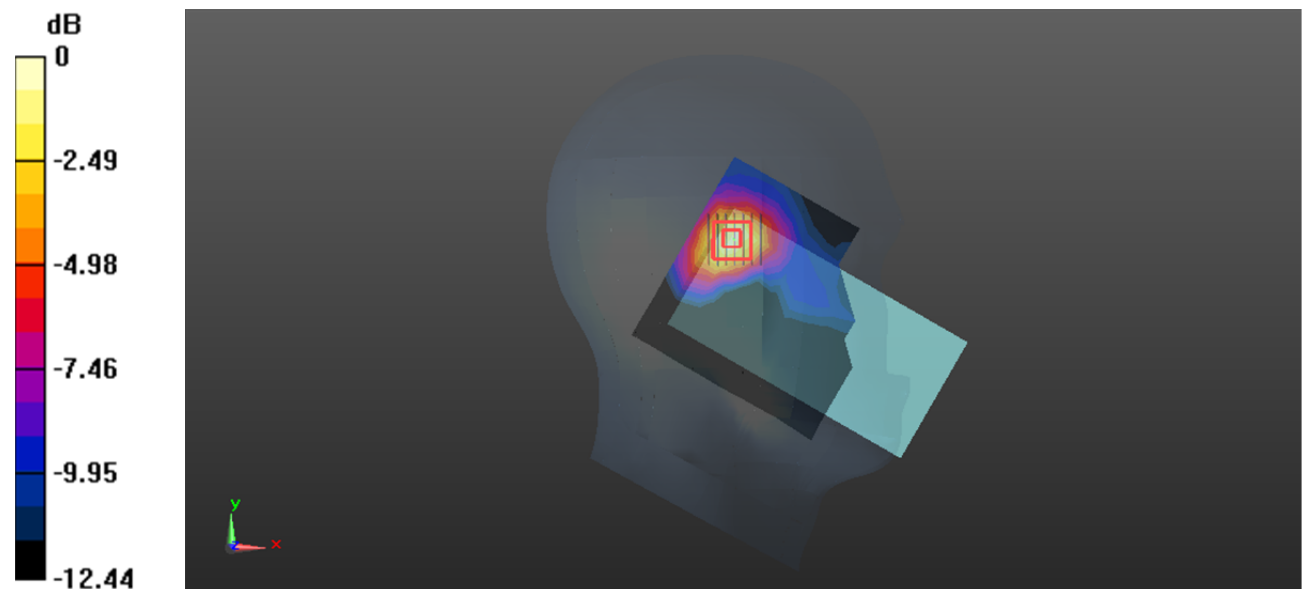

0 dB = 0.173 W/kg = -7.62 dBW/kg

Test Plot 18#: LTE Band 41 1RB Mid Body Back**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.927$ S/m; $\epsilon_r = 38.414$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(4.57, 4.67, 4.52) @ 2593 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 41 1RB Mid/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.450 W/kg

Body Back/LTE Band 41 1RB Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.3910 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.696 W/kg

SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.9%

Maximum value of SAR (measured) = 0.477 W/kg

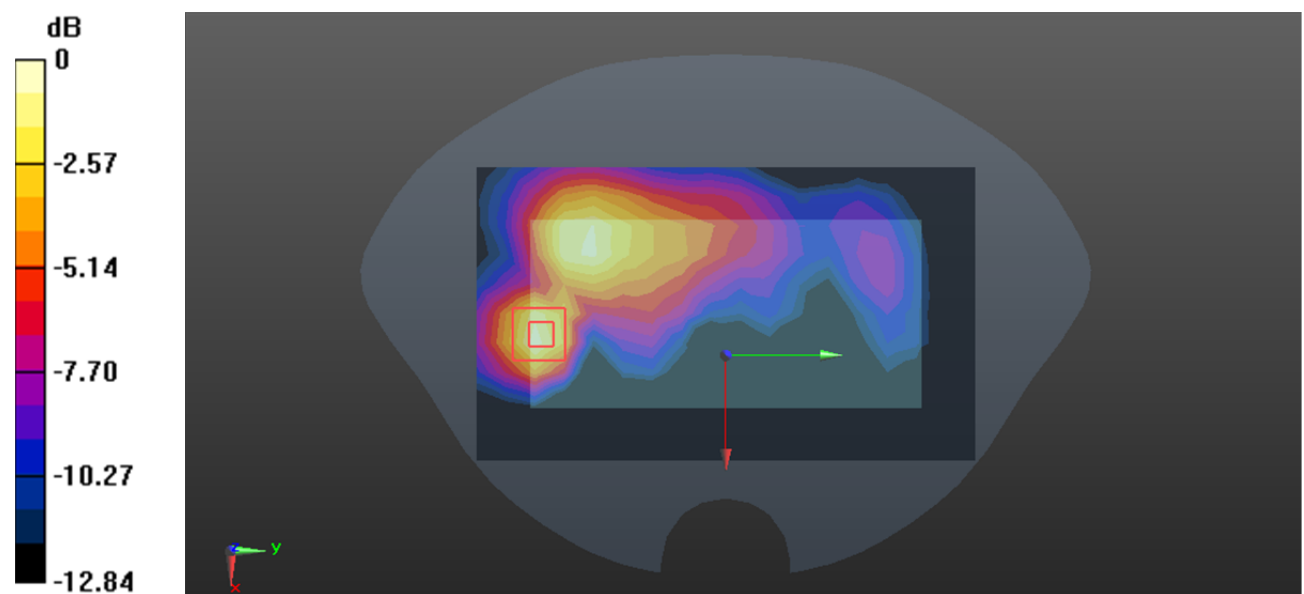

0 dB = 0.477 W/kg = -3.21 dBW/kg

Test Plot 19#: LTE Band 66 1RB Mid Head Right Cheek**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 38.924$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.16, 5.28, 5.1) @ 1745 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Right Cheek/LTE Band 66 1RB Mid/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.156 W/kg

Head Right Cheek/LTE Band 66 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.864 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.204 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.096 W/kg

Smallest distance from peaks to all points 3 dB below = 13.4 mm

Ratio of SAR at M2 to SAR at M1 = 70.9%

Maximum value of SAR (measured) = 0.164 W/kg

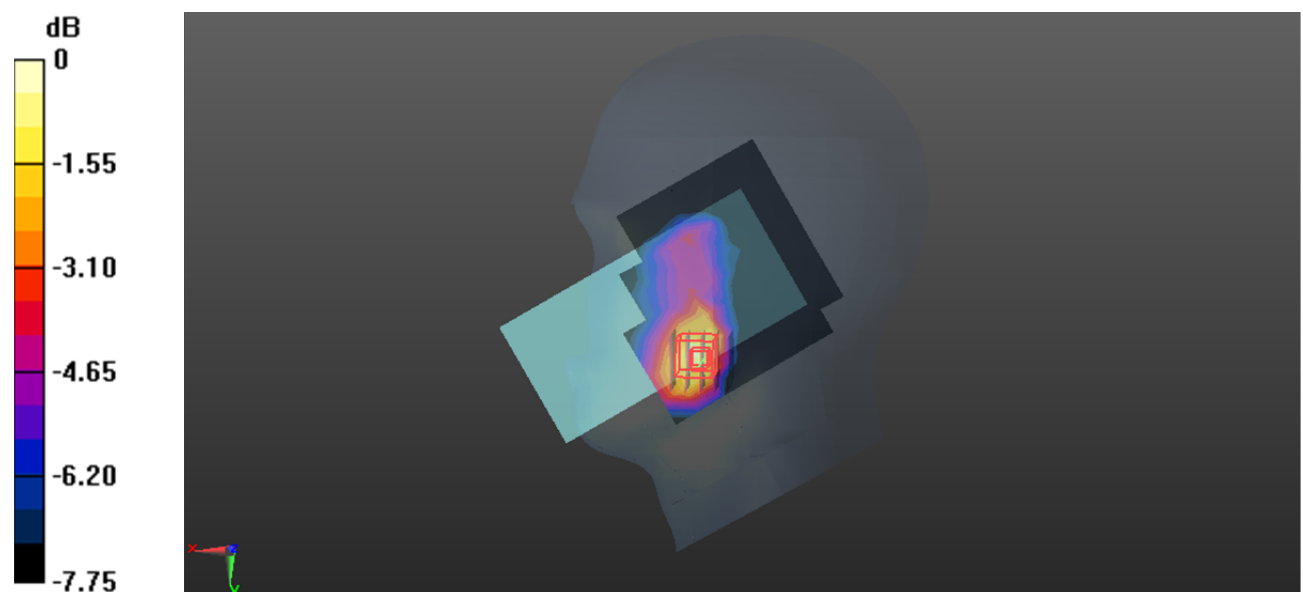

0 dB = 0.164 W/kg = -7.85 dBW/kg

Test Plot 20#: LTE Band 66 1RB Mid Body Back**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.357$ S/m; $\epsilon_r = 38.924$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3220; ConvF(5.16, 5.28, 5.1) @ 1745 MHz; Calibrated: 2025/12/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/LTE Band 66 1RB Mid/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.675 W/kg

Body Back/LTE Band 66 1RB Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.194 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.880 W/kg

SAR(1 g) = 0.575 W/kg; SAR(10 g) = 0.352 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 65%

Maximum value of SAR (measured) = 0.688 W/kg

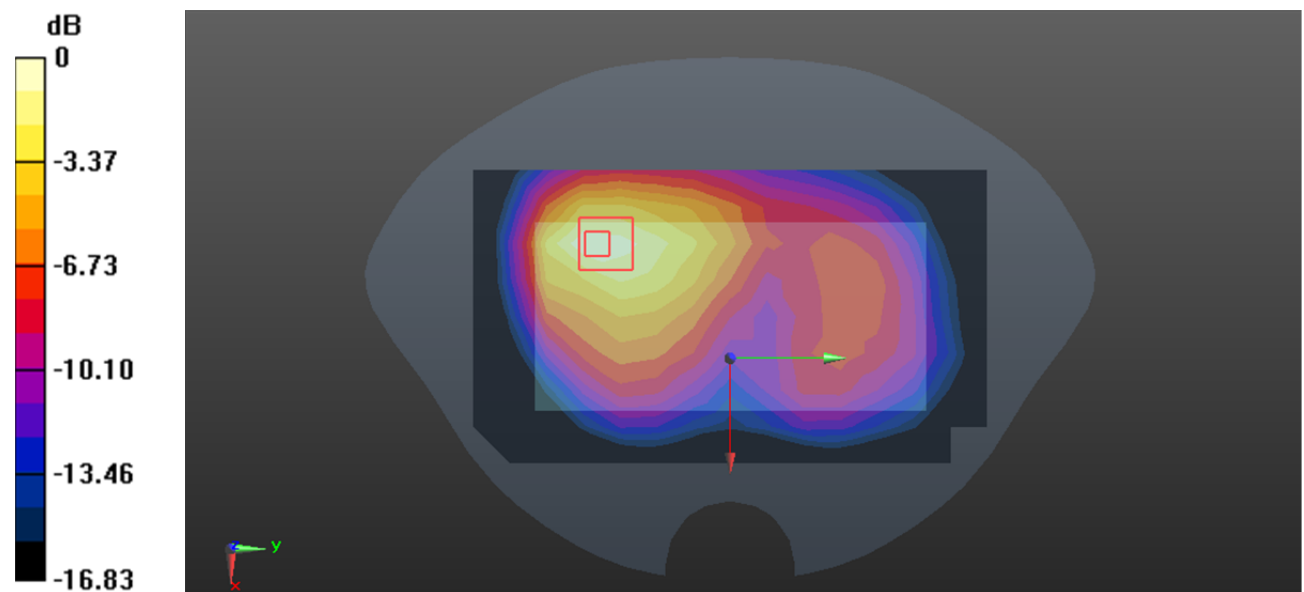

0 dB = 0.688 W/kg = -1.62 dBW/kg

Test Plot 21#: 2.4G WLAN Mid Head Right Cheek**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 38.629$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.77, 7.77, 7.77) @ 2437 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Right Cheek/2.4G WLAN Mid/Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.09 W/kg

Head Right Cheek/2.4G WLAN Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.05 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.772 W/kg; SAR(10 g) = 0.432 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 1.12 W/kg

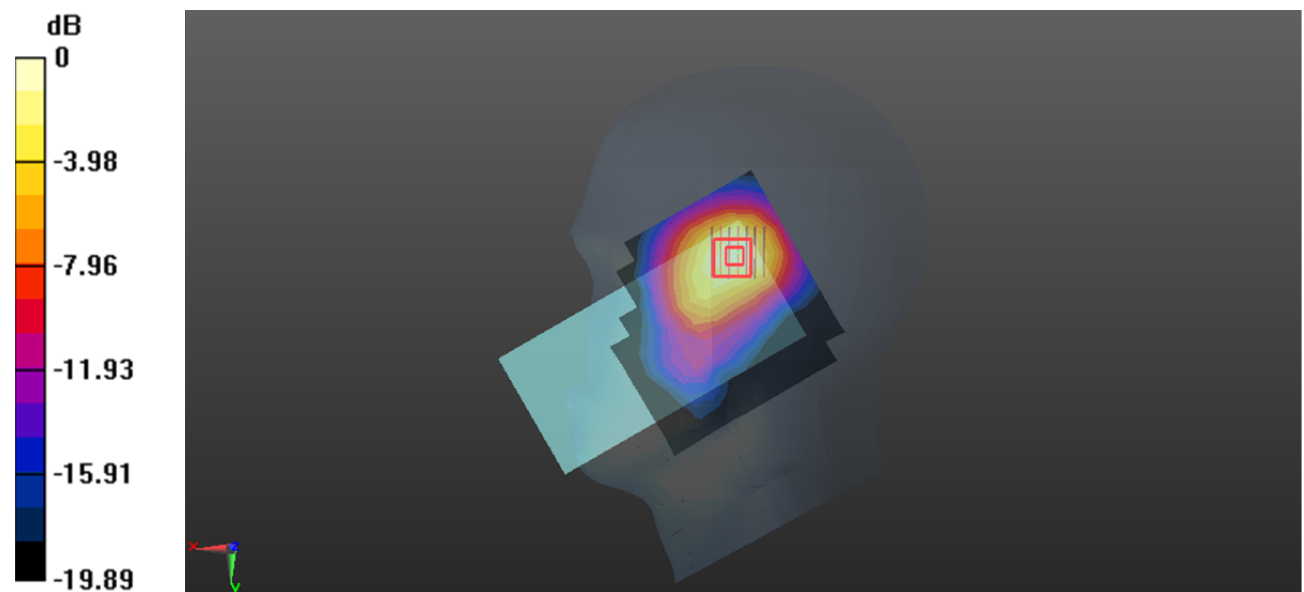

0 dB = 1.12 W/kg = 0.49 dBW/kg

Test Plot 22#: 2.4G WLAN Mid Body Left**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.823$ S/m; $\epsilon_r = 38.629$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.77, 7.77, 7.77) @ 2437 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Left/2.4G WLAN Mid/Area Scan (7x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.468 W/kg

Body Left/2.4G WLAN Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.570 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.594 W/kg

SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.176 W/kg

Smallest distance from peaks to all points 3 dB below = 13 mm

Ratio of SAR at M2 to SAR at M1 = 55.3%

Maximum value of SAR (measured) = 0.498 W/kg

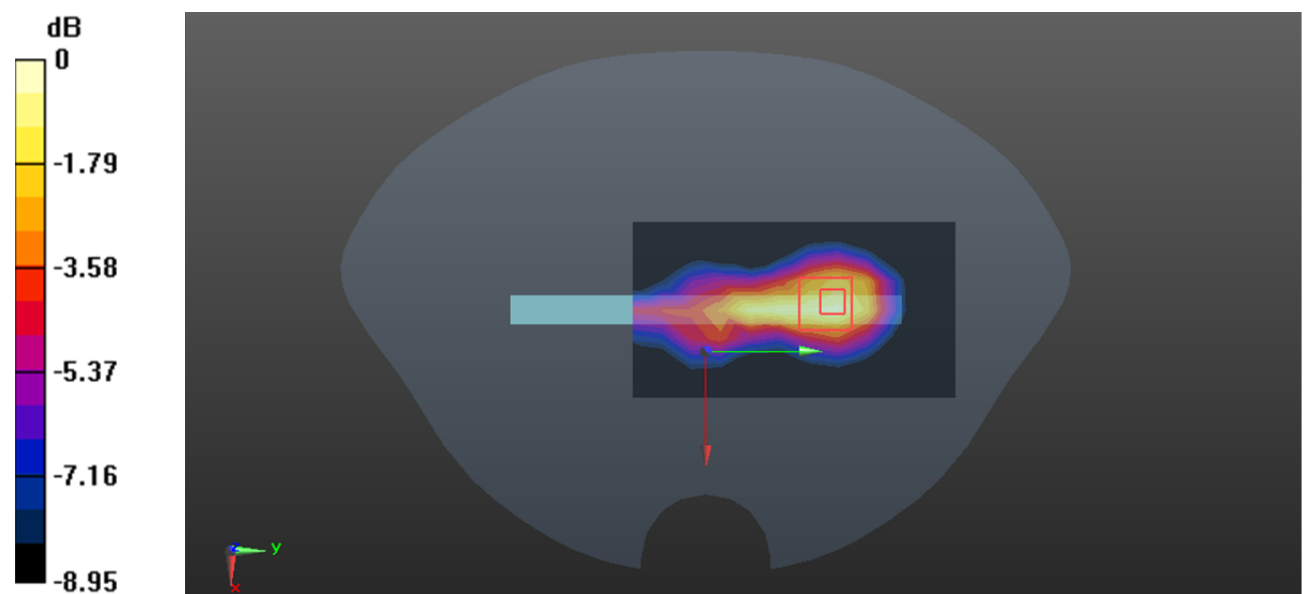

0 dB = 0.498 W/kg = -3.03 dBW/kg

Test Plot 23#: 5.2G WLAN Mid Head Right Tilt**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.546$ S/m; $\epsilon_r = 35.145$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.42, 5.42, 5.42) @ 5200 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Right Tilt/5.2G WLAN Mid/Area Scan (13x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.760 W/kg

Head Right Tilt/5.2G WLAN Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.338 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.348 W/kg; SAR(10 g) = 0.120 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.3%

Maximum value of SAR (measured) = 0.790 W/kg

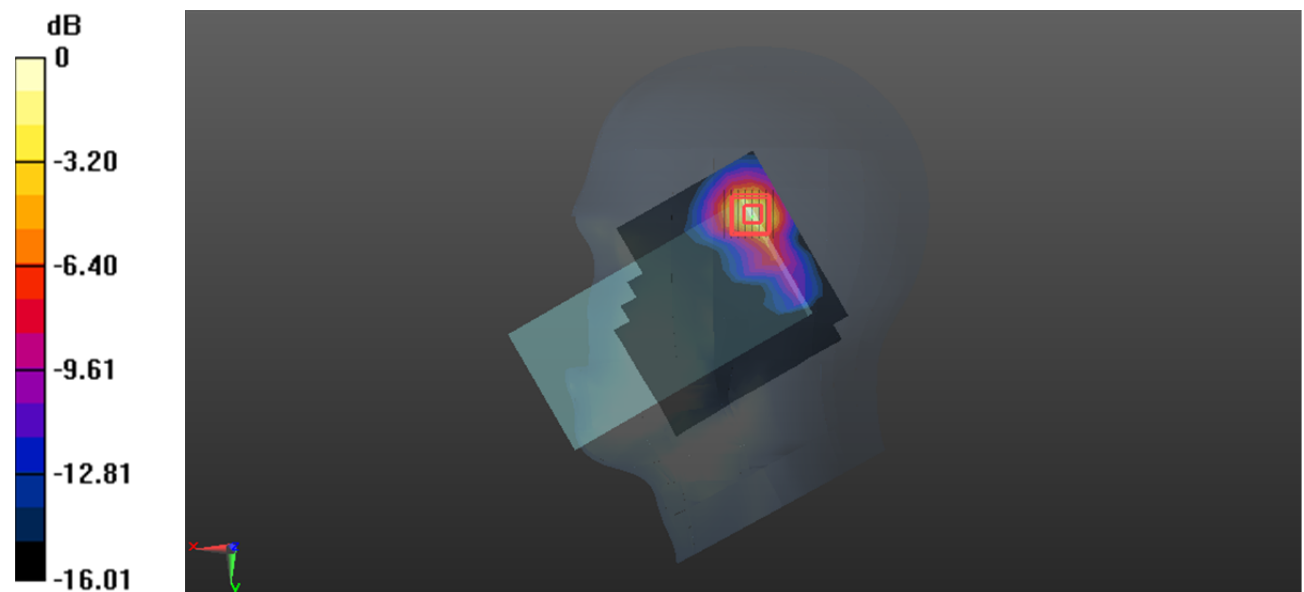

0 dB = 0.790 W/kg = -1.02 dBW/kg

Test Plot 24#: 5.2G WLAN Mid Body Back**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, 802.11a (0); Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.546$ S/m; $\epsilon_r = 35.145$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.42, 5.42, 5.42) @ 5200 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/5.2G WLAN Mid/Area Scan (13x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.809 W/kg

Body Back/5.2G WLAN Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.787 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.119 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.4%

Maximum value of SAR (measured) = 0.770 W/kg

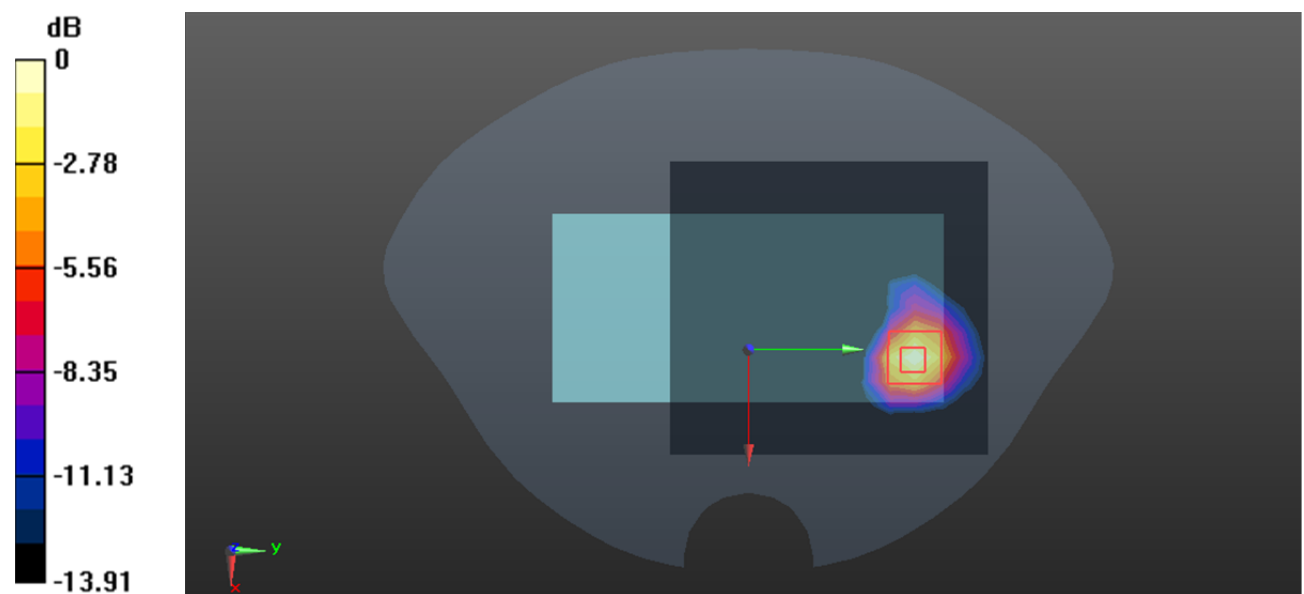

0 dB = 0.770 W/kg = -1.14 dBW/kg

Test Plot 25#: 5.3G WLAN Mid Head Right Cheek**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, 802.11a (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.614$ S/m; $\epsilon_r = 34.937$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.42, 5.42, 5.42) @ 5280 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Right Cheek/5.3G WLAN Mid/Area Scan (13x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.664 W/kg

Head Right Cheek/5.3G WLAN Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.066 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.092 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 57.2%

Maximum value of SAR (measured) = 0.677 W/kg

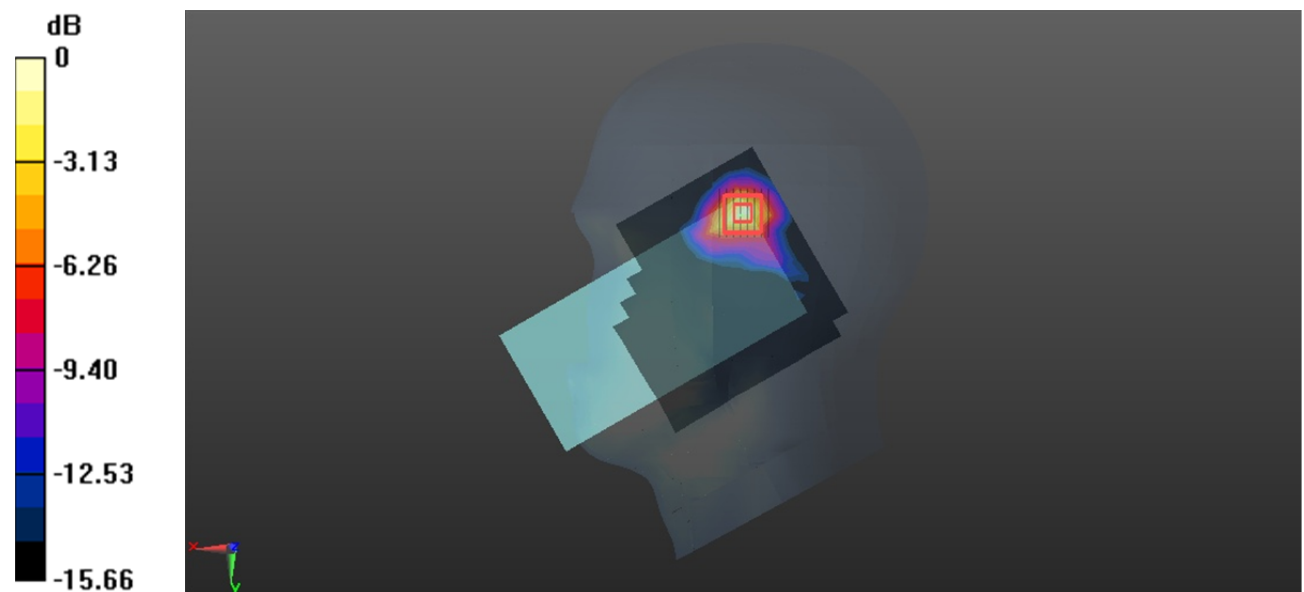

0 dB = 0.677 W/kg = -1.69 dBW/kg

Test Plot 26#: 5.3G WLAN Mid Body Back**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, 802.11a (0); Frequency: 5280 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5280$ MHz; $\sigma = 4.614$ S/m; $\epsilon_r = 34.937$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(5.42, 5.42, 5.42) @ 5280 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/5.3G WLAN Mid/Area Scan (13x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.452 W/kg

Body Back/5.3G WLAN Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.969 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.785 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.081 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 56%

Maximum value of SAR (measured) = 0.484 W/kg

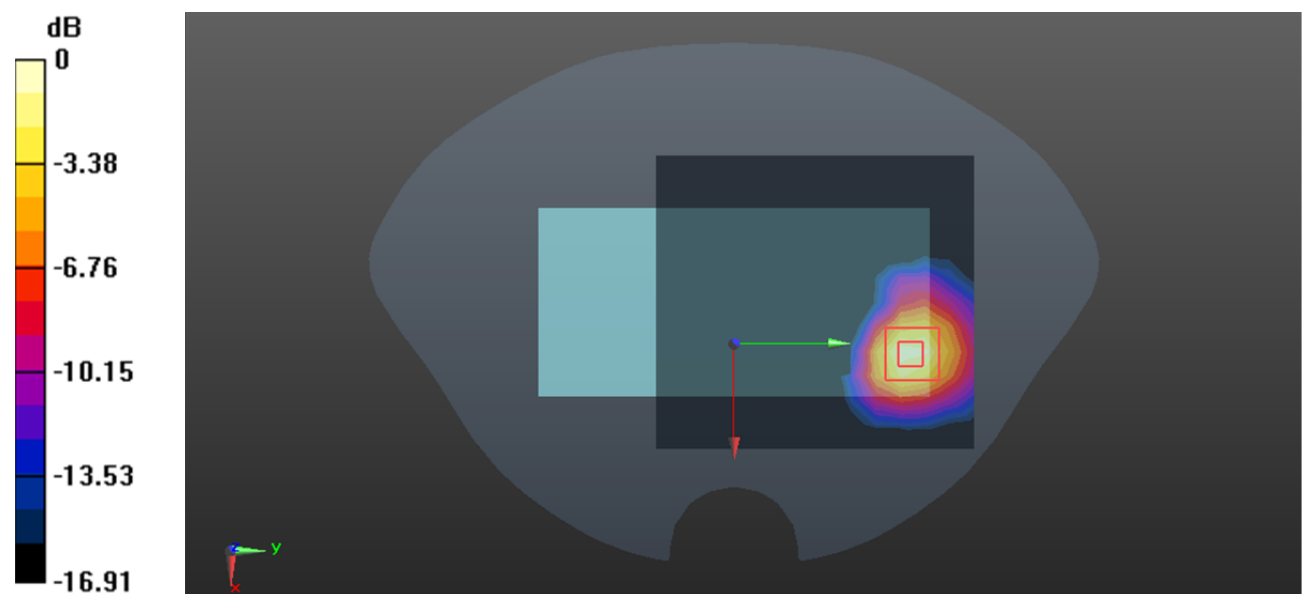

0 dB = 0.484 W/kg = -3.15 dBW/kg

Test Plot 27#: 5.8G WLAN Mid Head Right Cheek**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.078$ S/m; $\epsilon_r = 34.976$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.91, 4.91, 4.91) @ 5785 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Head Right Cheek/5.8G WLAN Mid/Area Scan (13x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.729 W/kg

Head Right Cheek/5.8G WLAN Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.267 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.129 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 0.791 W/kg

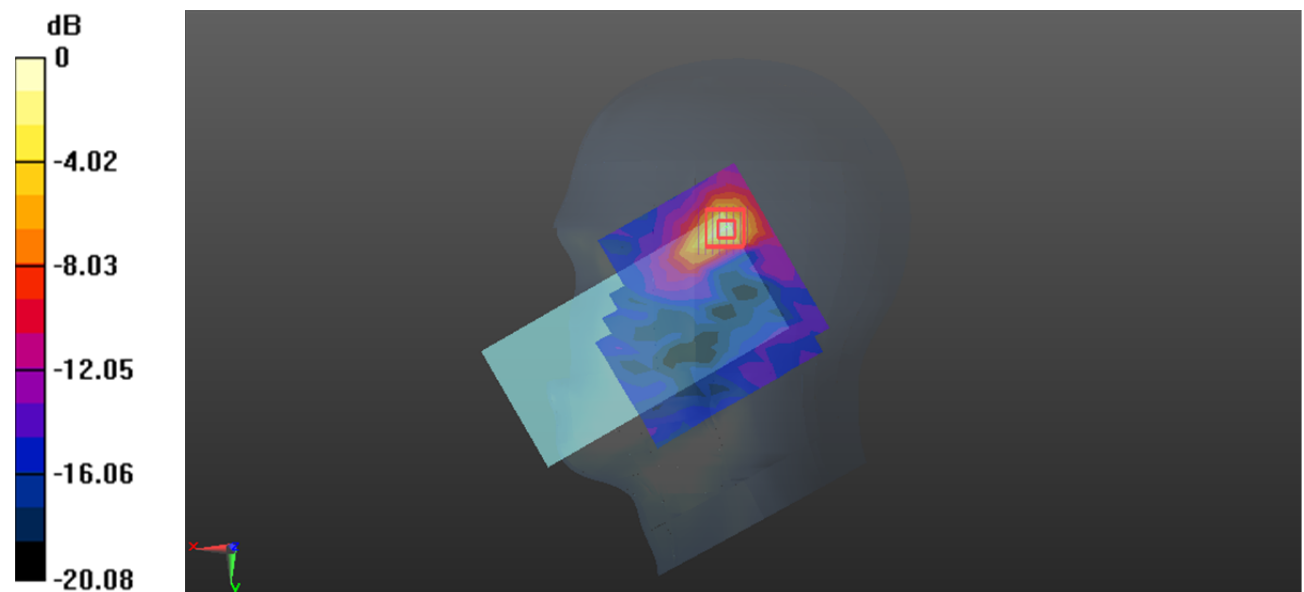

0 dB = 0.791 W/kg = -1.02 dBW/kg

Test Plot 28#: 5.8G WLAN Mid Body Back**DUT: 4G Handheld Terminal; Type: L611; Serial: 3N66-1**

Communication System: UID 0, 802.11a (0); Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.078$ S/m; $\epsilon_r = 34.976$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.91, 4.91, 4.91) @ 5785 MHz; Calibrated: 2026/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 2026/1/12
- Phantom: Twin SAM V5.0; Type: QD000P40CC; Serial: TP:1097
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Body Back/5.8G WLAN Mid/Area Scan (13x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.405 W/kg

Body Back/5.8G WLAN Mid/Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.708 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 0.739 W/kg

SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.071 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 0.427 W/kg

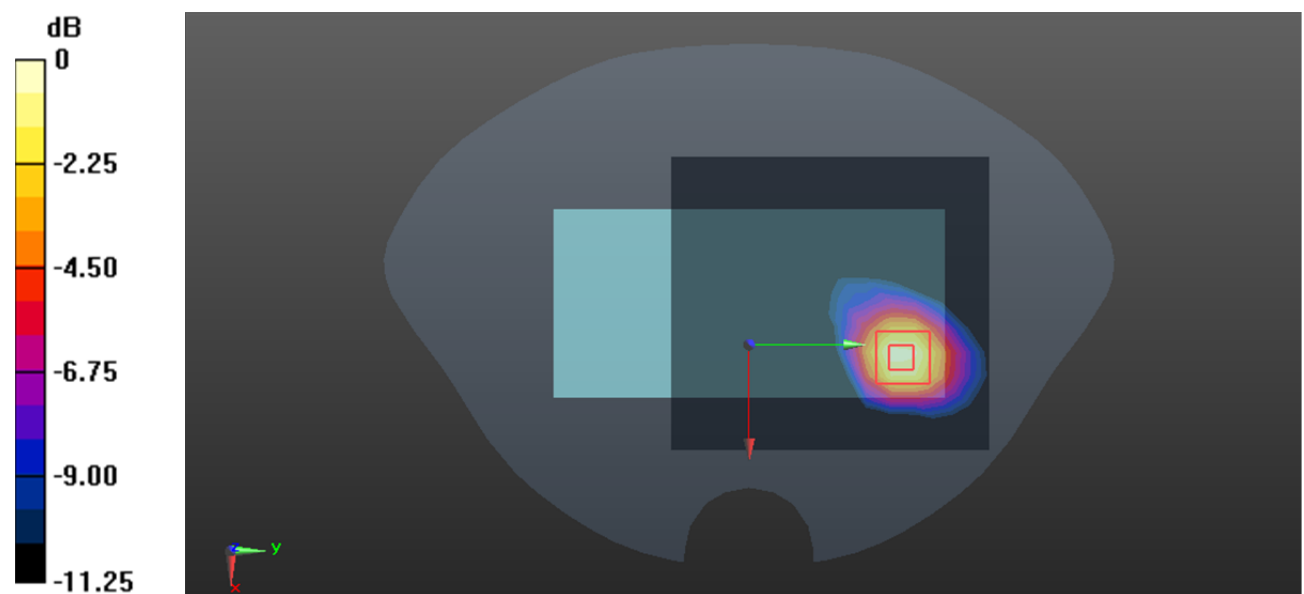

0 dB = 0.427 W/kg = -3.70 dBW/kg