

客戶名稱 : 常 禾
CUSTOMER

Documnet No.: ENS000160640

Approval Sheet Rev.: A0

Spec. Rev. A0

承 認 書

APPROVAL SHEET

產品品名/Product Model No. : WA-F-LA-03-266

客戶料號/Customer No. : 150203000024

發行日期/ Issue Date : 2022/02/18

承認日期/ Approved Date : 2022/02/18

Approved by customer: (signing or stamping here)



 禾邦電子(蘇州)有限公司
INPAQ TECHNOLOGY(SuZhou)
Co.,Ltd

 佳邦科技股份有限公司
INPAQ TECHNOLOGY Co.,Ltd

■ 蘇州市相城區黃埭鎮潘陽工業園區中心大
道5號

□ 苗栗縣竹南鎮大厝裏9鄰59-12號

No.5,zhongxin Road, PanYang industrial
Park,HuangDai town,XiangCheng
district ,Suzhou City

No. 59-12, 9 Lin, Ta Tsuo Li, Chu Nan
Chen, Miao Li Hsien, Taiwan, R.O.C.

WA-F-LA-03-266 Specification

1. Explanation of part number :

WA - F - LA - 03 - 266
(1) (2) (3) (4) (5)

(1) Product Type : Wireless Antenna

(2) Material: FPCB+CABLE

(3) Frequency : 2.4GHz-2.5GHz

(4) Coaxial Cable Type : 03

(5) Suffix :266

2. Storage Condition:

Temperature -40 to +70 °C
Humidity 65±20 % RH

3. Operating Condition:

Temperature -40 to +70 °C
Humidity 65±20 % RH

4. Electrical Specification :

Those specifications were specially defined for 哈曼 **SOUNDBAR 2721 BT** model, and all characteristics were measured under the model's handset testing.

4-1. Frequency Band:

Frequency Band	MHz
BT	2400-2500

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
ANGLES=± HOLEDIA=±

SCALE : UNIT : mm

DRAWN BY : 靳静 CHECKED BY : 赵付辉

DESIGNED BY : 牛永林 APPROVED BY : 赵付辉



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WA-F-LA-03-266Specification

DOCUMENT
NO.

ENS000160640

PAGE REV.
A0

4-2. Impedance

50 ohm nominal

4-3. Matching circuit

None

4-4.VSWR


4-4.1 MeasuringMethod

1.A 50Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR

2.Keeping this jig away from metal at least 20cm

4-4.2Measurement frequency points and VSWR value

Frequency (Unit MHz)	2400	2450	2500
VSWR	≤2.5	≤2.5	≤2.5
VSWR	1.28	1.11	1.24

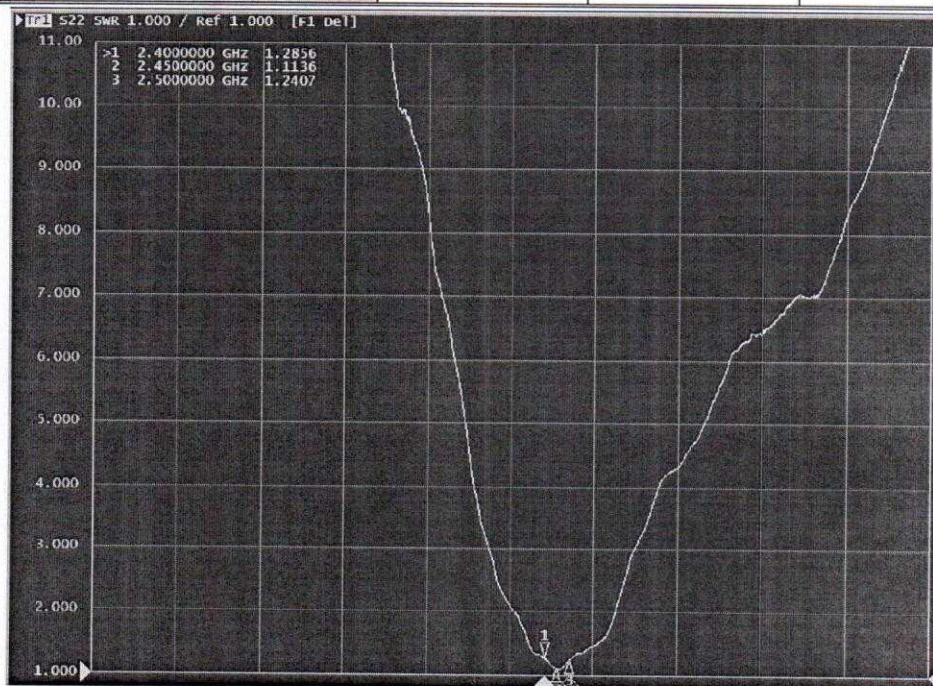

4-5.Efficiency and Gain

4-5.1 Measure method

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
ANGLES=± HOLEDIA=±

SCALE : UNIT : mm

DRAWN BY : 靳静 CHECKED BY : 赵付辉

DESIGNED BY : 牛永林 APPROVED BY : 赵付辉

TITLE : WA-F-LA-03-266Specification



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


DOCUMENT
NO.

ENS000160640

PAGE REV.
A0

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

4-5.2 Chamber definition

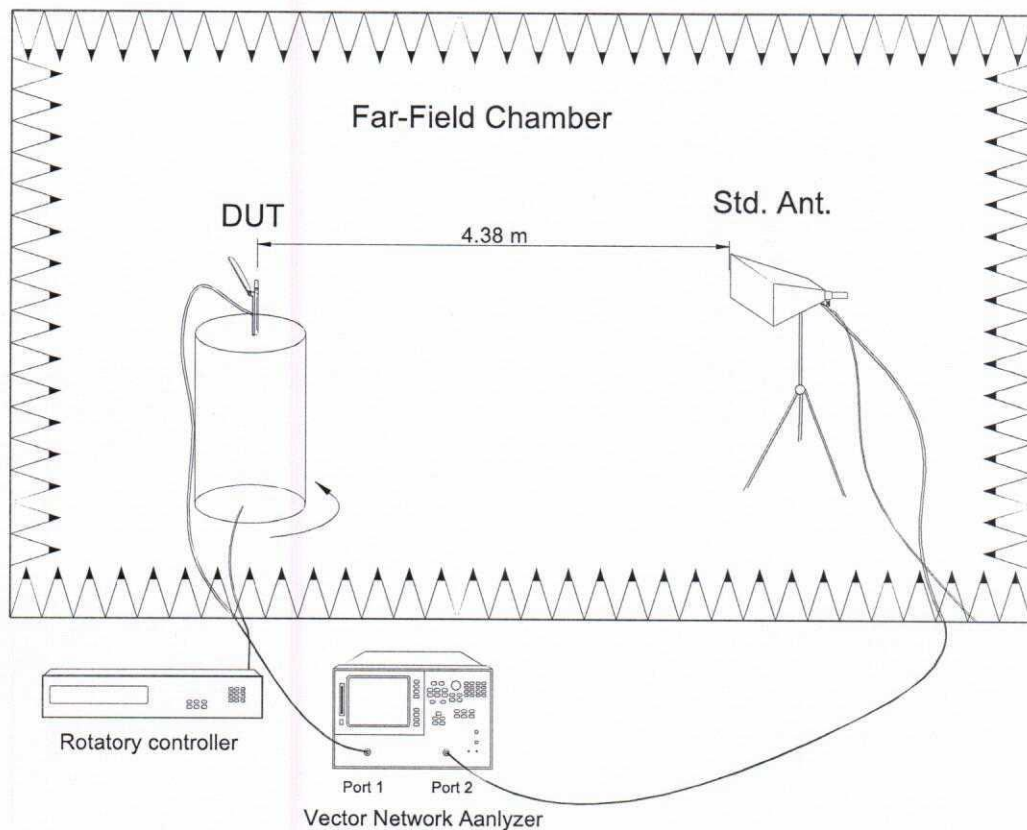

1. An anechoic chamber (7mx4mx3m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quite room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

4-5.3 Efficiency and Gain

Antenna gain is marked (dBi) and is based on STANDARD HORN antenna. The data shows Peak Gain and Average Gain.

Frequency (MHz)	2400.0	2450.0	2500.0
-----------------	--------	--------	--------

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±

SCALE : UNIT : mm

DRAWN BY : 靳静 CHECKED BY : 赵付辉

DESIGNED BY : 牛永林 APPROVED BY : 赵付辉



佳邦科技股份有限公司
 INPAQ TECHNOLOGY CO., LTD.

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : WA-F-LA-03-266Specification

DOCUMENT
 NO.

ENS000160640

PAGE REV.
 A0

Efficiency (%)	52.76	55.32	52.64
Gain (dBi)	0.28	0.44	0.11

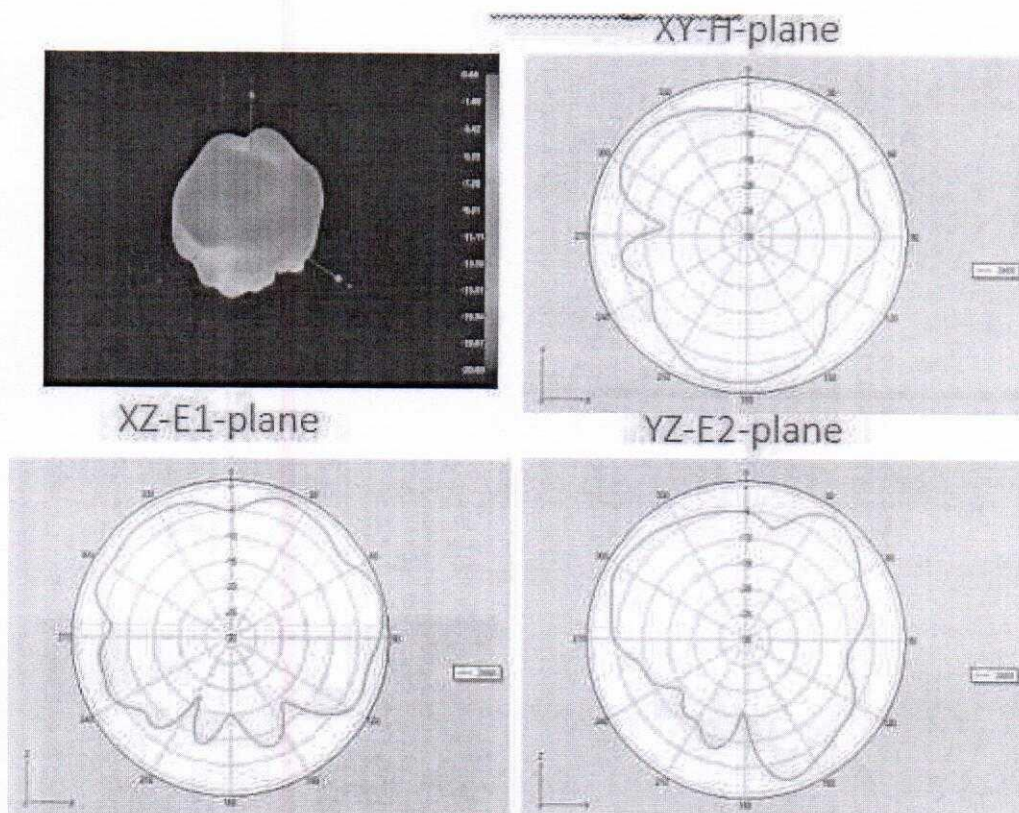


5. Mechanical Specification:



5-1. Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing Figure

5-1-1

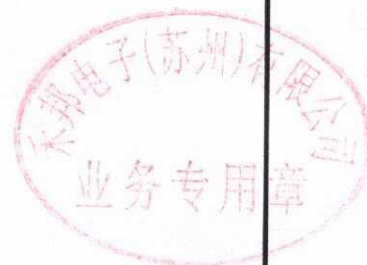

UNLESS OTHER SPECIFIED TOLERANCES ON :			 佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.		
X=±	X.X=±	X.XX=±			
ANGLES=±		HOLEDIA=±			
SCALE :		UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION		
DRAWN BY : 靳静		CHECKED BY : 赵付辉			
DESIGNED BY : 牛永林		APPROVED BY : 赵付辉			
TITLE : WA-F-LA-03-266Specification			DOCUMENT NO.	ENS000160640	PAGE REV
					A0

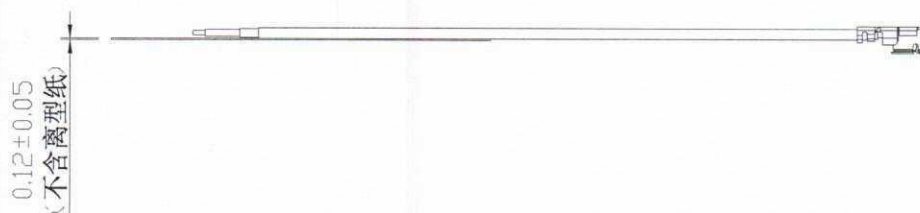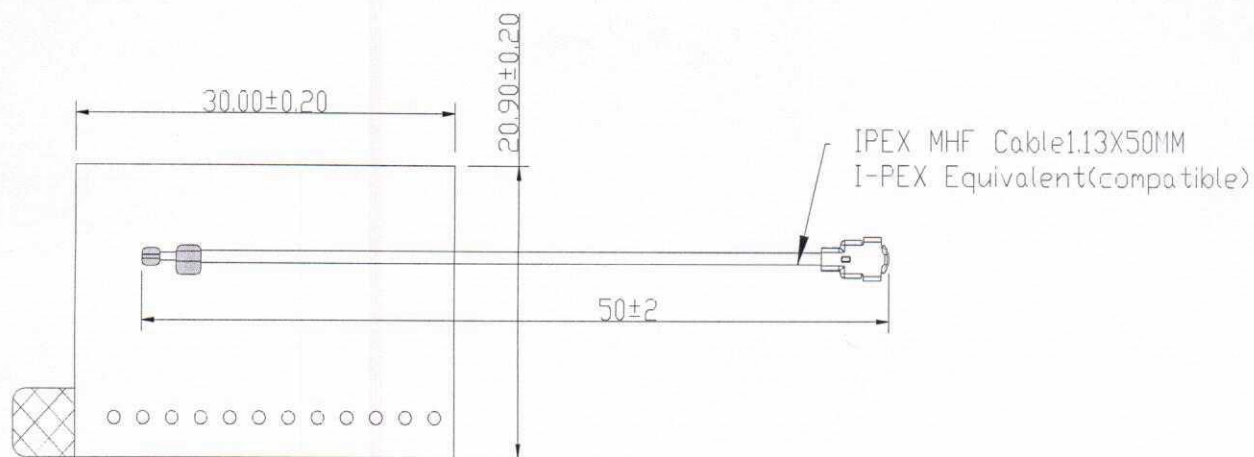

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES=± HOLEDIA=±



佳邦科技股份有限公司
 INPAQ TECHNOLOGY CO., LTD.

SCALE : UNIT : mm

DRAWN BY : 靳静 CHECKED BY : 赵付辉

DESIGNED BY : 牛永林 APPROVED BY : 赵付辉

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WA-F-LA-03-266Specification

DOCUMENT
 NO.

ENS000160640

PAGE REV.
 A0

包装规格: (供参考)

1. 将产品 10pcs 装入 1PE 袋, 然后将 PE 袋内的空气压出合上封口;



2. 将 200 袋天线放入一包装内箱, 共 $200 \times 10 = 2000\text{pcs}$, 放上填充物包好;



3. 将 4 个包装内箱放入包装外箱, 放好天地盖, 包装好并贴上标识, 共 $2000 \times 4 = 8000\text{pcs}$ 。

