

承 認 書

SPECIFICATION FOR APPROVAL

客 戶 料 號: CUSTOMER:	Haixin
客 戶 料 號: CUST P/N:	
音 澤 料 號: FINE P/N:	G43.5*0.75-20.5-0.08*48P-10TS-6.5UH-L15MM+BJ
產 品 型 號: DESC:	Φ 43.5MMX0.75MM
日 期: DATE:	2024/05/24
版 本: Version:	A.0

擬 制 PREPARED BY	審 核 CHECKED BY	批 准 APPROVED BY	客 戶 承 認 CUSTOMER APPROVE
Licheng He	Ma li	Keqing Dan	

Company: Dongguan Yinze Electronics Co., Ltd

Factory Address: No. 901, Building 2, Xinghan (Chuangfu Central City),
Chashan Town, Dongguan City

TEL: 18617251159

版本變更履歷


Version Change History

[illegible]

SPECIFICATION

產品型號: DESC	G43.5*0.75-20.5-0.08*48P-10 TS-6.5UH-L15MM+BJ	版本 Rev: A.0	客戶 CUST:	Haixin
			客戶料号 CUST P/N:	

一、尺寸 DIMENSION:(mm)

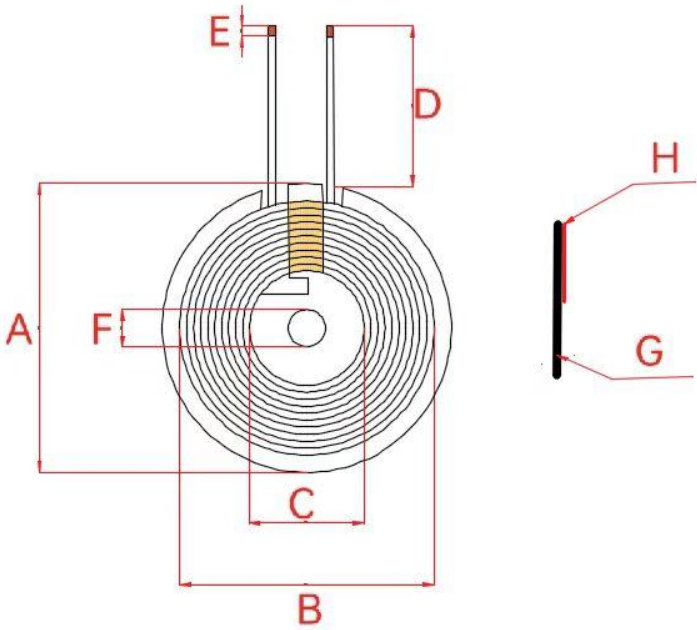

A	43.5±0.5
B	38.3±0.5
C	20.5±0.5
D	15 ±2
E	3±2
F	5.3±0.2
G	0.75±0.05
H	1.65±0.1
I	
K	

- Note:
1. Cross over outgoing lines;
 2. The coil is attached with double slot magnetic plates, with a size of 43.5 ± 0.5mm and a thickness of 0.75 ± 0.05mm
 3. Stick adhesive on the back of the magnetic sheet

二、原理图 SCHEMATIC DIAGRAM:

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	Hot air line 0.08*48P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.7uH ±10%Individual coil	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.5uH ±10%Add magnetic plates	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤100m Ω		LCZ METER 502B

拟制/日期 PREPARED BY/DATE	审核/日期 CHECKED BY/DATE
Licheng He 2024.05.24	