

承 认 书

SPECIFICATION FOR APPROVAL

客 户 CUSTOMER:	XXX
客 户 料 号: CUST P/N:	
天 夏 料 号: TX P/N:	
产 品 型 号 DESC:	圆25硬磁柱体-0.08*24P-10MM-7.3UH Round 25 mm hard magnetic cylinder - 0.08 * 24P - 10MM - 7.3UH
日 期 DATE:	2023/12/26
版 本: Version:	A.0

拟制 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY	客户承认 CUSTOMER APPROVE
曾伟浩 Weihao Zheng	张燕 Yan Zhang	罗勇军 Yongjun Luo	

深圳市天夏科技有限公司

Shenzhen Tianxia Technology Co., LTD

地址：深圳市宝安区33区C33科创园523-525室

Address: Room 523-525, C33 Science and Technology Innovation Park, District
33, Bao'an District, Shenzhen City

TEL： 18718699959

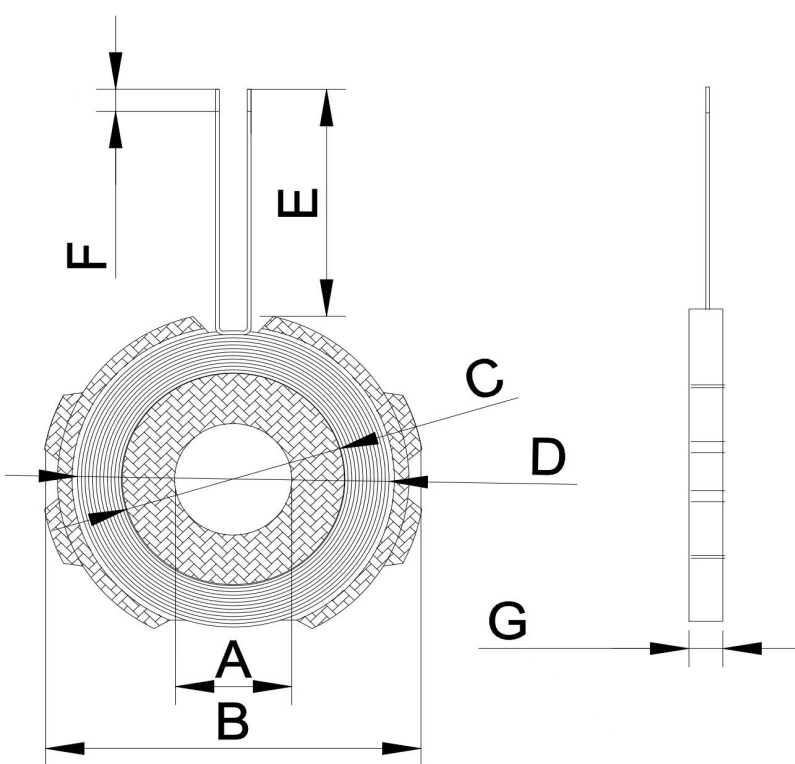
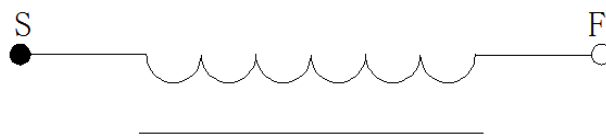
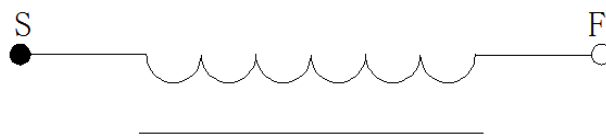
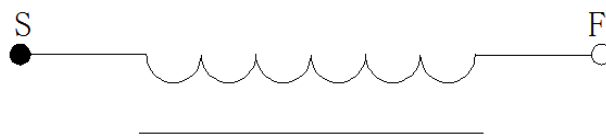
E-mail: 2321113770@qq.com

版本变更历史

Version Change History

[illegible]

SPECIFICATION

产 品 型 号:		圆25硬磁柱体-0.08*24P-10MM-7.3UH Round 25 mm hard magnetic cylinder - 0.08 * 24P - 10MM - 7.3UH		Rev: A.0	客户CUST:																																																																																																					
DESC					客户料号 CUST P/N:																																																																																																					
一、尺寸 DIMENSION:(mm)  <tr><td>A</td><td>7.5 ± 0.5mm</td></tr> <tr><td>B</td><td>25 ± 0.5 mm</td></tr> <tr><td>C</td><td>14 ± 0.5mm</td></tr> <tr><td>D</td><td>20.5 ± 0.5mm</td></tr> <tr><td>E</td><td>10 ± 1mm</td></tr> <tr><td>F</td><td>3 ± 1mm</td></tr> <tr><td>G</td><td>2.4 ± 0.5mm</td></tr> <tr><td></td><td></td></tr> <tr><td></td><td></td></tr> <tr><td colspan="5" rowspan="3"> 二、原理图 SCHEMATIC DIAGRAM  </td><td colspan="2" rowspan="3"> 注: 1.线圈平行出线; 1.Coil is laid out parallelly 2.磁片背面贴背胶 2. Adhesive is applied to the back of the magnetic disk. </td></tr> <tr></tr> <tr></tr> <tr><td colspan="5">三、绕线参数 Winding Specification:</td><td colspan="2"></td></tr> <tr><td>序号 NO.</td><td colspan="2">端子 TERMINAL</td><td>线径 WIRE</td><td>圈数 Turns</td><td colspan="2">绕线方向 Winding Direction</td></tr> <tr><td>1</td><td>S</td><td>F</td><td>0.08*24</td><td>11Ts</td><td colspan="2">顺时针</td></tr> <tr><td colspan="5">四、电气特性 ELECTRICAL CHARACTERISTICS:</td><td colspan="2"></td></tr> <tr><td colspan="5">温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%</td><td colspan="2"></td></tr> <tr><td>序号 NO.</td><td>项目 ITEM</td><td>端子 TERMINAL</td><td>标准 SPECIFICATION</td><td>测试条件 TEST FREQUENCY</td><td colspan="2">测试仪器 TEST EQUIPMENTS</td></tr> <tr><td>1</td><td>IND.</td><td>S-F</td><td>4.3uH±10% Single coil</td><td>100KHz/1.0V</td><td colspan="2">LCZ METER 1062B</td></tr> <tr><td>2</td><td>IND.</td><td>S-F</td><td>7.3 uH±10% With magnetic discs</td><td>100KHz/1.0V</td><td colspan="2">LCZ METER 1062B</td></tr> <tr><td>3</td><td>DCR</td><td>S-F</td><td>600m Ω Max</td><td></td><td colspan="2">LCZ METER 502B</td></tr> <tr><td colspan="4">拟制/日期 PREPARED BY/DATE</td><td colspan="3">审核/日期 CHECKED BY/DATE</td></tr> <tr><td colspan="4">曾伟浩 2023/12/26</td><td colspan="3">张燕 2023/12/26</td></tr>					A	7.5 ± 0.5mm	B	25 ± 0.5 mm	C	14 ± 0.5mm	D	20.5 ± 0.5mm	E	10 ± 1mm	F	3 ± 1mm	G	2.4 ± 0.5mm					二、原理图 SCHEMATIC DIAGRAM 					注: 1.线圈平行出线; 1.Coil is laid out parallelly 2.磁片背面贴背胶 2. Adhesive is applied to the back of the magnetic disk.		三、绕线参数 Winding Specification:							序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction		1	S	F	0.08*24	11Ts	顺时针		四、电气特性 ELECTRICAL CHARACTERISTICS:							温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%							序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS		1	IND.	S-F	4.3uH±10% Single coil	100KHz/1.0V	LCZ METER 1062B		2	IND.	S-F	7.3 uH±10% With magnetic discs	100KHz/1.0V	LCZ METER 1062B		3	DCR	S-F	600m Ω Max		LCZ METER 502B		拟制/日期 PREPARED BY/DATE				审核/日期 CHECKED BY/DATE			曾伟浩 2023/12/26				张燕 2023/12/26		
					A	7.5 ± 0.5mm																																																																																																				
					B	25 ± 0.5 mm																																																																																																				
					C	14 ± 0.5mm																																																																																																				
					D	20.5 ± 0.5mm																																																																																																				
					E	10 ± 1mm																																																																																																				
					F	3 ± 1mm																																																																																																				
					G	2.4 ± 0.5mm																																																																																																				
二、原理图 SCHEMATIC DIAGRAM 					注: 1.线圈平行出线; 1.Coil is laid out parallelly 2.磁片背面贴背胶 2. Adhesive is applied to the back of the magnetic disk.																																																																																																					
三、绕线参数 Winding Specification:																																																																																																										
序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction																																																																																																					
1	S	F	0.08*24	11Ts	顺时针																																																																																																					
四、电气特性 ELECTRICAL CHARACTERISTICS:																																																																																																										
温度 TEMPERATURE:25±10℃, 湿度 RELATIVE HUMIDITY:65±20%																																																																																																										
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS																																																																																																					
1	IND.	S-F	4.3uH±10% Single coil	100KHz/1.0V	LCZ METER 1062B																																																																																																					
2	IND.	S-F	7.3 uH±10% With magnetic discs	100KHz/1.0V	LCZ METER 1062B																																																																																																					
3	DCR	S-F	600m Ω Max		LCZ METER 502B																																																																																																					
拟制/日期 PREPARED BY/DATE				审核/日期 CHECKED BY/DATE																																																																																																						
曾伟浩 2023/12/26				张燕 2023/12/26																																																																																																						