



FCC RF Test Report

APPLICANT : FoxInsights GmbH
EQUIPMENT : FoxPressure
BRAND NAME : FoxInsights
MODEL NAME : FoxPressure-V1
FCC ID : 2BKML-FOXPRESSURE
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Oct. 14, 2024

This product installed a RF module (Brand Name: WROOM, Model Name: ESP-WROOM-32D, FCC ID: 2AC7Z-ESPWROOM32D) during the test, only the RSE worst mode and Co-location mode were verified in this report, all the other test results are leveraged from module RF report.

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 EUT Operation Test Setup	8
3 TEST RESULT	9
3.1 Radiated Band Edges and Spurious Emission Measurement	9
3.2 Antenna Requirements	13
4 LIST OF MEASURING EQUIPMENT	14
5 MEASUREMENT UNCERTAINTY	15
APPENDIX A. RADIATED SPURIOUS EMISSION	
APPENDIX B. DUTY CYCLE PLOTS	
APPENDIX C. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR492610C	Rev. 01	Initial issue of report	Nov. 04, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
-	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	1
-	-	99% Bandwidth	-	Report Only	1
-	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	1
-	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	1
-	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	1
		Conducted Spurious Emission		Pass	1
3.1	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 9.36 dB at 2483.50 MHz
-	15.207	AC Conducted Emission	15.207(a)	Not Applicable	EUT not connect to AC Mains
3.2	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Remark 1:

Verify the maximum conducted power of the host is lower than and very close to the module, all the conducted test results were leveraged from module RF report which can refer to Report No. RXA1710-0352RF01R1.

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

FoxInsights GmbH
Ridlerstr. 57 80339 Munich Germany

1.2 Manufacturer

FoxInsights GmbH
Ridlerstr. 57 80339 Munich Germany

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	FoxPressure
Brand Name	FoxInsights
Model Name	FoxPressure-V1
FCC ID	2BKML-FOXPRESSURE
SN Code	Radiation: ONP417602655
HW Version	1.0
SW Version	1.0.0
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Antenna Type / Gain	PCB Antenna type with gain 3.7 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH05-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	210616

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-


2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11n HT40	MCS0

Co-location mode
802.11n HT40 Tx CH09 + LTE B13 BW 5M Tx

2.3 Connection Diagram of Test System

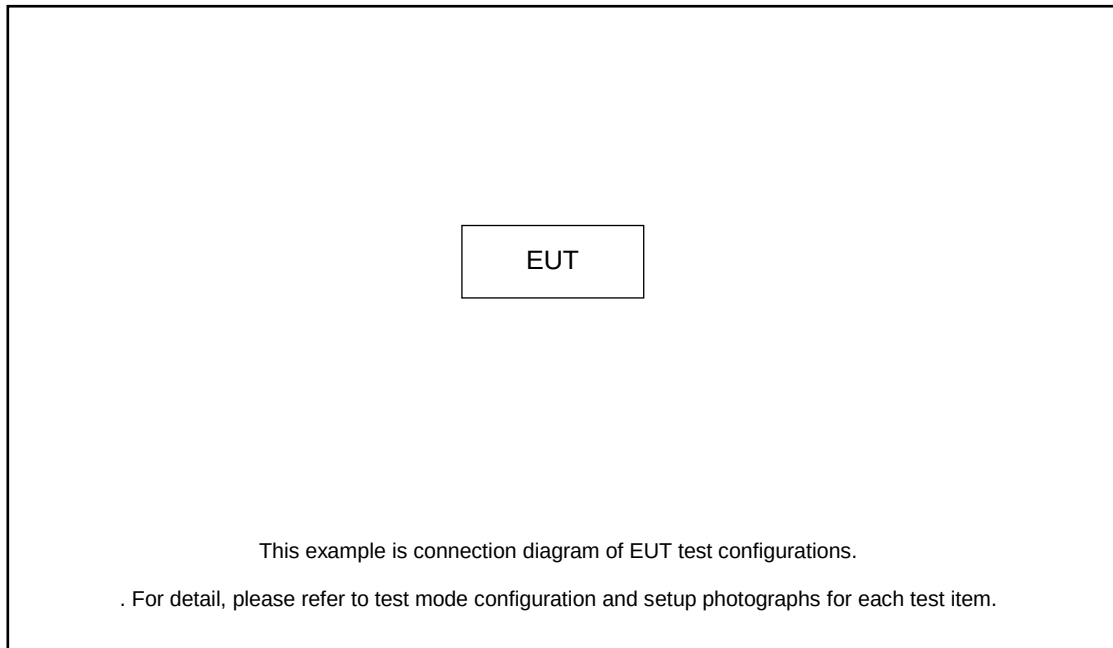

2.4 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

3 Test Result

3.1 Radiated Band Edges and Spurious Emission Measurement

3.1.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.1.4 Test Setup


For radiated emissions below 30MHz

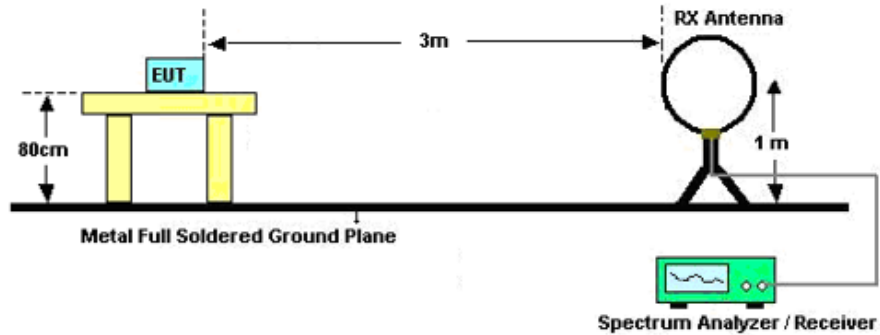

For radiated emissions from 30MHz to 1GHz

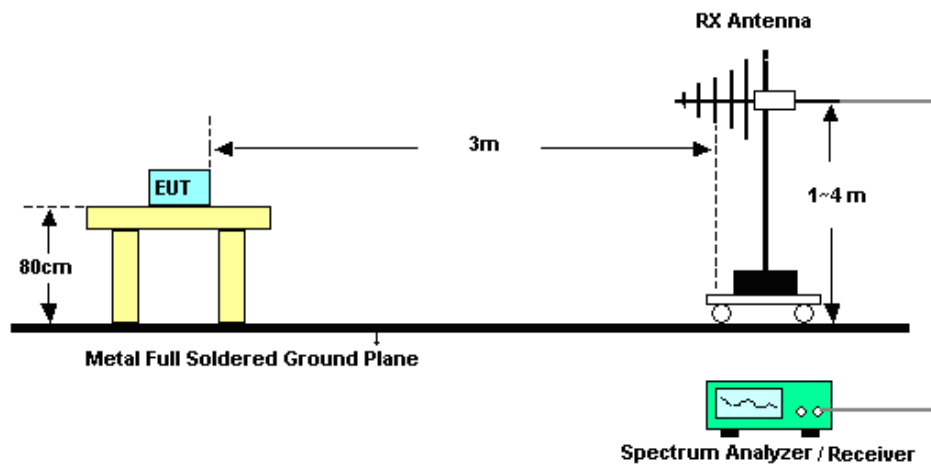

For radiated emissions above 1GHz

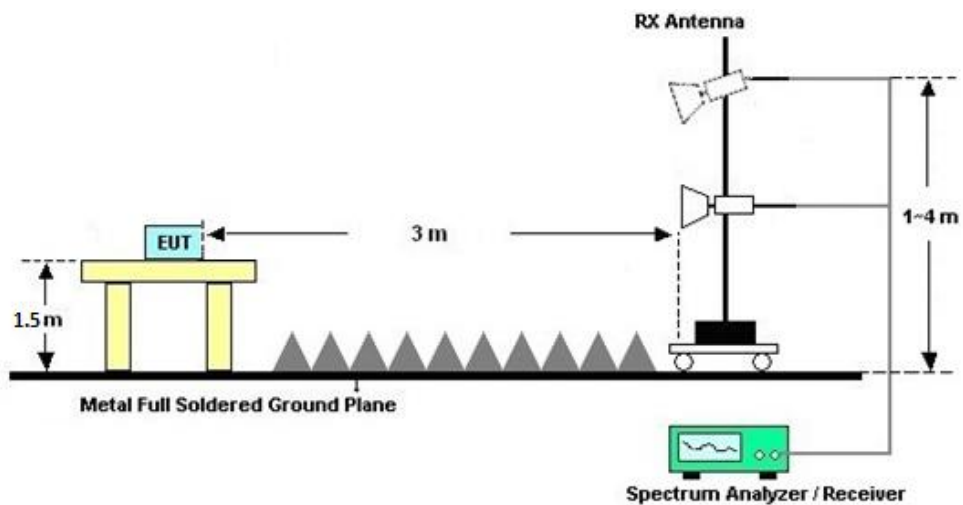

**3.1.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.1.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.1.7 Duty Cycle

Please refer to Appendix B.

3.1.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix A.



3.2 Antenna Requirements

3.2.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.2.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.2.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz;Max 30dBm	Jul. 04, 2024	Oct. 14, 2024	Jul. 03, 2025	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44G,MAX 30dB	Oct. 10, 2024	Oct. 14, 2024	Oct. 09, 2025	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Oct. 14, 2024	Sep. 07, 2025	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Apr. 18, 2024	Oct. 14, 2024	Apr. 17, 2025	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 11, 2024	Oct. 14, 2024	Apr. 10, 2025	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 06, 2024	Oct. 14, 2024	Jan. 05, 2025	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	381512	9KHz~1GHz	Jan. 02, 2024	Oct. 14, 2024	Jan. 01, 2025	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060852	18~40GHz	Jan. 02, 2024	Oct. 14, 2024	Jan. 01, 2025	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060843	1Ghz~18Ghz	Jan. 03, 2024	Oct. 14, 2024	Jan. 02, 2025	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz~18Ghz	Jan. 03, 2024	Oct. 14, 2024	Jan. 02, 2025	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 14, 2024	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 14, 2024	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 14, 2024	NCR	Radiation (03CH05-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.02dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.22dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.34dB
---	--------

----- THE END -----



Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	Jake	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	-	802.11n HT40	09	2452	MCS0	Full RU	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11n HT40	09	2483.50	44.64	54.00	-9.36	H	AVERAGE	Pass	Band Edge
1	802.11n HT40	09	4904.00	38.36	54.00	-15.64	V	AVERAGE	Pass	Harmonic

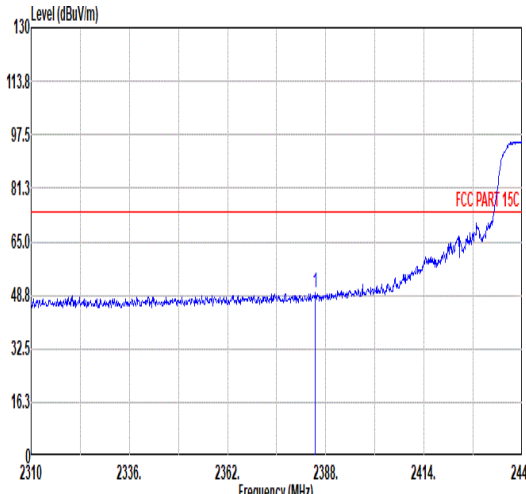
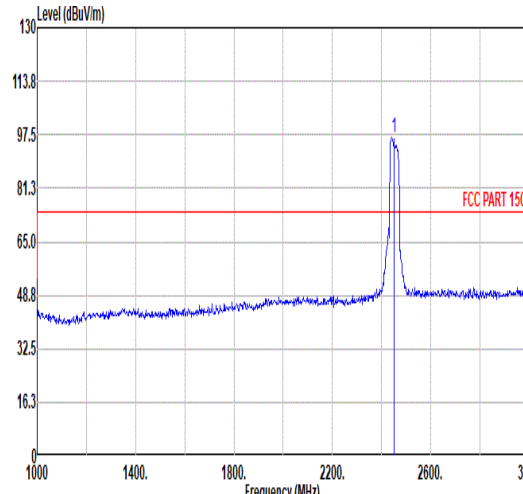
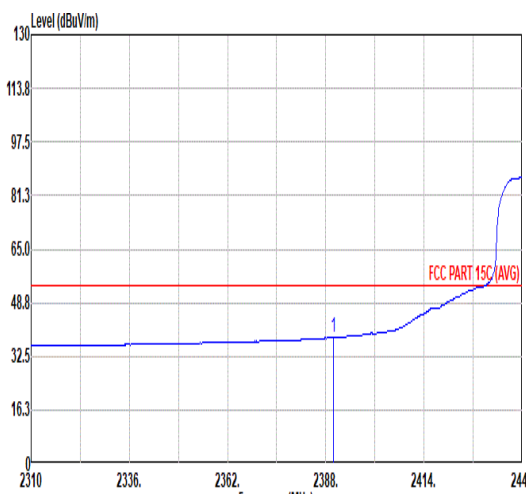
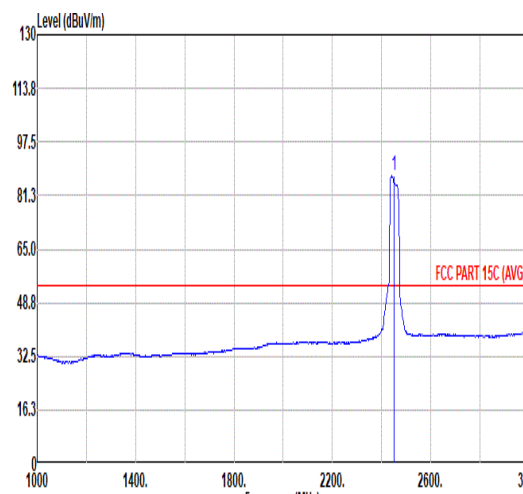


		1																																																				
Mode		Band Edge - L																																																				
		2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																																				
Pol.		Horizontal																																																				
Peak																																																						
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.14</td><td>49.32</td><td>74.00</td><td>-24.68</td><td>41.12</td><td>32.15</td><td>7.10</td><td>37.05</td><td>6.00</td><td>146</td><td>12</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.14	49.32	74.00	-24.68	41.12	32.15	7.10	37.05	6.00	146
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2385.14	49.32	74.00	-24.68	41.12	32.15	7.10	37.05	6.00	146	12	PEAK																																										
Fundamental																																																						
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>96.42</td><td>-----</td><td>-----</td><td>87.80</td><td>32.38</td><td>7.19</td><td>36.95</td><td>6.00</td><td>146</td><td>12</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	96.42	-----	-----	87.80	32.38	7.19	36.95	6.00	146
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2452.00	96.42	-----	-----	87.80	32.38	7.19	36.95	6.00	146	12	PEAK																																										
Avg																																																						
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>38.19</td><td>54.00</td><td>-15.81</td><td>29.93</td><td>32.20</td><td>7.11</td><td>37.05</td><td>6.00</td><td>146</td><td>12</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	38.19	54.00	-15.81	29.93	32.20	7.11	37.05	6.00	146
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2389.95	38.19	54.00	-15.81	29.93	32.20	7.11	37.05	6.00	146	12	AVERAGE																																										
																																																						
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>87.09</td><td>-----</td><td>-----</td><td>78.46</td><td>32.38</td><td>7.19</td><td>36.94</td><td>6.00</td><td>146</td><td>12</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	87.09	-----	-----	78.46	32.38	7.19	36.94	6.00	146
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2452.00	87.09	-----	-----	78.46	32.38	7.19	36.94	6.00	146	12	AVERAGE																																										

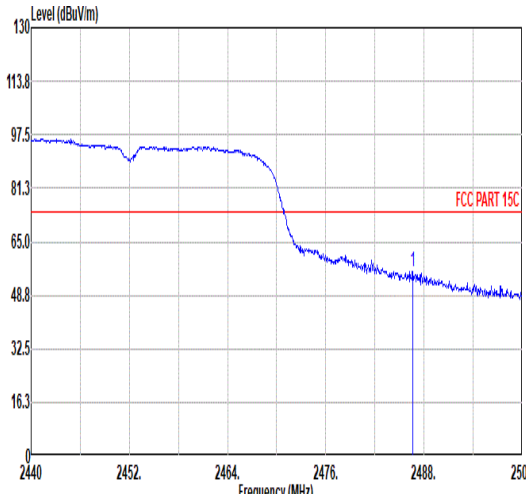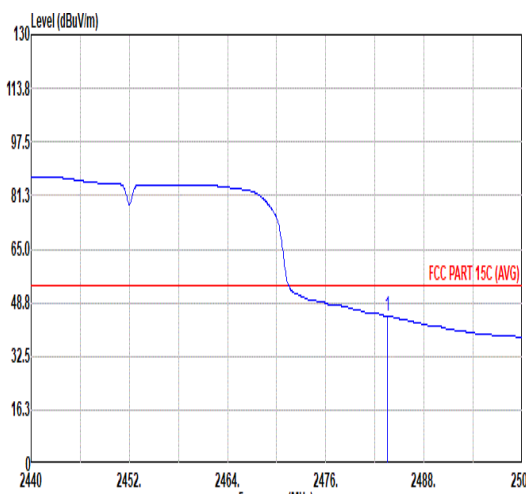

Mode	1																																														
	Band Edge - R																																														
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																														
Pol.	Horizontal	Fundamental																																													
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.62</td><td>55.90</td><td>74.00</td><td>-18.10</td><td>47.01</td><td>32.47</td><td>7.26</td><td>36.84</td><td>6.00</td><td>146</td><td>12</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2486.62	55.90	74.00	-18.10	47.01	32.47	7.26	36.84	6.00	146	12	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	2486.62	55.90	74.00	-18.10	47.01	32.47	7.26	36.84	6.00	146	12	PEAK																																			
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>44.64</td><td>54.00</td><td>-9.36</td><td>35.76</td><td>32.47</td><td>7.26</td><td>36.85</td><td>6.00</td><td>146</td><td>12</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.50	44.64	54.00	-9.36	35.76	32.47	7.26	36.85	6.00	146	12	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	2483.50	44.64	54.00	-9.36	35.76	32.47	7.26	36.85	6.00	146	12	AVERAGE																																			

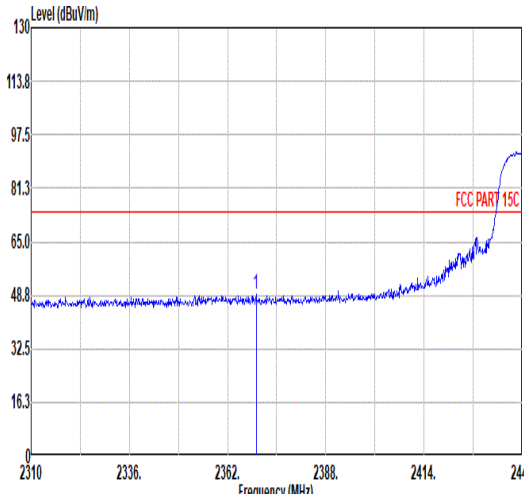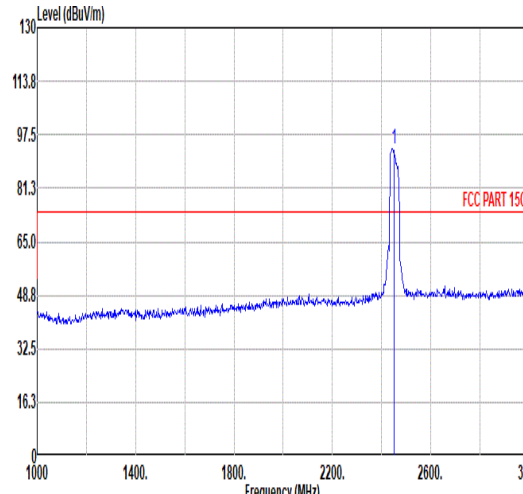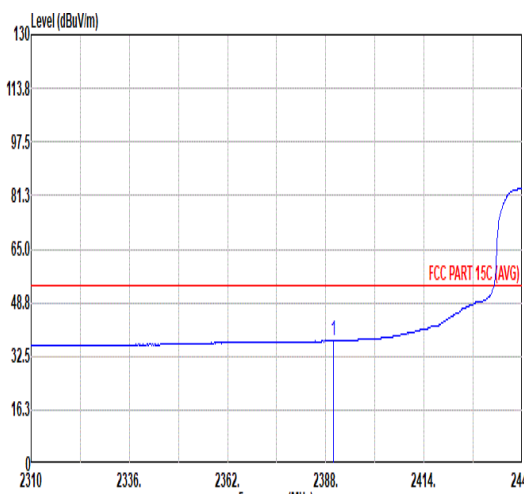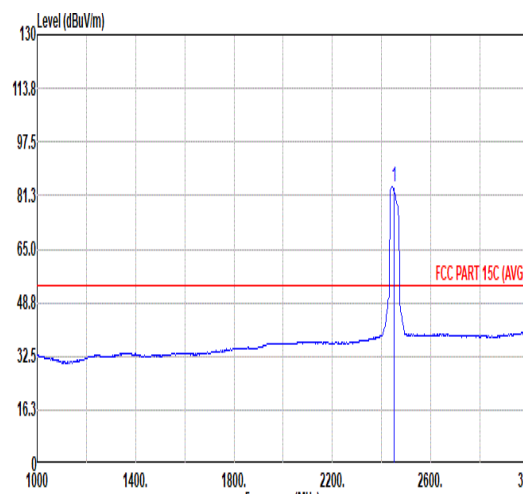

Mode	1																																																																																																														
	Band Edge - L																																																																																																														
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2369.54</td><td>48.85</td><td>74.00</td><td>-25.15</td><td>40.84</td><td>32.00</td><td>7.07</td><td>37.06</td><td>6.00</td><td>111</td><td>244</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2369.54	48.85	74.00	-25.15	40.84	32.00	7.07	37.06	6.00	111	244	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>93.35</td><td>-----</td><td>-----</td><td>84.72</td><td>32.38</td><td>7.19</td><td>36.94</td><td>6.00</td><td>111</td><td>244</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	93.35	-----	-----	84.72	32.38	7.19	36.94	6.00	111	244
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2369.54	48.85	74.00	-25.15	40.84	32.00	7.07	37.06	6.00	111	244	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2452.00	93.35	-----	-----	84.72	32.38	7.19	36.94	6.00	111	244	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2309.95</td><td>37.18</td><td>54.00</td><td>-16.82</td><td>28.92</td><td>32.20</td><td>7.11</td><td>37.05</td><td>6.00</td><td>111</td><td>244</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2309.95	37.18	54.00	-16.82	28.92	32.20	7.11	37.05	6.00	111	244	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>84.10</td><td>-----</td><td>-----</td><td>75.46</td><td>32.39</td><td>7.19</td><td>36.94</td><td>6.00</td><td>111</td><td>244</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	84.10	-----	-----	75.46	32.39	7.19	36.94	6.00	111	244
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2309.95	37.18	54.00	-16.82	28.92	32.20	7.11	37.05	6.00	111	244	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2452.00	84.10	-----	-----	75.46	32.39	7.19	36.94	6.00	111	244	AVERAGE																																																																																																			





Mode	1																																																									
	Band Edge - R																																																									
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																																									
Pol.	Vertical										Fundamental																																															
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.82</td><td>54.51</td><td>74.00</td><td>-19.49</td><td>45.61</td><td>32.48</td><td>7.26</td><td>36.84</td><td>6.00</td><td>111</td><td>244</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2487.82	54.51	74.00	-19.49	45.61	32.48	7.26	36.84	6.00	111	244	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor		cm	deg																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	2487.82	54.51	74.00	-19.49	45.61	32.48	7.26	36.84	6.00	111	244	PEAK																																														
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>42.55</td><td>54.00</td><td>-11.45</td><td>33.67</td><td>32.47</td><td>7.26</td><td>36.85</td><td>6.00</td><td>111</td><td>244</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.50	42.55	54.00	-11.45	33.67	32.47	7.26	36.85	6.00	111	244	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Level	Factor	Loss	Factor	Factor		cm	deg																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																															
1	2483.50	42.55	54.00	-11.45	33.67	32.47	7.26	36.85	6.00	111	244	AVERAGE																																														





Mode	1																																																																																																																																																								
	Harmonic																																																																																																																																																								
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																																																		
Peak Avg																																																																																																																																																									
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th colspan="2"></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4906.00</td><td>46.07</td><td>74.00</td><td>-27.93</td><td>67.12</td><td>34.17</td><td>10.33</td><td>65.55</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7356.00</td><td>42.79</td><td>74.00</td><td>-31.21</td><td>60.67</td><td>35.00</td><td>12.73</td><td>66.41</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4906.00	46.07	74.00	-27.93	67.12	34.17	10.33	65.55	0.00	--	--	Peak	2	7356.00	42.79	74.00	-31.21	60.67	35.00	12.73	66.41	0.00	--	--	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th colspan="2"></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4904.00</td><td>48.22</td><td>74.00</td><td>-25.78</td><td>69.27</td><td>34.17</td><td>10.33</td><td>65.55</td><td>0.00</td><td>100</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>4904.00</td><td>38.36</td><td>54.00</td><td>-15.64</td><td>59.41</td><td>34.17</td><td>10.33</td><td>65.55</td><td>0.00</td><td>100</td><td>0</td><td>AVERAGE</td></tr><tr><td>3</td><td>7356.00</td><td>42.68</td><td>74.00</td><td>-31.32</td><td>60.56</td><td>35.80</td><td>12.73</td><td>66.41</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4904.00	48.22	74.00	-25.78	69.27	34.17	10.33	65.55	0.00	100	0	PEAK	2	4904.00	38.36	54.00	-15.64	59.41	34.17	10.33	65.55	0.00	100	0	AVERAGE	3	7356.00	42.68	74.00	-31.32	60.56	35.80	12.73	66.41	0.00	--	--	PEAK
			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																	
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																													
1	4906.00	46.07	74.00	-27.93	67.12	34.17	10.33	65.55	0.00	--	--	Peak																																																																																																																																													
2	7356.00	42.79	74.00	-31.21	60.67	35.00	12.73	66.41	0.00	--	--	PEAK																																																																																																																																													
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																	
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																													
1	4904.00	48.22	74.00	-25.78	69.27	34.17	10.33	65.55	0.00	100	0	PEAK																																																																																																																																													
2	4904.00	38.36	54.00	-15.64	59.41	34.17	10.33	65.55	0.00	100	0	AVERAGE																																																																																																																																													
3	7356.00	42.68	74.00	-31.32	60.56	35.80	12.73	66.41	0.00	--	--	PEAK																																																																																																																																													

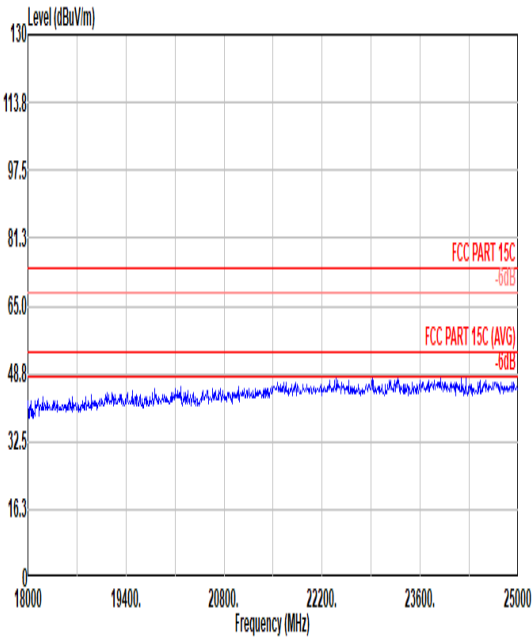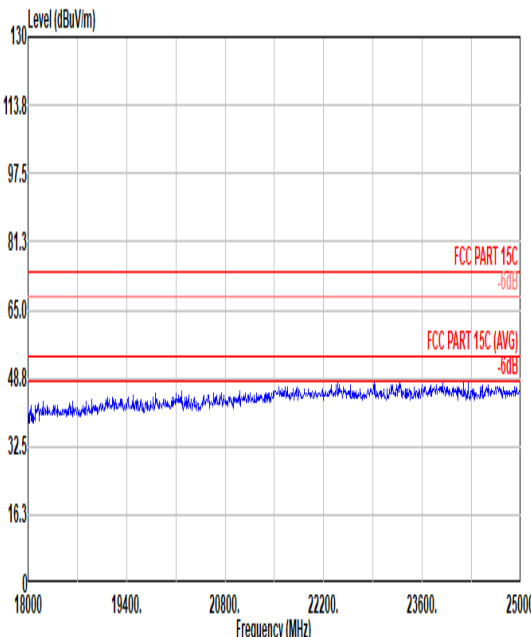

Mode	11	
	18G-25G	
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz	
Pol.	Horizontal	Vertical
Peak Avg	 Horizontal Peak Avg plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a blue signal line and red horizontal lines for FCC Part 15C limits. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 18000 to 25000 MHz. The signal level is approximately 48.8 dBuV/m, which is below the FCC Part 15C limit of 65.0 dBuV/m.	 Vertical Peak Avg plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a blue signal line and red horizontal lines for FCC Part 15C limits. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 18000 to 25000 MHz. The signal level is approximately 48.8 dBuV/m, which is below the FCC Part 15C limit of 65.0 dBuV/m.

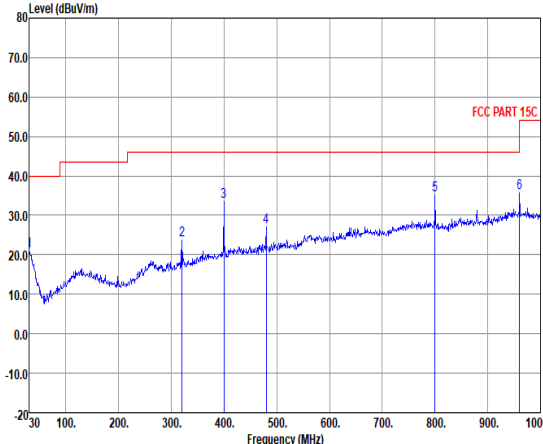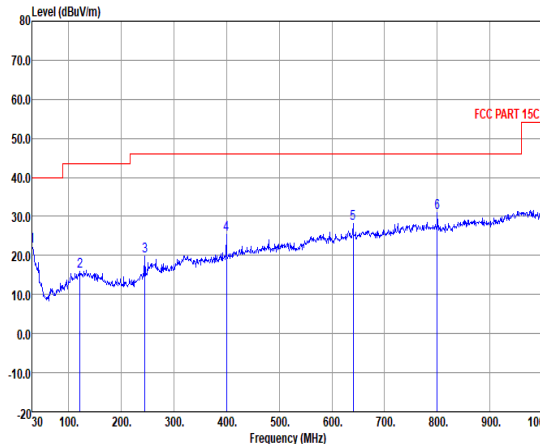

Mode	1																																																																																																									
	30M-1G																																																																																																									
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																																																																																									
Pol.	Horizontal																																																																																																									
Peak																																																																																																										
	<table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Over</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>30.00</td><td>20.94</td><td>40.00</td><td>-19.06</td><td>27.60</td><td>25.39</td><td>0.76</td><td>32.81</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>320.03</td><td>23.84</td><td>46.00</td><td>-22.16</td><td>34.44</td><td>19.61</td><td>2.63</td><td>32.84</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>399.57</td><td>33.35</td><td>46.00</td><td>-12.65</td><td>41.57</td><td>21.81</td><td>3.00</td><td>33.03</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>480.08</td><td>27.08</td><td>46.00</td><td>-18.92</td><td>33.50</td><td>23.55</td><td>3.14</td><td>33.11</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>800.18</td><td>35.13</td><td>46.00</td><td>-10.87</td><td>35.50</td><td>28.42</td><td>4.22</td><td>33.01</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>960.23</td><td>35.76</td><td>54.00</td><td>-18.24</td><td>31.71</td><td>31.00</td><td>4.61</td><td>31.56</td><td>0.00</td><td>---</td><td>Peak</td></tr></tbody></table>												Freq	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	30.00	20.94	40.00	-19.06	27.60	25.39	0.76	32.81	0.00	---	Peak	2	320.03	23.84	46.00	-22.16	34.44	19.61	2.63	32.84	0.00	---	Peak	3	399.57	33.35	46.00	-12.65	41.57	21.81	3.00	33.03	0.00	---	Peak	4	480.08	27.08	46.00	-18.92	33.50	23.55	3.14	33.11	0.00	---	Peak	5	800.18	35.13	46.00	-10.87	35.50	28.42	4.22	33.01	0.00	---	Peak	6	960.23	35.76	54.00	-18.24	31.71	31.00	4.61	31.56	0.00	---	Peak
		Freq	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	30.00	20.94	40.00	-19.06	27.60	25.39	0.76	32.81	0.00	---	Peak																																																																																															
2	320.03	23.84	46.00	-22.16	34.44	19.61	2.63	32.84	0.00	---	Peak																																																																																															
3	399.57	33.35	46.00	-12.65	41.57	21.81	3.00	33.03	0.00	---	Peak																																																																																															
4	480.08	27.08	46.00	-18.92	33.50	23.55	3.14	33.11	0.00	---	Peak																																																																																															
5	800.18	35.13	46.00	-10.87	35.50	28.42	4.22	33.01	0.00	---	Peak																																																																																															
6	960.23	35.76	54.00	-18.24	31.71	31.00	4.61	31.56	0.00	---	Peak																																																																																															
Peak																																																																																																										
	<table><thead><tr><th></th><th>Freq</th><th>Limit</th><th>Over</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>30.00</td><td>22.46</td><td>40.00</td><td>-17.54</td><td>30.20</td><td>24.57</td><td>0.71</td><td>33.02</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>121.18</td><td>16.05</td><td>43.50</td><td>-27.45</td><td>30.46</td><td>16.79</td><td>1.65</td><td>32.85</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>244.37</td><td>19.88</td><td>46.00</td><td>-26.12</td><td>32.20</td><td>18.07</td><td>2.39</td><td>32.78</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>399.57</td><td>25.46</td><td>46.00</td><td>-20.54</td><td>33.57</td><td>21.67</td><td>3.05</td><td>32.83</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>640.13</td><td>28.19</td><td>46.00</td><td>-17.81</td><td>32.13</td><td>25.17</td><td>3.86</td><td>32.97</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>800.18</td><td>30.97</td><td>46.00</td><td>-15.03</td><td>33.13</td><td>26.26</td><td>4.32</td><td>32.74</td><td>0.00</td><td>---</td><td>Peak</td></tr></tbody></table>												Freq	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	30.00	22.46	40.00	-17.54	30.20	24.57	0.71	33.02	0.00	---	Peak	2	121.18	16.05	43.50	-27.45	30.46	16.79	1.65	32.85	0.00	---	Peak	3	244.37	19.88	46.00	-26.12	32.20	18.07	2.39	32.78	0.00	---	Peak	4	399.57	25.46	46.00	-20.54	33.57	21.67	3.05	32.83	0.00	---	Peak	5	640.13	28.19	46.00	-17.81	32.13	25.17	3.86	32.97	0.00	---	Peak	6	800.18	30.97	46.00	-15.03	33.13	26.26	4.32	32.74	0.00	---	Peak
		Freq	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	30.00	22.46	40.00	-17.54	30.20	24.57	0.71	33.02	0.00	---	Peak																																																																																															
2	121.18	16.05	43.50	-27.45	30.46	16.79	1.65	32.85	0.00	---	Peak																																																																																															
3	244.37	19.88	46.00	-26.12	32.20	18.07	2.39	32.78	0.00	---	Peak																																																																																															
4	399.57	25.46	46.00	-20.54	33.57	21.67	3.05	32.83	0.00	---	Peak																																																																																															
5	640.13	28.19	46.00	-17.81	32.13	25.17	3.86	32.97	0.00	---	Peak																																																																																															
6	800.18	30.97	46.00	-15.03	33.13	26.26	4.32	32.74	0.00	---	Peak																																																																																															



<Co-location mode>

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 2	Part27F B13 BW=5M							
	2400-2483.5	-	802.11n HT40	09	2452	MCS0	Full RU	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
2	802.11n HT40	09	2483.50	44.37	54.00	-9.63	V	AVERAGE	Pass	Band Edge
2	802.11n HT40	09	3270.00	43.48	74.00	-30.52	V	Peak	Pass	Harmonic



2

Mode

Band Edge - L



2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz

Pol.



Horizontal

Fundamental



Peak

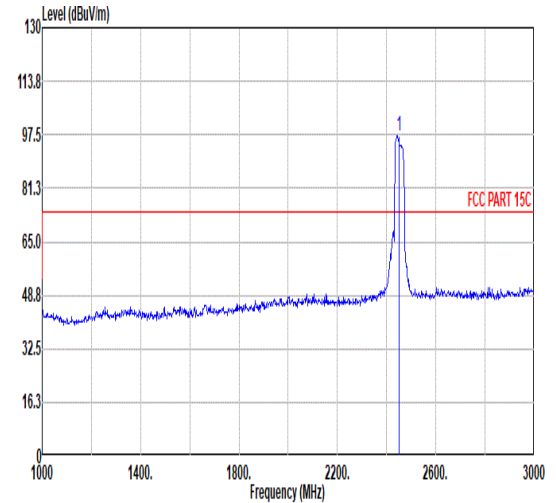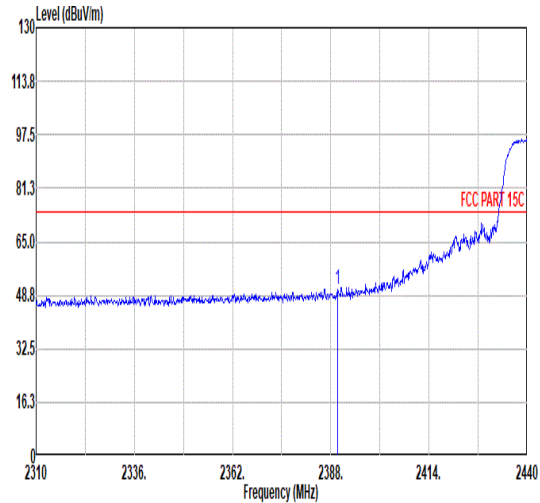

Avg

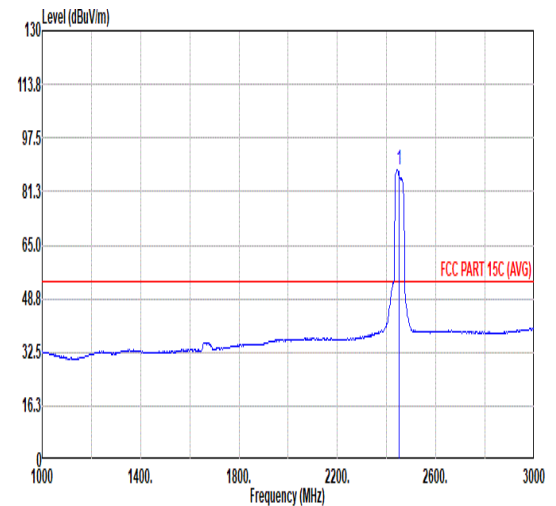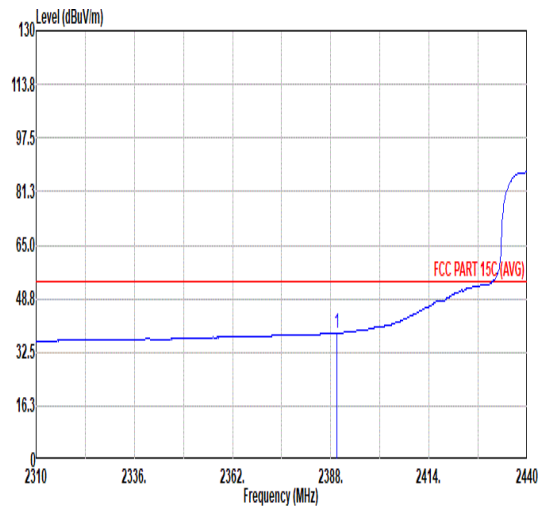

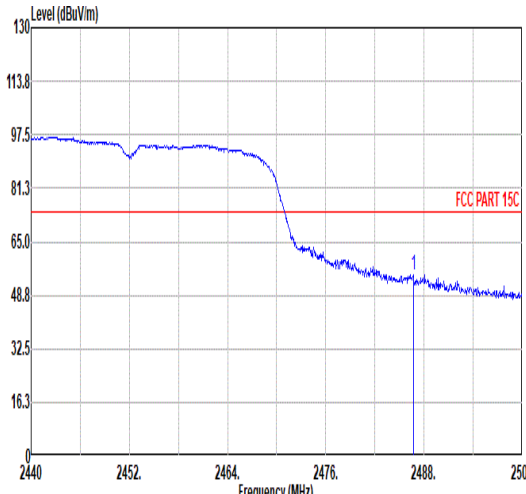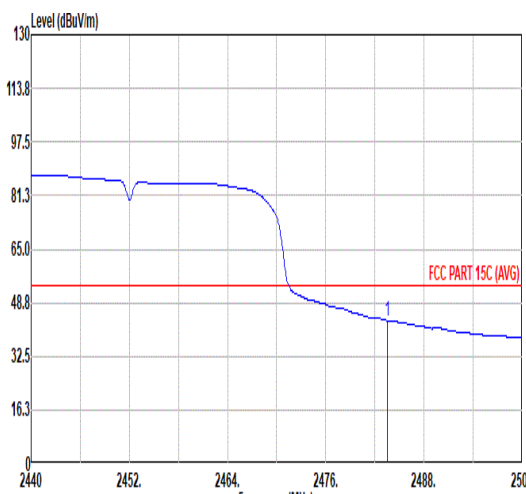

Mode	2																																													
	Band Edge - R																																													
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																													
Pol.	Horizontal	Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.68</td><td>54.98</td><td>74.00</td><td>-19.02</td><td>46.09</td><td>32.47</td><td>7.26</td><td>36.84</td><td>6.00</td><td>100</td><td>346</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.68	54.98	74.00	-19.02	46.09	32.47	7.26	36.84	6.00	100	346	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2486.68	54.98	74.00	-19.02	46.09	32.47	7.26	36.84	6.00	100	346	PEAK																																		
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>43.38</td><td>54.00</td><td>-10.62</td><td>34.50</td><td>32.47</td><td>7.26</td><td>36.85</td><td>6.00</td><td>100</td><td>346</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	43.38	54.00	-10.62	34.50	32.47	7.26	36.85	6.00	100	346	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2483.50	43.38	54.00	-10.62	34.50	32.47	7.26	36.85	6.00	100	346	AVERAGE																																		



2

Mode

Band Edge - L


2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz

Pol.


Vertical

Fundamental

Peak

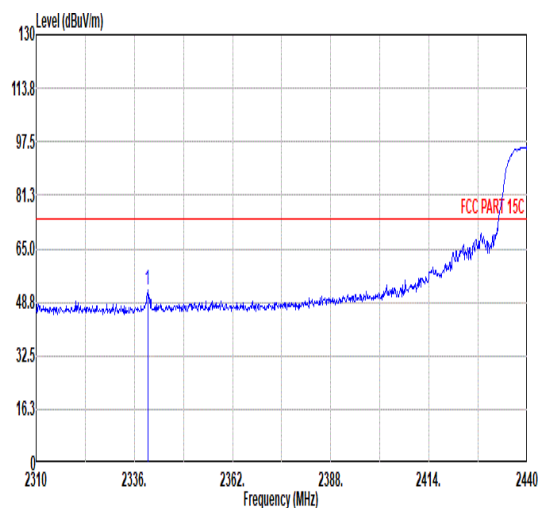


Freq	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	
	Line	Margin									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1 2339.51	52.49	74.00	-21.51	44.83	31.70	7.03	37.07	6.00	100	256	PEAK

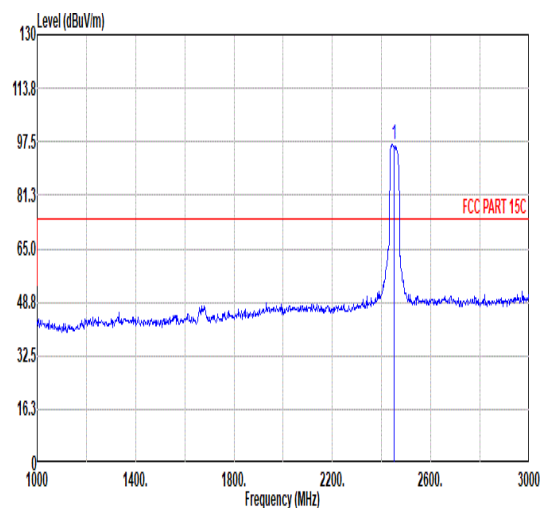


Freq	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		
	Line	Margin										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2452.00	96.61	-----		87.99	32.38	7.19	36.95	6.00	100	256	PEAK

Avg

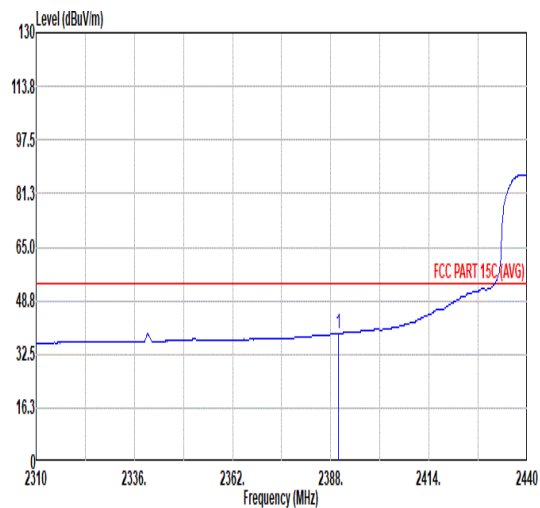

Freq	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		
	Line	Margin										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.95	38.81	54.00	-15.19	30.55	32.20	7.11	37.05	6.00	100	256	AVERAGE

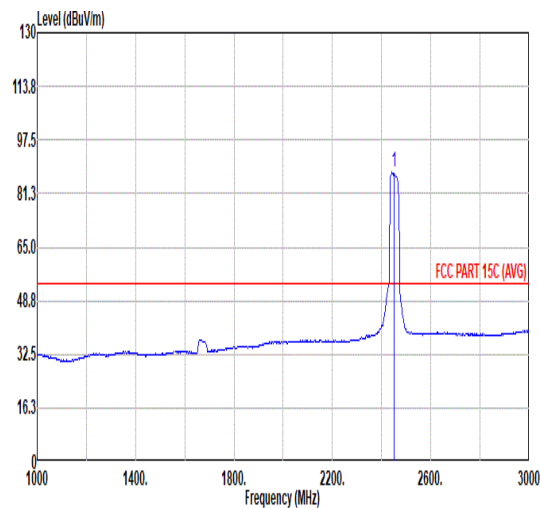

Freq	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		
	Line	Margin										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2452.00	87.58	-----	-----	78.95	32.38	7.19	36.94	6.00	100	256	AVERAGE



Mode	2																																													
	Band Edge - R																																													
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																													
Pol.	Vertical	Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.16</td><td>55.68</td><td>74.00</td><td>-18.32</td><td>46.80</td><td>32.47</td><td>7.26</td><td>36.85</td><td>6.00</td><td>100</td><td>256</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.16	55.68	74.00	-18.32	46.80	32.47	7.26	36.85	6.00	100	256	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2484.16	55.68	74.00	-18.32	46.80	32.47	7.26	36.85	6.00	100	256	PEAK																																		
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>44.37</td><td>54.00</td><td>-9.63</td><td>35.49</td><td>32.47</td><td>7.26</td><td>36.85</td><td>6.00</td><td>100</td><td>256</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	44.37	54.00	-9.63	35.49	32.47	7.26	36.85	6.00	100	256	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2483.50	44.37	54.00	-9.63	35.49	32.47	7.26	36.85	6.00	100	256	AVERAGE																																		



Mode	2																																																																																																																																																							
	Harmonic																																																																																																																																																							
	2400-2483.5_802.11n HT40_CH09_Full RU_2452MHz																																																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																																																	
Peak Avg																																																																																																																																																								
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th colspan="2"></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4900.00</td><td>42.67</td><td>74.00</td><td>-31.33</td><td>63.73</td><td>34.17</td><td>10.32</td><td>65.55</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7356.00</td><td>43.26</td><td>74.00</td><td>-30.74</td><td>61.14</td><td>35.00</td><td>12.73</td><td>66.41</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4900.00	42.67	74.00	-31.33	63.73	34.17	10.32	65.55	0.00	--	--	Peak	2	7356.00	43.26	74.00	-30.74	61.14	35.00	12.73	66.41	0.00	--	--	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th colspan="2"></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3270.00</td><td>43.48</td><td>74.00</td><td>-30.52</td><td>67.81</td><td>32.82</td><td>8.38</td><td>65.53</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4904.00</td><td>40.88</td><td>74.00</td><td>-33.12</td><td>61.93</td><td>34.17</td><td>10.33</td><td>65.55</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>7356.00</td><td>42.29</td><td>74.00</td><td>-31.71</td><td>60.17</td><td>35.80</td><td>12.73</td><td>66.41</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3270.00	43.48	74.00	-30.52	67.81	32.82	8.38	65.53	0.00	--	--	Peak	2	4904.00	40.88	74.00	-33.12	61.93	34.17	10.33	65.55	0.00	--	--	PEAK	3	7356.00	42.29	74.00	-31.71	60.17	35.80	12.73	66.41	0.00	--	--
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																												
1	4900.00	42.67	74.00	-31.33	63.73	34.17	10.32	65.55	0.00	--	--	Peak																																																																																																																																												
2	7356.00	43.26	74.00	-30.74	61.14	35.00	12.73	66.41	0.00	--	--	PEAK																																																																																																																																												
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																												
1	3270.00	43.48	74.00	-30.52	67.81	32.82	8.38	65.53	0.00	--	--	Peak																																																																																																																																												
2	4904.00	40.88	74.00	-33.12	61.93	34.17	10.33	65.55	0.00	--	--	PEAK																																																																																																																																												
3	7356.00	42.29	74.00	-31.71	60.17	35.80	12.73	66.41	0.00	--	--	PEAK																																																																																																																																												

Appendix B. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11n HT40	100	-	-	10Hz

802.11n HT40

