

深圳市三盛创电子科技有限公司

Shenzhen Sansheng Chuang electronic Technology Co., LTD

承 認 書 (specification)

客 戶:
CUSTOMER: 中立冠达【深圳】智能有限公司

客 戶 料 號:
CUST P/N: ZLGD-A1-0326

三盛创 料 號:
FINE P/N: I40-6.5uH 单线圈 0.08*24P*2P*11TS

產 品 型 號:
DESC: Φ 40MMX5.3MMX0.8MM 开槽

日 期:
DATE: 2024.05.13

版 本:
Version: A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
郭柳	安帅印	安帅印	

深圳市三盛创电子科技有限公司

Shenzhen Sansheng Chuang electronic Technology Co., LTD

工廠地址: 深圳市光明区玉塘街道玉律社区大洋一路 19 号 2 楼

Factory address: 2nd Floor, No. 19, Dayang Road, Yulu Community,
Yutang Street, Guangming District, Shenzhen

Version Change History

SPECIFICATION

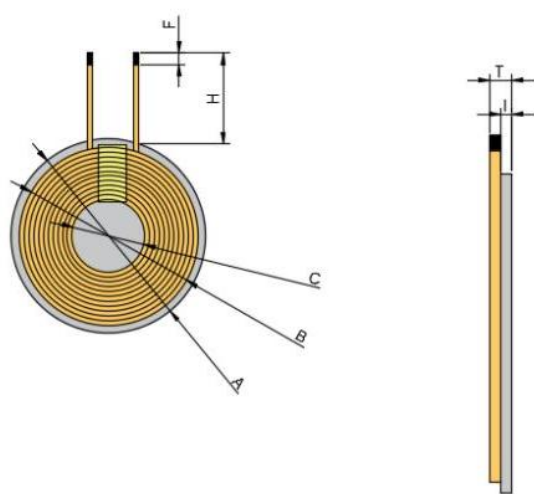
產品型號:

Φ 20.5x38-7.7uH-0.08*24P-5mm

版本

客戶 CUST:

中立冠达

DESC			Rev: A.0	客户料号 CUST P/N:	ZLGD-A1-0326	
一、尺寸 DIMENSION:(mm) 				A	40±0.5	
				B	38±1.0	
				C	20.5±0.5	
				F	3±1.0	
				H	5±1.5	
				I	0.8±0.1	
				T	1.8±0.2	
二、原理图 SCHEMATIC DIAGRAM: 				注: 1.Cross out wire; 2.Wrap 5mm(ref) high temperature adhesive paper around the cable outlet 1-2Ts; 3.线 The coil is attached to the circular hard magnetic disc with groove, the magnetic disc size is 40 ±0.5mm, and the inner hole 5.3mm, The thickness is 0.8±0.1mm。		
三、绕线参数 Winding Specification:						
序号 NO.		端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1		S	F	热风线 0.08*24P	11Ts	CCW
四、电气特性 ELECTRICAL CHARACTERISTICS:						
温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%						
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS	
1	IND.	S-F	4.8uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B	
2	IND.	S-F	7.7uH ±10%加磁片	100KHz/1.0V	LCZ METER 1062B	
3	DCR	S-F	≤99m Ω	100KHz/1.0V	LCZ METER 502B	
4	Q	S-F	≥40	100KHz/1.0V	LCZ METER 502B	
拟制/日期 PREPARED BY/DATE				审核/日期 CHECKED BY/DATE		
郭柳 2024.05.13				安帅印 2024.05.13		