

SPECIFICATION

CUSTOMER: Shenzhen Keshi Technology Co., Ltd

SUPPLIER: Shenzhen Zhaohe Communication Technology Co., Ltd

DESCRIPTION: 300MMConnector cable+2DB Dual-band Wifi Antenna

MATERIAL CODE: 1305001816

SUPPLIER PRODUCT NAME:300MMConnector cable+2DB Dual-band Wifi Antenna

SUPPLIER MATERIAL CODE:

DATE: 2025.9.4

SUPPLIER		
PREPARED BY	CHECKED BY	APPROVED BY
liu zhuo	Lin weidong	Lin weidong



CUSTOMER		
ACCEPTED BY	CHECKED BY	APPROVED BY

REMARK: Please send us one or copy of this approval with stamp after accepting,other copies filed by the customer.

ADD:2nd Floor, Building 6, No. 25 Longxi Wulian Road, Longgang District, Shenzhen

Postal code:

Tel:0755-32971376

Fax:0755-33298253

Http:

REVISION HISTORY

[illegible]


CONTENT

1.Cover.....	1
2.Change History.....	2
3.Directory.....	3
4.Product parameters.....	4
5.Engineering drawing.....	5
6.Microwave darkroom test report.....	6
7、Environmental Test Report.....	12
8.Mechanical Test Report.....	13
9.Packaging instruction report.	14

4.Product parameters





Table 1			
NO	DESCRIPTION	VALUE	Laboratory allowable additional errors
4.1.1	Frequency range	2.4G-2.5G/5G-5.8G	——
4.1.2	V. S. W. R	Compare to the sample	——
4.1.3	Radiation	Omni-directional	——
4.1.4	Radiating element	1/4 Ware Helical	——
4.1.5	Polarization	Linear Vertical	——
4.1.6	Admitted power	1W	——
4.1.7	Connector	SMA	——
4.1.8	weight	7.57g	±0.3g

5.Engineering drawing

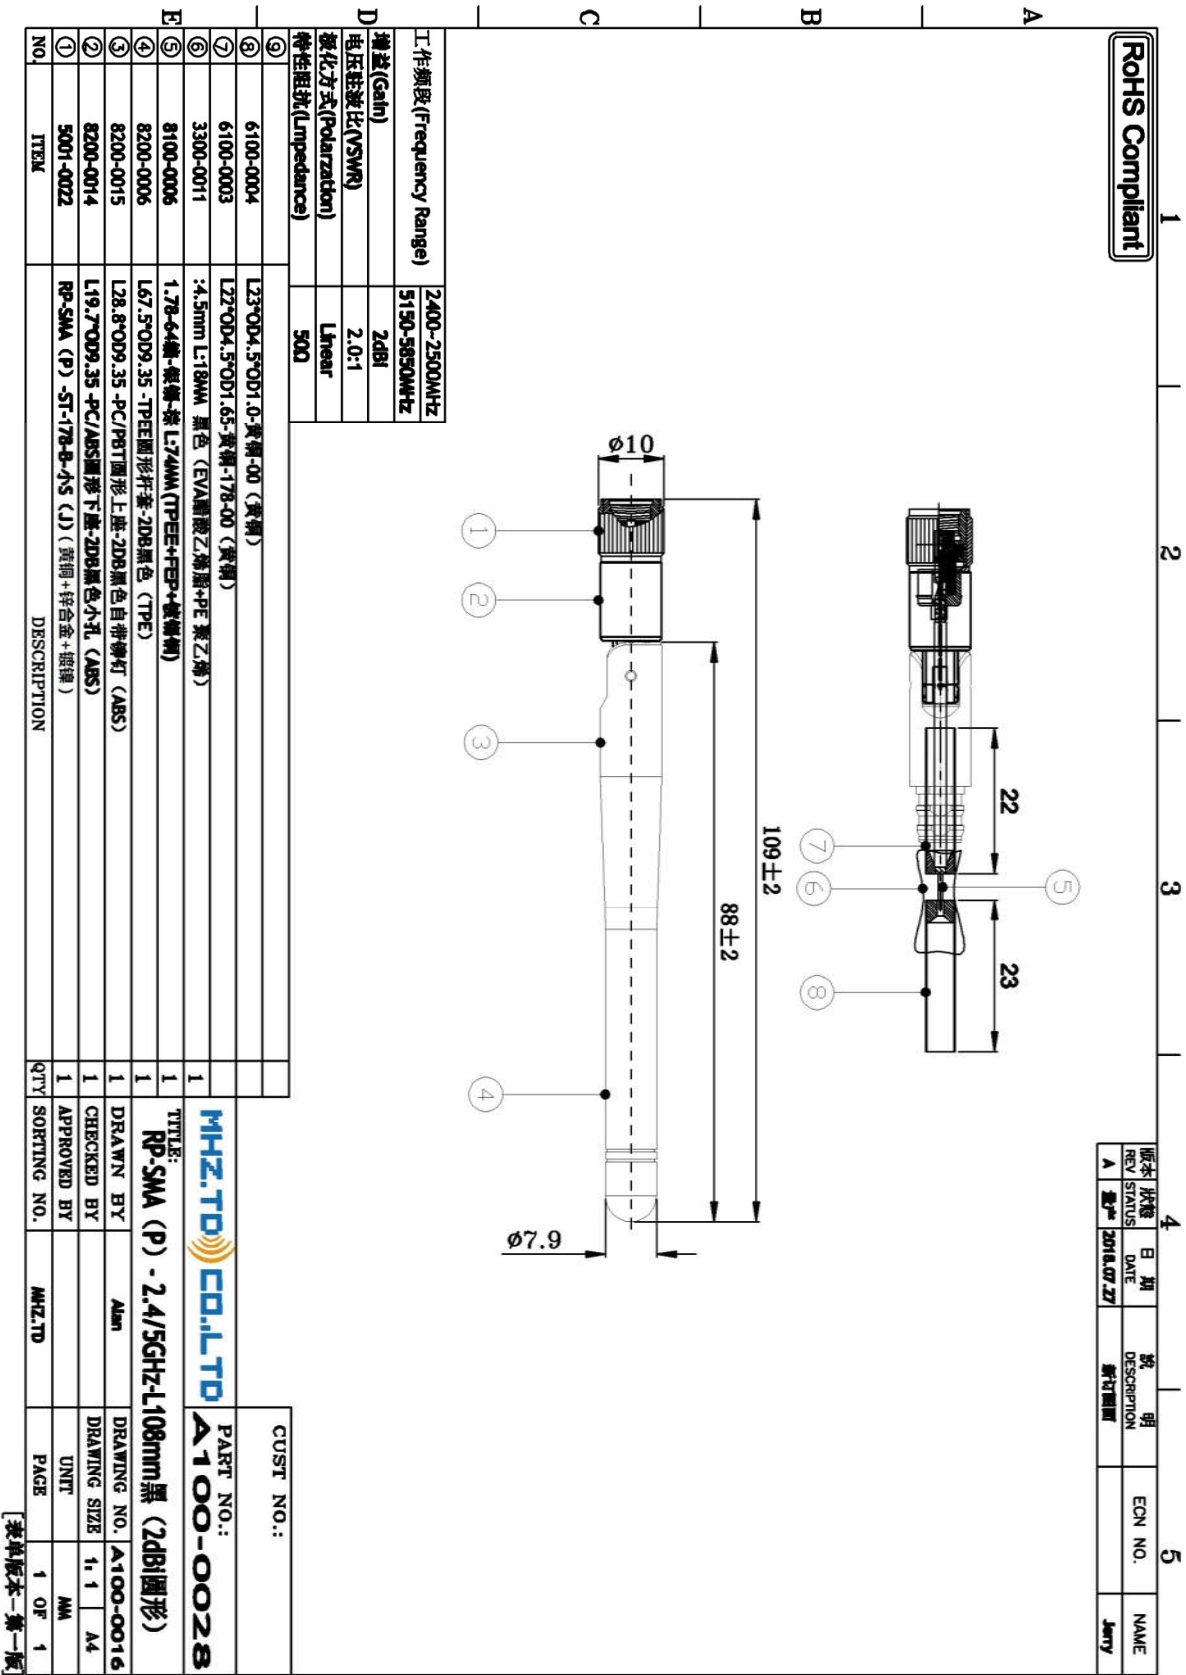


六: Microwave darkroom test report


Passive Test For 5150-5850									
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	UHS (%)	DHS (%)	Max (dB)	Min (dB)	Attenut Hor	Attenut Ver
5150	57.5	-2.4	1.29	35.8	21.768	1.29	-12.22	59.04	58.22
5220	61.2	-2.13	1.67	37.7	23.494	1.67	-11.29	58.69	58.07
5290	63	-2.01	1.75	37.7	25.293	1.75	-11.12	58.96	58.16
5360	52.7	-2.78	1.51	30.7	22.058	1.51	-17.05	59.02	58.59
5430	75.9	-1.2	2.95	42	33.867	2.95	-23.77	60.59	59.65
5500	64.2	-1.93	2.26	34.7	29.484	2.26	-19.56	60.82	59.59
5570	48.2	-3.17	1.17	25.7	22.509	1.17	-17.07	62.12	60.71
5640	76.9	-1.14	2.8	41.1	35.811	2.8	-12.97	62.52	61.91
5710	63.6	-1.96	1.55	33.3	30.287	1.55	-14.87	62.36	61.76
5780	59.8	-2.24	1.12	31.4	28.336	1.12	-12.43	62.8	62.24
5850	52.9	-2.77	0.73	28.2	24.658	0.73	-11.96	63.41	62.86

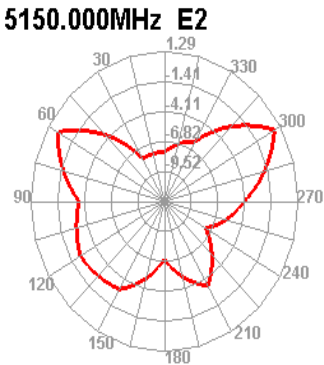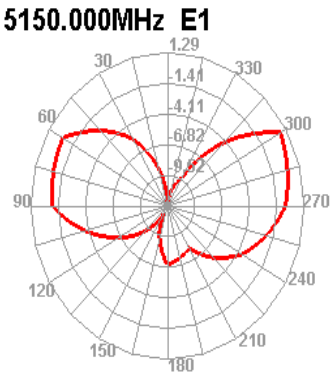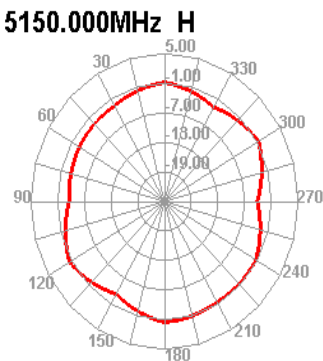


5220.000MHz




5220.000MHz H




5220.000MHz E1




5220.000MHz E2




5500.000MHz




5500.000MHz H




5500.000MHz E1

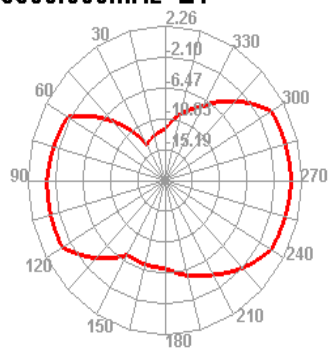


5500.000MHz E2




5850.000MHz




5850.000MHz H



5850.000MHz E1

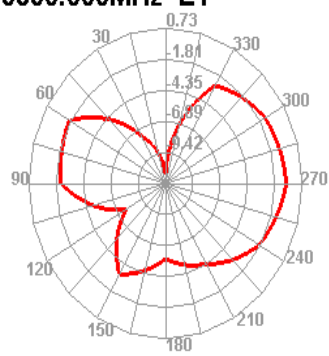


5850.000MHz E2




Passive Test For 2400-2500									
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	UHS (%)	DHIS (%)	Max (dB)	Min (dB)	Attenut Hor	Attenut Ver
2400	62.4	-2.05	2.06	26.7	35.695	2.06	-10.16	48.55	48.51
2410	62	-2.08	1.81	26.8	35.218	1.81	-9.81	48.59	48.53
2420	56.2	-2.5	1.17	24.5	31.7	1.17	-10.26	48.73	48.42
2430	53.4	-2.73	0.73	23.7	29.639	0.73	-10.6	48.44	48.12
2440	60.9	-2.16	1.05	27.6	33.234	1.05	-9.96	48.55	48.21
2450	64.7	-1.89	1.02	30	34.742	1.02	-9.68	48.76	48.47
2460	60.5	-2.19	0.47	28.6	31.893	0.47	-10.02	49.04	48.68
2470	57.3	-2.42	0.19	27.4	29.903	0.19	-10.08	48.91	48.68
2480	63.6	-1.97	0.57	30.8	32.767	0.57	-9.97	48.86	48.43
2490	73.2	-1.35	1.21	36	37.26	1.21	-9.61	49.07	48.72
2500	69.7	-1.57	1.06	34.7	35.013	1.06	-10.33	49.21	48.76


2400.000MHz




2400.000MHz H

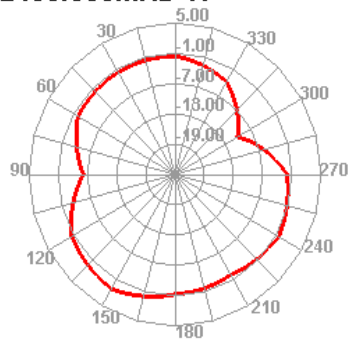


2400.000MHz E1

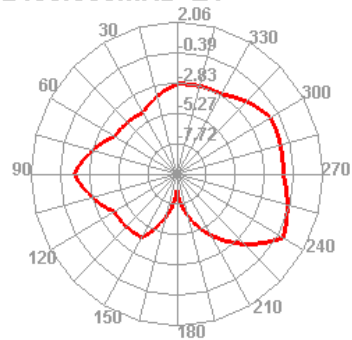


2400.000MHz E2

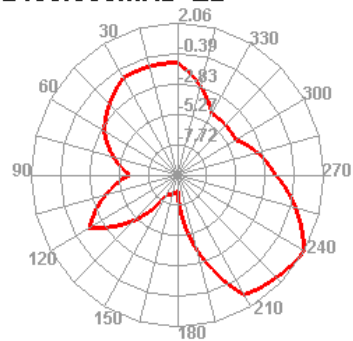


2410.000MHz




2410.000MHz H

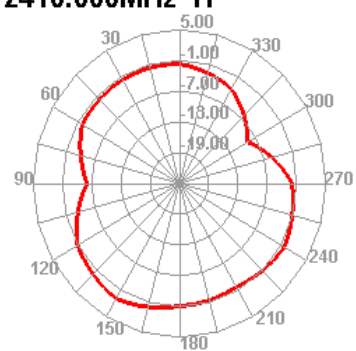


2410.000MHz E1

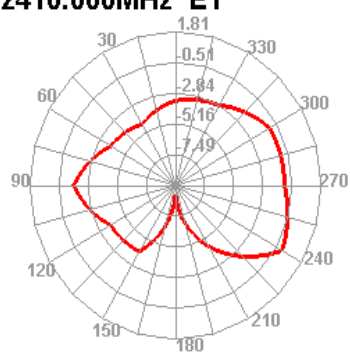


2410.000MHz E2

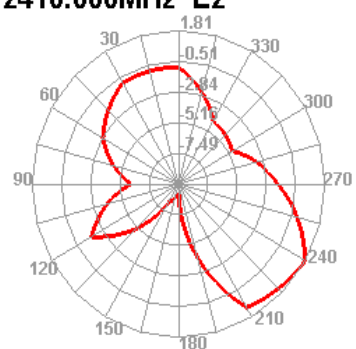

2450.000MHz




2450.000MHz H

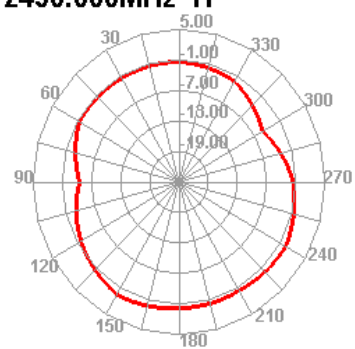


2450.000MHz E1




2450.000MHz E2

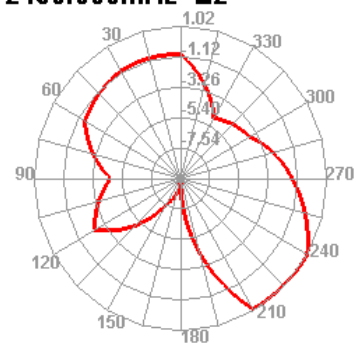

2500.000MHz




2500.000MHz H

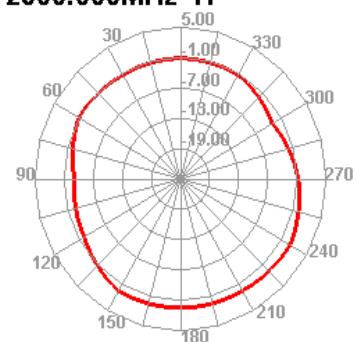

2500.000MHz E1



2500.000MHz E2

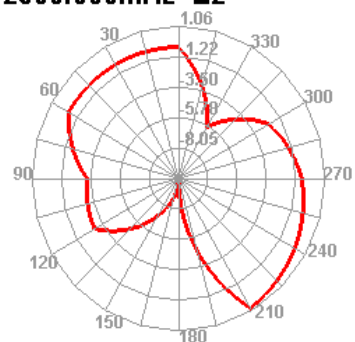

7.Environmental Test Report

No	Test Item	Test Methods and Conditions	Equipment	Test Result
1	Temperature and Humidity Test	Refer to EIA 364-31 Method III, Condition A The purpose of this test procedure is to evaluate the products used in the detailed standard test methods, which are evaluated by the effects of high humidity and heat, affecting the properties of the material.	K.SON INS THS-A4L-150	Pass
		Request: Temperature: 70°C Humidity: 90~95% (R.H)		
2	Low Temperature Test	Refer to Zhaohe's test standard: The measured sample should be placed in a temperature environment with a temperature set to -20 °C	K.SON INS THS-A4L-150	Pass
		Request : Time: 24H		
3	High Temperature Test	Refer to Zhaohe's test standard: The measured sample should be placed in a temperature environment with a temperature set to 70	K.SON INS THS-A4L-150	Pass
		Request: Time: 24H		
4	Thermal Shock	Refer to Zhaohe's test standard: The measured sample should be placed in a fixed environment with a temperature set to -20~70°C.	K.SON INS THS-A4L-150	Pass
		Request: More than 8H.(each time 30mins, 12 cycles)		
5	Salt Spray Test	Refer to Zhaohe's test standard: The measured sample should be placed in a fixed environment at its request: NaCL concentration: 40-60g/1Kg PH value: 6.5-7.2 Testing time: 24H	Salt Spray Tester	Pass
		1.No rust and peeling on gold plated products. 2.No rust on 2 or more points of other nickle plated, tin plated and galvanized products in the same axis or face.		

8: Mechanical Test Report

No	Test Item	Test Methods and Conditions	Equipment	Test Result
1	Vibration Test	Condition A The purpose of this test procedure is to evaluate the products used in the detailed standard test methods, which are evaluated by the movement or movement, affecting the performance of the material.	Vibration Tester	Pass
		Request: Vibration scope: 10-55HZ Displacement amplitude: 0.35mm Acceleration amplitude: 50.0M/S Frequency sweep times: 30times		
2	Low Temperature Test	Refer to Zhaohe's test standard: The measured sample should be placed at a certain height, its height is set to 1M, according to the direction of 6 free fall 3 times.	Drop Test Fixture	Pass
		Request: After the drop test, the mechanical properties of the product are normal.		
3	High Temperature Test	Refer to Zhaohe's test standard: Fixed the object by the jig. Using a certain force to opposite direction after the force, the product assembly can not fall off.	Tension Tester	Pass
		Request: 1. Products assembly can not fall off. 2. SMA minimum tension: 3KG		

9. Packaging instruction report

Package by PE bags, Antenna 100PCS/ bag, Feeder line 200PCS/ bag;

The carton label shall contain the following information: supplier name, customer material number, material name, RoHS tag, packing quantity, production date.

REMARKS:

- 1. Product samples provided by the supplier and the amount of material must meet the technical requirements**
- 2. Each page and all the attachments were confirmed need official seal of the supplier**
- 3. Each page not enough to fill out, the supplier can increase on its own**
- 4. Technical specification must be provided prior to trial production, and need to be admitted as the basic condition material approval.**