



EZ-TagSwift mini

Integrated Portable Tag tester Instrument

- Tag test equipment for applications in laboratories, label production, and engineering sites.
- Lightweight design, easy to carry.
- Supports 840~960 MHz frequency range.
- Tag Chip Type Identification.
- Synchronized testing of EPC+TID.
- Can save baseline tag curves for easy comparison of target tags.
- Built-in broadband antenna for quick testing.
- Supports external antenna, which flexibly adapts to various application scenarios.
- Comes with its own screen for easy viewing of data.
- Built-in 4000mAh rechargeable battery, can work continuously for more than 3 hours.
- Support USB port communication and charging.

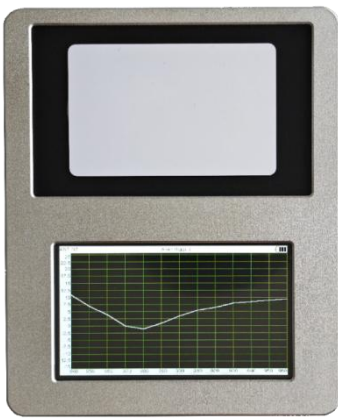

Built-in Antenna Test

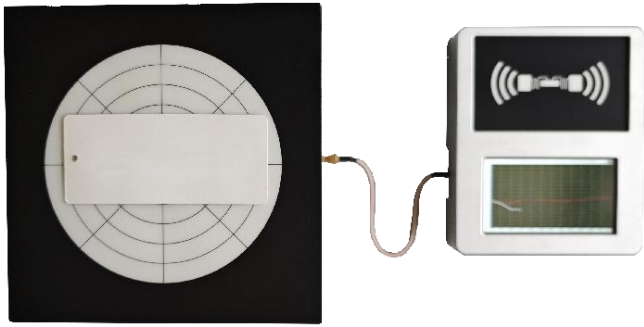

External Antenna Test

Integrated Portable Tag tester Instrument

Model:EZ-TagSwift

Input:5V $\approx$ 2000mA

FCC ID:2BKVHEZ-TAGSWIFTM

CE

FC

Easy RFID Technologies Ltd

Address:581, No.93 Qianjin Second Road, 81st District,HexiCommunity, Xixiang Street, Bao'an District, Shenzhen

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and

(2) This device must accept any interference received, including interference that may cause undesired operation.



Packing list



FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- ncrease the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.



Easy RFID Technologies Ltd

Address: 581, No. 93 Qianjin Second Road, 81st District, Hexi Community, Xixiang Street, Bao'an District, Shenzhen,518101, China.
Email: sales@easy-rfid.net Web: www.easy-rfid.net

Physical Parameters	
Dimensions（L×W×H）	168mm×138mm×45mm
Weight	825g
Body Material	Aluminum alloy
LCD Display Specifications (LCM)	4.3
External Antenna Interface	SMA female connector
Communication & Charging Interface	USB Type-C
Ambient Conditions	
Operating temperature	0℃ to +40℃
Storage temperature	-20℃ to +60℃
Relative humidity	10%RH to 90%RH

Technical Data		
Item	Technical indicators	Remark
Frequency range	840MHz~960MHz	
Rated power	-20~-25dBm	
Battery capacity	4200mAh	
Charging voltage\current	5V\2000mA	
Other Functions	EPC+TID Reading	
	Tag model identification	
	Built-in antenna + external antenna	
	Base curve recording	

Note: This product has applied for both FCC and RED certifications. The frequency range of the product can be controlled within 902.25 to 927.25MHz through software