



FCC TEST REPORT

FCC ID: 2BLJ6-W-920

On Behalf of

Shenzhen Wodeke Electronic Technology Co., Ltd.

FM AM radio TF card BT music player

Model No.: W-920

Prepared for : Shenzhen Wodeke Electronic Technology Co., Ltd.
Address : 4th Floor,Building C11,Fuyuan Industrial City,No. 598 Zhoushi
Road,Hangcheng Street,Bao'an District,Shenzhen

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2607137-C03-R01
Date of Receipt : July 27, 2026
Date of Test : July 27, 2026 – August 13, 2026
Date of Report : September 2, 2026
Version Number : V0
Test Result : Pass

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. Summary of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of Test	8
2.5. Test Mode Description	9
2.6. Test Conditions	9
2.7. Test Facility	10
2.8. Measurement Uncertainty	10
2.9. Test Equipment List	11
3. Maximum Peak Output power	16
3.1. Limit	16
3.2. Test Procedure	16
3.3. Test Setup	16
3.4. Test Result	16
4. Bandwidth	17
4.1. Limit	17
4.2. Test Procedure	17
4.3. Test Setup	17
4.4. Test Result	17
5. Carrier Frequency Separation	28
5.1. Limit	28
5.2. Test Procedure	28
5.3. Test Setup	28
5.4. Test Result	28
6. Number Of Hopping Channel	30
6.1. Limit	30
6.2. Test Procedure	30
6.3. Test Setup	30
6.4. Test Result	30
7. Dwell Time	32
7.1. Test Limit	32
7.2. Test Procedure	32
7.3. Test Setup	32
7.4. Test Result	32
8. Radiated emissions	42
8.1. Limit	42
8.2. Block Diagram of Test Setup	43

8.3. Test Procedure.....	44
8.4. Test Result.....	44
9. RF Conducted Spurious Emissions.....	50
9.1. Block Diagram of Test Setup	50
9.2. Limits	50
9.3. Test Procedure	50
9.4. Test Result.....	50
10. Band Edge Compliance.....	60
10.1. Block Diagram of Test Setup	60
10.2. Limit	60
10.3. Test Procedure	61
10.4. Test Result	61
11. Band Edge (Conducted).....	64
11.1. Block Diagram of Test Setup.....	64
11.2. Test Limits	64
11.3. Test Procedure.....	64
11.4. Test Results	65
12. Power Line Conducted Emissions.....	77
12.1. Block Diagram of Test Setup	77
12.2. Limit	77
12.3. Test Procedure	77
12.4. Test Result	77
13. Antenna Requirements.....	80
13.1. Limit	80
13.2. Result.....	80
14. Test setup photo	81
14.1. Photo of Radiated Emission Test	81
14.2. Photo of Conducted Emission Test	82

TEST REPORT DECLARATION

Applicant : Shenzhen Wodeke Electronic Technology Co., Ltd.
Address : 4th Floor,Building C11,Fuyuan Industrial City,No. 598 Zhoushi Road,Hangcheng Street,Bao'an District,Shenzhen
Manufacturer : Shenzhen Wodeke Electronic Technology Co., Ltd.
Address : 4th Floor,Building C11,Fuyuan Industrial City,No. 598 Zhoushi Road,Hangcheng Street,Bao'an District,Shenzhen
EUT Description : FM AM radio TF card BT music player
(A) Model No. : W-920
(B) Trademark : N/A

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.
After the test, our opinion is that EUT compliance with the requirement of the above standards.
This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: David Hu
Project Engineer 

Approved by (name + signature).....: Alan Fan
Project Manager 

Date of issue.....: September 2, 2026

Revision History

Revision	Issue Date	Revisions	Revised By
V0	September 2, 2026	Initial released Issue	David Hu

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10-2020	P
Bandwidth	FCC Part 15: 15.215 ANSI C63.10-2020	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10-2020	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10-2020	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10-2020	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10-2020	P
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10-2020	P
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10-2020	P
Antenna requirement	FCC Part 15: 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description : FM AM radio TF card BT music player
Model Number : W-920
Diff : N/A
Power supply : DC 5V from Type-C port and DC 3.7V from battery

Radio Technology : Bluetooth BR/EDR

Operation frequency : 2402-2480MHz
Channel No. : 79 Channels
Channel spacing : 1MHz
Modulation type : GFSK, $\pi/4$ DQPSK, 8DPSK

Antenna Type : PCB antenna, Maximum Gain is 2.338dBi
(Antenna information is provided by applicant.)
(Testing lab is not responsible for the accuracy of the information.)

Software version : V1.0

Hardware version : V1.0

Intend use environment : Residential, commercial and light industrial environment


2.2. Accessories of Device (EUT)

Accessories : N/A
Manufacturer : N/A
Model : N/A
Ratings : N/A

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
1.	Notebook PC	Lenovo	ThinkPad L14	N/A	N/A

2.4. Block Diagram of Test

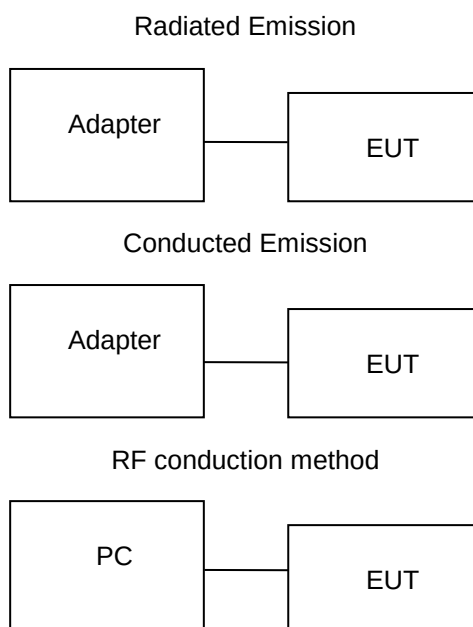

2.5. Test Mode Description

Tested mode, channel information		
Mode	Channel	Frequency (MHz)
GFSK, $\pi/4$ DQPSK, 8DPSK Hopping-off mode	Low :CH0	2402
	Middle: CH39	2441
	High: CH78	2480
GFSK, $\pi/4$ DQPSK, 8DPSK Hopping-on mode	Hopping	2402-2480

Using FCC_assist_1.0.2.2 testing software to control EUT work in Continuous TX mode, and select test channel, wireless mode, the power level of the test is set to default.

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	24℃
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	4.17dB(Polarize: V)
	4.08dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 18GHz)	4.29dB(Polarize: V)
	4.82dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31dB(Polarize: V)
	4.30dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.3℃
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%
Uncertainty for Power Spectral Density	0.69dB
Uncertainty for Occupied-Bandwidth	4.22%

2.9. Test Equipment List

Equipment	Manufacturer	Model No.	Firmware version	Serial No.	Last Cal.	Cal. Due day
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2025.03.09	4Year
4*4*3 Shielded room	CHENYU	4*4*3	/	N/A	2025.03.09	4Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2025.08.04	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2025.08.04	1Year
Spectrum analyzer	Keysight	N9020A	A.19.05	MY54500254	2025.08.04	1Year
CMW500	ROHDE&SCHWARZ	CMW500	V 3.7.20	1201.0002K50 -149889-wL	2025.08.04	1Year
CMW500	ROHDE&SCHWARZ	CMW500	V 3.7.22	1201.0002K50 -117239-sM	2025.08.04	1Year
UXM 5G Base Wireless Test Platform	Keysight	E5175E	1.8.1.2908 2(NR)(LTE)	MY62226130	2026.03.03	1Year
Test Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03 -102082-Wa	2025.08.04	1Year
Test Receiver	ROHDE&SCHWARZ	ESCI	4.42 SP1	101165	2025.08.04	1Year
Bilog Antenna	SCHWARZBECK	VULB 9168	/	VULB 9168#627	2025.08.11	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2025.08.11	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2025.08.11	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2025.08.04	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2025.08.04	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2025.08.04	1Year
Amplifier	HP	HP8347A	/	2834A00455	2025.08.04	1Year
Amplifier	Agilent	8449B	/	3008A02664	2025.08.04	1Year
L.I.S.N.#1	SCHWARZBECK	NSLK8126	/	8126-466	2025.08.04	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2025.08.04	1Year
Pulse Limiter	SCHWARZBECK	9516F	/	9618	2025.08.04	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2025.08.11	2Year
Preamplifier	SKET	LNPA_1840-5 0	/	SK201810180 1	2025.08.04	1 Year
Vector Signal Generator	Agilent	N5182A	/	MY49060042	2025.08.04	1 Year
Vector Signal Generator	Agilent	N5172B	2.02	MY51350397	2025.08.04	1 Year
Power Meter	Agilent	E4419B	/	GB40202122	2025.08.04	1 Year
Power Sensor	Agilent	E9300A	/	MY41496628	2025.08.04	1 Year
Power Sensor	Agilent	E9304A	/	MY41496815	2025.08.04	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO	2025.08.04	1 Year

				91		
Power Sensor	DARE	RPR3006W	/	15100041SNO 92	2025.08.04	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205- 01	2025.07.14	1 Year
Electronic Thermo-Hygromet er	S.H.Qixiang	HTC-1	/	N/A	2025.08.04	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2025.08.04	1 Year
Adjustable attenuator	MWRFtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A
6dB Fixed Attenuator	SKET	AP_DC01G-2 W-N-6dB	/	N/A	2025.08.04	1 Year

Equipment	Manufacturer	Model No.	Firmware version	Serial No.	Last Cal.	Cal. Due day
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2025/03/09	4 Year
4*4*3 Shielded room	CHENYU	4*4*3	/	N/A	2025/03/09	4 Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2026/7/28	1 Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2026/7/27	1 Year
Spectrum analyzer	Keysight	N9020A	A.19.05	MY54500254	2026/7/27	1 Year
Spectrum analyzer	ROHDE&SCHWARZ	FSU	4.71.SP5	200002	2026/7/28	1 Year
CMW500	ROHDE&SCHWARZ	CMW500	V 3.7.22	1201.0002K50-117239-sM	2026/7/27	1 Year
UXM 5G Base Wireless Test Platform	Keysight	E5175E	1.8.1.2908 2(NR)(LTE)	MY62226130	2026/03/03	1 Year
Test Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-102082-Wa	2026/7/27	1 Year
Test Receiver	ROHDE&SCHWARZ	ESCI	4.42 SP1	101165	2026/7/28	1 Year
Bilog Antenna	SCHWARZBECK	VULB 9168	/	VULB 9168#627	2025/08/11	2 Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2025/08/11	2 Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2025/08/11	2 Year
RF Cable	Resenberger	Cable 1	/	RE1	2026/7/27	1 Year
RF Cable	Resenberger	Cable 2	/	RE2	2026/7/27	1 Year
RF Cable	Resenberger	Cable 3	/	CE1	2026/7/27	1 Year
Amplifier	HP	HP8347A	/	2834A00455	2026/7/28	1 Year
Amplifier	Agilent	8449B	/	3008A02664	2026/7/27	1 Year
Amplifier	SKET	LNPA_0118G-45	/	SK2020010801	2026/7/27	1 Year
Filter/Amplifier bank unit	SKET	RSESU-HPH-LNPP18G	/	SK20190712	2026/7/27	1 Year
L.I.S.N.#1	SCHWARZBECK	NSLK8126	/	8126-466	2026/7/28	1 Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2026/7/28	1 Year
Pulse Limiter	SCHWARZBECK	9516F	/	9618	2026/7/27	1 Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2025/8/11	2 Year
Preamplifier	SKET	LNPA_1840-50	/	SK2018101801	2026/7/27	1 Year
Vector Signal Generator	Agilent	N5182A	/	MY49060042	2026/7/28	1 Year
Vector Signal Generator	Agilent	N5172B	2.02	MY51350397	2026/7/27	1 Year
Analog Signal	HP	83712B	10.02	US34490219	2026/7/27	1 Year

Generator						
Power Meter	Agilent	E4419B	/	GB40202122	2026/7/27	1 Year
Power Sensor	Agilent	E9300A	/	MY41496628	2026/7/27	1 Year
Power Sensor	Agilent	E9304A	/	MY41496815	2026/7/27	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO 91	2026/7/28	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO 92	2026/7/28	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205- 01	2026/07/07	1 Year
Electronic Thermo-Hygromet er	S.H.Qixiang	HTC-1	/	N/A	2026/7/31	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2026/7/27	1 Year
Adjustable attenuator	MWRFtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A
6dB Fixed Attenuator	SKET	AP_DC01G-2 W-N-6dB	/	N/A	2026/7/28	1 Year

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	Farad	Alpha-3A1
CE	EZ-EMC	Farad	Alpha-3A1
RF-CE	MTS 8310	MWRFtest	V2.0.0.0

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit

Please refer section 15.247.


For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

Please refer ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

3.3. Test Setup



3.4. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	-4.664	21	Pass
NVNT	1-DH5	2441	Ant1	-3.599	21	Pass
NVNT	1-DH5	2480	Ant1	-1.557	21	Pass
NVNT	2-DH5	2402	Ant1	-3.586	21	Pass
NVNT	2-DH5	2441	Ant1	-2.201	21	Pass
NVNT	2-DH5	2480	Ant1	-1.975	21	Pass
NVNT	3-DH5	2402	Ant1	-3.137	21	Pass
NVNT	3-DH5	2441	Ant1	-2.695	21	Pass
NVNT	3-DH5	2480	Ant1	-2.231	21	Pass

4. BANDWIDTH


4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Setup




4.4. Test Result

-20dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	1.032	/	Pass
NVNT	1-DH5	2441	Ant1	1.034	/	Pass
NVNT	1-DH5	2480	Ant1	1.034	/	Pass
NVNT	2-DH5	2402	Ant1	1.298	/	Pass
NVNT	2-DH5	2441	Ant1	1.392	/	Pass
NVNT	2-DH5	2480	Ant1	1.37	/	Pass
NVNT	3-DH5	2402	Ant1	1.328	/	Pass
NVNT	3-DH5	2441	Ant1	1.292	/	Pass
NVNT	3-DH5	2480	Ant1	1.338	/	Pass

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

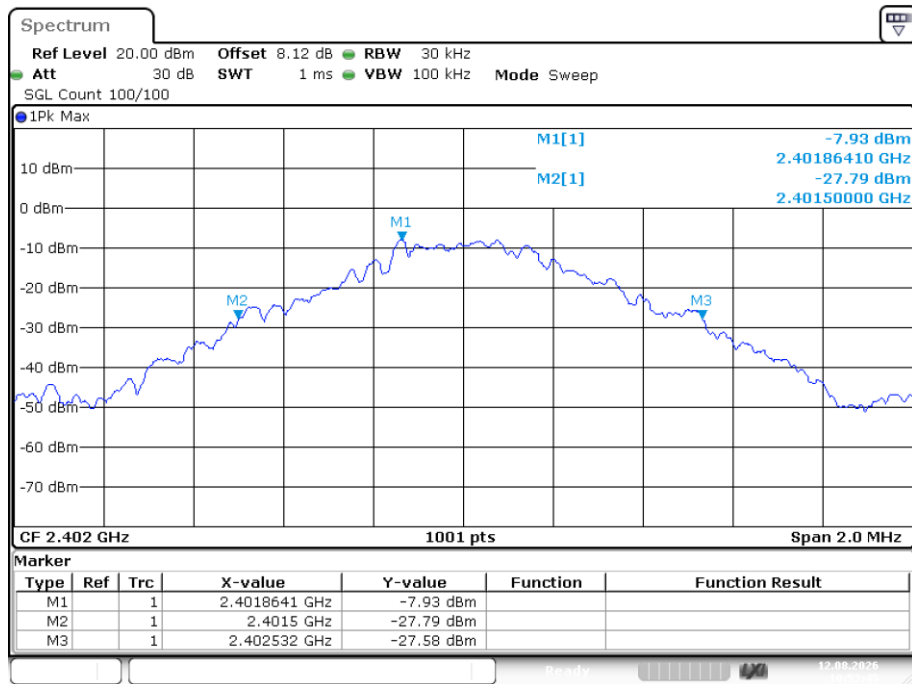


Date: 12.AUG.2026 10:53:45

-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

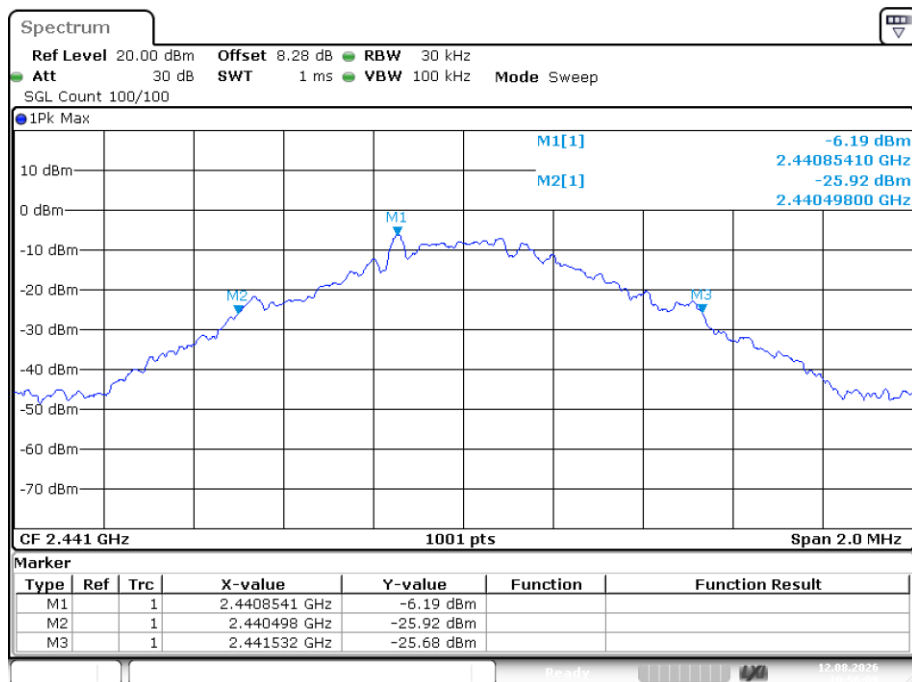


Date: 12.AUG.2026 10:56:09

-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

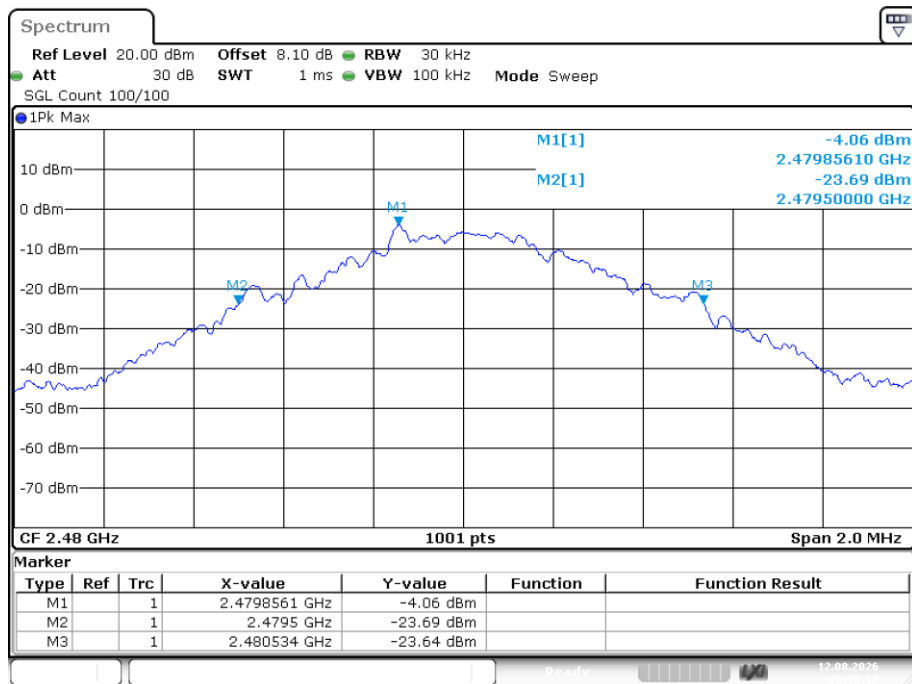


Date: 12.AUG.2026 10:58:18

-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

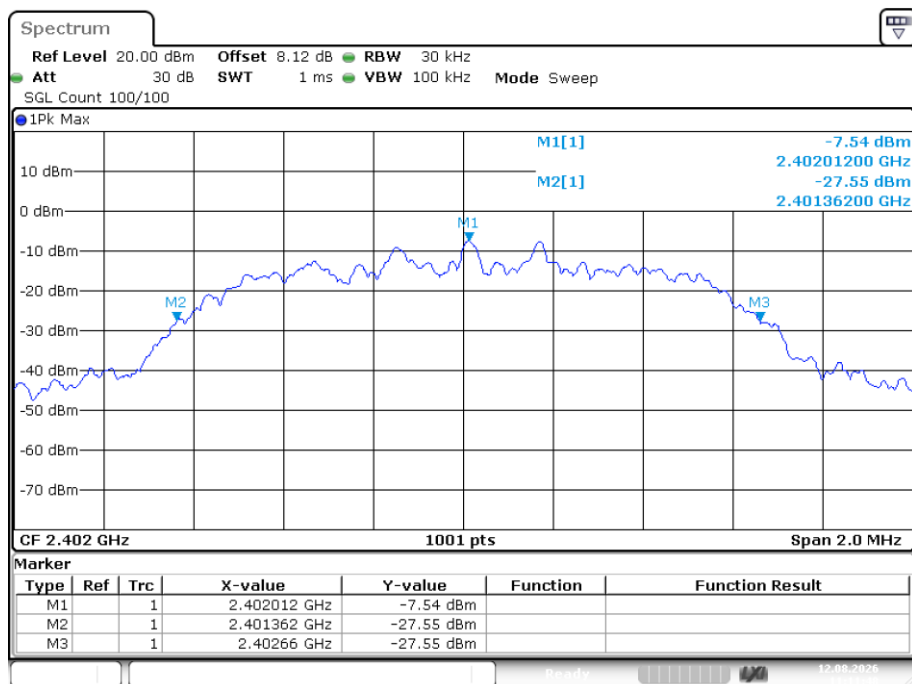


Date: 12.AUG.2026 11:11:48

-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

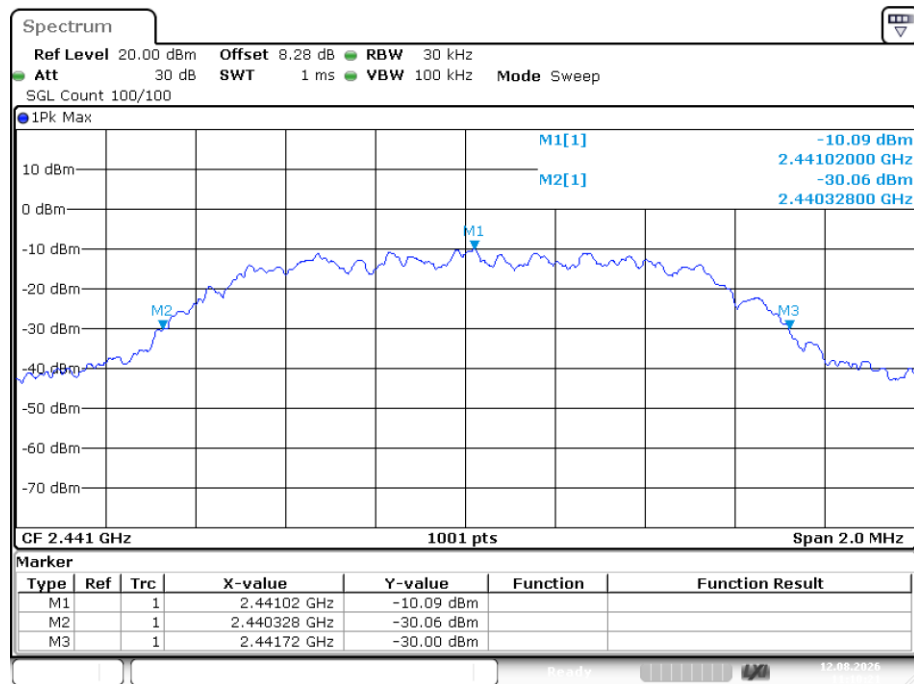


Date: 12.AUG.2026 11:10:21

-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

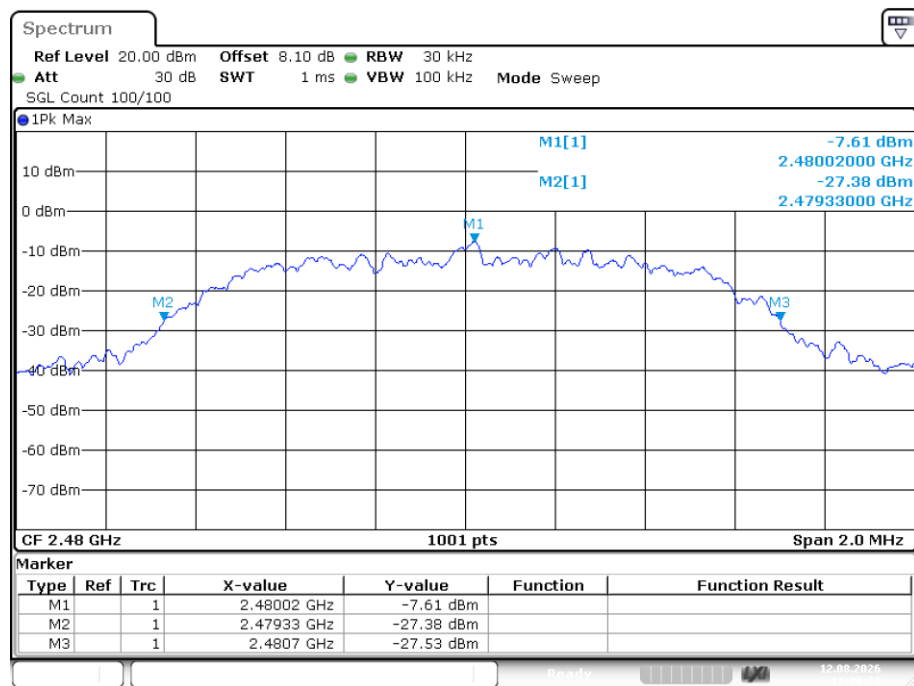


Date: 12.AUG.2026 11:08:22

-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

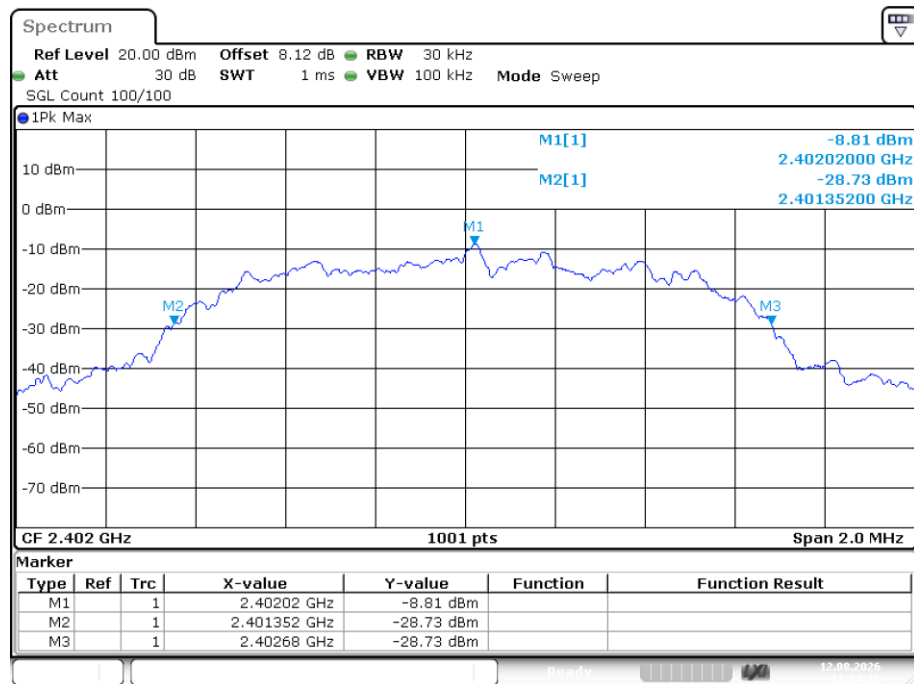


Date: 12.AUG.2026 11:24:16

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

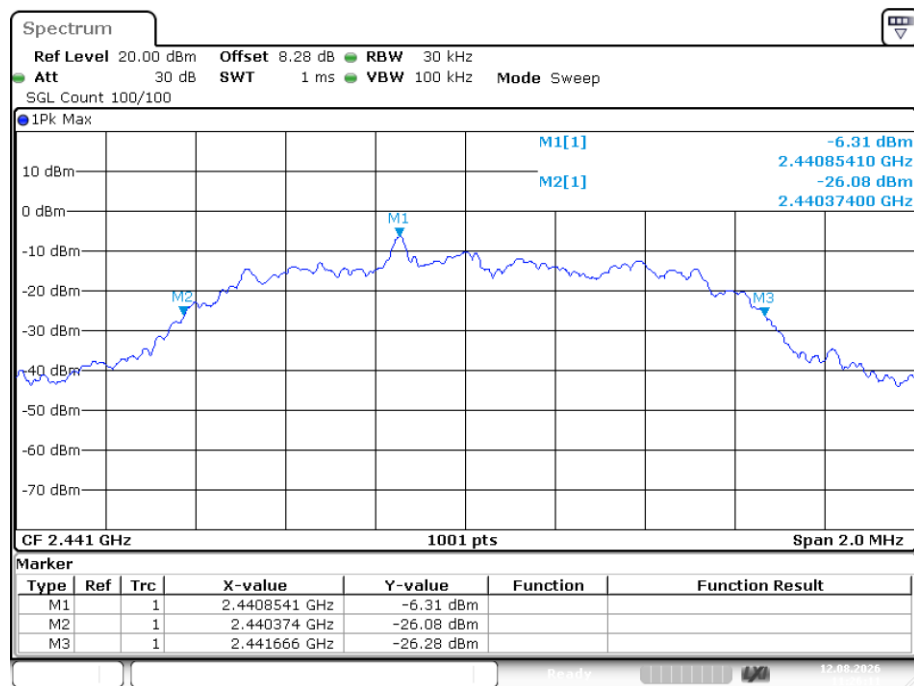

Date: 12.AUG.2026 11:26:11

-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1

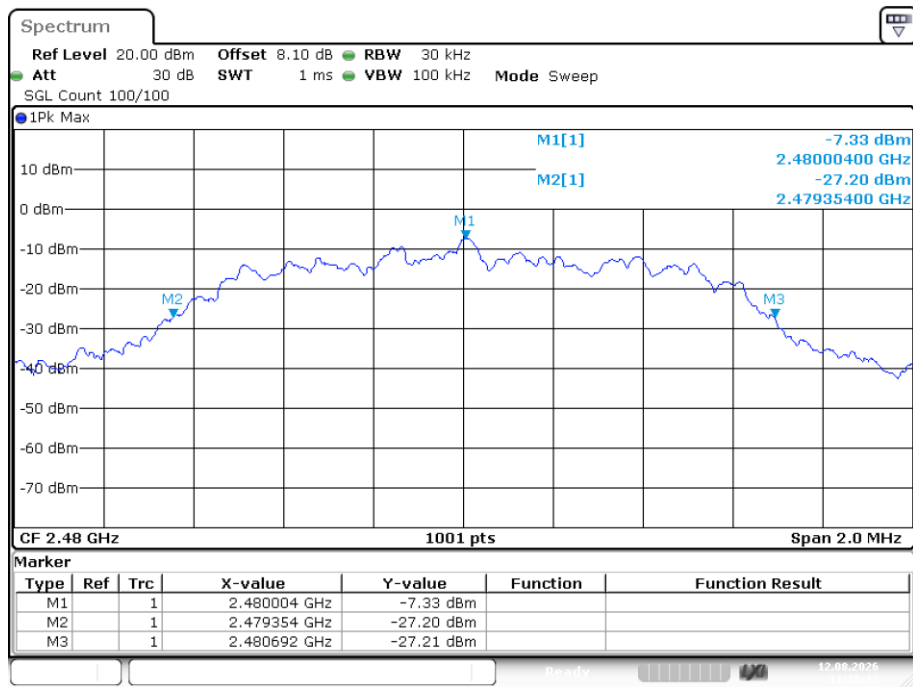


Date: 12.AUG.2026 11:28:12

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH5	2402	Ant1	0.939
NVNT	1-DH5	2441	Ant1	0.957
NVNT	1-DH5	2480	Ant1	0.967
NVNT	2-DH5	2402	Ant1	1.219
NVNT	2-DH5	2441	Ant1	1.227
NVNT	2-DH5	2480	Ant1	1.261
NVNT	3-DH5	2402	Ant1	1.227
NVNT	3-DH5	2441	Ant1	1.227
NVNT	3-DH5	2480	Ant1	1.219

OBW NVNT 1-DH5 2402MHz Ant1

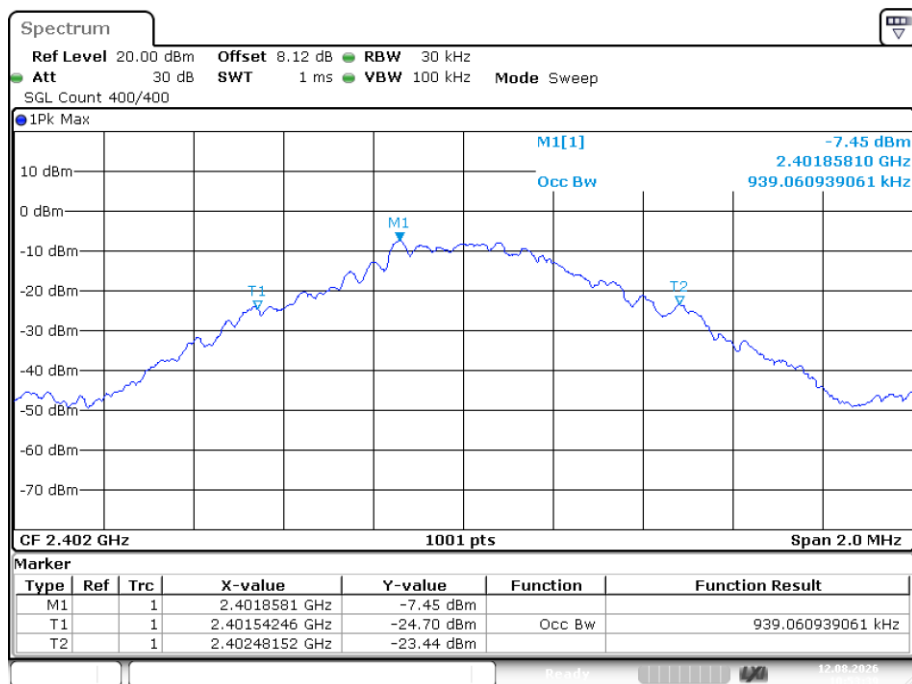


Date: 12.AUG.2026 10:53:38

OBW NVNT 1-DH5 2441MHz Ant1

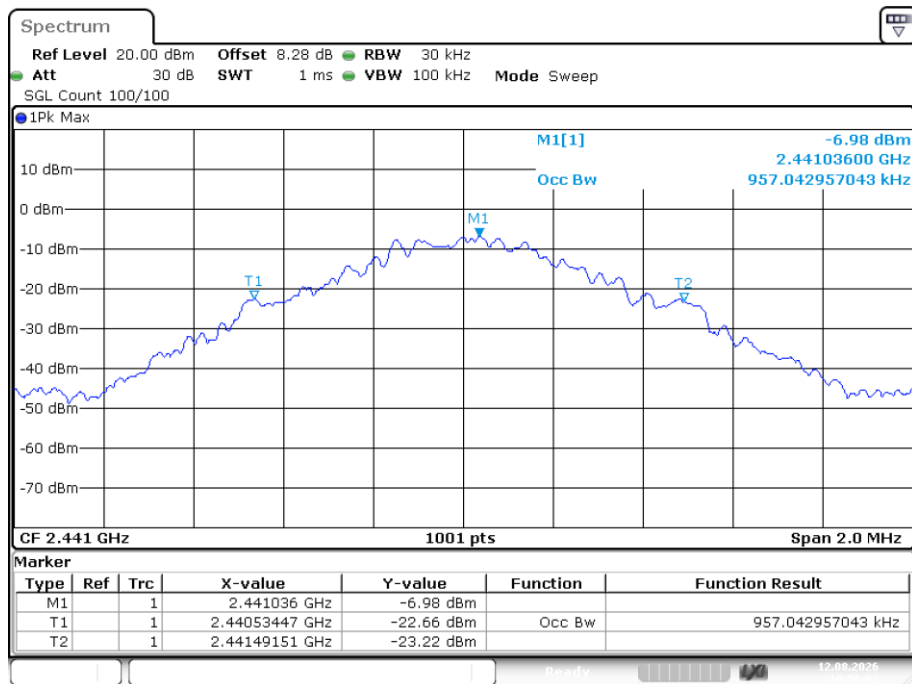


Date: 12.AUG.2026 10:56:02

OBW NVNT 1-DH5 2480MHz Ant1

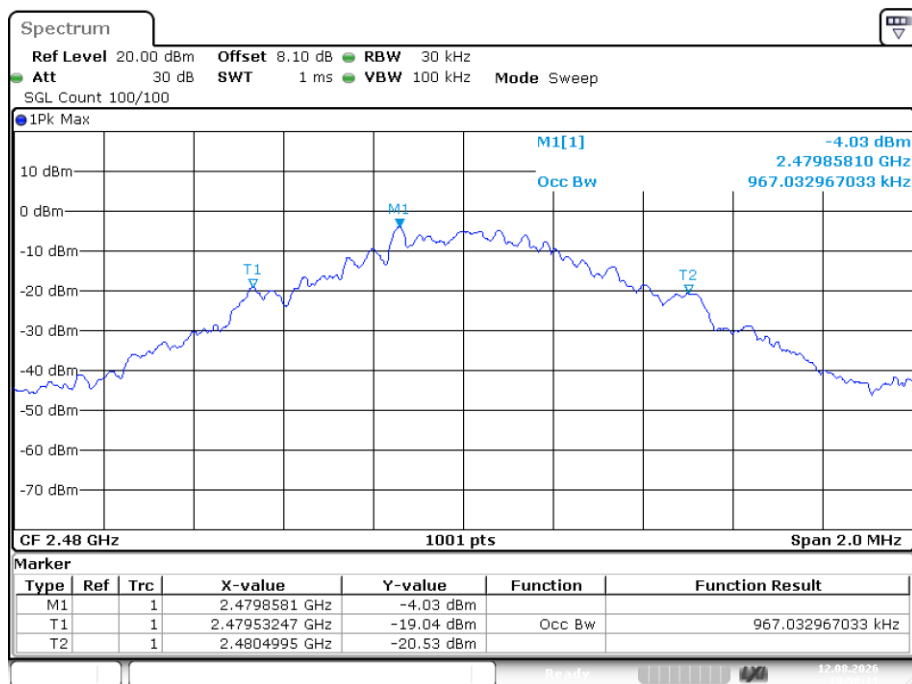


Date: 12.AUG.2026 10:58:11

OBW NVNT 2-DH5 2402MHz Ant1

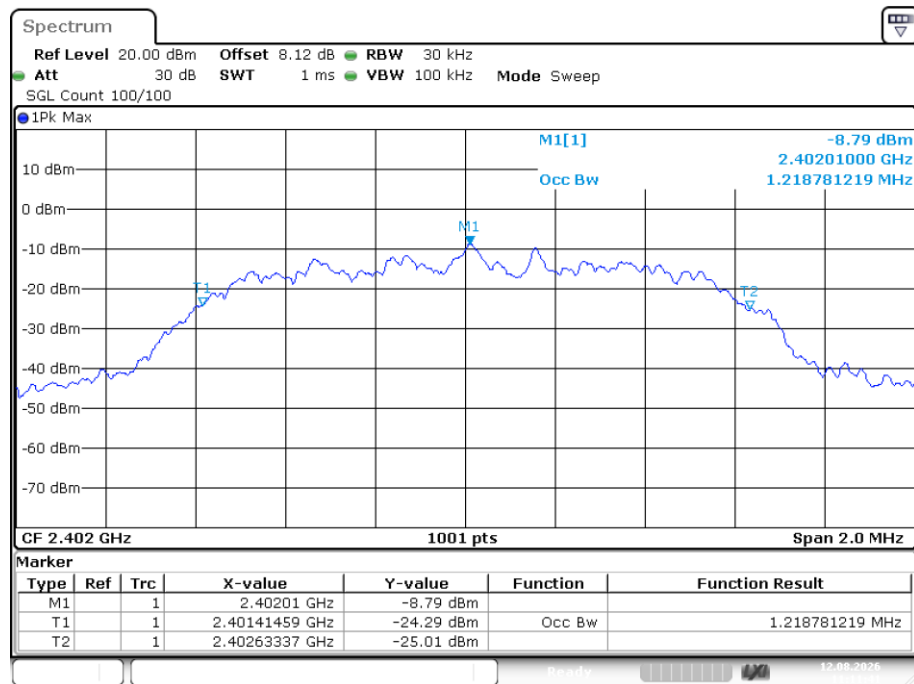


Date: 12.AUG.2026 11:11:41

OBW NVNT 2-DH5 2441MHz Ant1

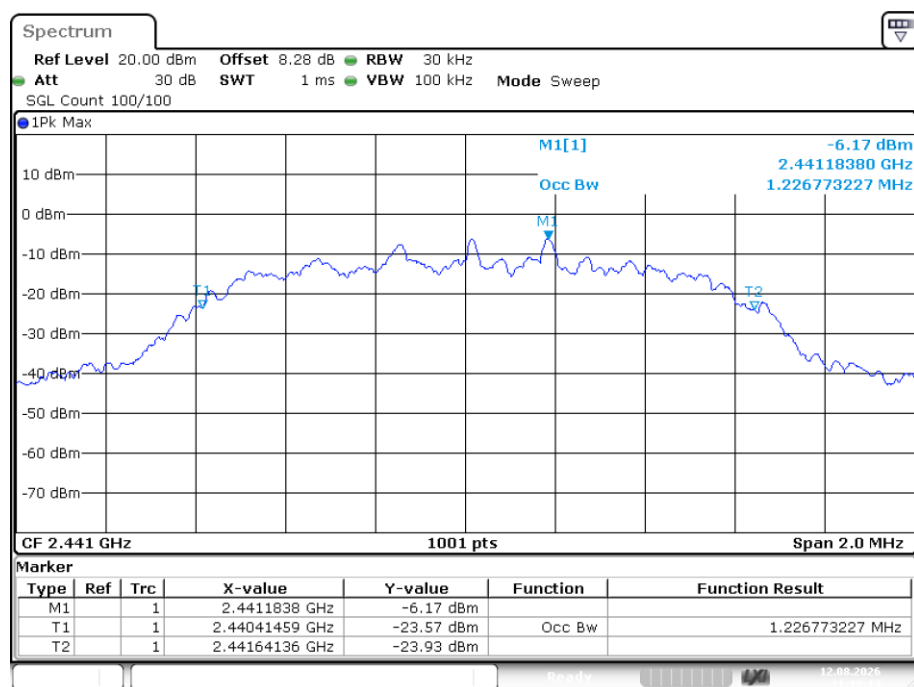


Date: 12.AUG.2026 11:10:14

OBW NVNT 2-DH5 2480MHz Ant1

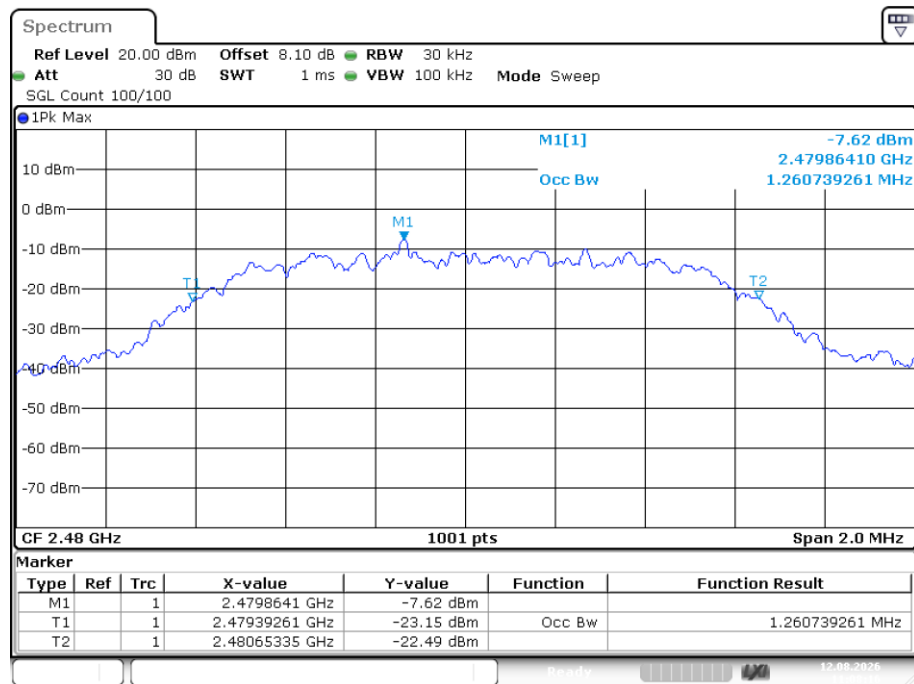


Date: 12.AUG.2026 11:08:15

OBW NVNT 3-DH5 2402MHz Ant1

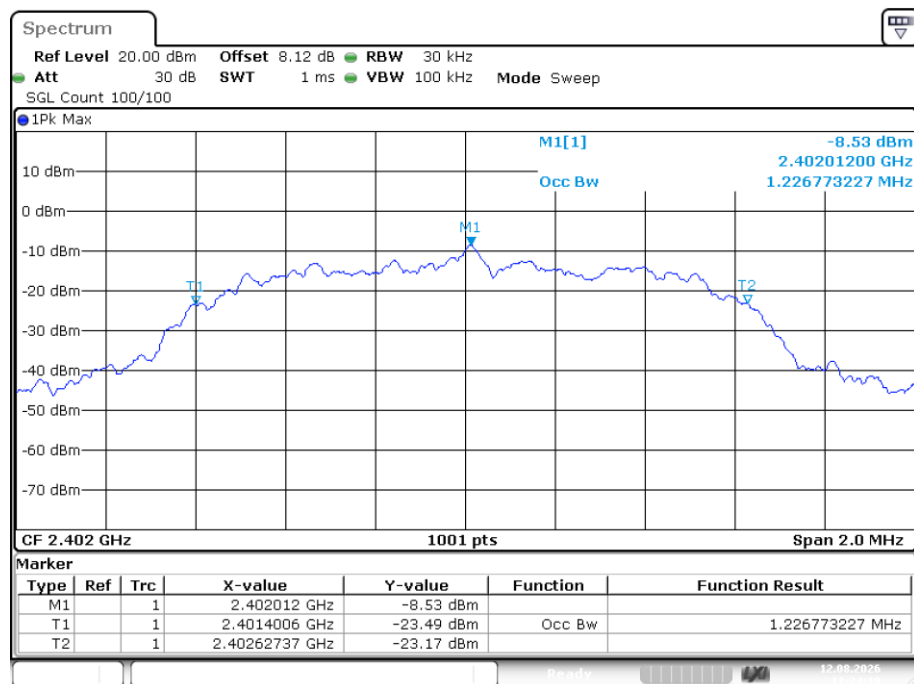


Date: 12.AUG.2026 11:24:09

OBW NVNT 3-DH5 2441MHz Ant1

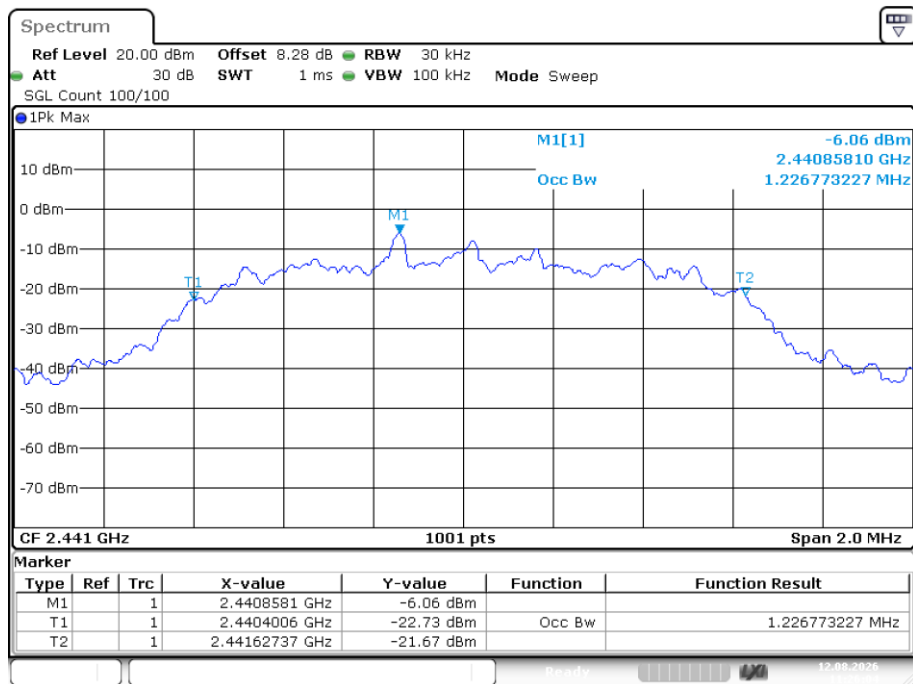

Date: 12.AUG.2026 11:26:03

OBW NVNT 3-DH5 2480MHz Ant1

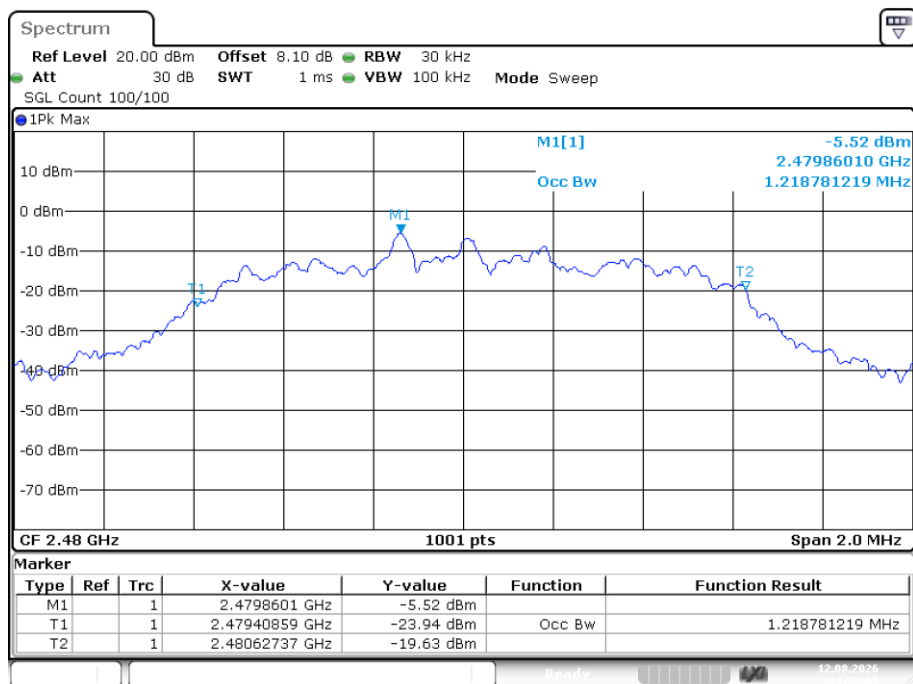

Date: 12.AUG.2026 11:28:05

5. CARRIER FREQUENCY SEPARATION


5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

5.2. Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

5.3. Test Setup




5.4. Test Result

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2441.11	2442.152	1.042	1.034	Pass
NVNT	2-DH5	Ant1	2441.026	2442.006	0.98	0.928	Pass
NVNT	3-DH5	Ant1	2440.934	2441.866	0.932	0.861	Pass

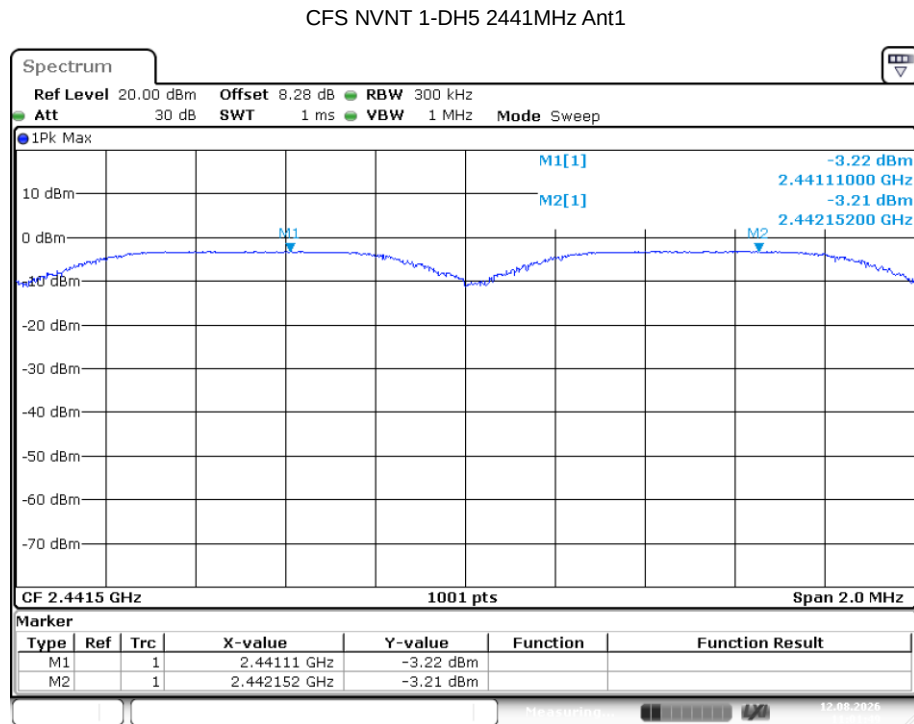


Date: 12.AUG.2026 11:01:49

CFS NVNT 2-DH5 2441MHz Ant1

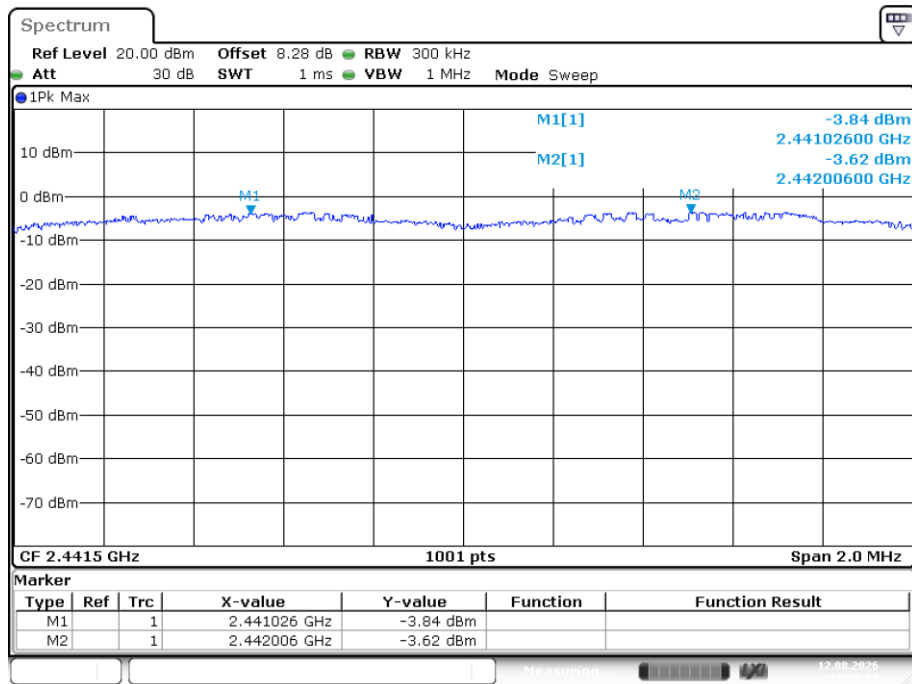

Date: 12.AUG.2026 11:20:12

CFS NVNT 3-DH5 2441MHz Ant1

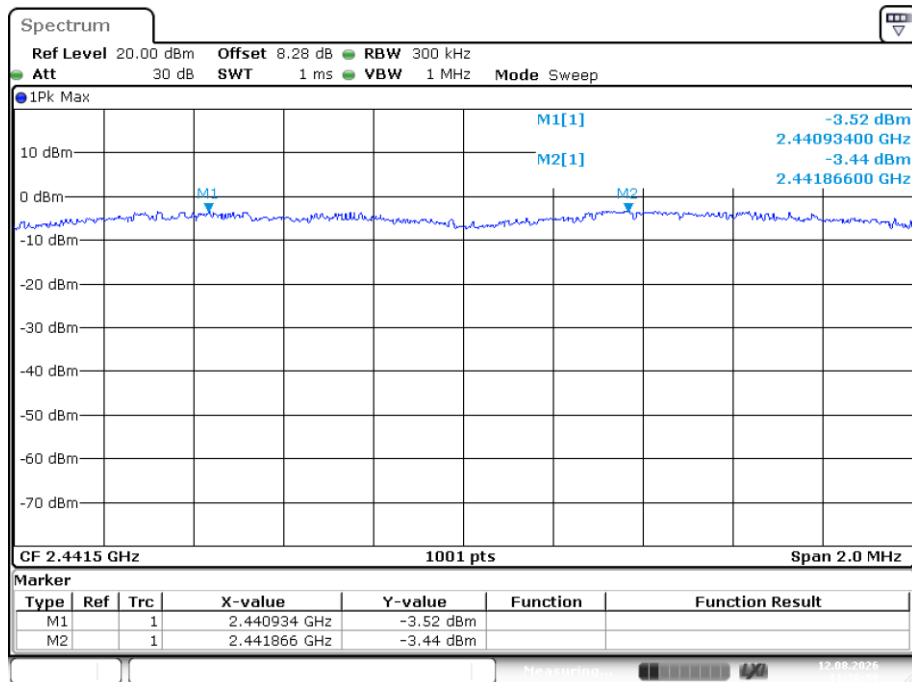

Date: 12.AUG.2026 11:36:59

6. NUMBER OF HOPPING CHANNEL


6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW.


6.3. Test Setup




6.4. Test Result

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass

Hopping No. NVNT 1-DH5 2441MHz Ant1

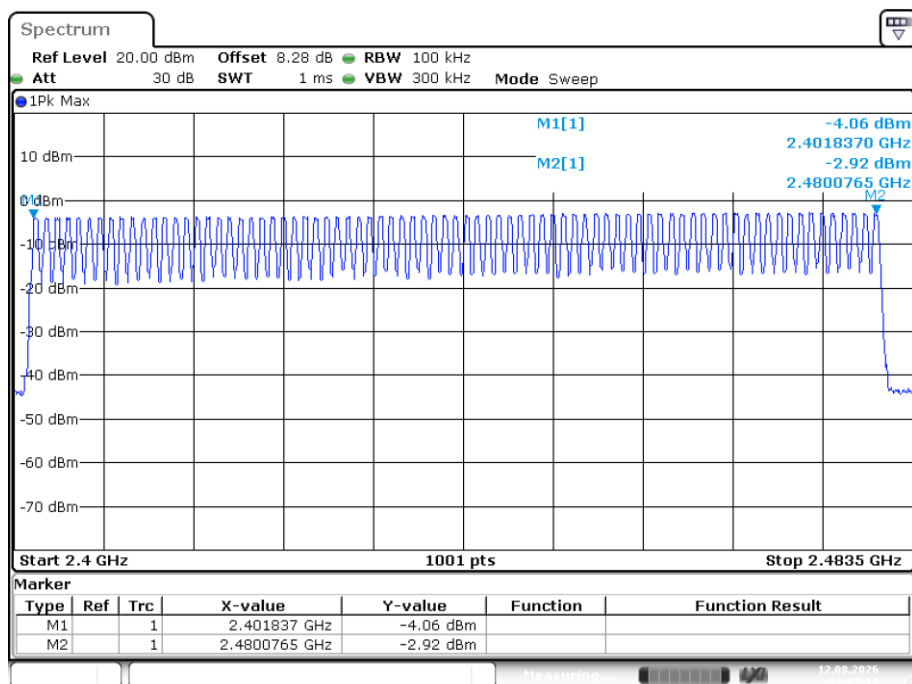


Hopping No. NVNT 2-DH5 2441MHz Ant1

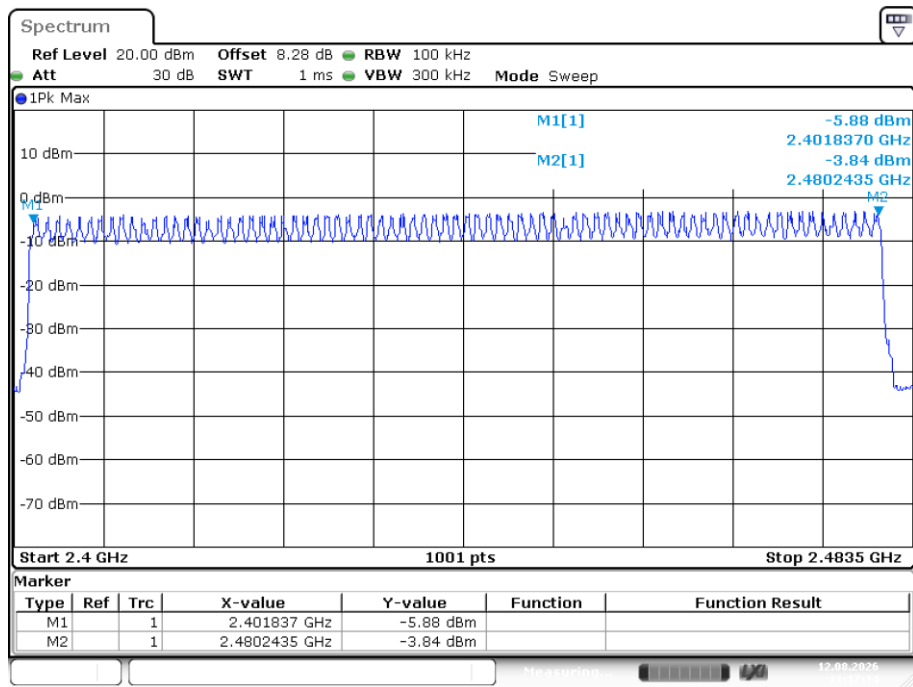

Date: 12.AUG.2026 11:17:14

Hopping No. NVNT 3-DH5 2441MHz Ant1

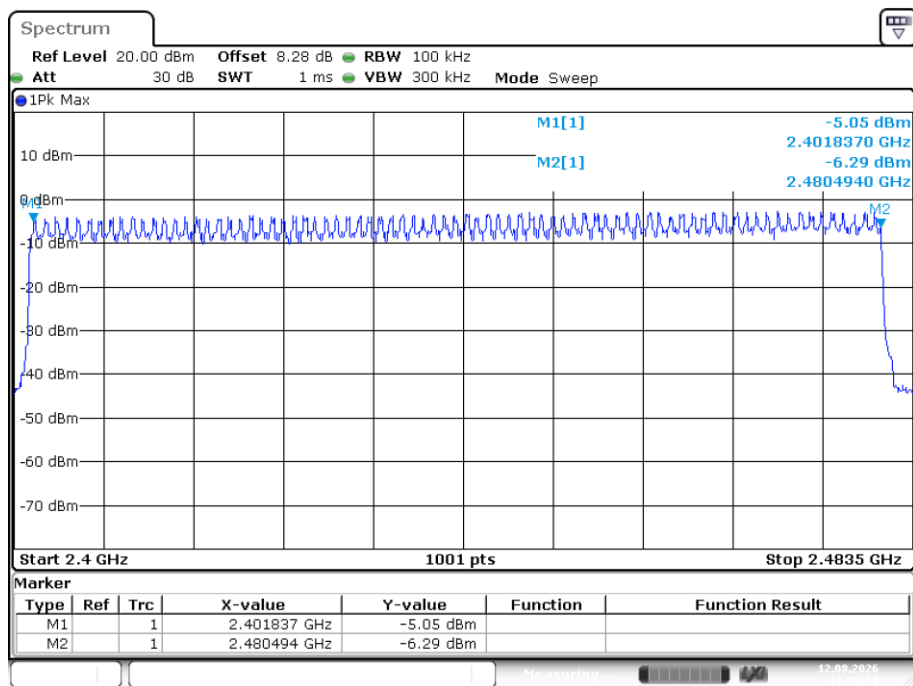

Date: 12.AUG.2026 11:33:58

7. DWELL TIME

7.1. Test Limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.


7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

7.3. Test Setup




7.4. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.374	117.81	315	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.631	252.805	155	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.879	293.658	102	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.386	126.608	328	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.637	275.016	168	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.885	305.81	106	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.387	122.292	316	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.636	260.124	159	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.888	297.464	103	31600	400	Pass


Note: Total Dwell Time= Pulse Time* Burst Count

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst

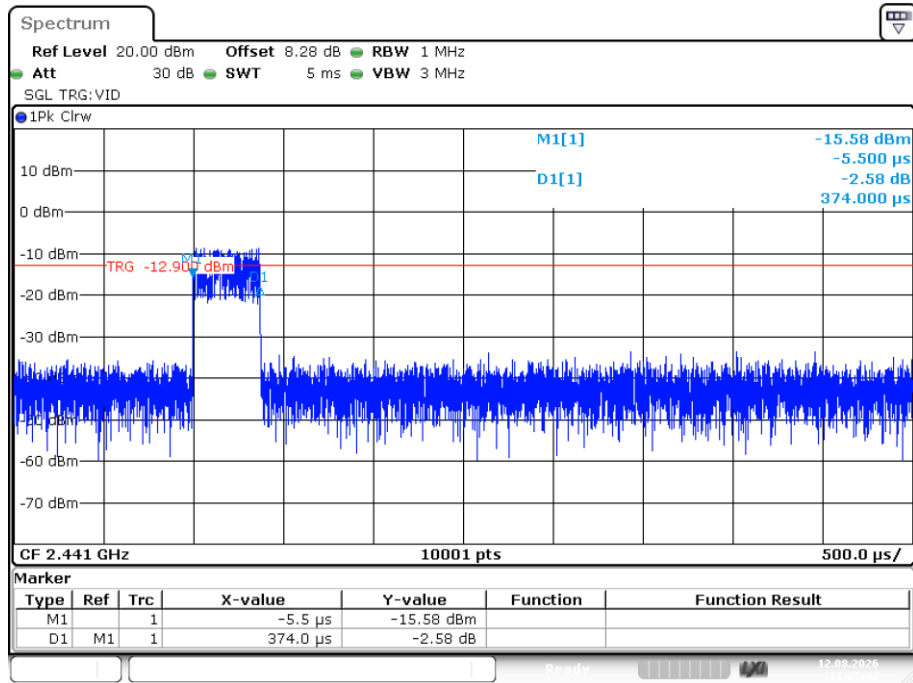


Date: 12.AUG.2026 11:05:41

Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

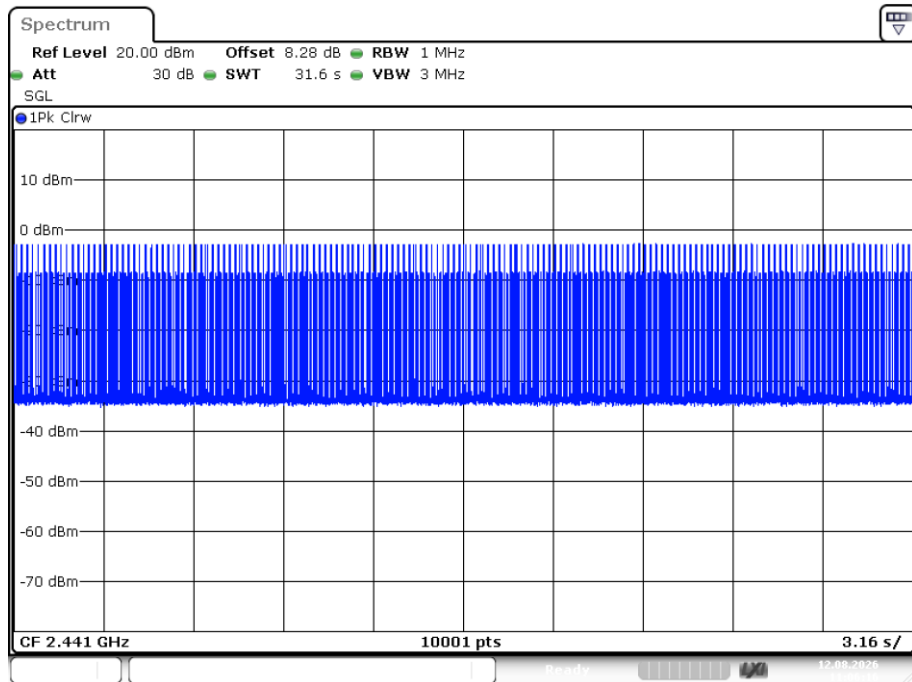


Date: 12.AUG.2026 11:06:15

Dwell NVNT 1-DH3 2441MHz Ant1 One Burst

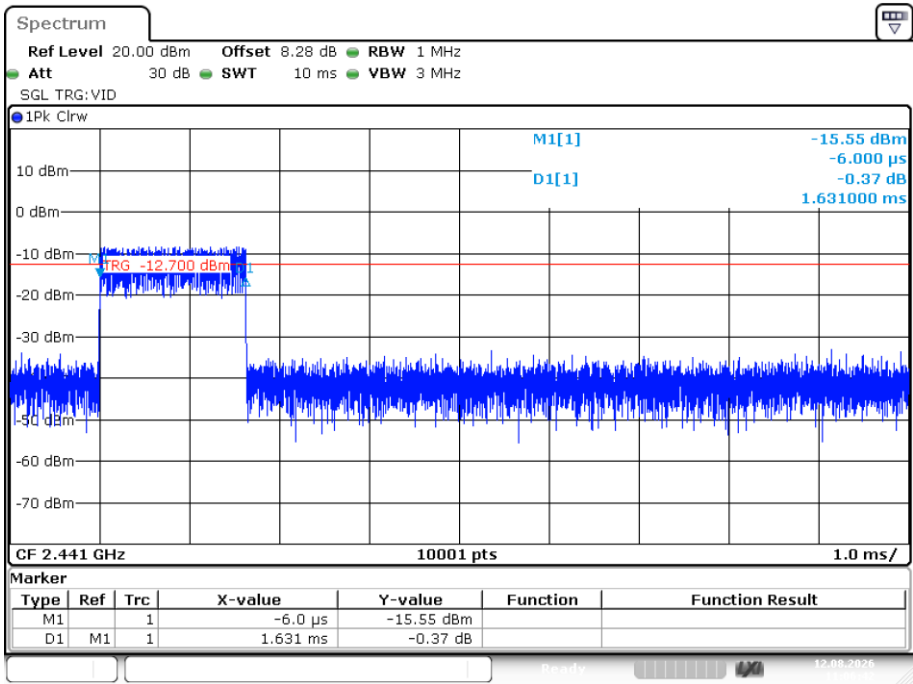


Date: 12.AUG.2026 11:06:42

Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

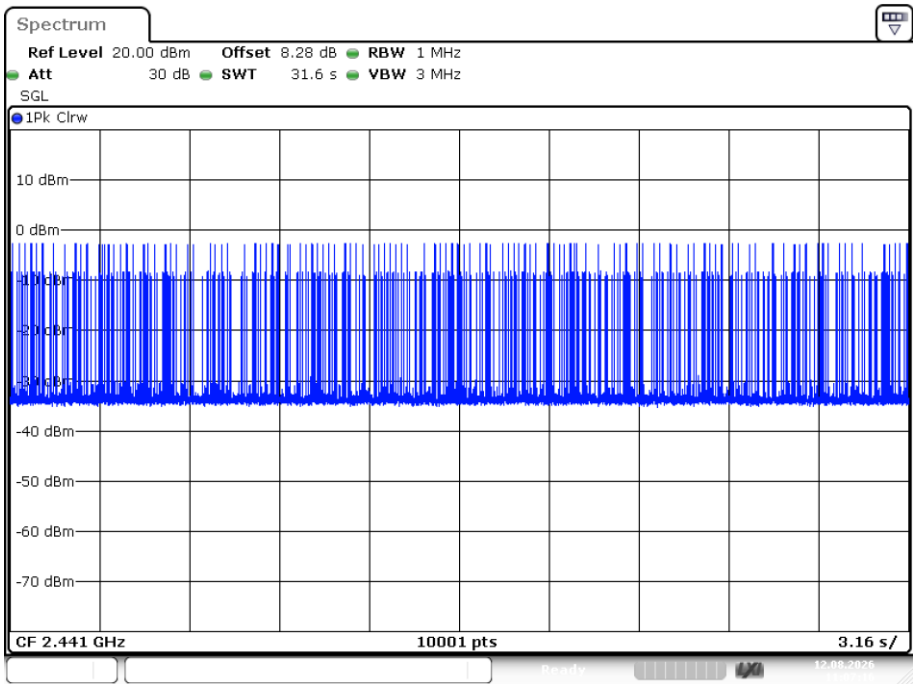


Date: 12.AUG.2026 11:07:16

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

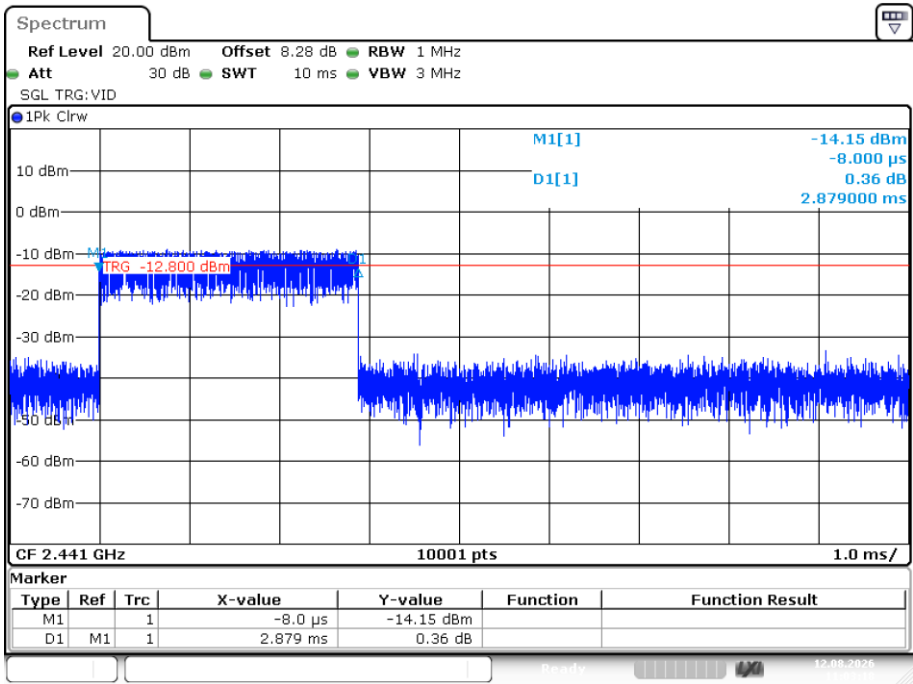


Date: 12.AUG.2026 11:03:17

Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

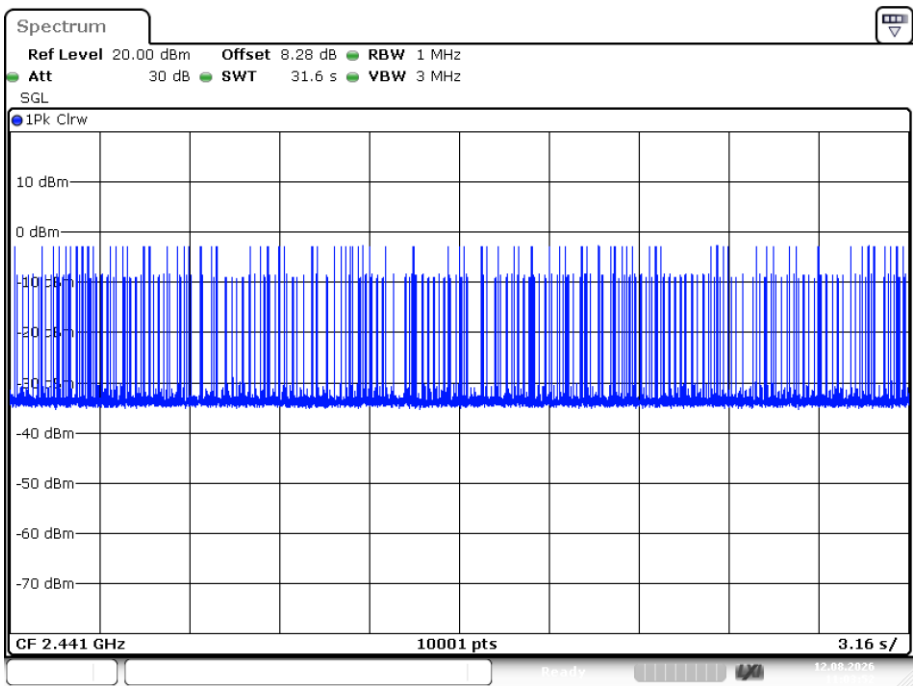


Date: 12.AUG.2026 11:03:52

Dwell NVNT 2-DH1 2441MHz Ant1 One Burst

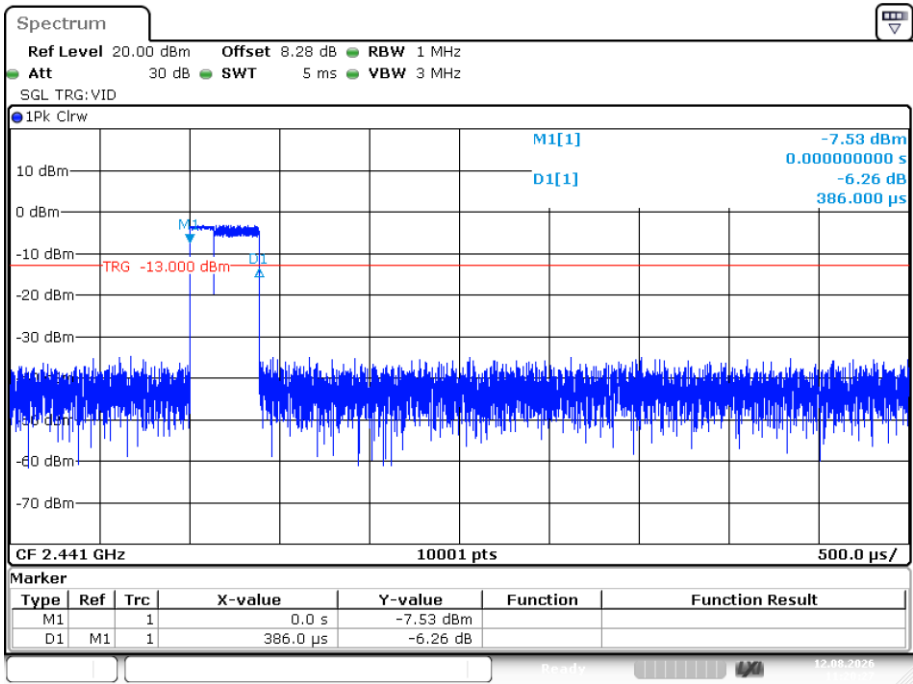


Date: 12.AUG.2026 11:20:27

Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

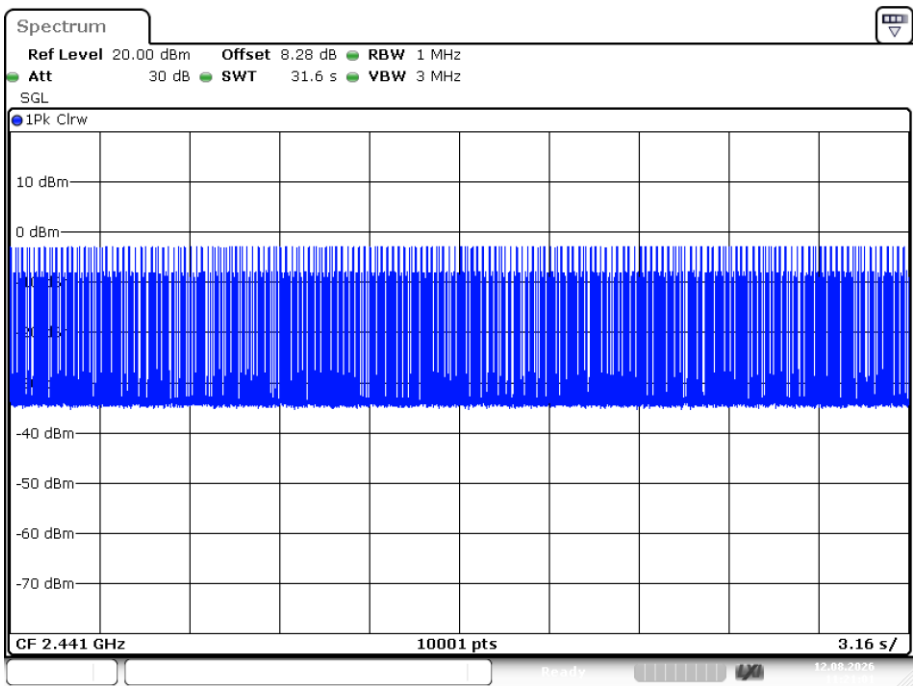


Date: 12.AUG.2026 11:21:01

Dwell NVNT 2-DH3 2441MHz Ant1 One Burst

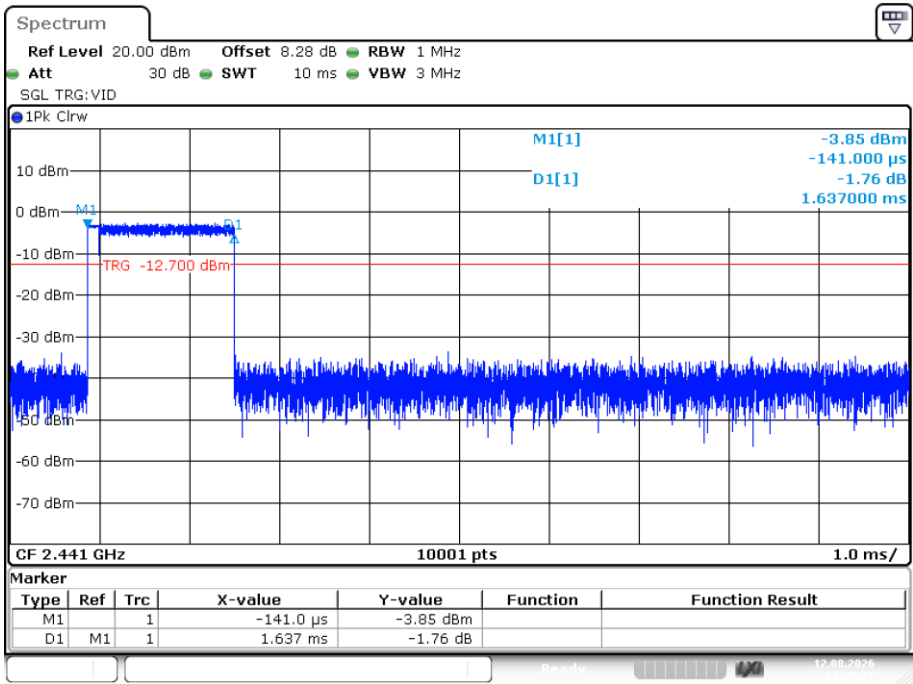


Date: 12.AUG.2026 11:22:27

Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

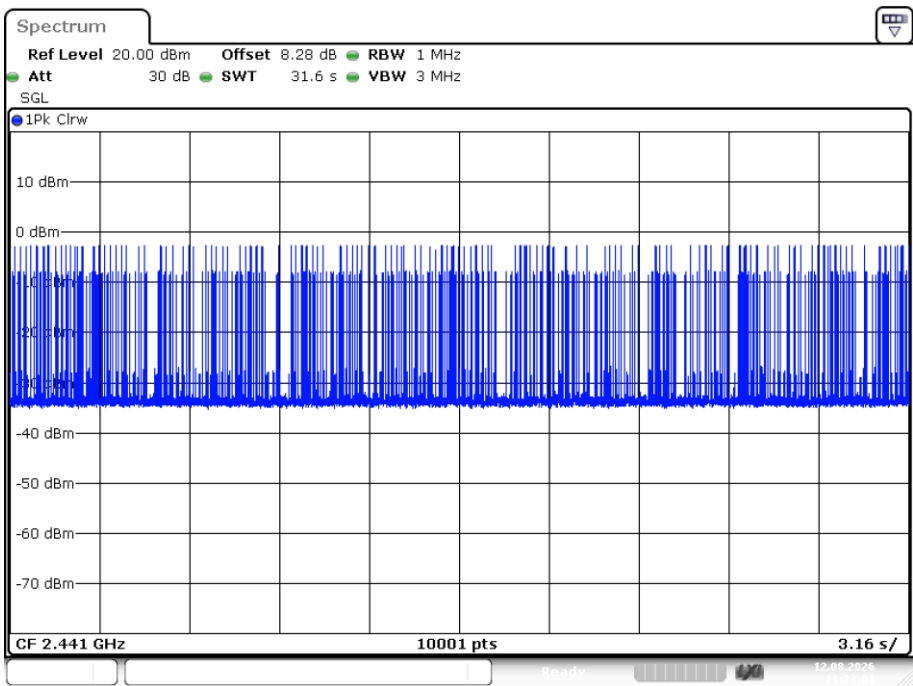


Date: 12.AUG.2026 11:23:01

Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

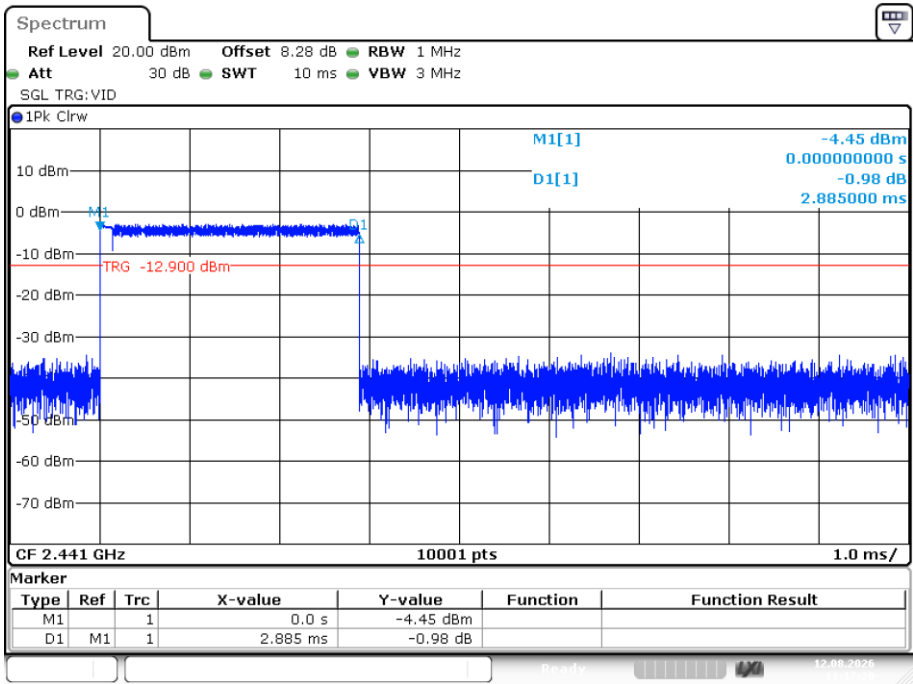


Date: 12.AUG.2026 11:17:20

Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

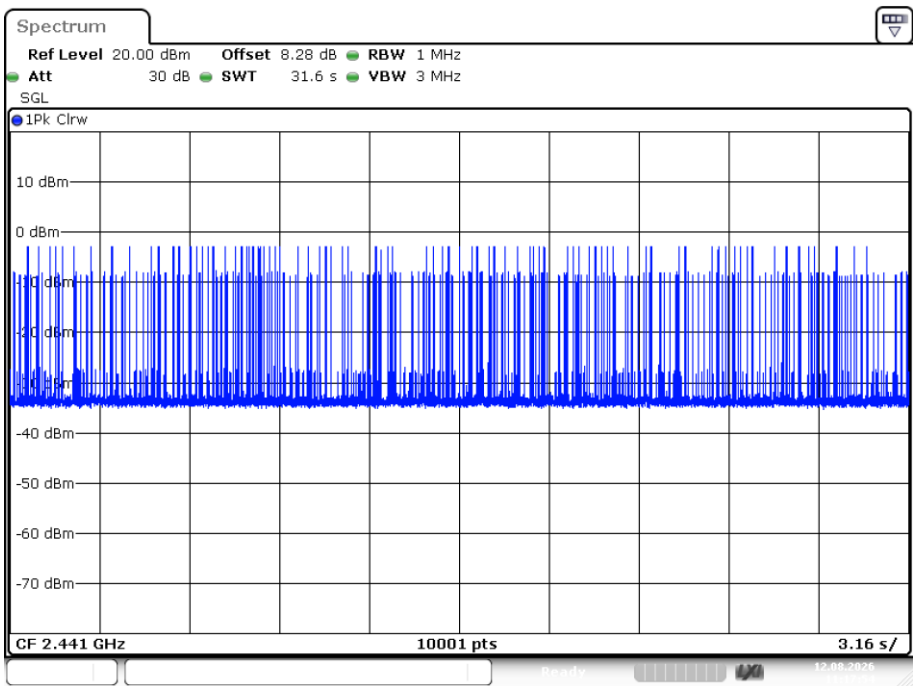


Date: 12.AUG.2026 11:17:54

Dwell NVNT 3-DH1 2441MHz Ant1 One Burst

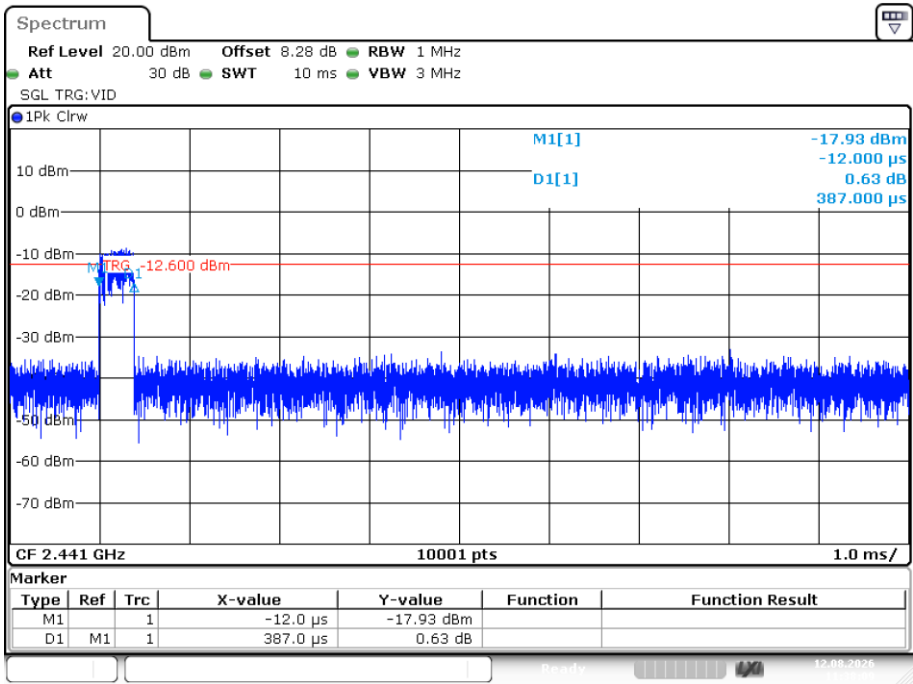


Date: 12.AUG.2026 11:38:09

Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

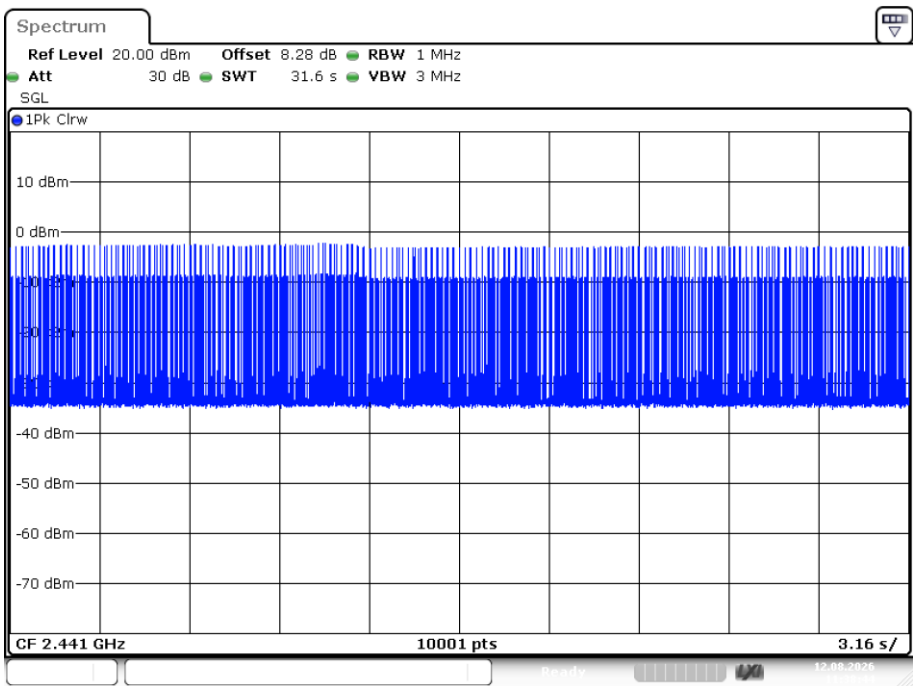


Date: 12.AUG.2026 11:38:43

Dwell NVNT 3-DH3 2441MHz Ant1 One Burst

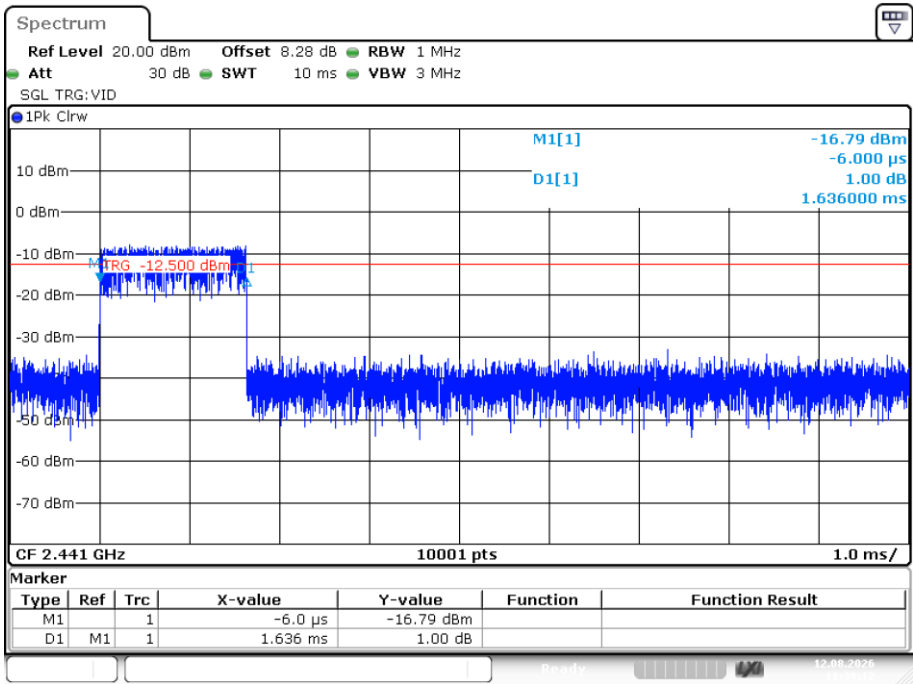


Date: 12.AUG.2026 11:39:12

Dwell NVNT 3-DH3 2441MHz Ant1 Accumulated

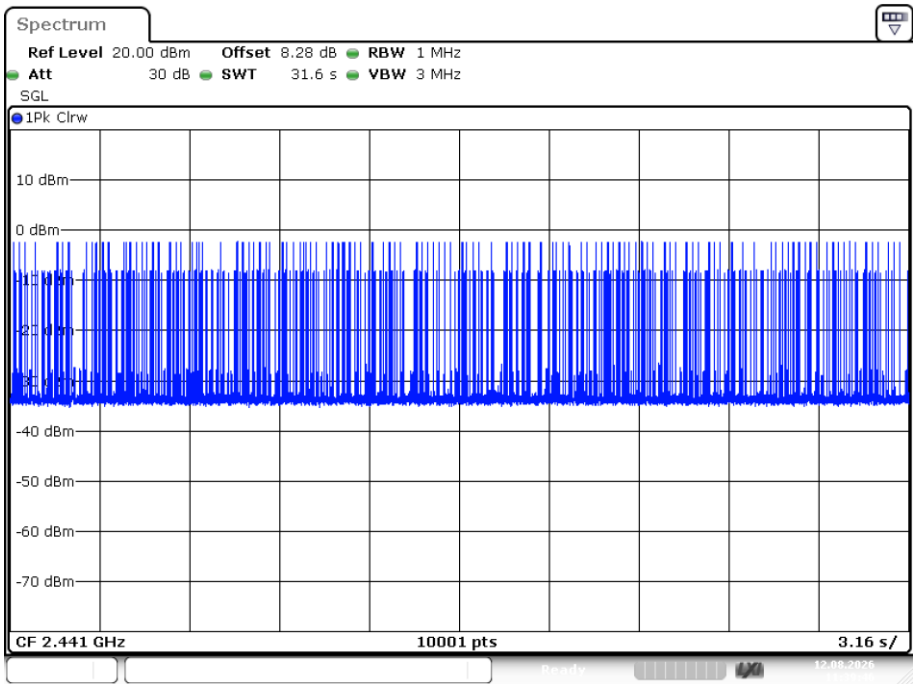


Date: 12.AUG.2026 11:39:46

Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

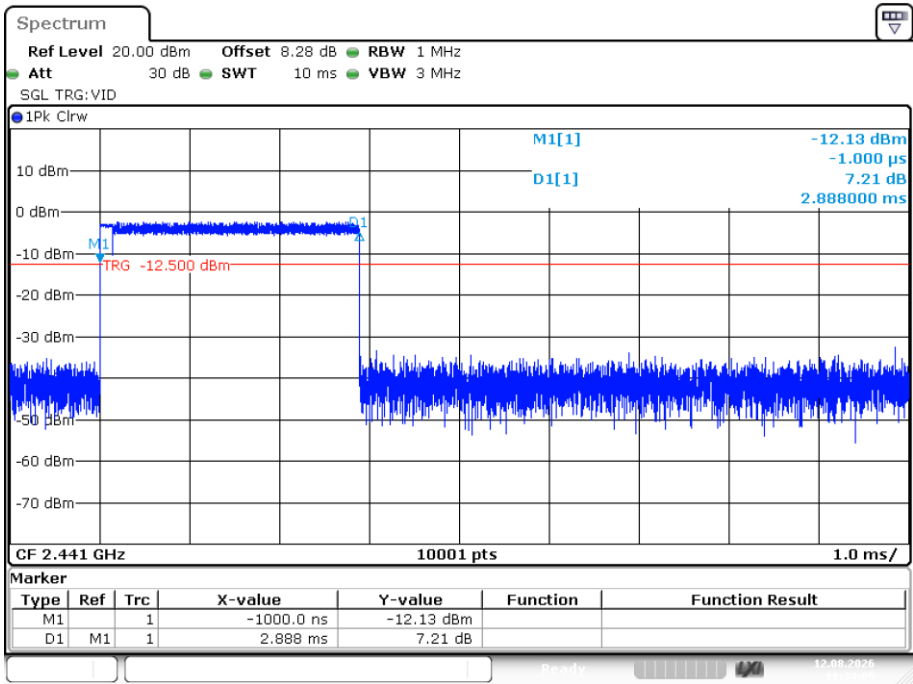

Date: 12.AUG.2026 11:34:05

Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

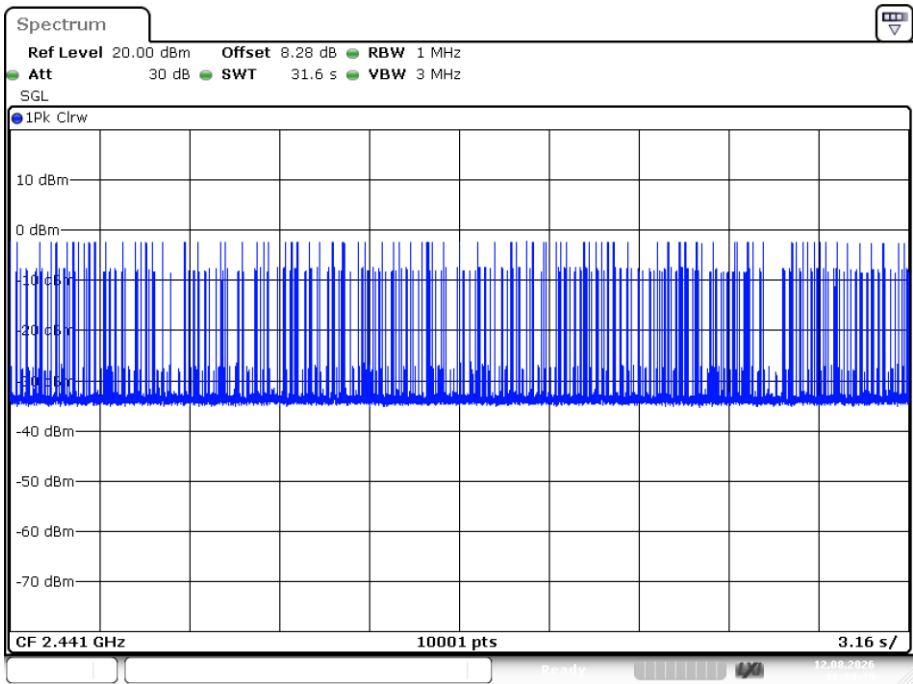

Date: 12.AUG.2026 11:34:39

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test Setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

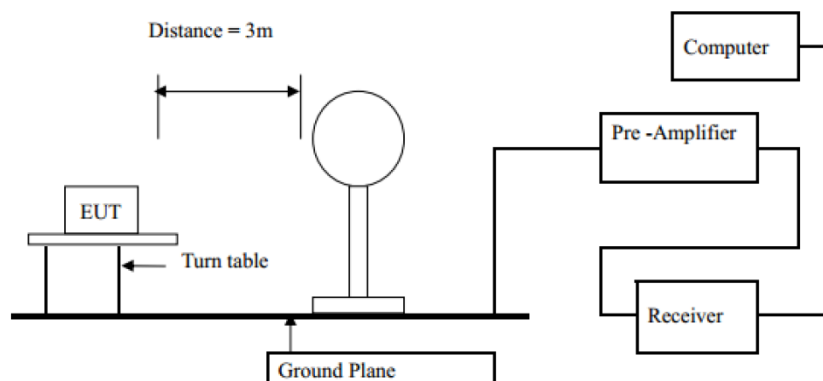

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

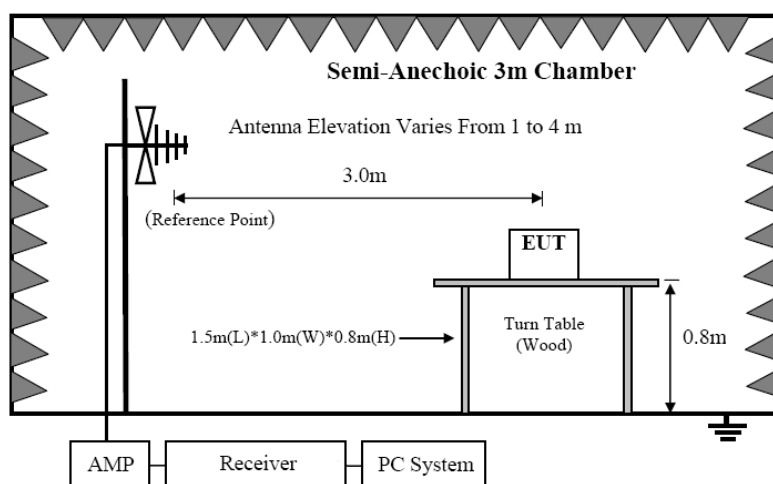

8.2.3 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

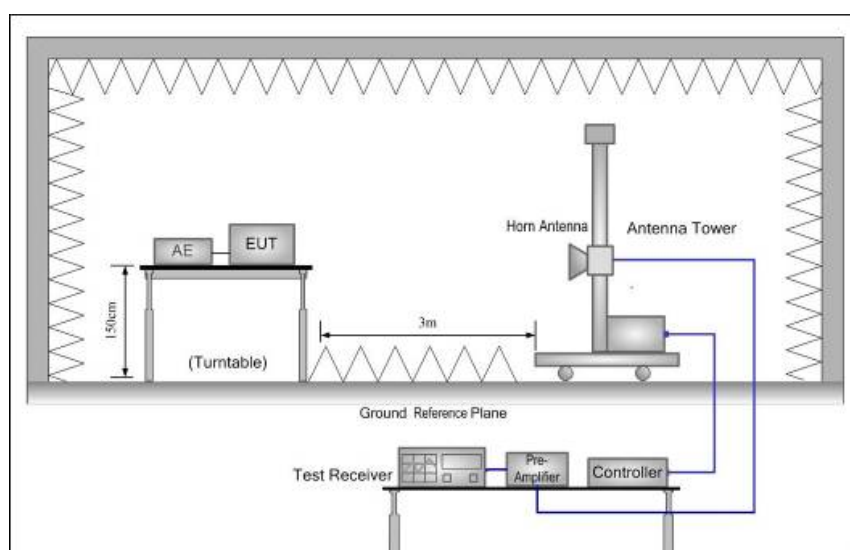

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10-2020 on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

- Note: 1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Only show the test data of the worst Channel in this report.

From 30MHz to 1000MHz: Conclusion: PASS


Vertical:

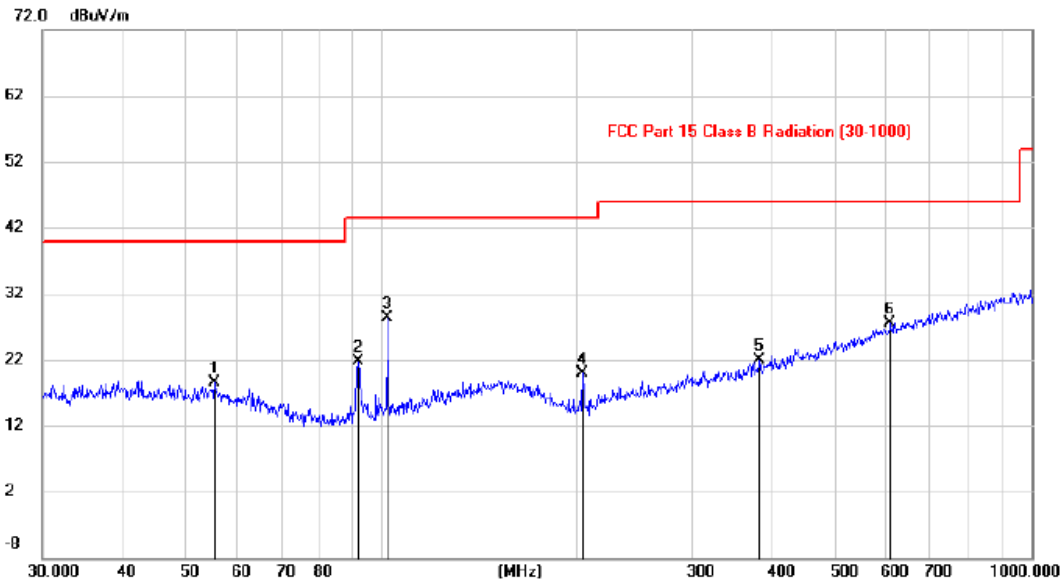

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		55.2982	-0.69	19.15	18.46	40.00	-21.54	peak		
2		91.8485	6.06	15.63	21.69	43.50	-21.81	peak		
3	*	102.0729	11.74	16.54	28.28	43.50	-15.22	peak		
4		204.1421	3.21	16.63	19.84	43.50	-23.66	peak		
5		382.0516	-0.40	22.33	21.93	46.00	-24.07	peak		
6		606.0841	0.68	26.91	27.59	46.00	-18.41	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

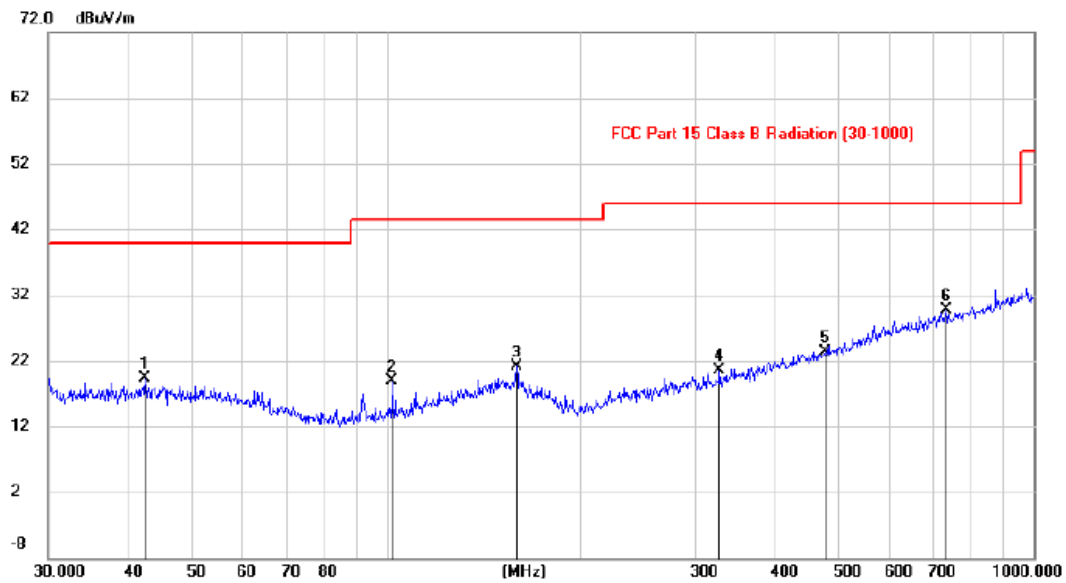Horizontal:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		42.4211	-0.54	19.78	19.24	40.00	-20.76	peak	
2		102.0610	2.34	16.54	18.88	43.50	-24.62	peak	
3		158.7791	0.45	20.58	21.03	43.50	-22.47	peak	
4		327.0452	-0.39	20.93	20.54	46.00	-25.46	peak	
5		475.4991	-1.04	24.35	23.31	46.00	-22.69	peak	
6	*	733.7191	0.79	28.91	29.70	46.00	-16.30	peak	

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

Remark: All modes have been tested, and only worst data of GFSK (2402MHz) was listed in this report.

From 1G-25GHz

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	46.58	V	33.95	10.18	34.26	56.45	74	-17.55	PK
4804	35.54	V	33.95	10.18	34.26	45.41	54	-8.59	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	44.61	H	33.95	10.18	34.26	54.48	74	-19.52	PK
4804	37.74	H	33.95	10.18	34.26	47.61	54	-6.39	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	42.64	V	33.93	10.2	34.29	52.48	74	-21.52	PK
4882	34.45	V	33.93	10.2	34.29	44.29	54	-9.71	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	43.31	H	33.93	10.2	34.29	53.15	74	-20.85	PK
4882	33.46	H	33.93	10.2	34.29	43.30	54	-10.70	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4960	46.61	V	33.93	10.2	34.29	56.45	74	-17.55	PK
4960	34.13	V	33.93	10.2	34.29	43.97	54	-10.03	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	42.59	H	33.93	10.2	34.29	52.43	74	-21.57	PK
4960	34.69	H	33.93	10.2	34.29	44.53	54	-9.47	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Note:


- 1, Result = Read level + Antenna factor + cable loss-Amp factor
- 2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Note:

- 1, Result = Read level + Antenna factor + cable loss-Amp factor
- 2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

9. RF CONDUCTED SPURIOUS EMISSIONS

9.1. Block Diagram of Test Setup



9.2. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).


9.3. Test Procedure

The test receiver set RBW = 100kHz, VBW $\geq$ 3*RBW =300kHz, sweep time set auto

9.4. Test Result


PASS

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

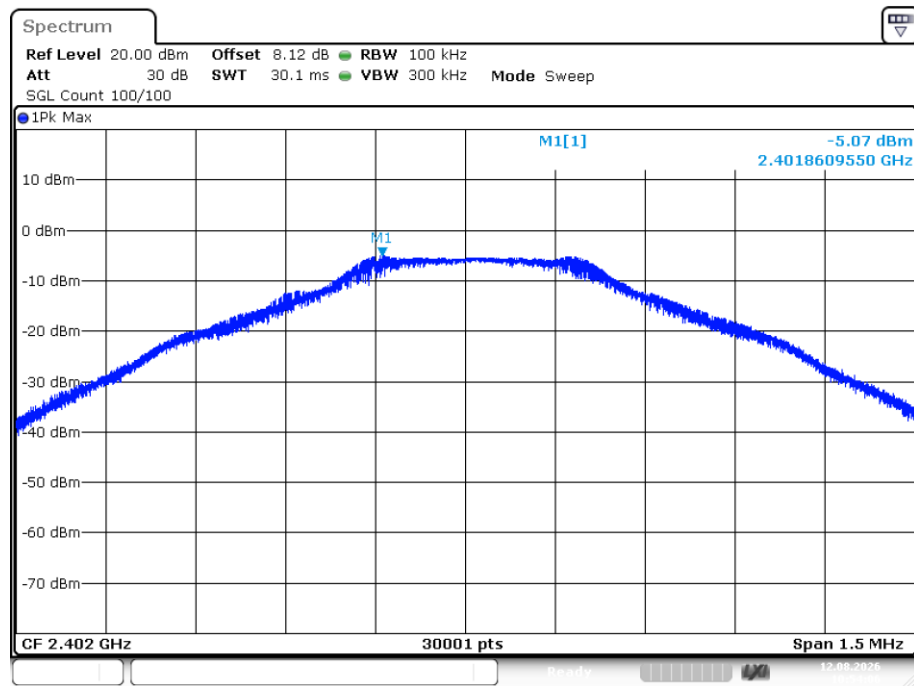


Date: 12.AUG.2026 10:54:06

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

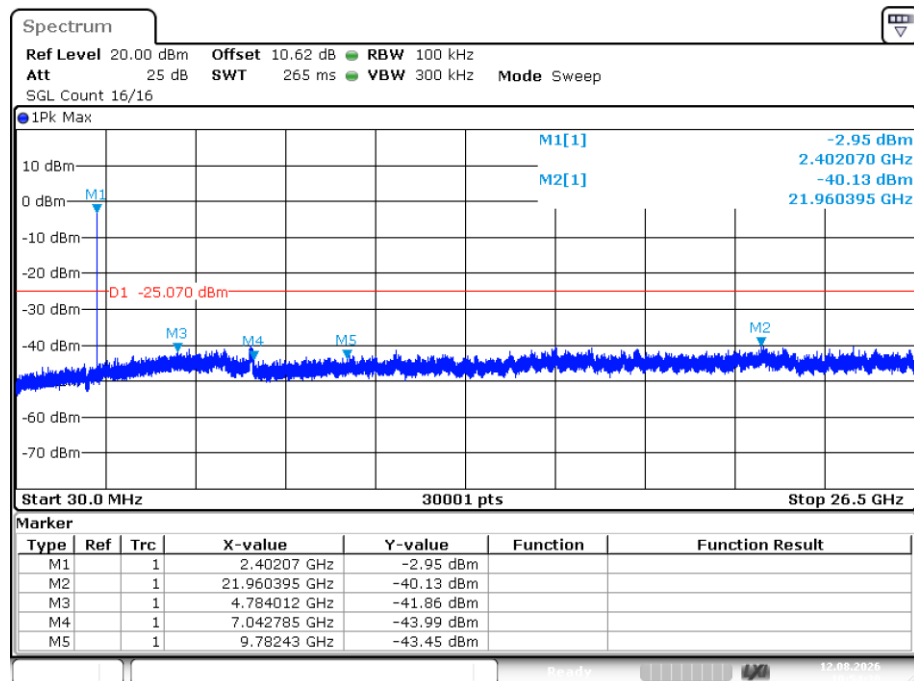


Date: 12.AUG.2026 10:54:29

Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

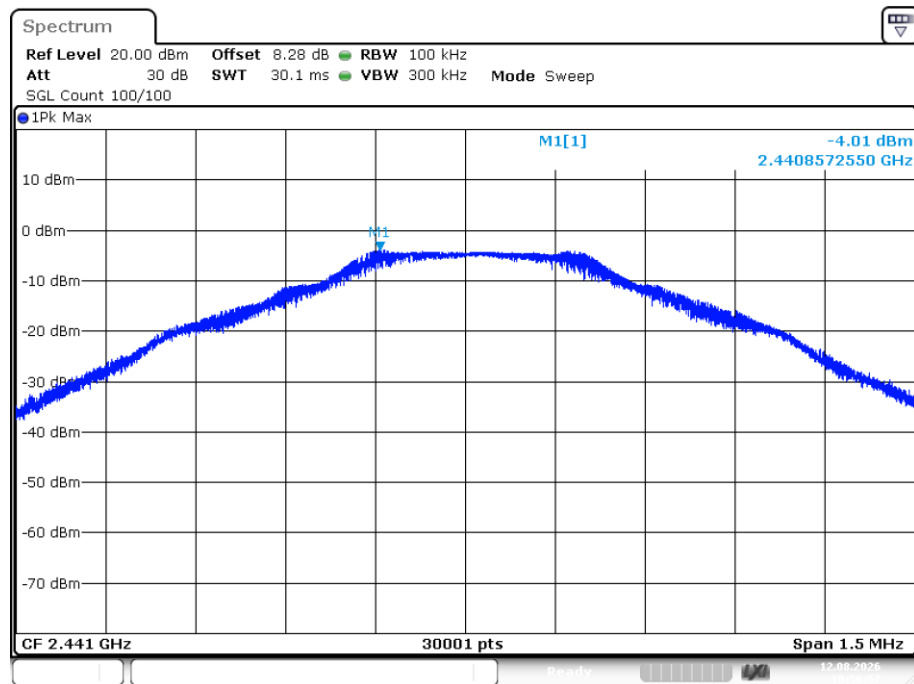


Date: 12.AUG.2026 10:56:57

Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

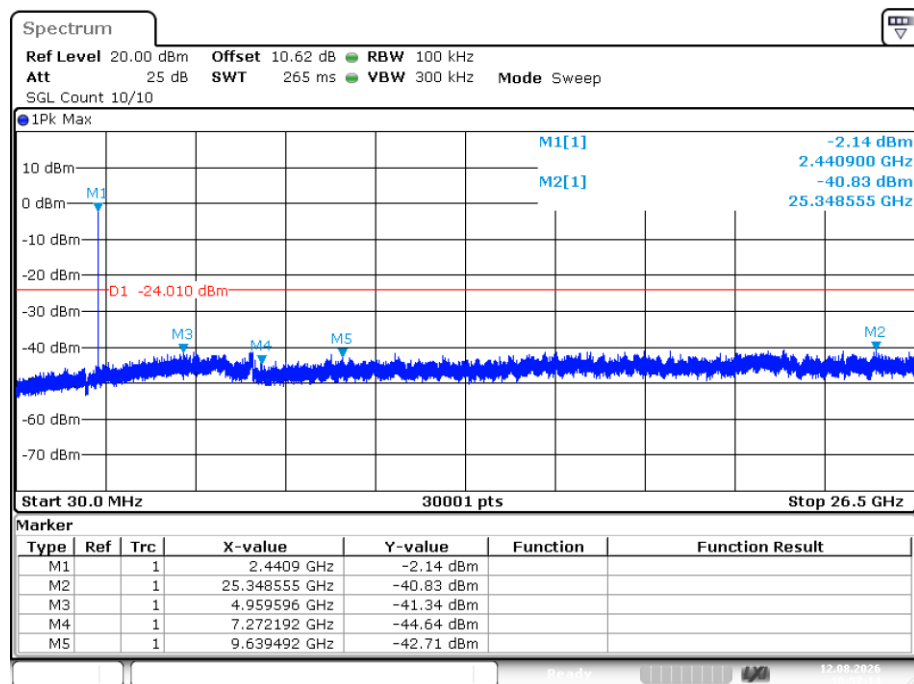


Date: 12.AUG.2026 10:57:14

Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

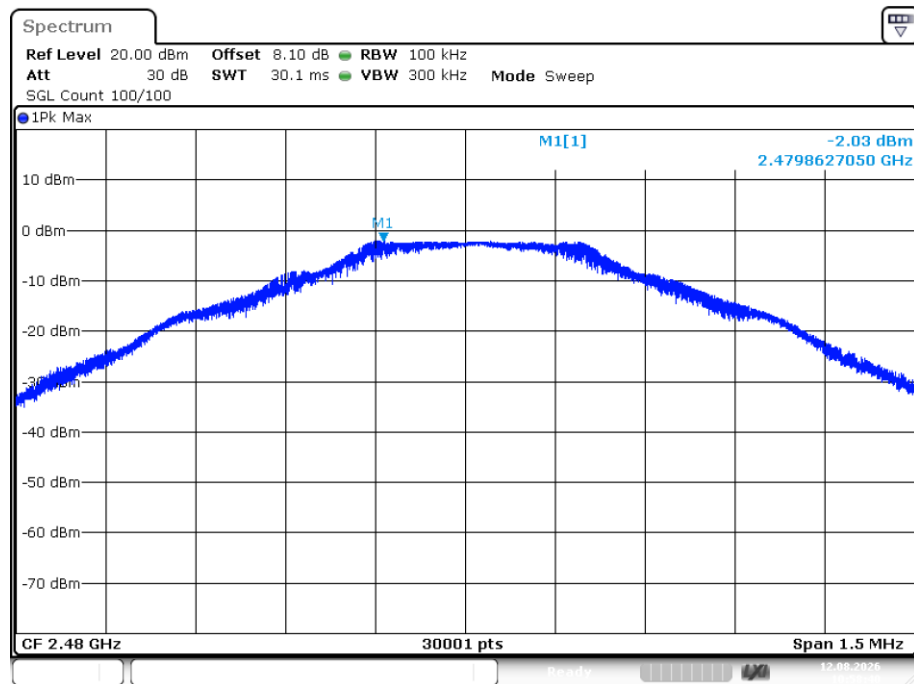


Date: 12.AUG.2026 10:58:41

Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

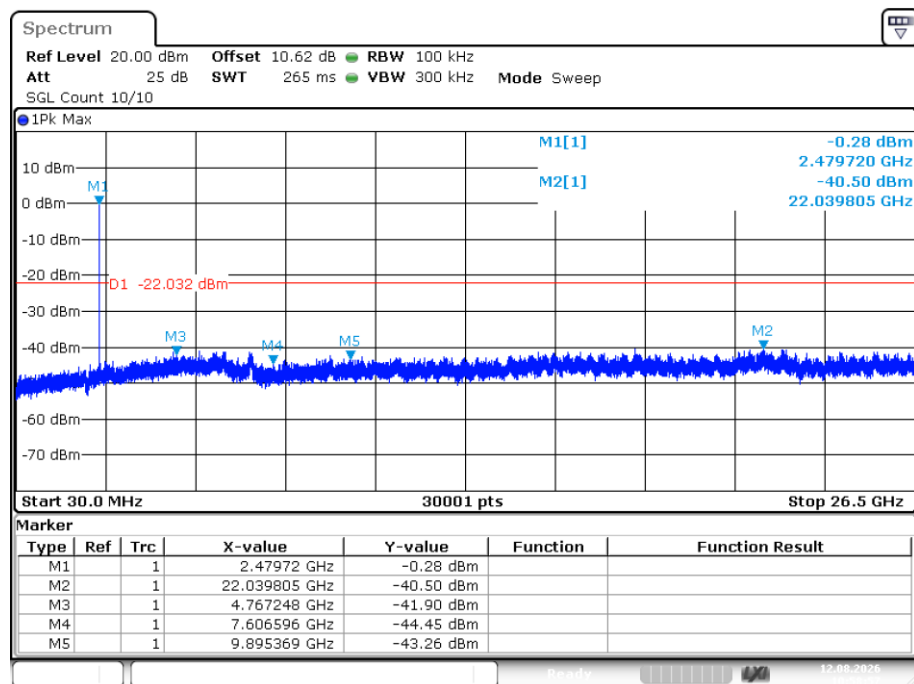


Date: 12.AUG.2026 10:58:57

Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

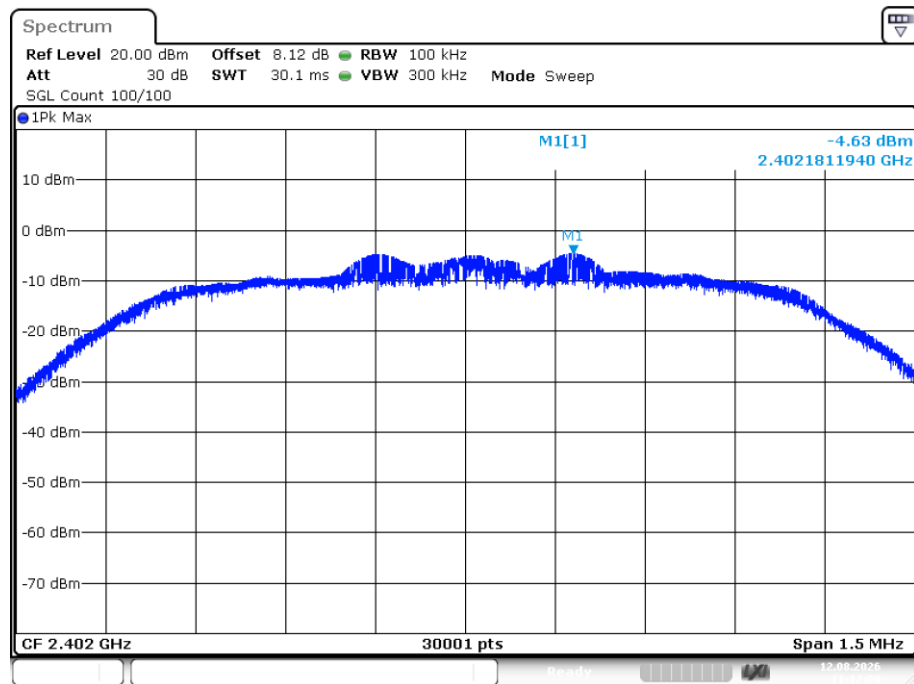


Date: 12.AUG.2026 11:12:09

Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

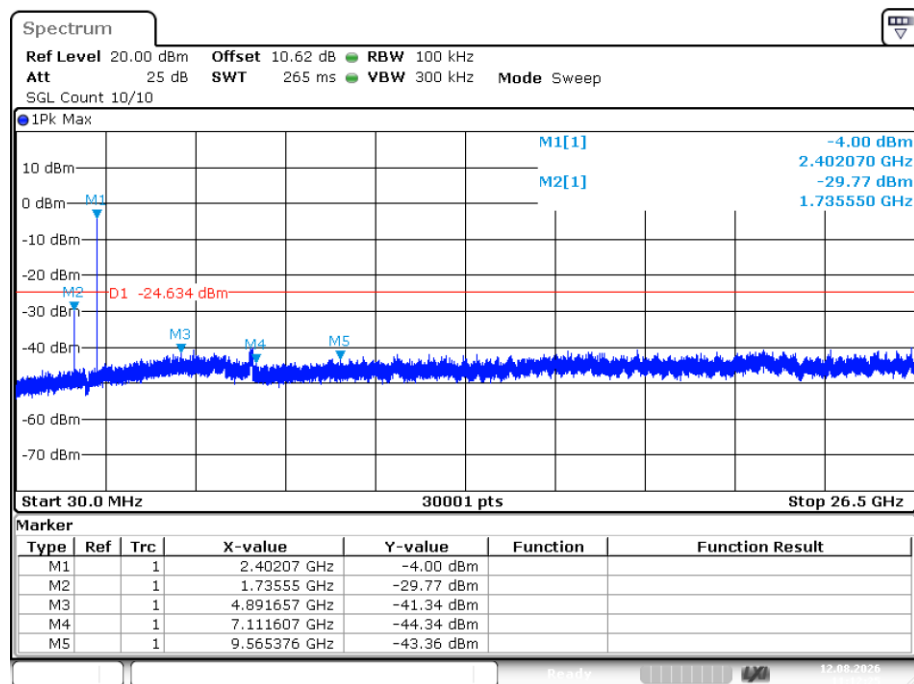


Date: 12.AUG.2026 11:12:25


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

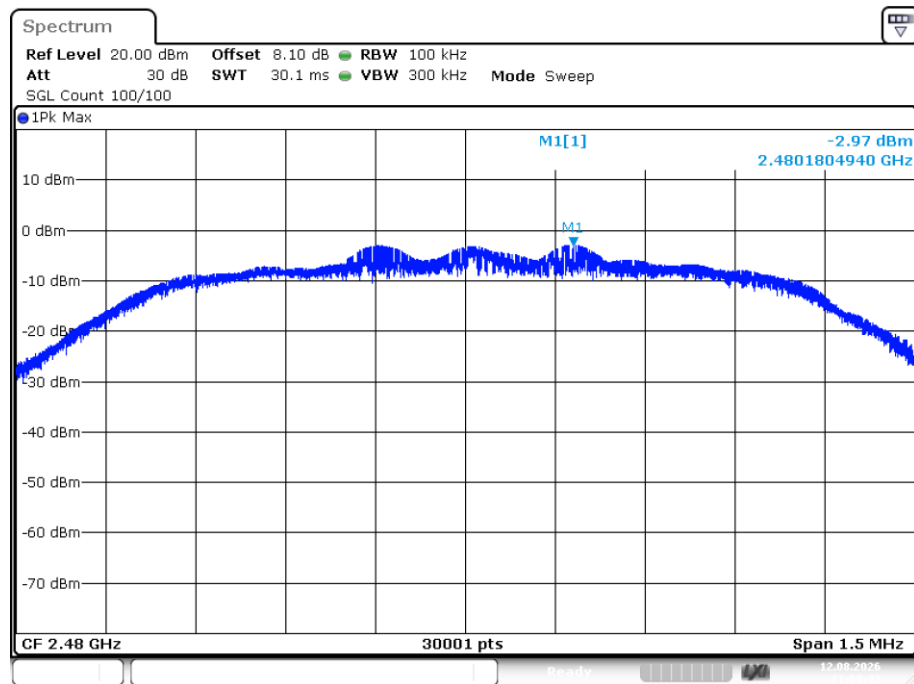

Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

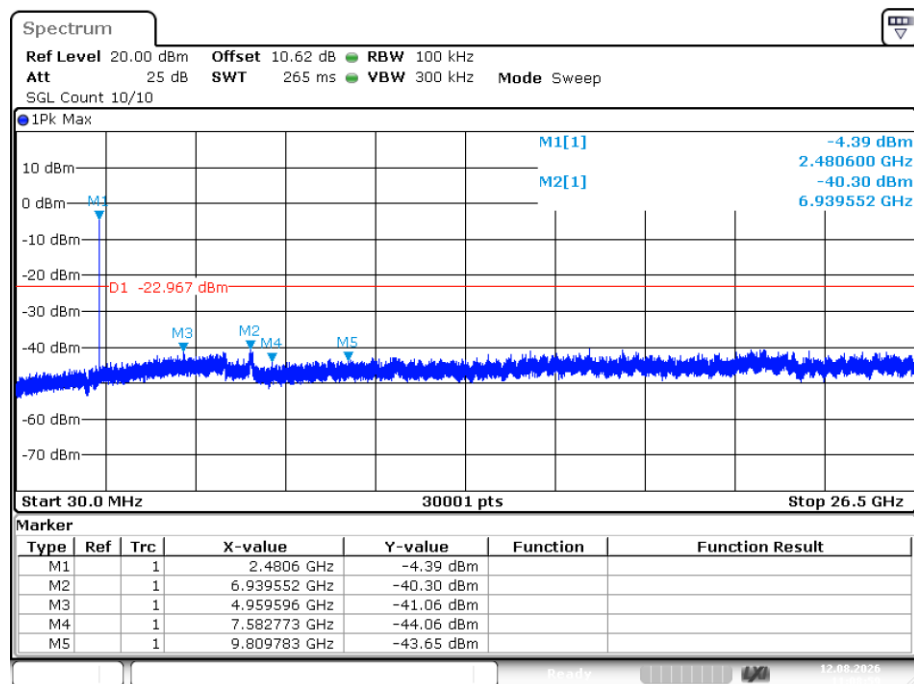


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

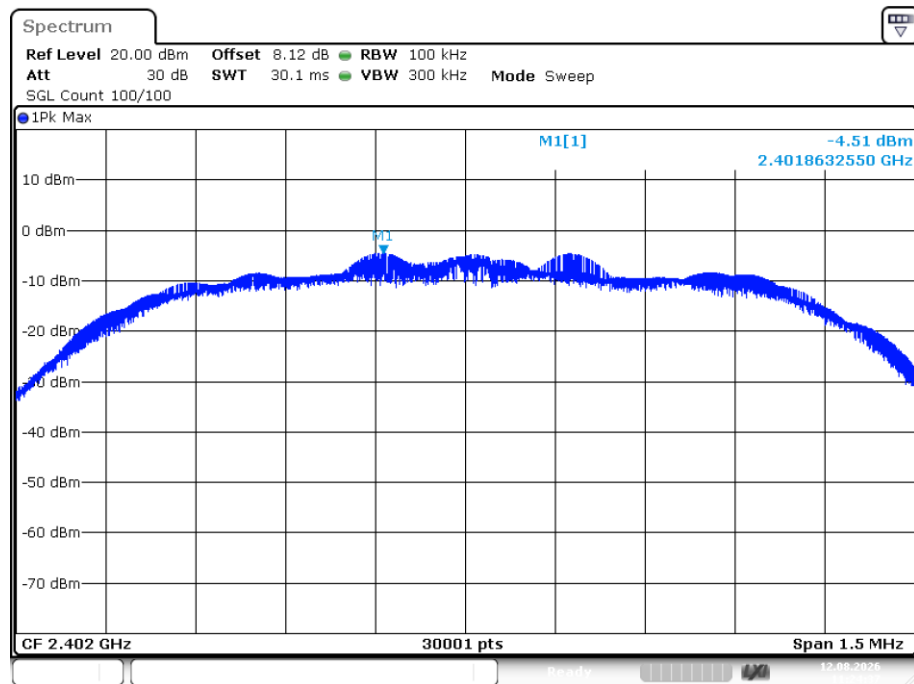


Date: 12.AUG.2026 11:24:37

Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

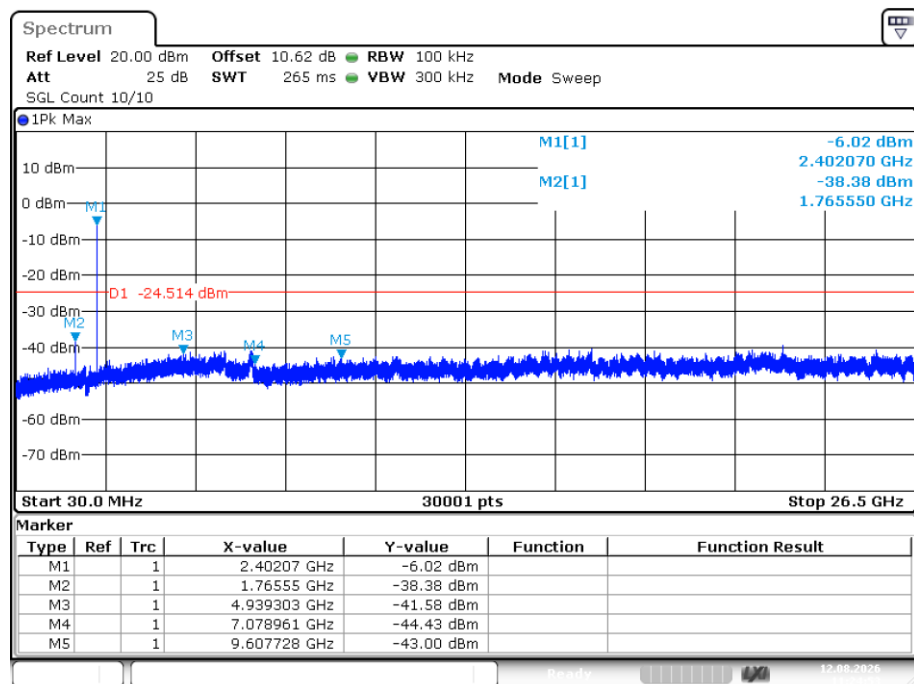


Date: 12.AUG.2026 11:24:53

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

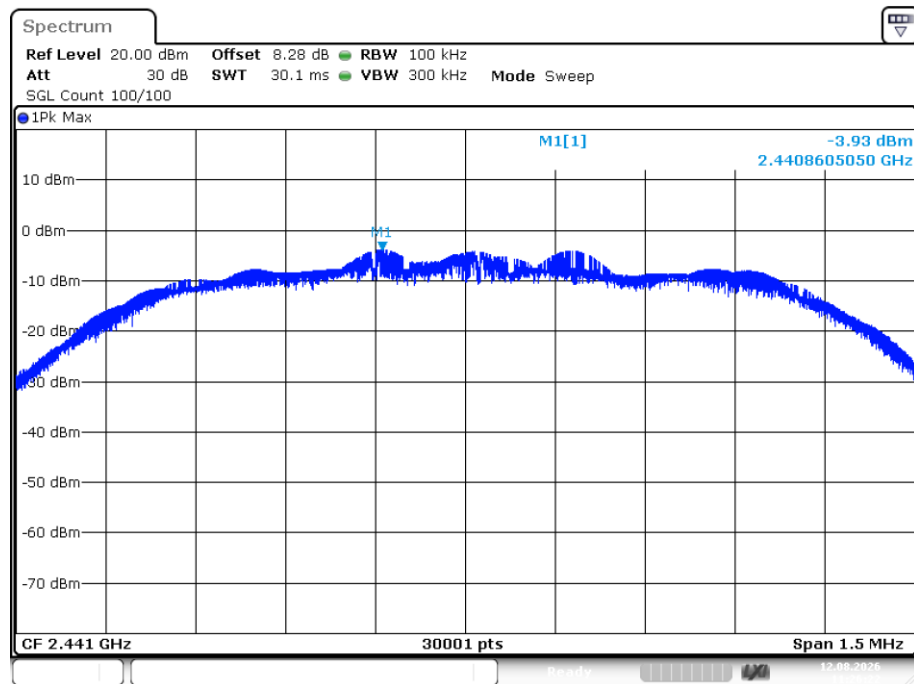


Date: 12.AUG.2026 11:26:22

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

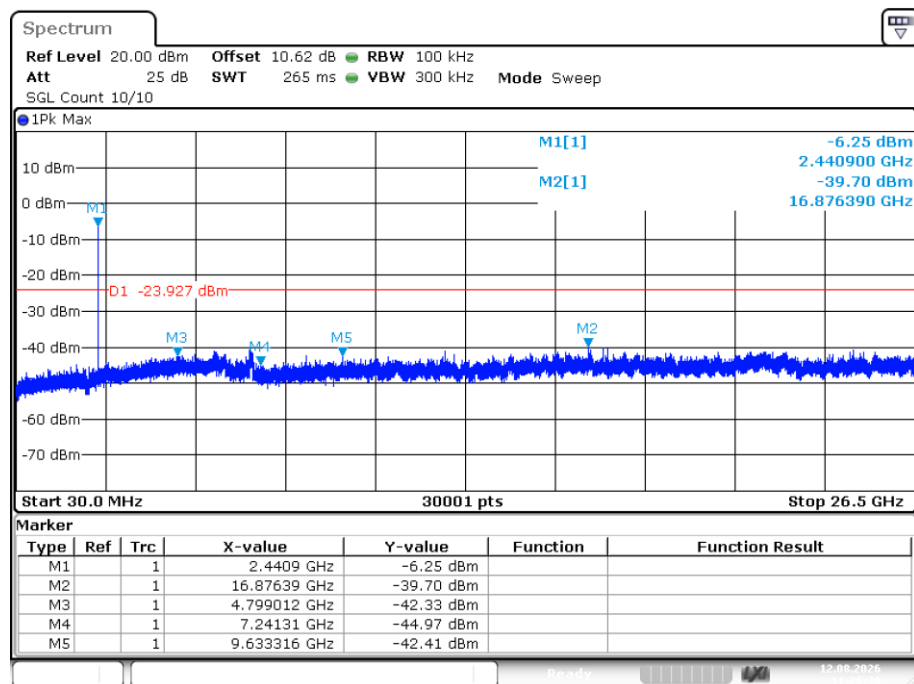


Date: 12.AUG.2026 11:26:38

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

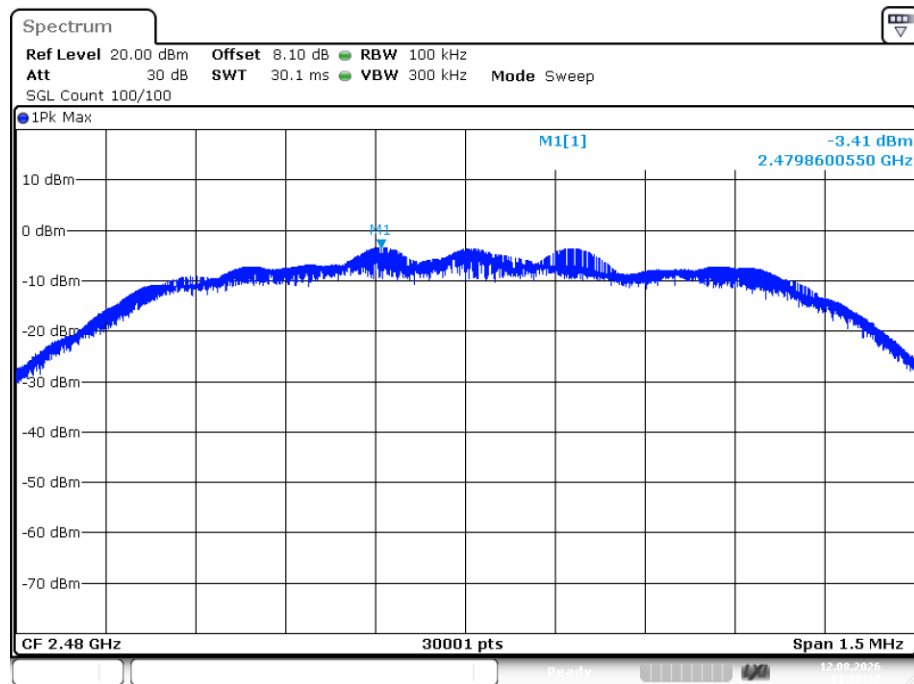

Date: 12.AUG.2026 11:28:32


Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

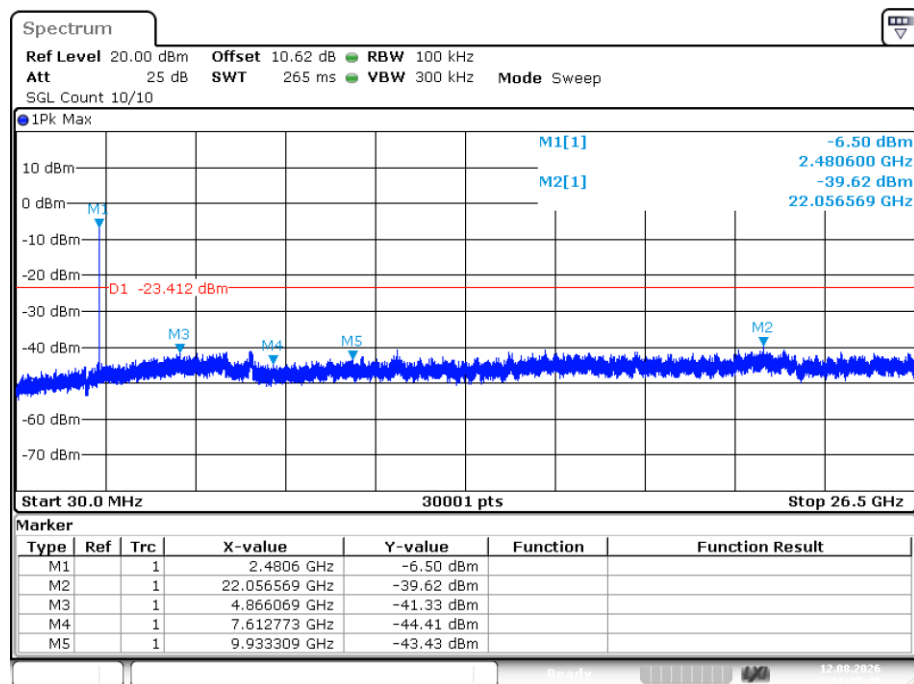

Date: 12.AUG.2026 11:28:48

10. BAND EDGE COMPLIANCE

10.1. Block Diagram of Test Setup

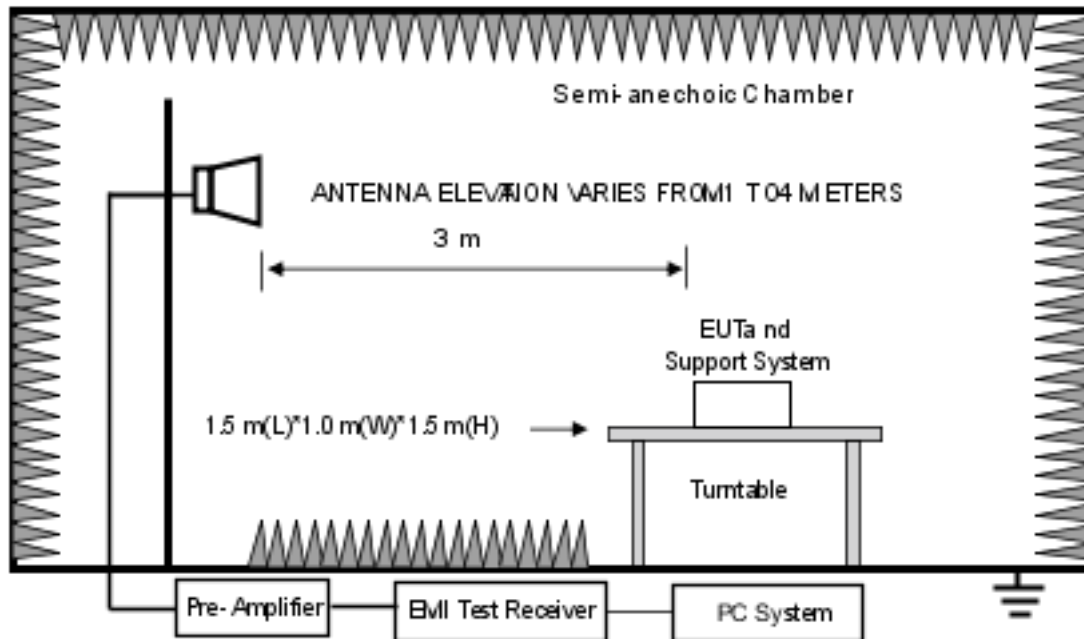

10.2. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

10.3. Test Procedure

Details see the ANSI C63.10-2020

10.3.1 Put the EUT on a 0.8m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

10.3.2 Check the spurious emissions out of band.

10.3.3 RBW 1MHz, VBW 3MHz, peak detector for peak value, RBW 1MHz, VBW 3MHz, RMS detector for AV value.


All restriction band and non- restriction band have been tested, only worse case is reported.

10.4. Test Result

PASS. (See below detailed test data)


Horizontal

Test Mode: GFSK-Low Hopping-off

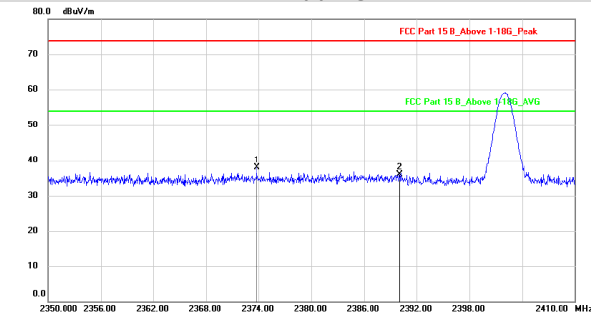


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	dBuV	Factor	ment	dBuV/m	dB	Detector	Height	Degree
1	*	2373.790	56.54	-18.64	37.90	74.00	-36.10	peak		
2		2390.000	54.57	-18.66	35.91	74.00	-38.09	peak		

Test Mode: GFSK-High Hopping-off

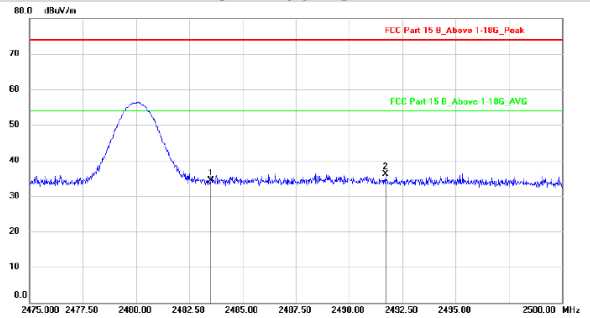


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	dBuV	Factor	ment	dBuV/m	dB	Detector	Height	Degree
1		2483.500	53.14	-18.76	34.38	74.00	-39.62	peak		
2	*	2491.723	54.89	-18.75	36.14	74.00	-37.86	peak		

Test Mode: GFSK-Low Hopping-on

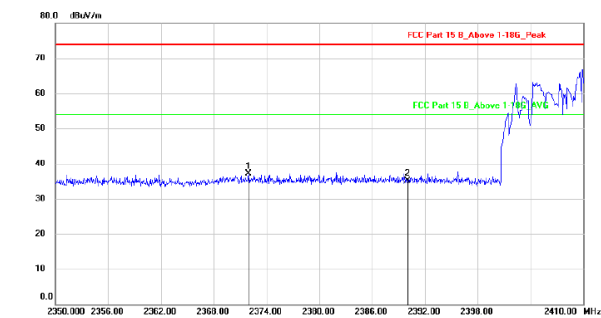

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	dBuV	Factor	ment	dBuV/m	dB	Detector	Height	Degree
1	*	2371.968	55.68	-18.63	37.05	74.00	-36.95	peak		
2		2390.000	53.73	-18.66	35.07	74.00	-38.93	peak		


Test Mode: GFSK-High Hopping-on

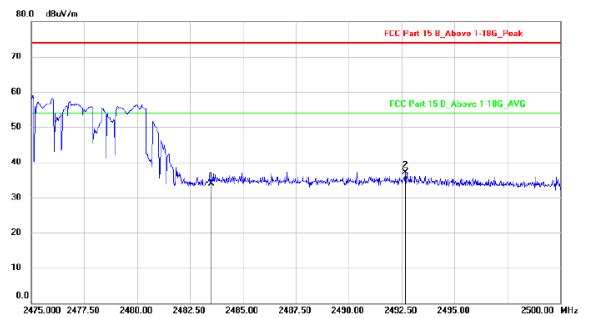


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	dBuV	Factor	ment	dBuV/m	dB	Detector	Height	Degree
1		2483.500	52.59	-18.76	33.83	74.00	-40.17	peak		
2	*	2492.679	55.89	-18.75	37.14	74.00	-36.86	peak		

Vertical


Test Mode: GFSK-Low Hopping-off

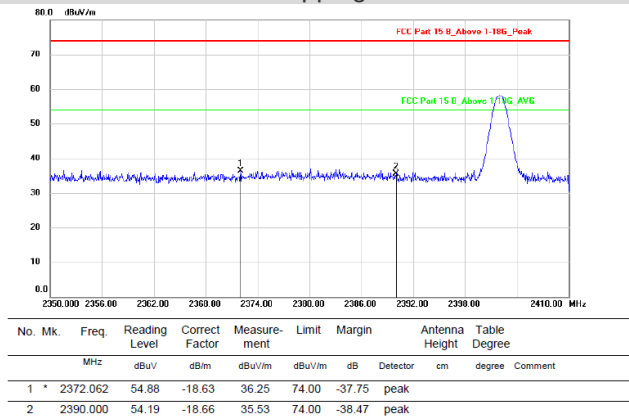


Test Mode: GFSK-High Hopping-off

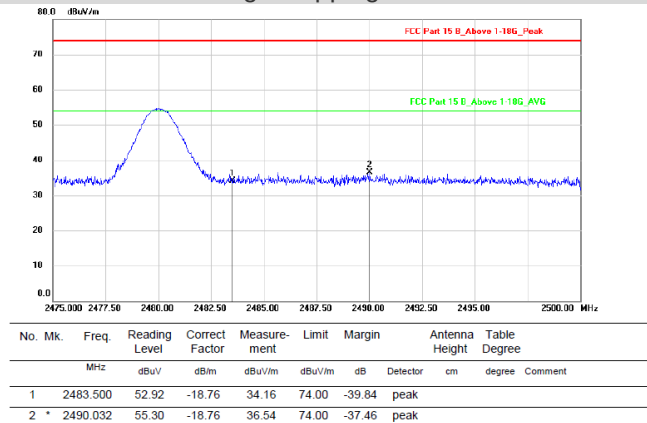

Test Mode: GFSK-Low Hopping-on

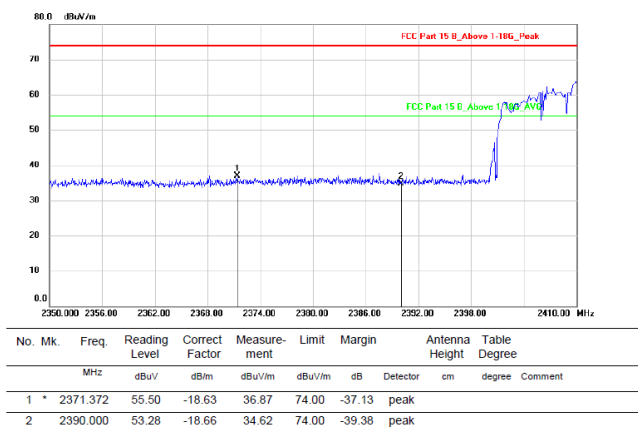


Test Mode: GFSK-High Hopping-on

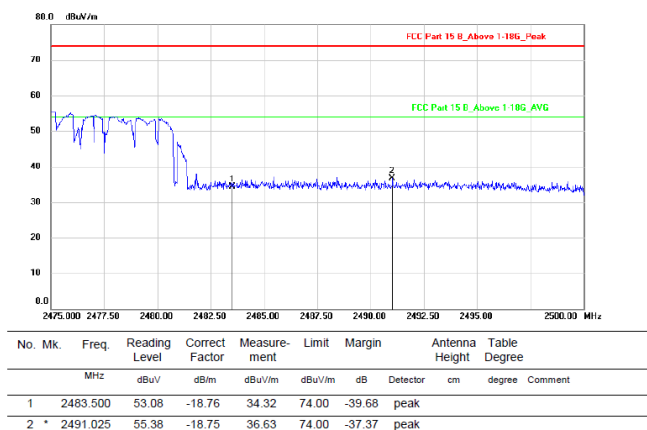

Remark: All modes have been tested, and only worst data of GFSK (2402MHz) was listed in this report.

11. BAND EDGE (CONDUCTED)

11.1. Block Diagram of Test Setup



11.2. Test Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

11.3. Test Procedure

Details see the ANSI C63.10-2020

Place the EUT on the table and set it in transmitting mode.

11.3.1. Place the EUT on the table and set it in transmitting mode.

11.3.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

11.3.3. Set the spectrum analyzer as RBW=100KHz, VBW=300KHz, Sweep = auto.


11.3.4. Repeat above procedures until all frequency measured were complete..

11.4. Test Results

Pass


Band Edge (No-Hopping)

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

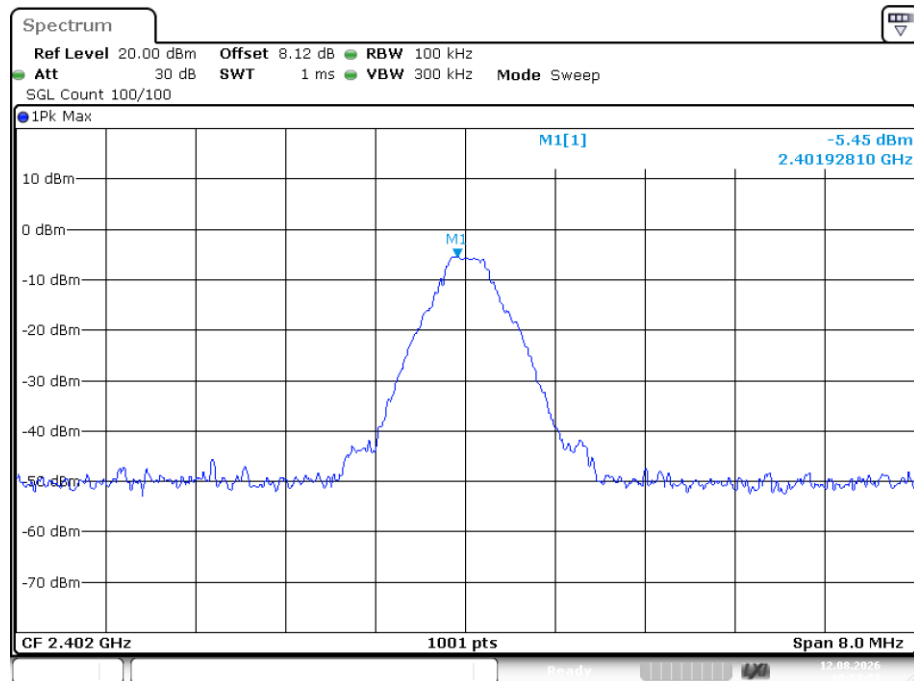


Date: 12.AUG.2026 10:53:51

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

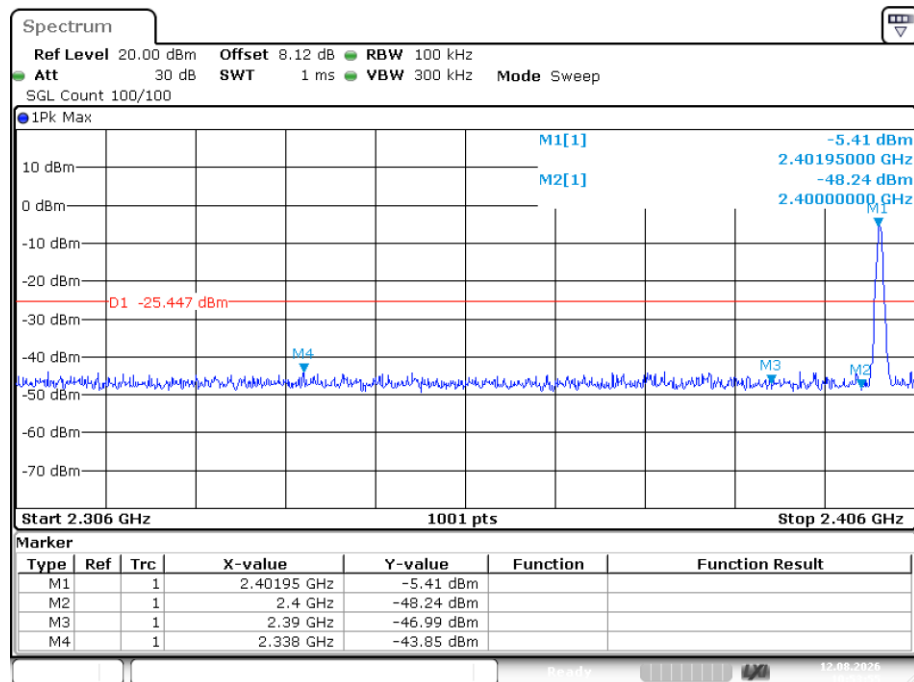


Date: 12.AUG.2026 10:53:54

Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

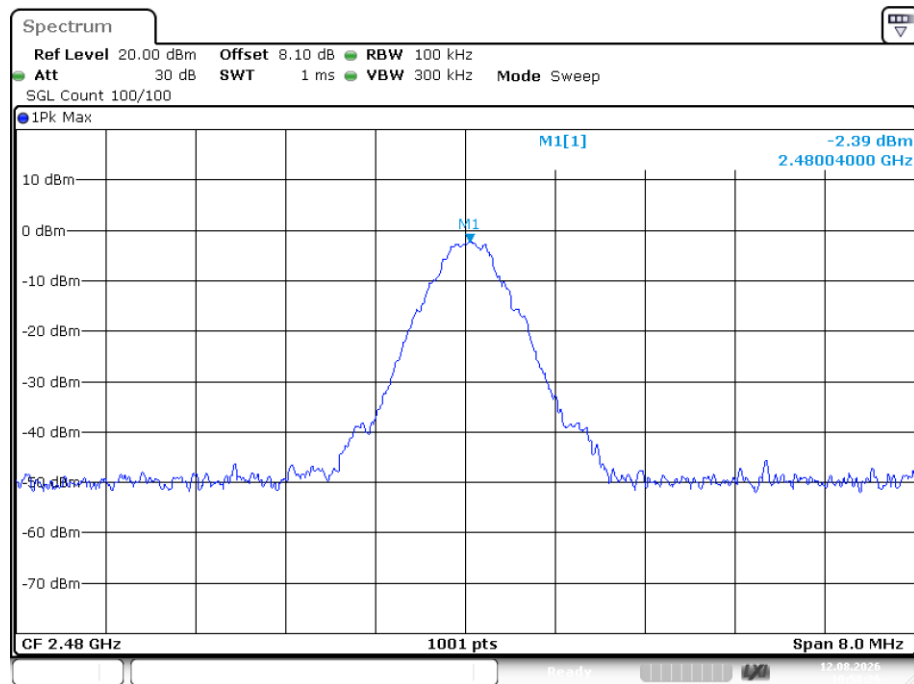


Date: 12.AUG.2026 10:58:26

Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

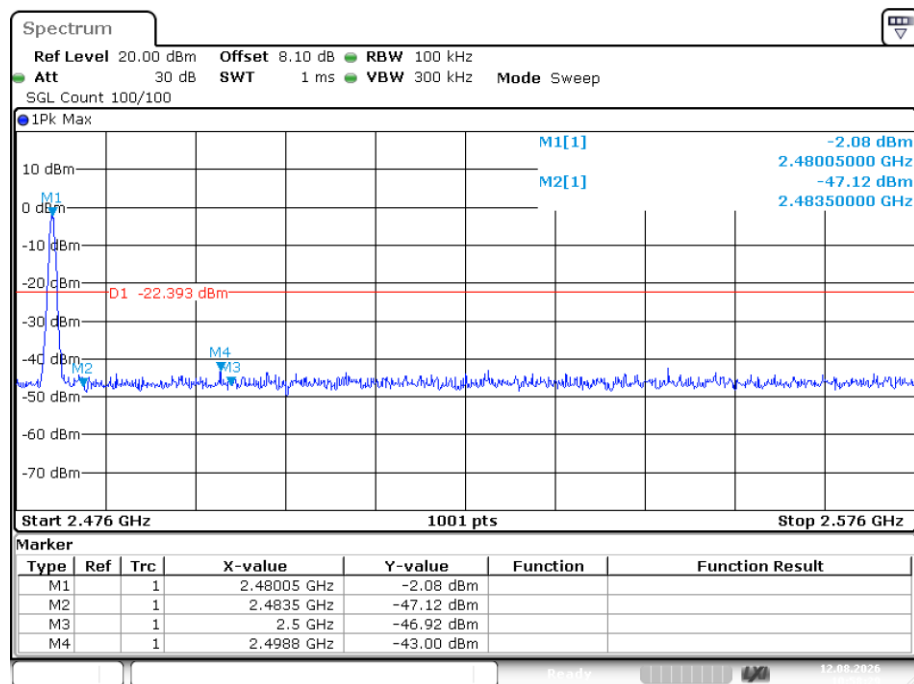


Date: 12.AUG.2026 10:58:29

Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

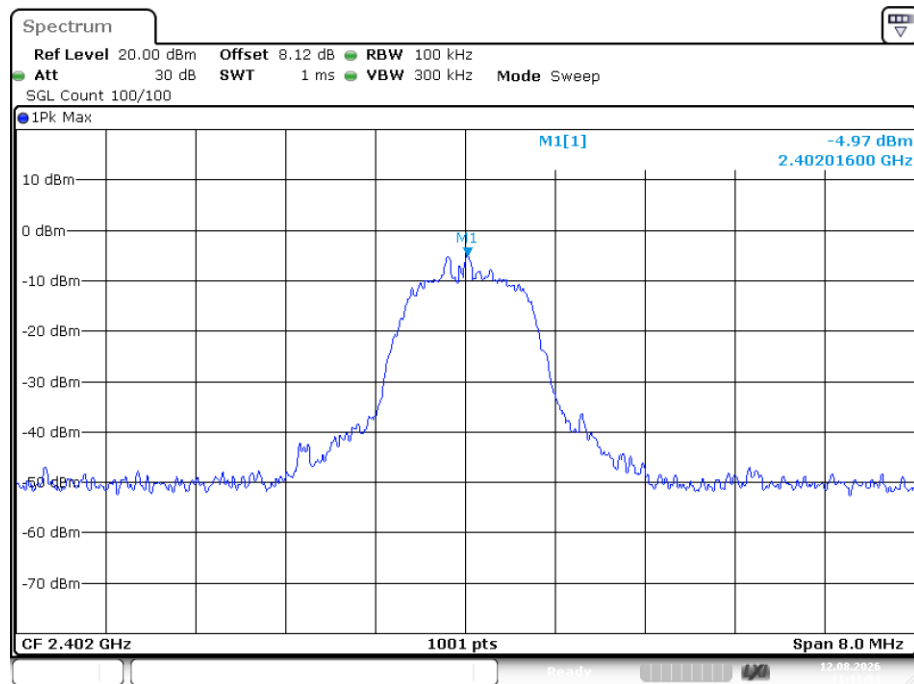

Date: 12.AUG.2026 11:11:53

Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

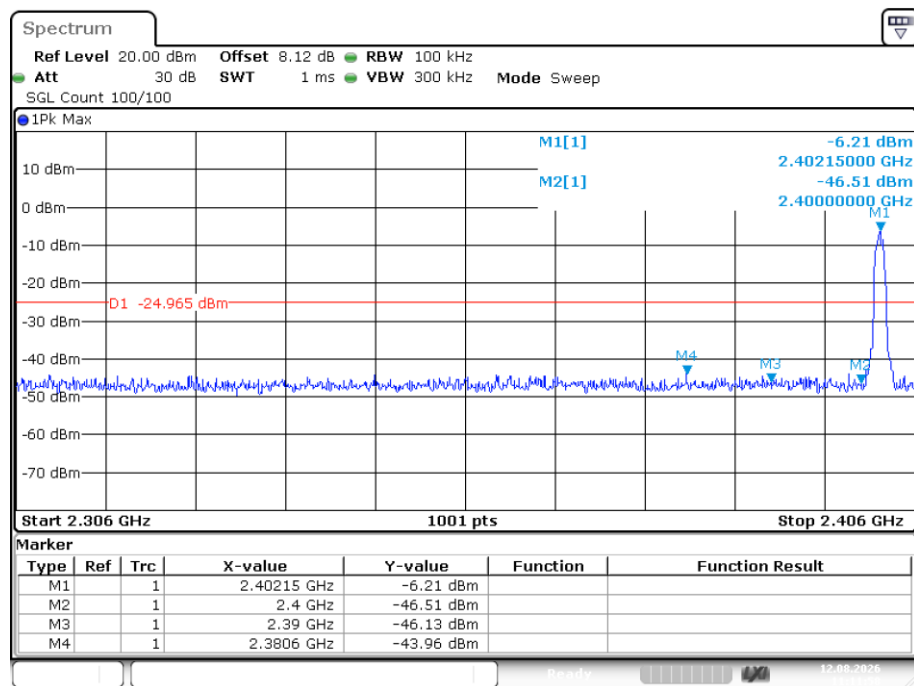

Date: 12.AUG.2026 11:11:57

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref