



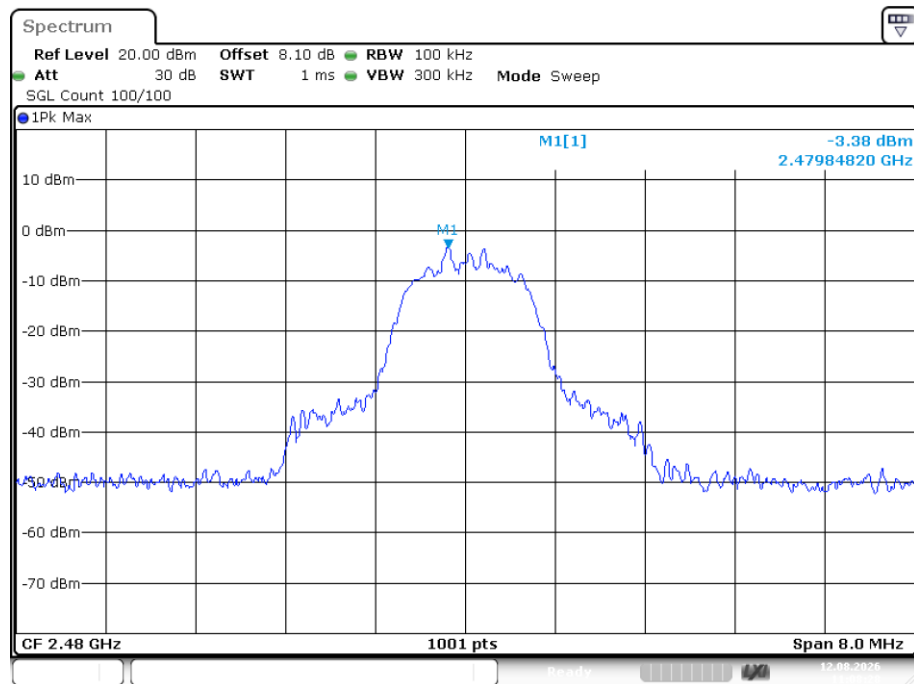


Date: 12.AUG.2026 11:08:28

Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

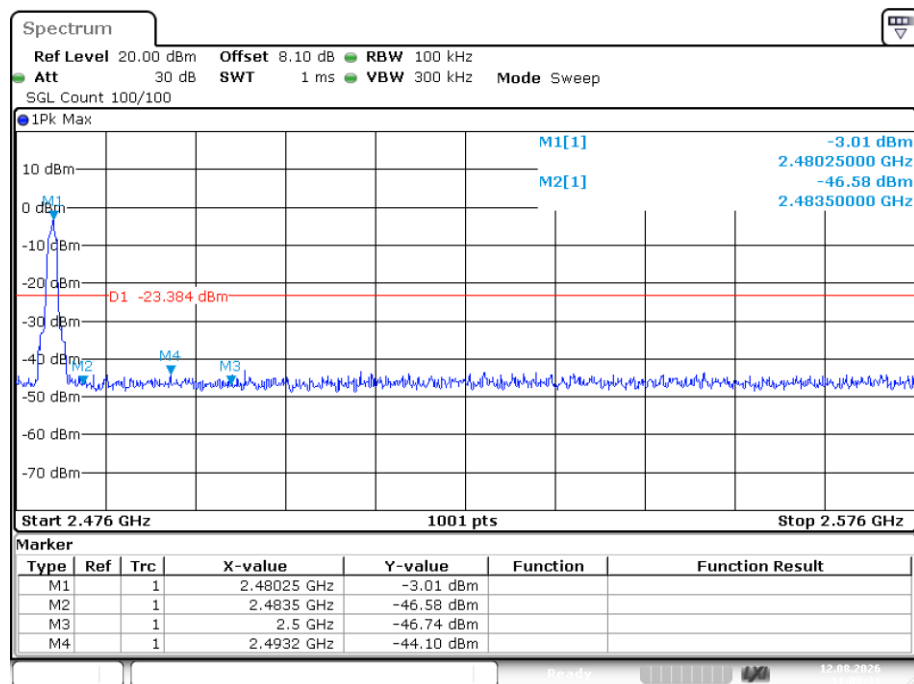


Date: 12.AUG.2026 11:08:31

Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

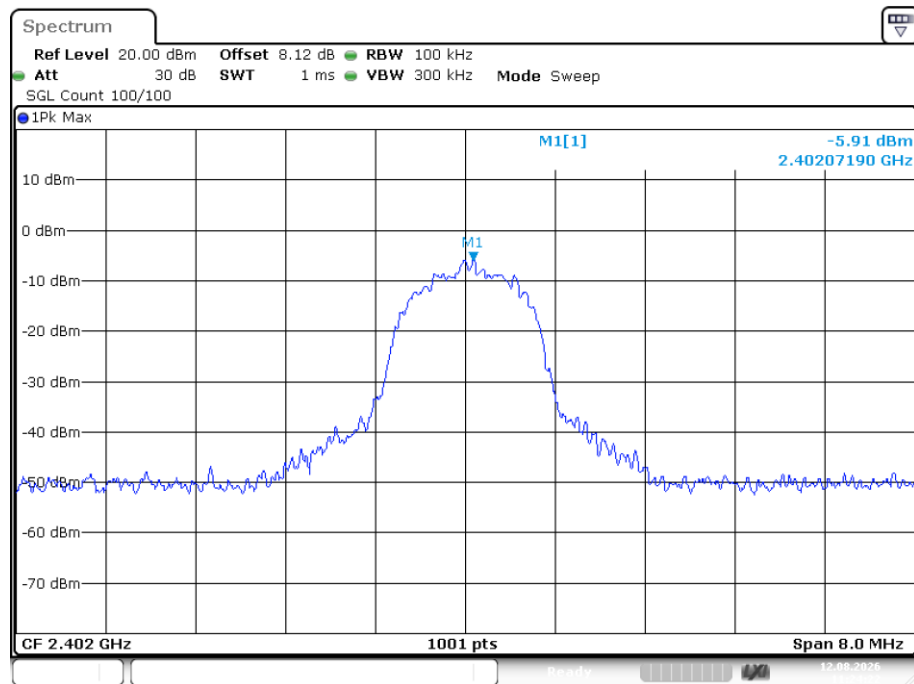


Date: 12.AUG.2026 11:24:22

Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

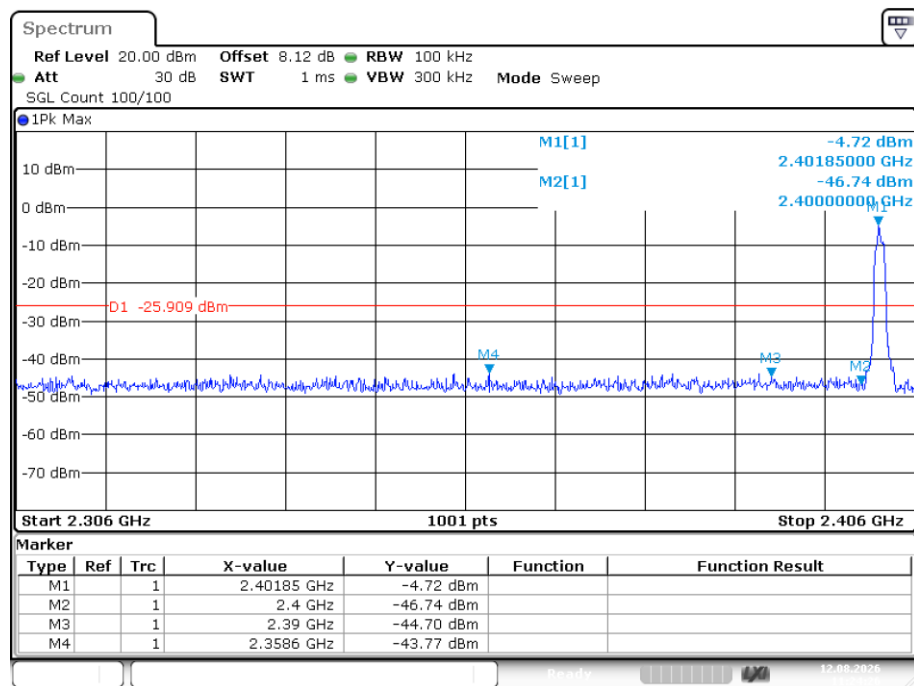


Date: 12.AUG.2026 11:24:26

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

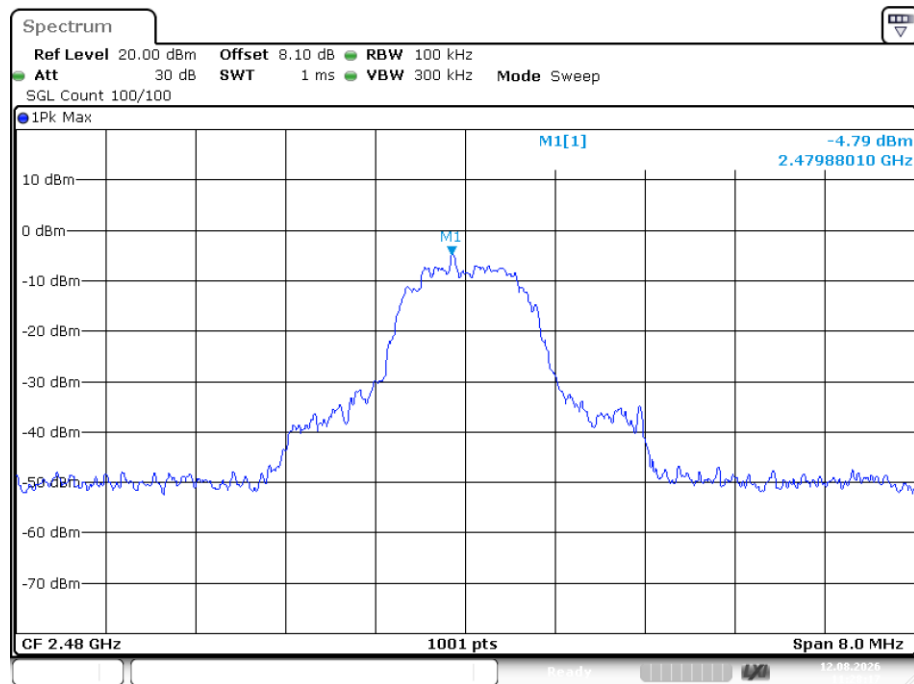

Date: 12.AUG.2026 11:28:18


Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

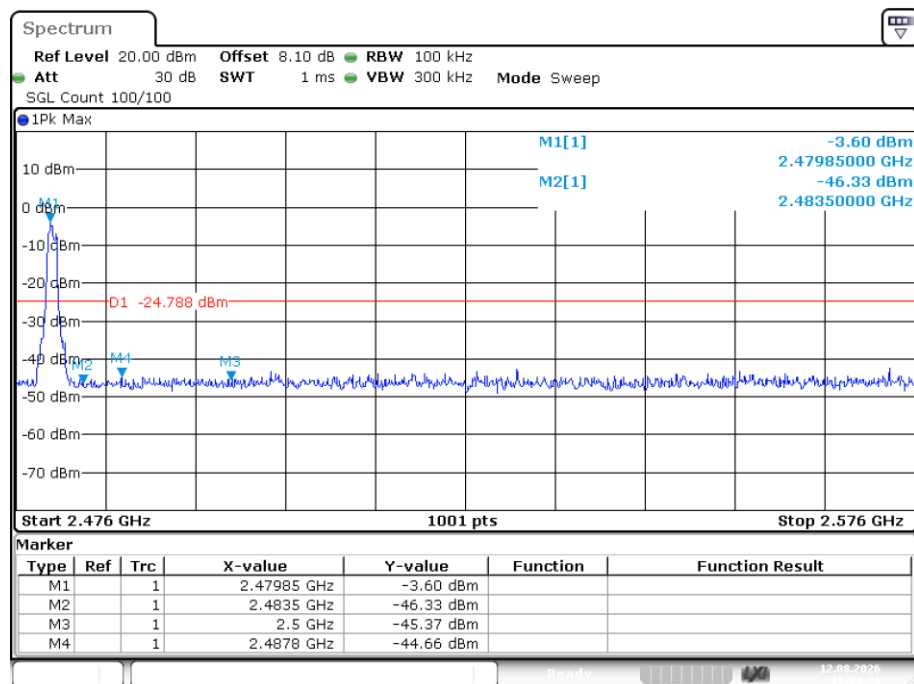

Date: 12.AUG.2026 11:28:21


Band Edge (Hopping)

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

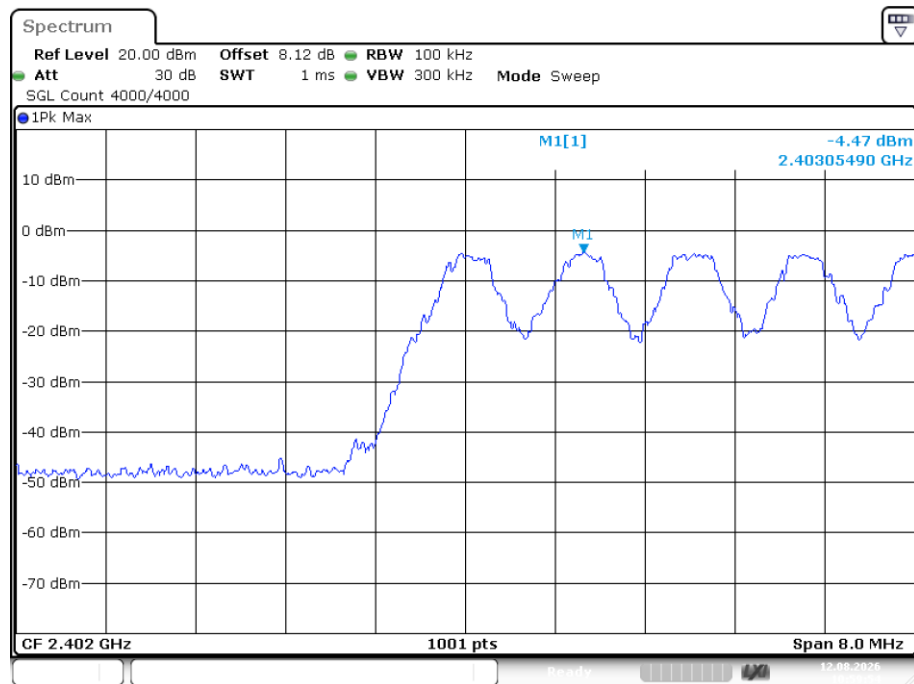


Date: 12.AUG.2026 10:59:54

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

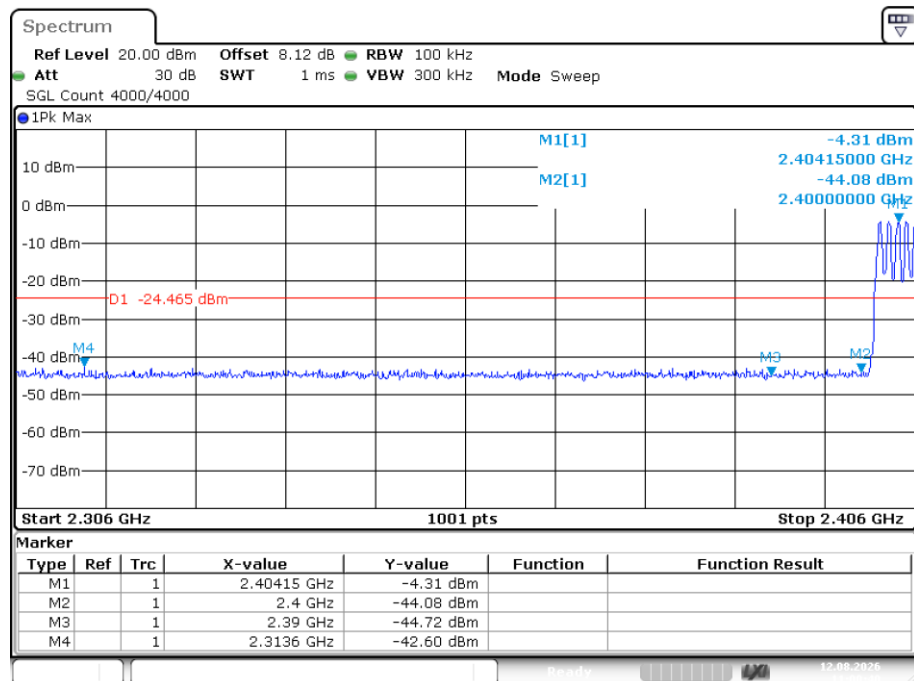


Date: 12.AUG.2026 11:00:41

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

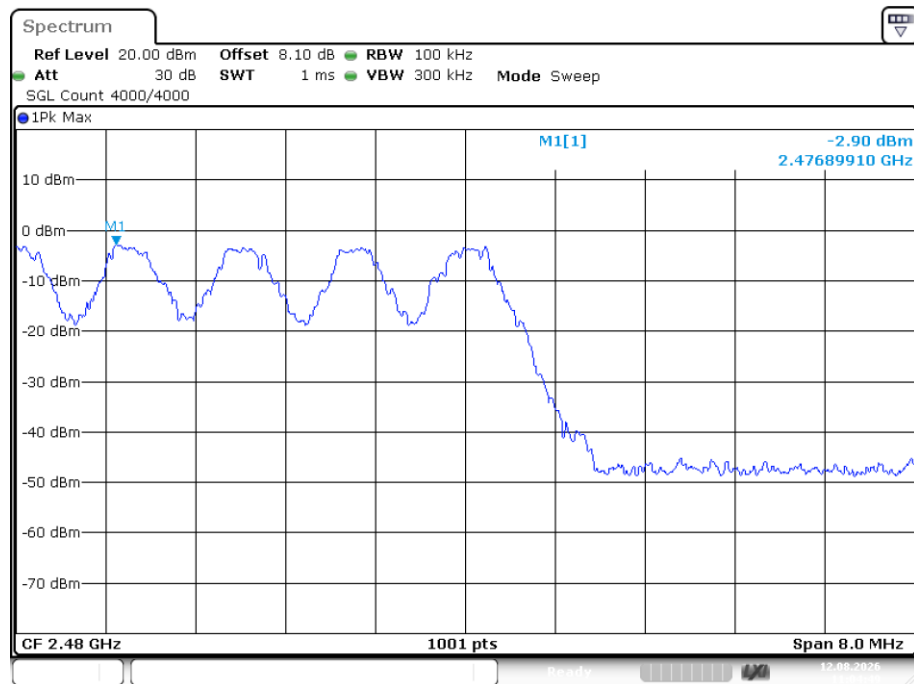


Date: 12.AUG.2026 11:04:49

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

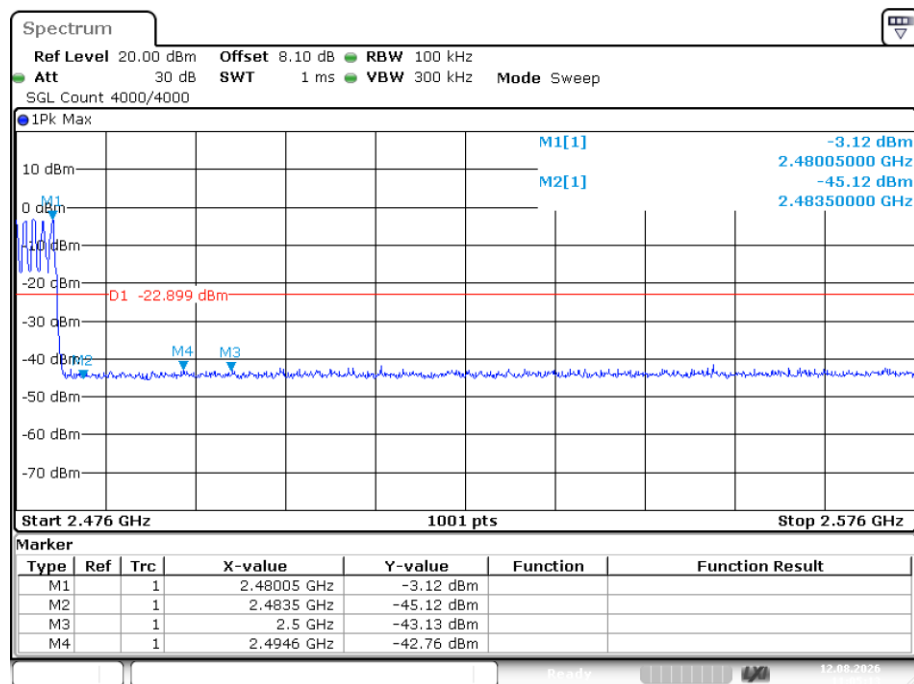


Date: 12.AUG.2026 11:05:14

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref

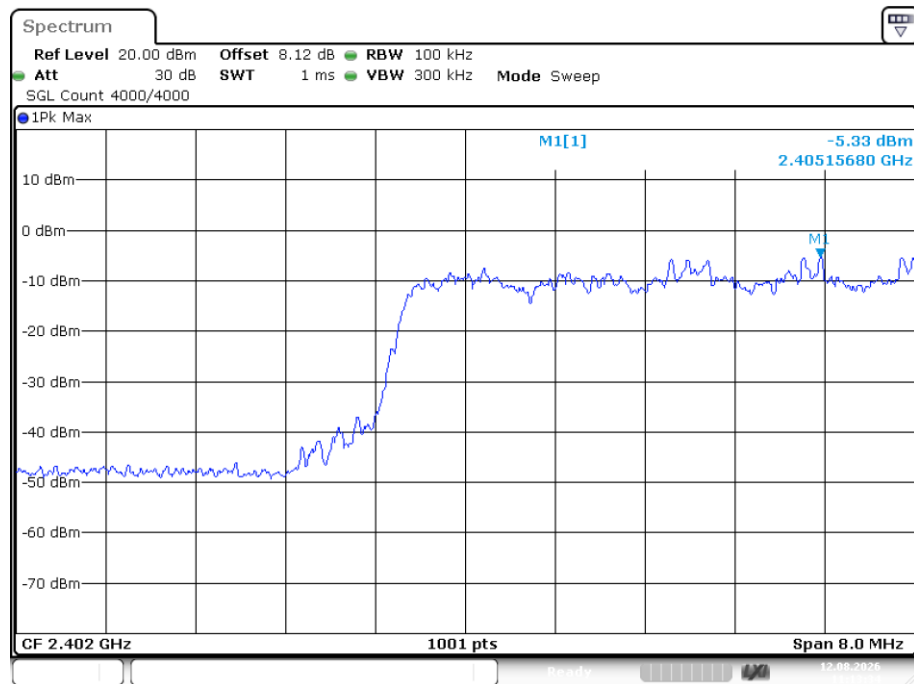


Date: 12.AUG.2026 11:13:33

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

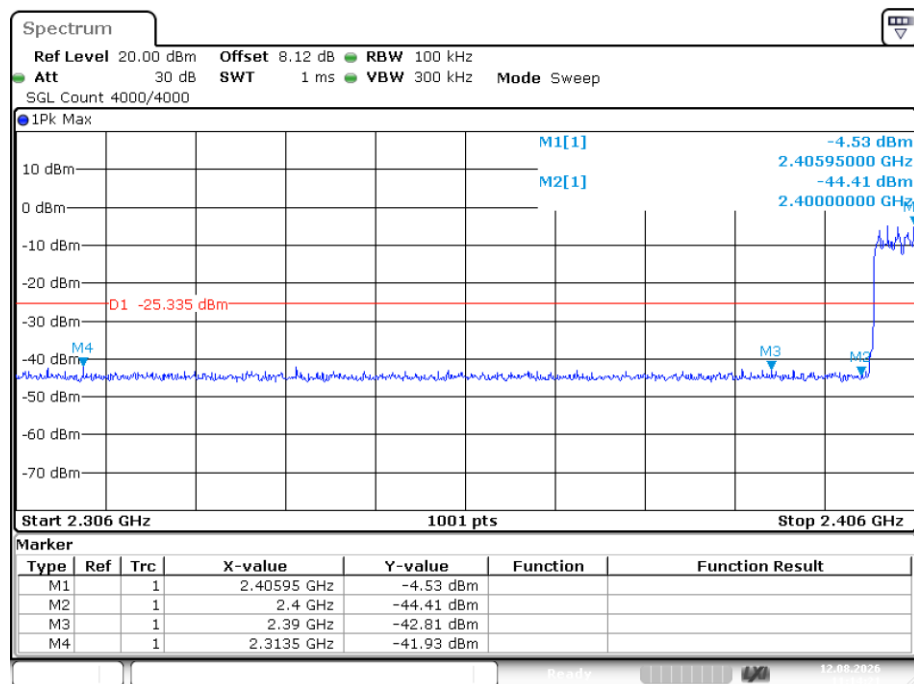


Date: 12.AUG.2026 11:14:21

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref

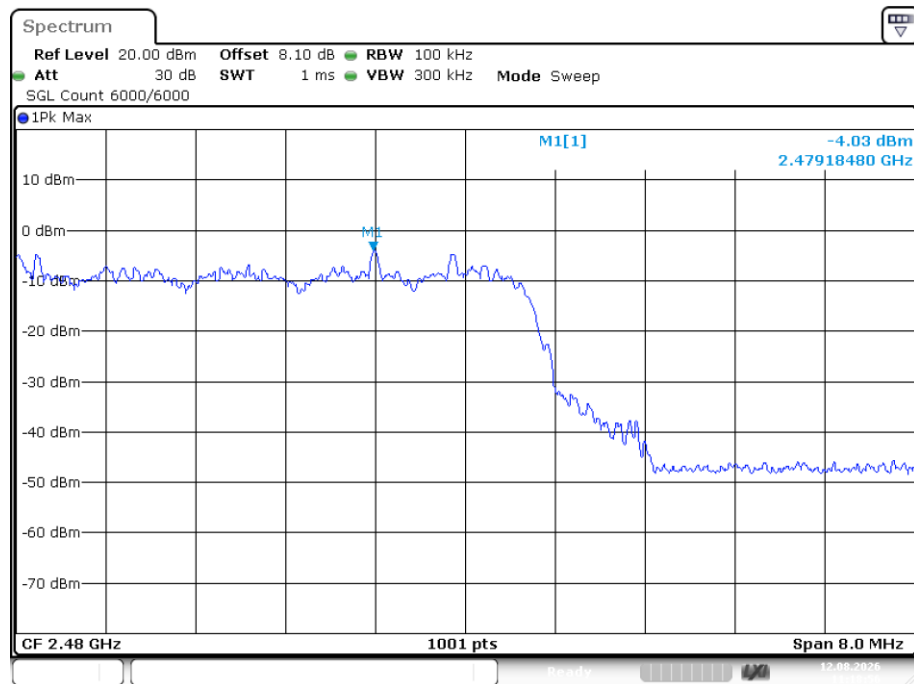


Date: 12.AUG.2026 11:18:56

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

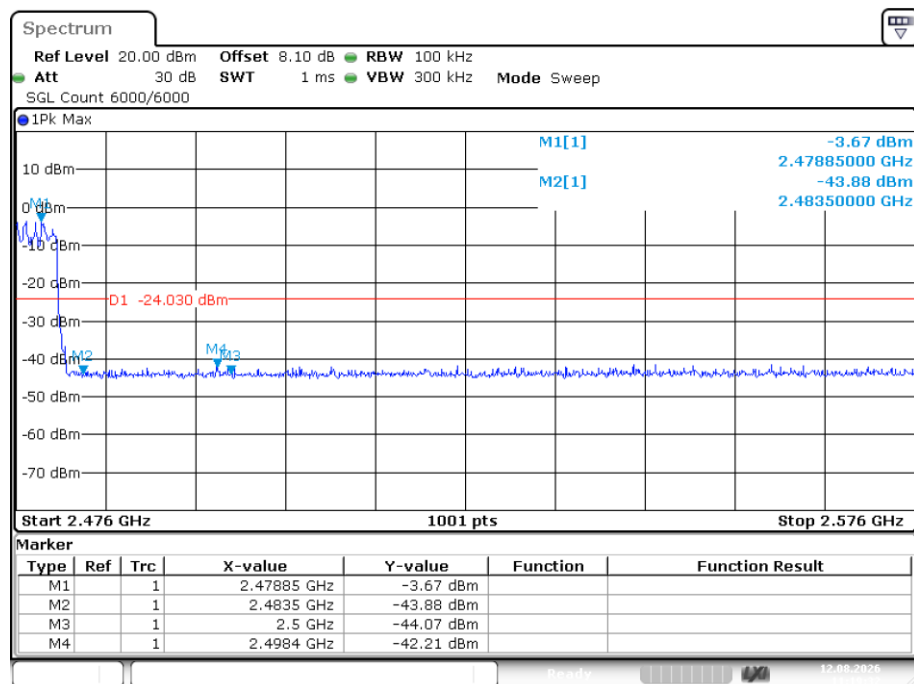


Date: 12.AUG.2026 11:19:32

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref

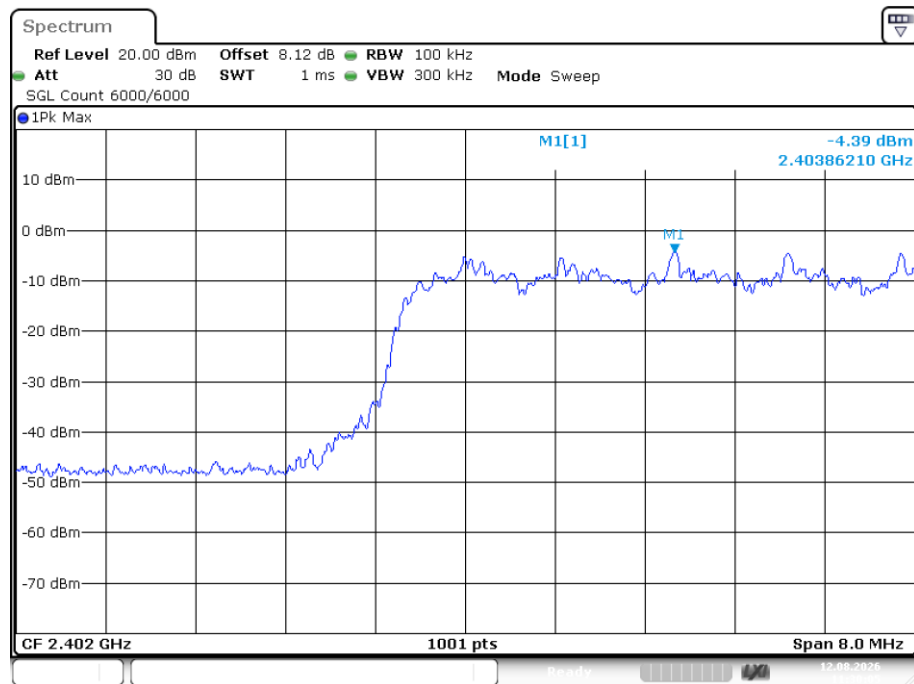


Date: 12.AUG.2026 11:30:04

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

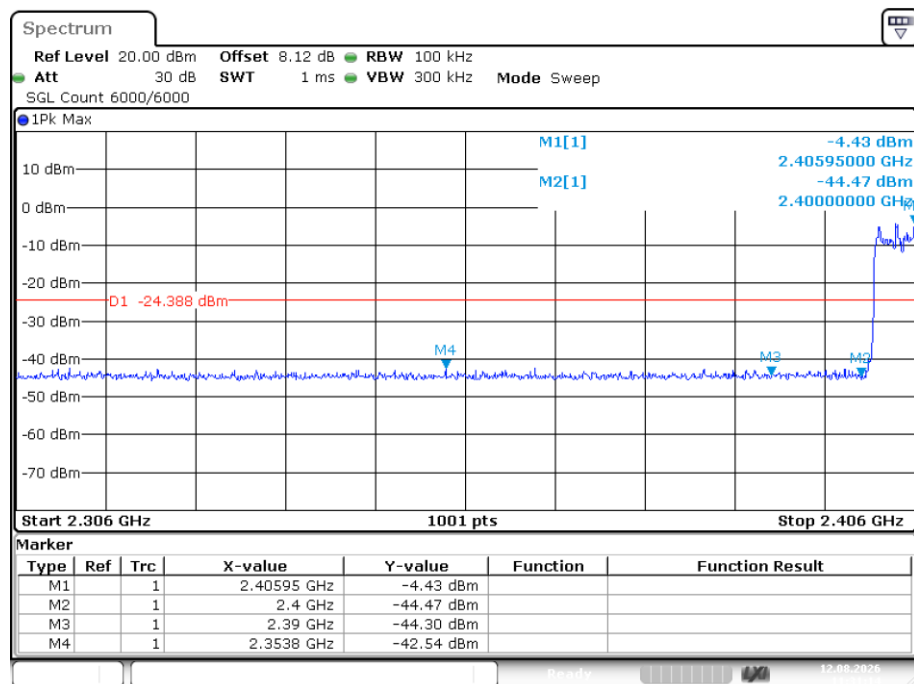


Date: 12.AUG.2026 11:31:14

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

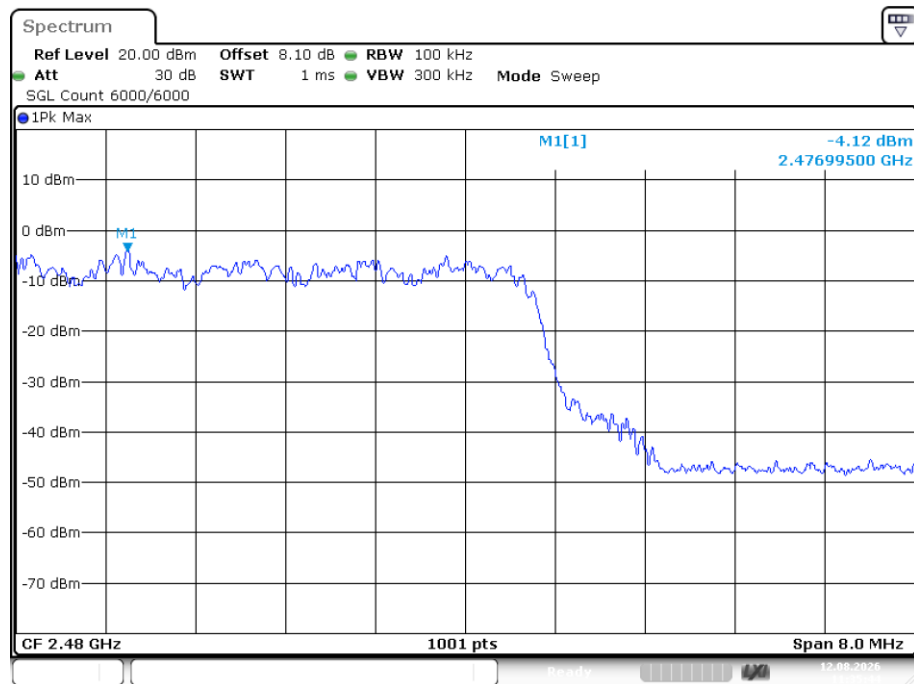

Date: 12.AUG.2026 11:35:44


Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

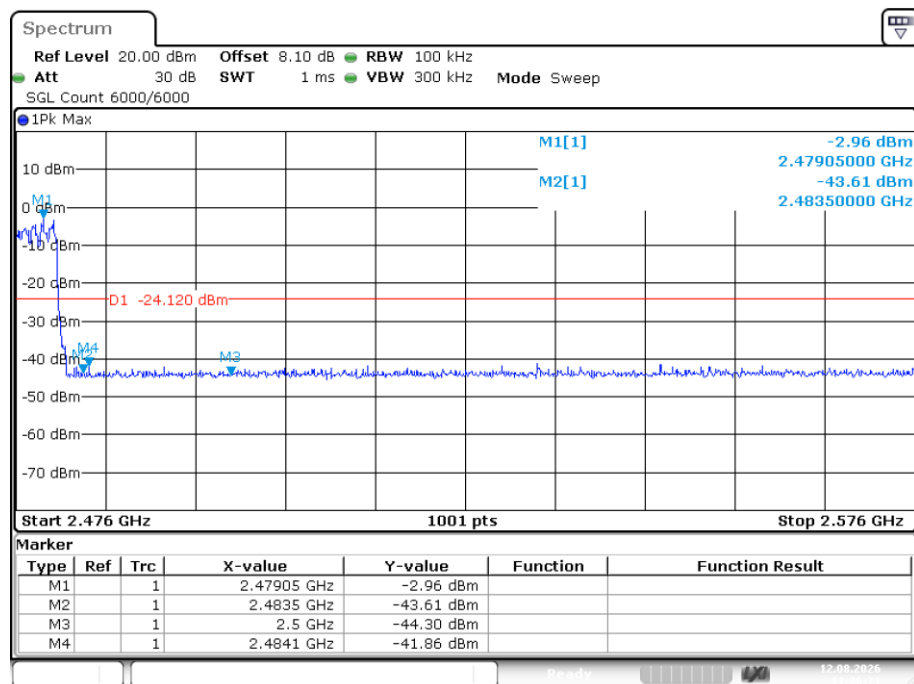

Date: 12.AUG.2026 11:36:21

12. POWER LINE CONDUCTED EMISSIONS

12.1. Block Diagram of Test Setup

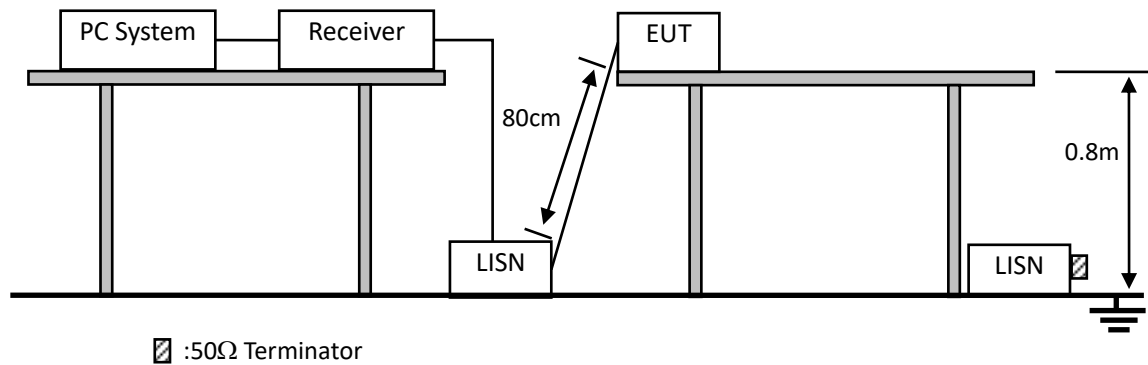

12.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.
 2. The lower limit shall apply at the transition frequencies.

12.3. Test Procedure


- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10-2020 on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.
- (5) The frequency range from 150 KHz to 30MHz is checked.

12.4. Test Result

PASS. (See below detailed test data)

Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

Line:

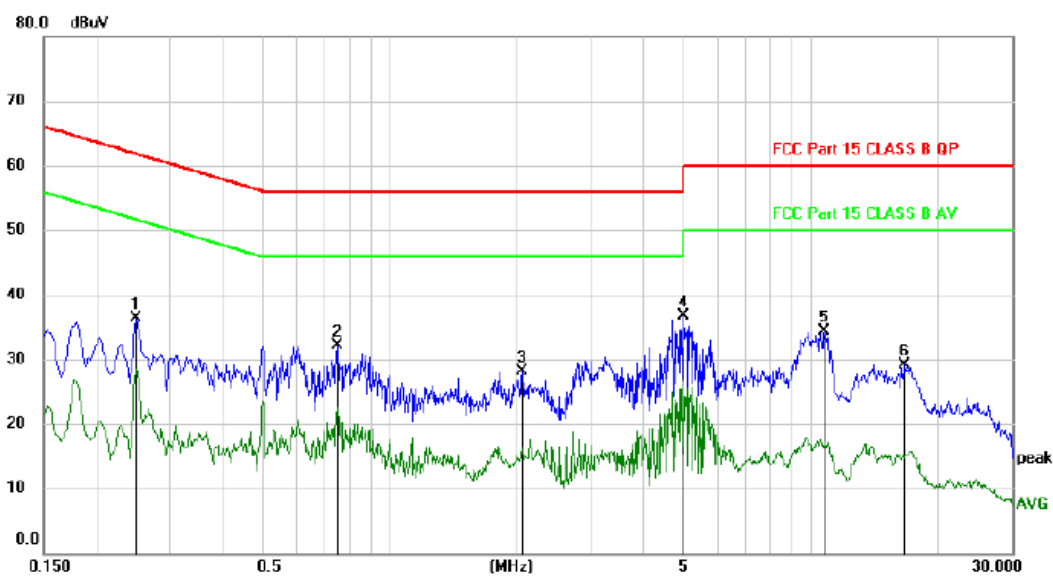


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.2490	25.48	10.75	36.23	61.79	-25.56	peak	
2	0.7470	21.28	10.88	32.16	56.00	-23.84	peak	
3	2.0610	17.42	10.77	28.19	56.00	-27.81	peak	
4 *	4.9650	25.69	11.00	36.69	56.00	-19.31	peak	
5	10.7610	23.02	11.30	34.32	60.00	-25.68	peak	
6	16.7370	17.90	11.15	29.05	60.00	-30.95	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

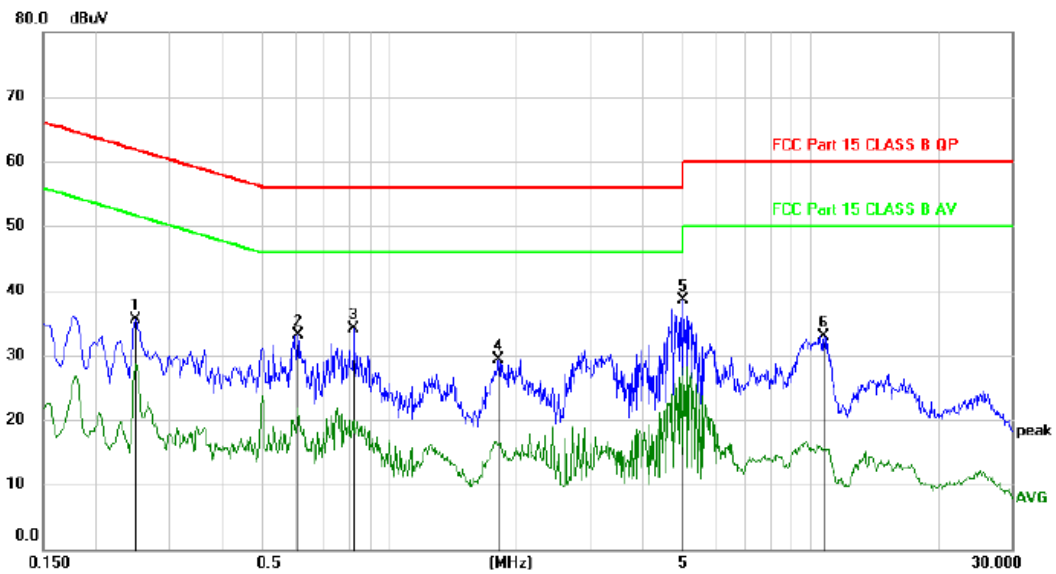Neutral:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2490	24.84	10.75	35.59	61.79	-26.20	peak	
2		0.6060	22.16	10.95	33.11	56.00	-22.89	peak	
3		0.8220	23.20	10.87	34.07	56.00	-21.93	peak	
4		1.8180	18.58	10.81	29.39	56.00	-26.61	peak	
5	*	4.9620	27.48	11.00	38.48	56.00	-17.52	peak	
6		10.7880	21.67	11.30	32.97	60.00	-27.03	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Note: All modes and channels have been tested and only the GFSK 2402MHz mode with the worst data is listed.

13. ANTENNA REQUIREMENTS

13.1.Limit



For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

13.2.Result


The EUT antenna is PCB Antenna. It complies with the standard requirement.

14. TEST SETUP PHOTO

14.1. Photo of Radiated Emission Test

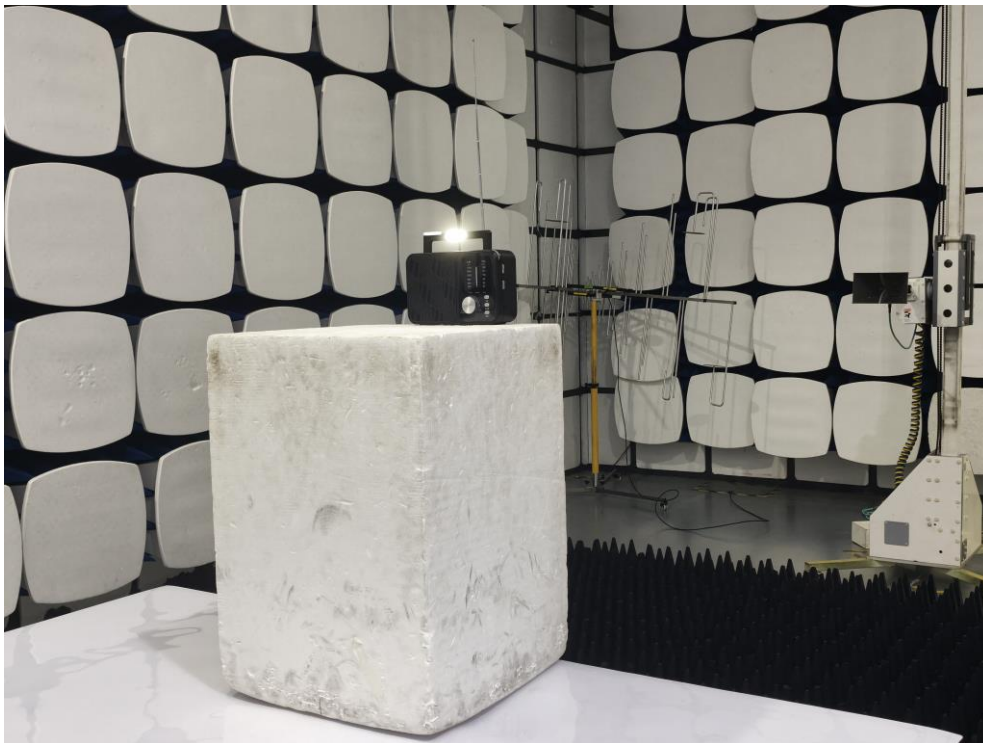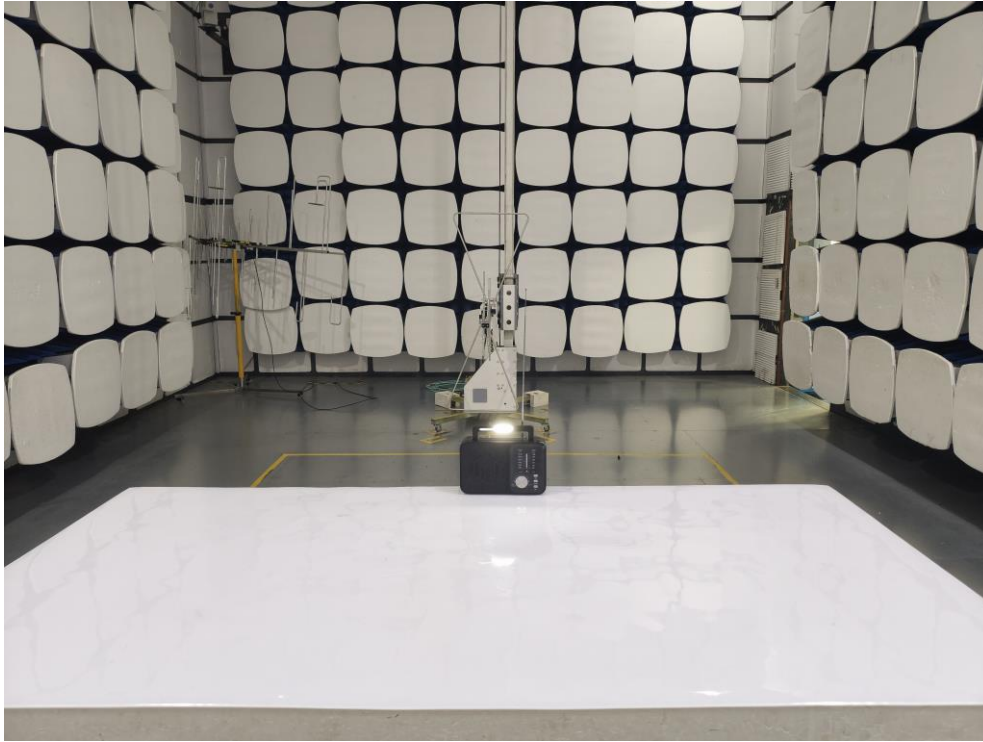



14.2.Photo of Conducted Emission Test


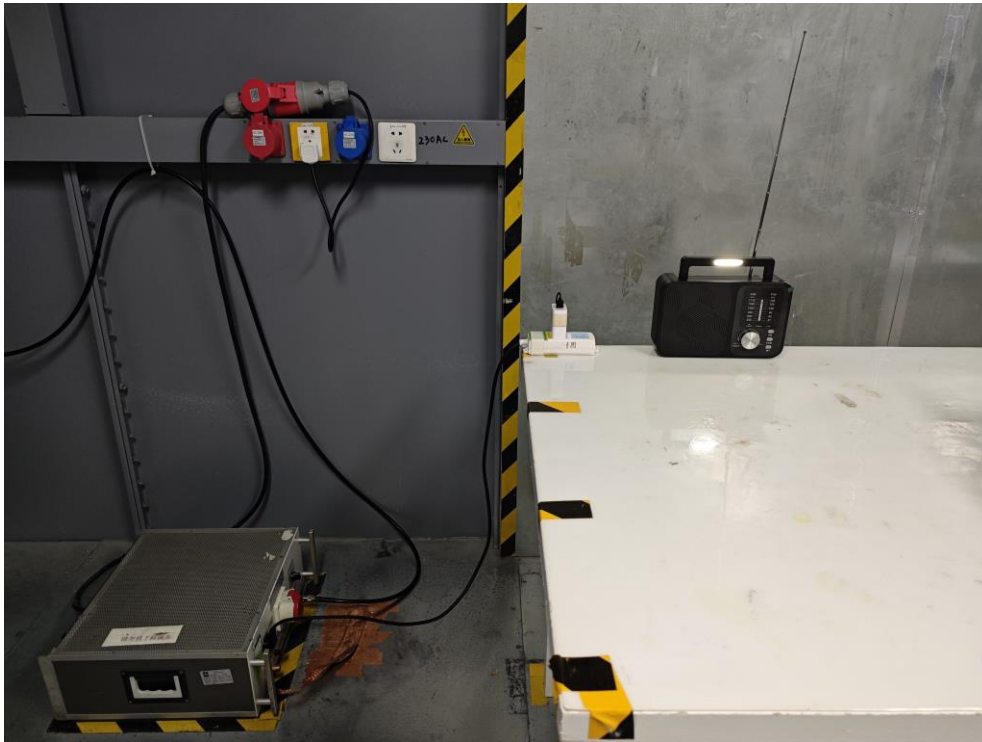


15. EUT PHOTO







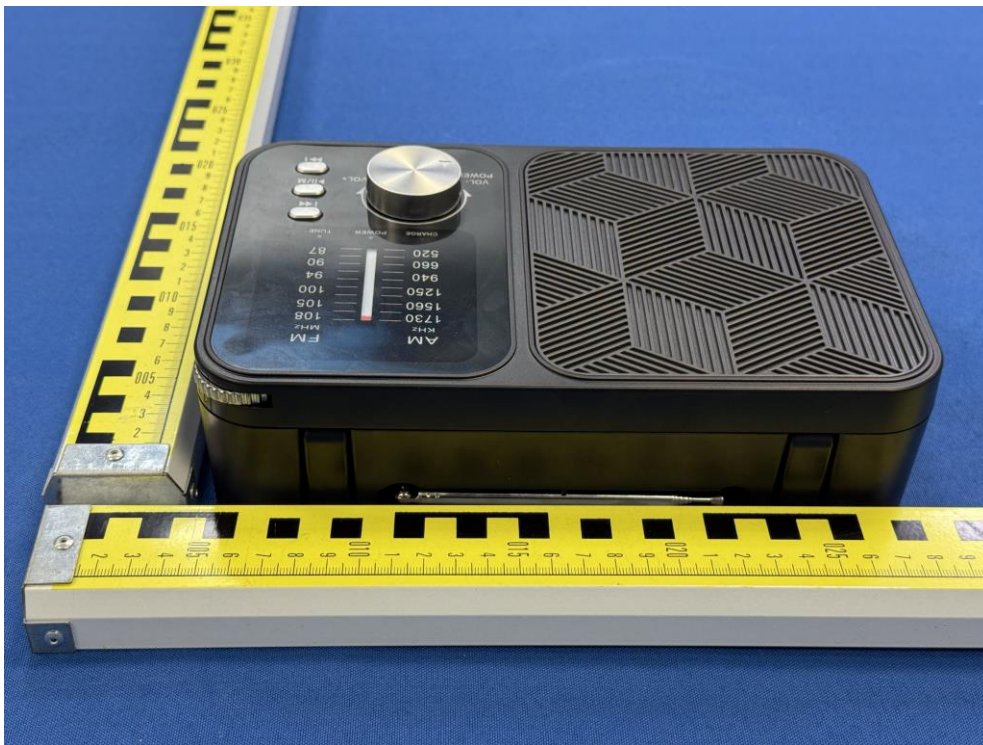
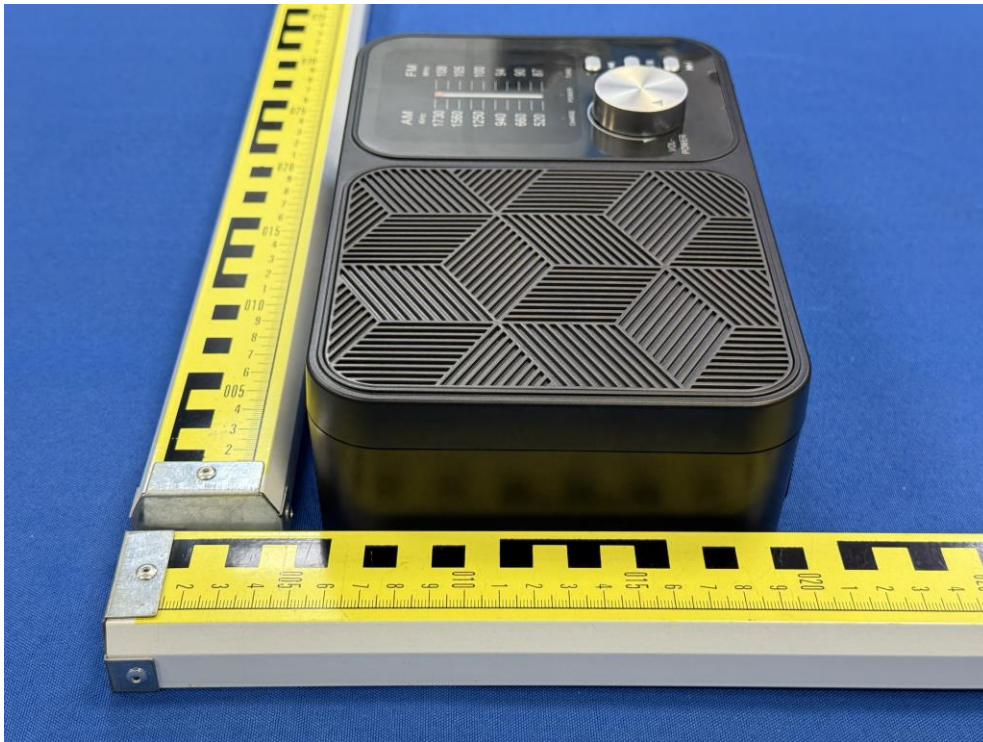


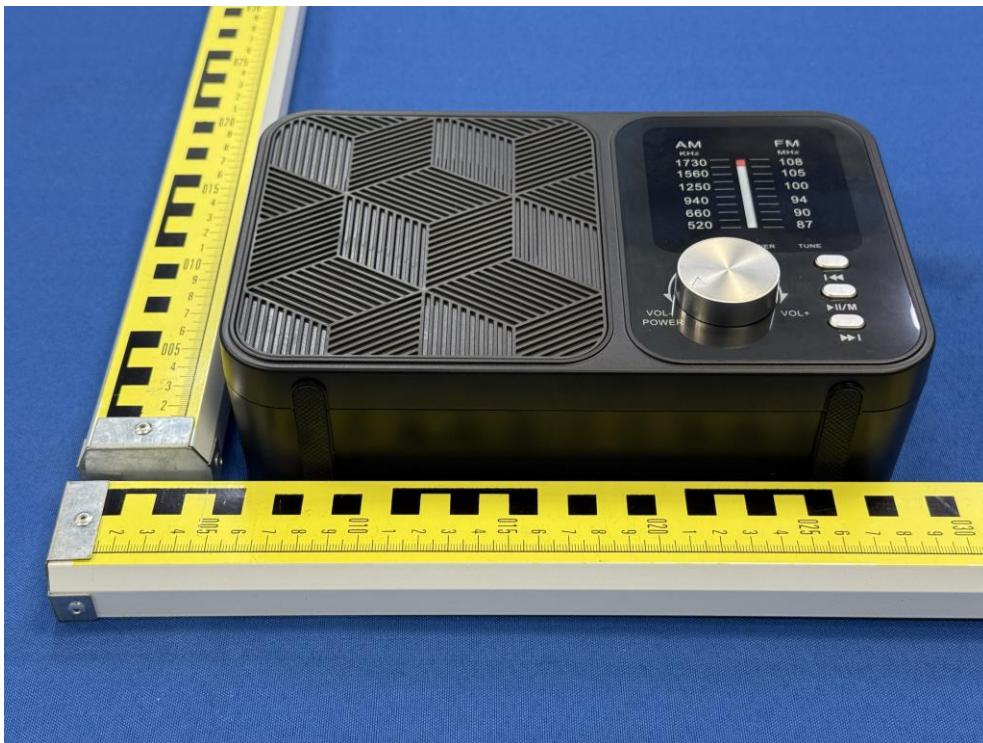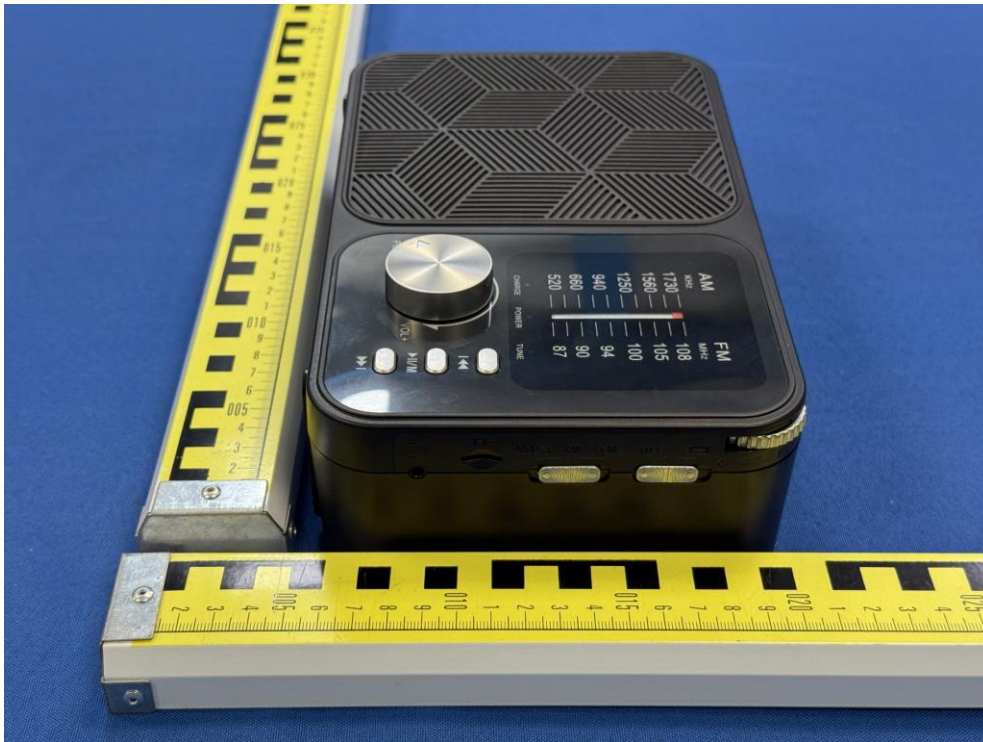







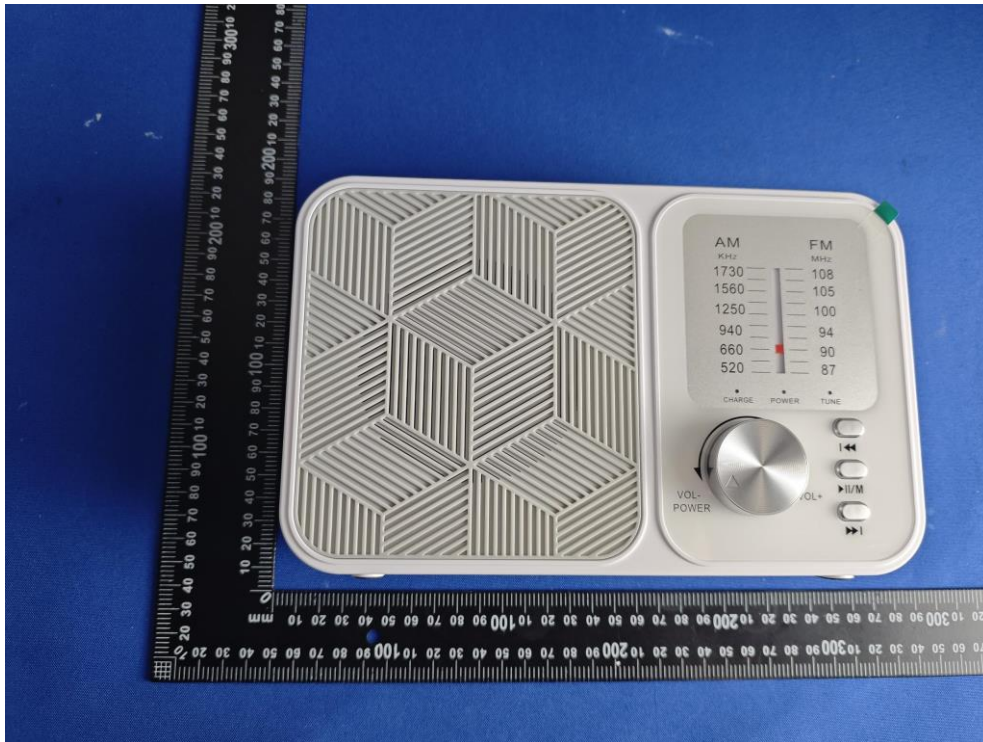



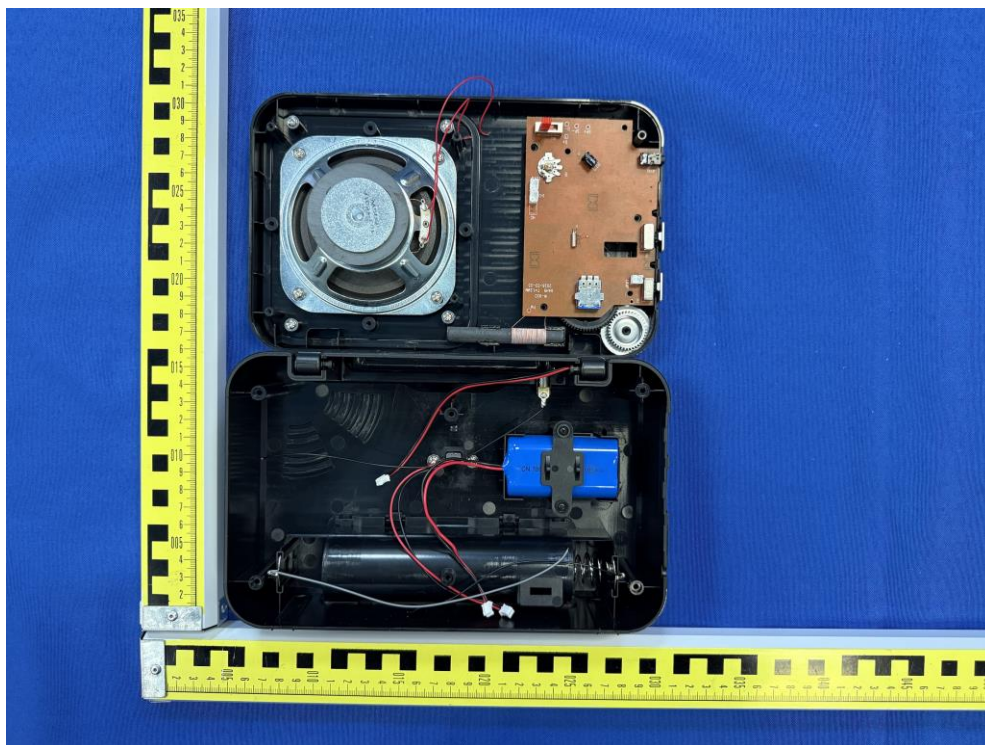


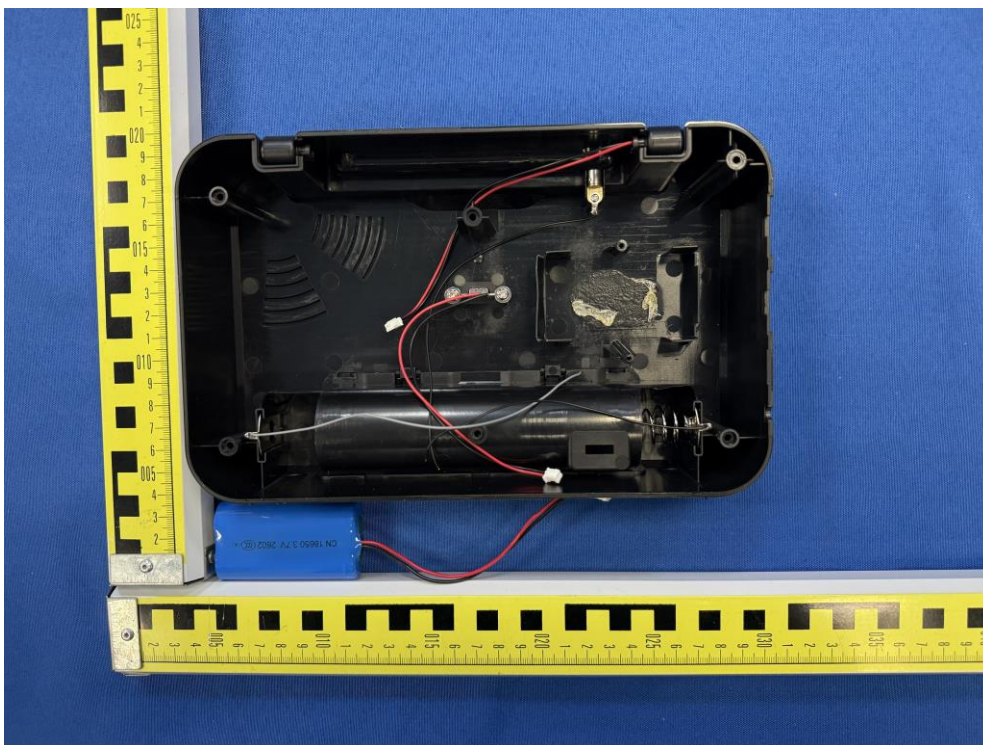
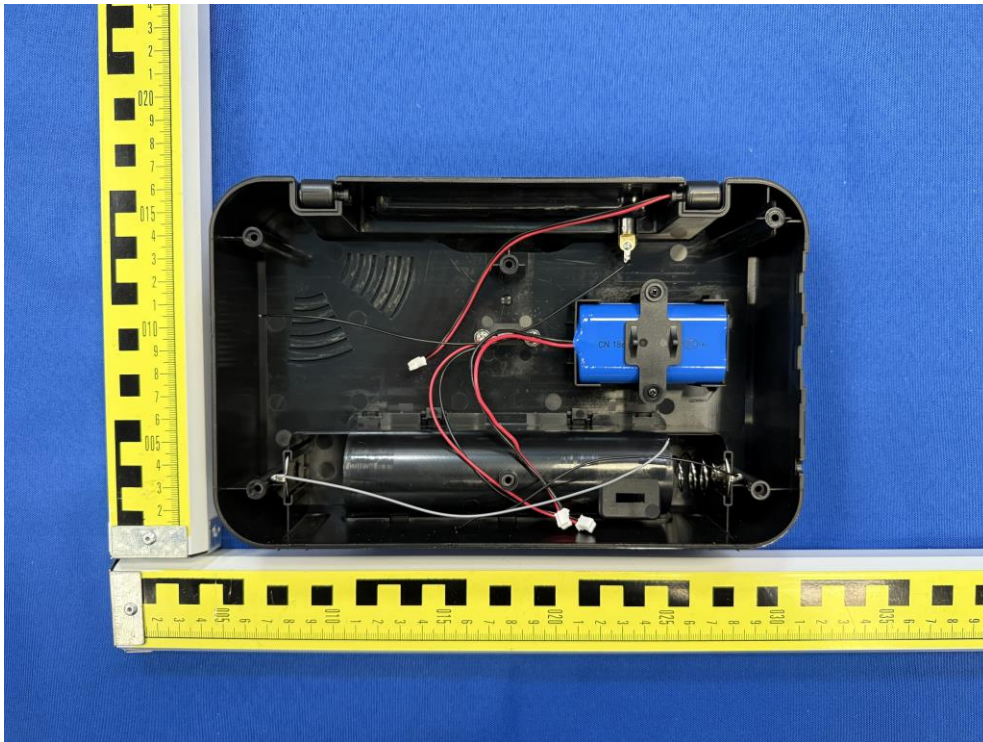



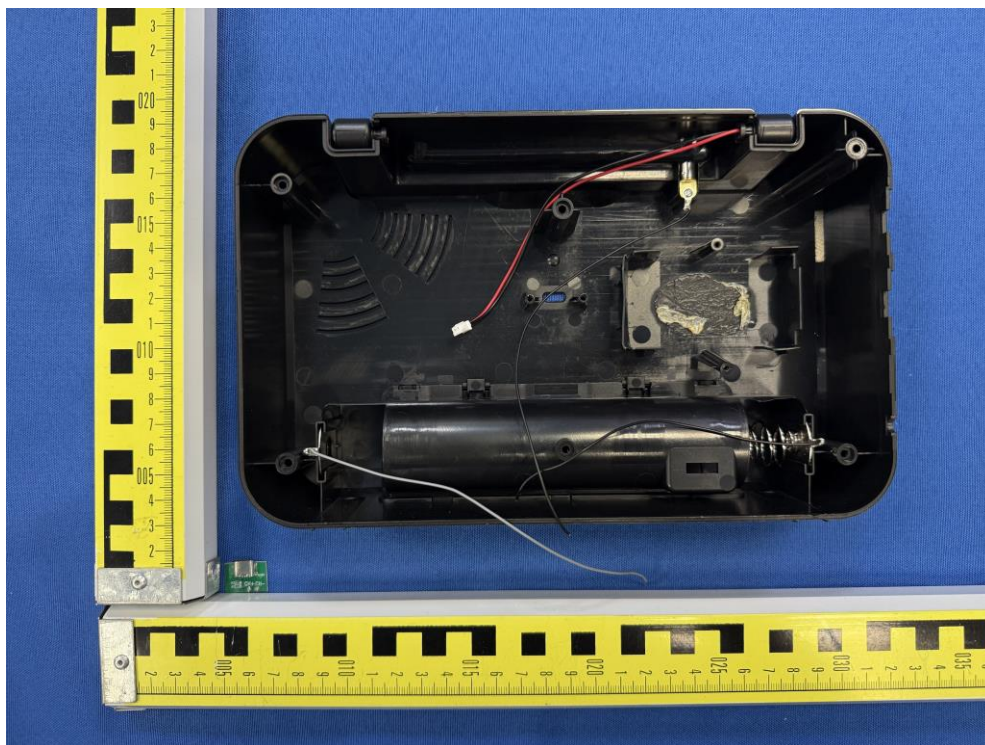


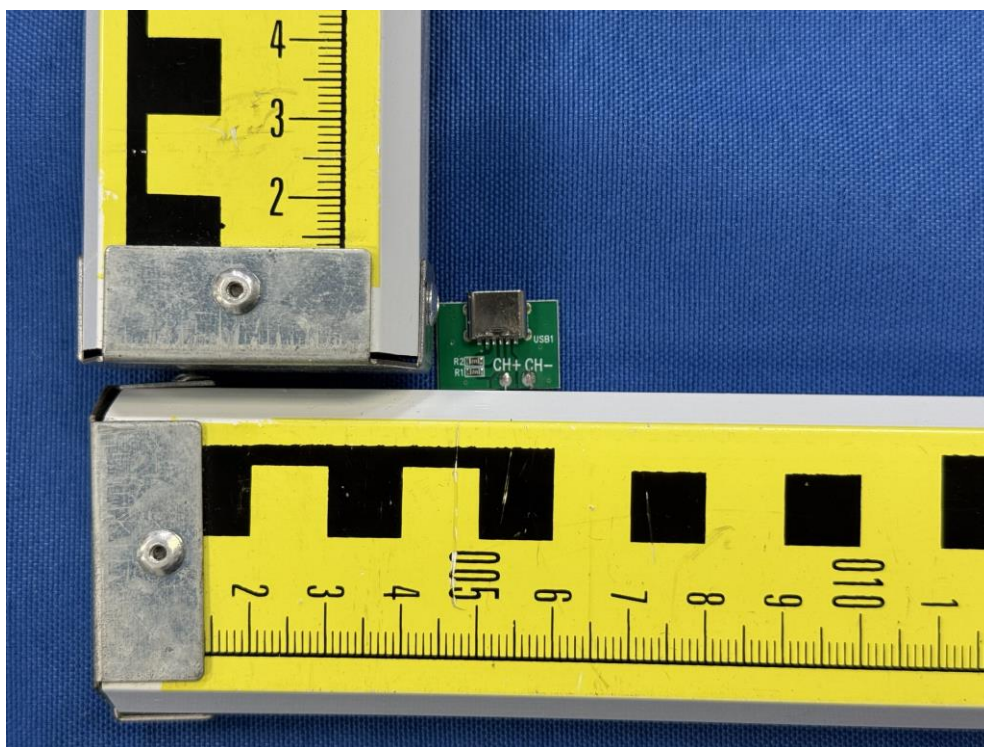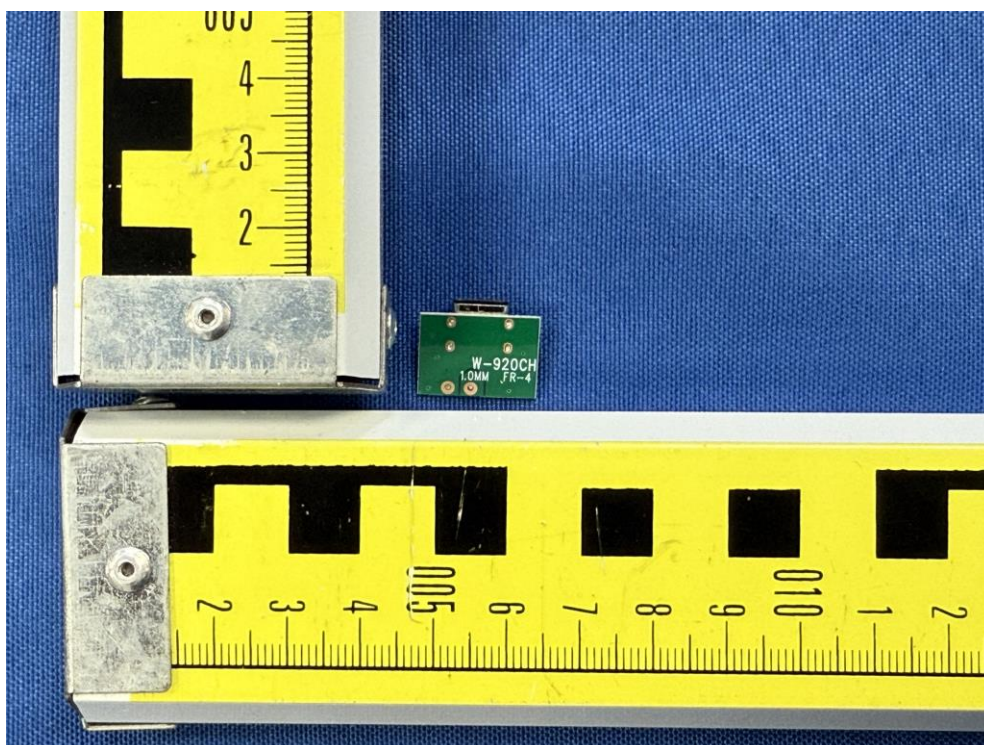

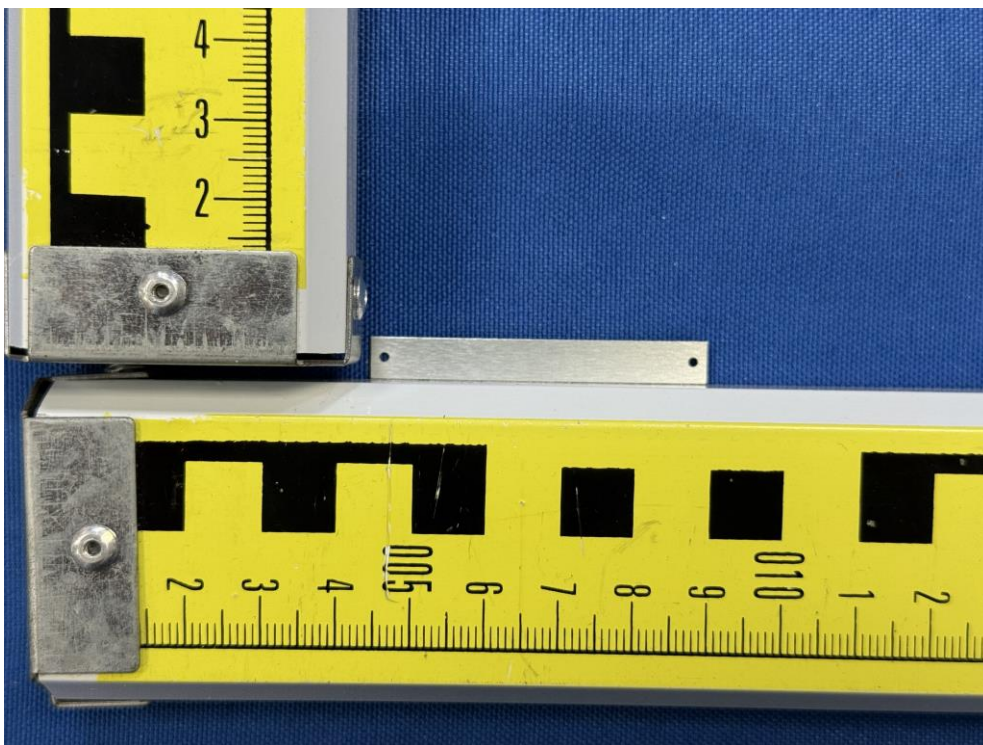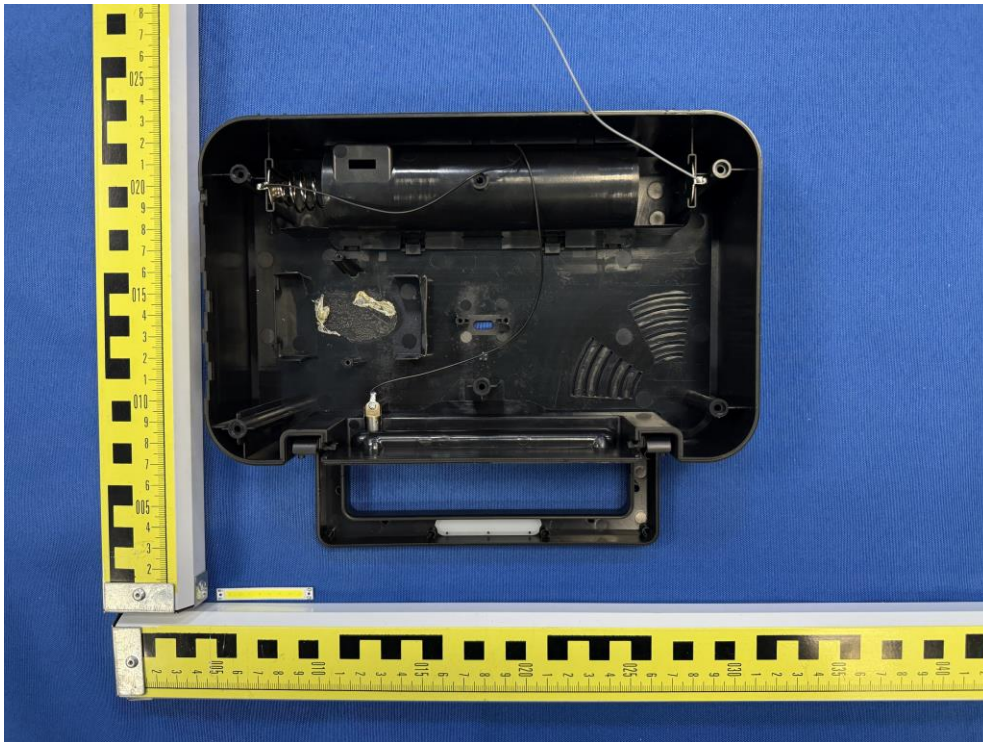

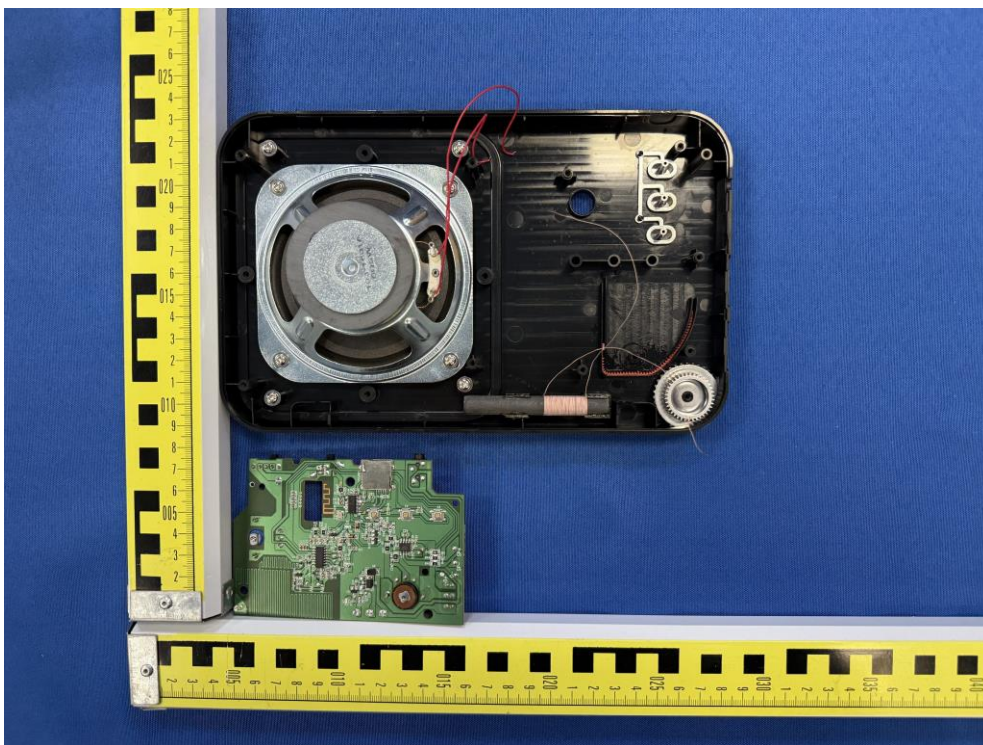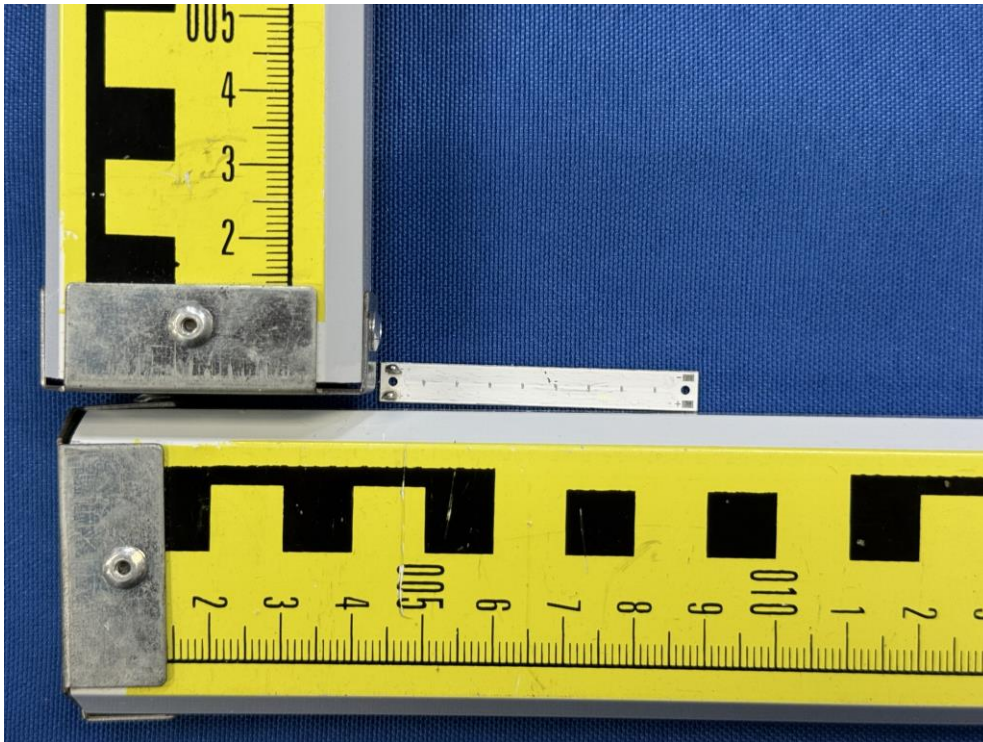

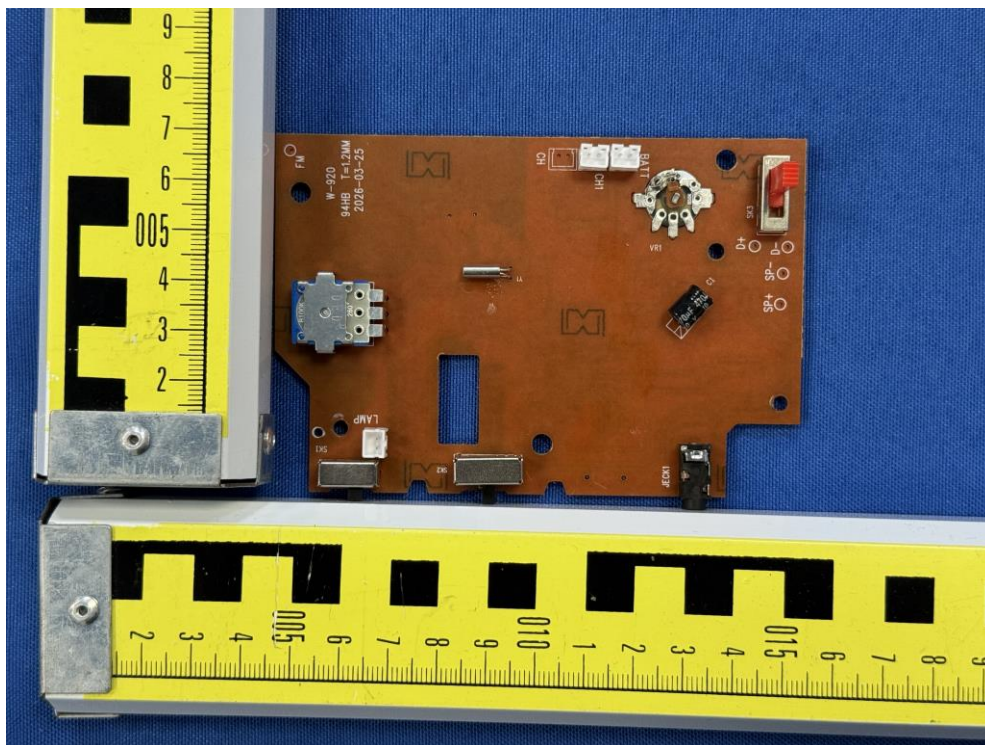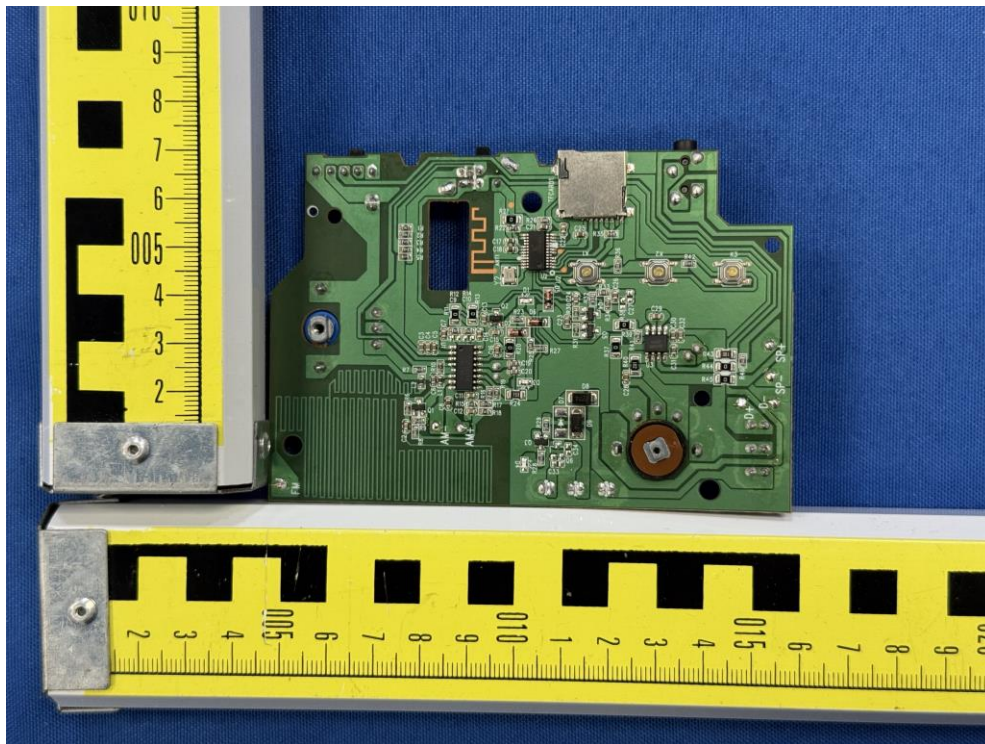

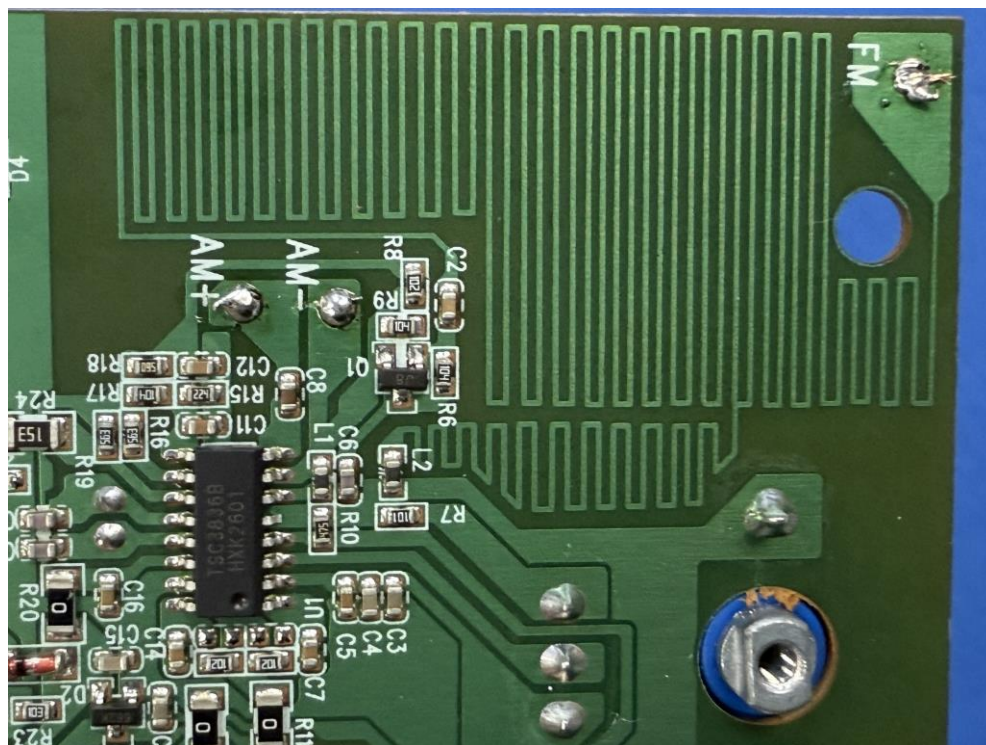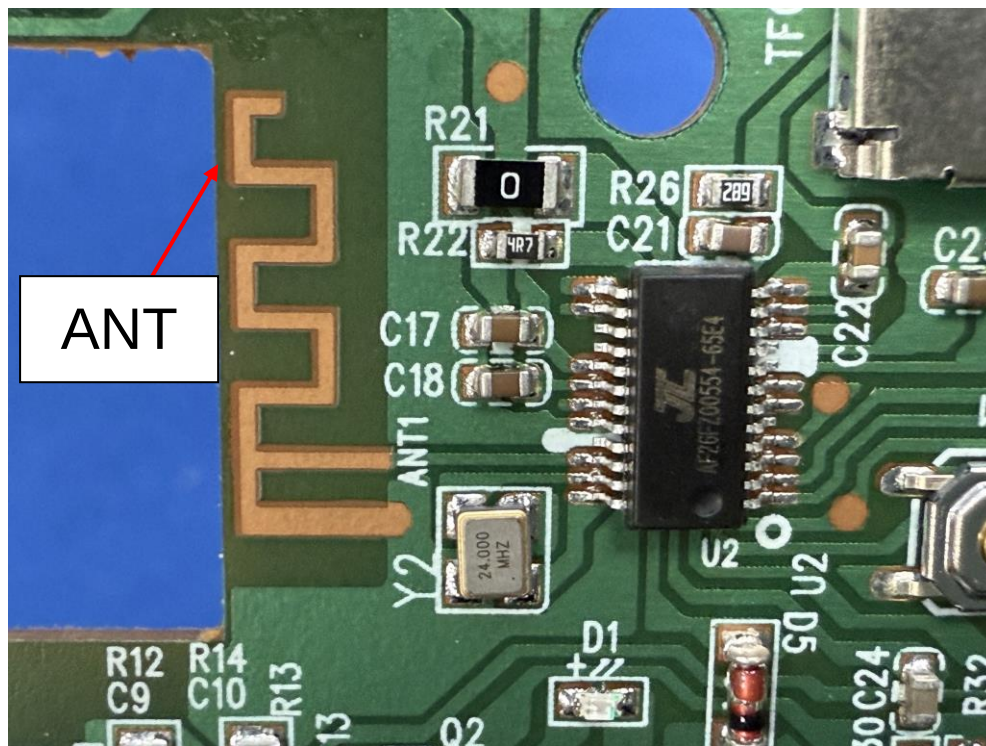

-----END OF REPORT-----