

## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15.231

**Report Reference No.**.....: **MAX26032413P01-R01**

**FCC ID**.....: 2BLKDJC01

Compiled by  
( position+printed name+signature)...: Engineer/ Cindy Zheng

*Cindy Zheng*

Supervised by  
( position+printed name+signature)...: Manager/Haley Wen

*Haley Wen*

Approved by  
( position+printed name+signature)...: RF Manager/ Vivian Jiang

*Vivian Jiang*

Date of issue.....: March 27, 2026

**Testing Laboratory Name** .....: **MAXLAB Testing Co.,Ltd.**

Address .....: 1/F, Building B, Xinshidai GR Park,Shiyan Street, Bao'an District, Shenzhen,Guangdong, 518052, People's Republic of China

**Applicant's name**.....: **Zhongshan Jiecai optoelectronic technology Co., LTD**

Address .....: One of the 5th floor, Building 2, No.148, Dongxing East Road, Guzhen Town, Zhongshan City

**Test specification** .....

Standard .....: **FCC Part 15.231**  
**ANSI C63.10:2020**

**MAXLAB Testing Co.,Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the MAXLAB Testing Co.,Ltd. is acknowledged as copyright owner and source of the material. MAXLAB Testing Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** .....: **Intelligent remote control**

Trade Mark .....: N/A

Manufacturer .....: Zhongshan Jiecai optoelectronic technology Co., LTD

Model/Type reference.....: JC01

Listed Models .....: JC-011, JC-022, JC-033, JC-044, JC-055, JC-066

Ratings .....: DC3V(2\*1.5V AAA battery)

Modulation .....: ASK

Frequency.....: 433.92MHz

Result.....: **PASS**

## TEST REPORT

**Equipment under Test** : Intelligent remote control

**Model /Type** : JC01

**Listed Models** : JC-011, JC-022, JC-033, JC-044, JC-055, JC-066

**Model Declaration** : All models covered in this report are the same with each other, except for different model No. for trading purpose.

**Applicant** : Zhongshan Jiecai optoelectronic technology Co., LTD

**Address** : One of the 5th floor, Building 2, No.148, Dongxing East Road, Guzhen Town, Zhongshan City

**Manufacturer** : Zhongshan Jiecai optoelectronic technology Co., LTD

**Address** : One of the 5th floor, Building 2, No.148, Dongxing East Road, Guzhen Town, Zhongshan City

|                     |             |
|---------------------|-------------|
| <b>Test Result:</b> | <b>PASS</b> |
|---------------------|-------------|

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

|                                                               |           |
|---------------------------------------------------------------|-----------|
| <b>1 TEST STANDARDS.....</b>                                  | <b>4</b>  |
| <b>2 SUMMARY.....</b>                                         | <b>5</b>  |
| 2.1 General Remarks .....                                     | 5         |
| 2.2 Product Description .....                                 | 5         |
| 2.3 Equipment Under Test .....                                | 5         |
| 2.4 Short description of the Equipment under Test (EUT) ..... | 5         |
| 2.5 Block Diagram of Test Setup .....                         | 5         |
| 2.6 Special Accessories .....                                 | 6         |
| 2.7 Related Submittal(s) / Grant (s).....                     | 6         |
| 2.8 Modifications .....                                       | 6         |
| <b>3 TEST ENVIRONMENT .....</b>                               | <b>7</b>  |
| 3.1 Address of the test laboratory .....                      | 7         |
| 3.2 Test Facility.....                                        | 7         |
| 3.3 Environmental conditions .....                            | 7         |
| 3.4 Summary of measurement results .....                      | 8         |
| 3.5 Statement of the measurement uncertainty .....            | 8         |
| 3.6 Equipments Used during the Test .....                     | 9         |
| <b>4 TEST CONDITIONS AND RESULTS.....</b>                     | <b>11</b> |
| 4.1 AC Power Conducted Emission.....                          | 11        |
| 4.2 Radiated Emission .....                                   | 12        |
| 4.3 20dB Bandwidth .....                                      | 18        |
| 4.4 Deactivation Time.....                                    | 19        |
| 4.5 Antenna Requirement .....                                 | 20        |
| <b>5 TEST SETUP PHOTOS OF THE EUT .....</b>                   | <b>21</b> |
| <b>6 PHOTOS OF THE EUT .....</b>                              | <b>22</b> |

## **1 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.231](#): Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

[ANSI C63.10:2020](#) : American National Standard for Testing Unlicensed Wireless Devices

## 2 SUMMARY

### 2.1 General Remarks

|                                |   |                |
|--------------------------------|---|----------------|
| Date of receipt of test sample | : | March 17, 2026 |
| Testing commenced on           | : | March 17, 2026 |
| Testing concluded on           | : | March 27, 2026 |

### 2.2 Product Description

|                       |                                                                                  |
|-----------------------|----------------------------------------------------------------------------------|
| Product Name:         | Intelligent remote control                                                       |
| Model/Type reference: | JC01, JC-011, JC-022, JC-033, JC-044, JC-055, JC-066                             |
| Testing sample ID:    | MAX26032413P01-R01-1# (Engineer sample),<br>MAX26032413P01-R01-2#(Normal sample) |
| Power supply:         | DC 3V From Battery                                                               |
| Hardware Version:     | /                                                                                |
| Software version :    | /                                                                                |
| Modulation:           | ASK                                                                              |
| Operation frequency:  | 433.92MHz                                                                        |
| Transmit Peak Power:  | 72.19 dBμV/m                                                                     |
| Channel number:       | 1                                                                                |
| Antenna type:         | PCB Antenna                                                                      |
| Antenna gain:         | 2.34 dBi                                                                         |

### 2.3 Equipment Under Test

#### Power supply system utilised

|                      |   |                                                                                         |                                   |
|----------------------|---|-----------------------------------------------------------------------------------------|-----------------------------------|
| Power supply voltage | : | <input type="radio"/> 230V / 50 Hz                                                      | <input type="radio"/> 120V / 60Hz |
|                      |   | <input type="radio"/> 5V DC                                                             | <input type="radio"/> 24 V DC     |
|                      |   | <input checked="" type="radio"/> Other (specified in blank below)<br>DC 3V From Battery |                                   |

### 2.4 Short description of the Equipment under Test (EUT)

This is a Intelligent remote control.

For more details, refer to the user's manual of the EUT.

### 2.5 Block Diagram of Test Setup



## 2.6 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

| Description | Manufacturer | Model | Technical Parameters | Certificate | Provided by |
|-------------|--------------|-------|----------------------|-------------|-------------|
| /           | /            | /     | /                    | /           | /           |

## 2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.231 of the FCC Part 15, Subpart C Rules.

## 2.8 Modifications

No modifications were implemented to meet testing criteria.

### **3 TEST ENVIRONMENT**

#### **3.1 Address of the test laboratory**

**MAXLAB Testing Co.,Ltd.**

1/F, Building B, Xinshidai GR Park, Shiyan Street, Bao'an District, Shenzhen, Guangdong, 518052, People's Republic of China

#### **3.2 Test Facility**

**FCC-Registration No.: 562200 Designation Number: CN1338**

MAX Testing Co.,Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

**Industry Canada Registration Number. Is: 11093A CAB identifier: CN0019**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

**A2LA-Lab Cert. No.: 4707.01**

MAX Testing Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

#### **3.3 Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Radiated Emission:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 25 ° C       |
| Humidity:             | 45 %         |
| Atmospheric pressure: | 950-1050mbar |

Conducted testing:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 25 ° C       |
| Humidity:             | 44 %         |
| Atmospheric pressure: | 950-1050mbar |

### 3.4 Summary of measurement results

| FCC and IC Requirements              |                                                 |      |
|--------------------------------------|-------------------------------------------------|------|
| FCC Part 15.207                      | Conducted Emission                              | N/A  |
| FCC Part 15.231(a)(2)                | Automatically Deactivate                        | PASS |
| FCC Part 15.231(b)                   | Electric Field Strength of Fundamental Emission | PASS |
| FCC Part 15.205 & 15.209 & 15.231(b) | Electric Field Strength of Spurious Emission    | PASS |
| FCC Part 15.231(c)                   | -20dB bandwidth                                 | PASS |

Remark: The measurement uncertainty is not included in the test result.

“ N/A ” denotes test is not applicable in this test report.

### 3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 “ Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1 ” and TR-100028-02 “ Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 ” and is documented in the MAXLAB Testing Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for MAXLAB Testing Co.,Ltd. :

| Test                        | Range      | Measurement Uncertainty | Notes |
|-----------------------------|------------|-------------------------|-------|
| Radiated Emission           | 9KHz~30MHz | 3.82 dB                 | (1)   |
| Radiated Emission           | 30~1000MHz | 4.06 dB                 | (1)   |
| Radiated Emission           | 1~18GHz    | 5.14 dB                 | (1)   |
| Radiated Emission           | 18-40GHz   | 5.38 dB                 | (1)   |
| Conducted Disturbance       | 0.15~30MHz | 2.14 dB                 | (1)   |
| Transmitter power conducted | 1~40GHz    | 0.57 dB                 | (1)   |
| Conducted spurious emission | 1~40GHz    | 1.60 dB                 | (1)   |
| OBW                         | 1~40GHz    | 25 Hz                   | (1)   |
| PSD                         | 1~40GHz    | 0.01 dBm/3KHz           | (1)   |

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

### 3.6 Equipments Used during the Test

| Conducted Emission        |                         |                      |            |              |            |
|---------------------------|-------------------------|----------------------|------------|--------------|------------|
| Test Equipment            | Manufacturer            | Model                | Serial No. | Date of Cal. | Due Date   |
| Shielding Room            | ZhongYu Electron        | 7.3(L)x3.1(W)x2.9(H) | MAX252     | 2025-10-27   | 2026-10-26 |
| EMI Test Receiver         | R&S                     | ESCI 7               | MAX552     | 2025-10-27   | 2026-10-26 |
| Coaxial Switch            | ANRITSU CORP            | MP59B                | MAX225     | 2025-10-27   | 2026-10-26 |
| ENV216 2-L-V-NETZNACHB.DE | ROHDE&SCHWARZ           | ENV216               | MAX226     | 2025-10-27   | 2026-10-26 |
| Coaxial Cable             | MAX                     | N/A                  | MAX227     | N/A          | N/A        |
| EMI Test Software         | AUDIX                   | E3                   | N/A        | N/A          | N/A        |
| Thermo meter              | KTJ                     | TA328                | MAX233     | 2025-10-27   | 2026-10-26 |
| Absorbing clamp           | Elektronik-Feinmechanik | MDS21                | MAX229     | 2025-10-27   | 2026-10-26 |
| LISN                      | R&S                     | ENV216               | 308        | 2025-10-27   | 2026-10-26 |
| LISN                      | R&S                     | ENV216               | 314        | 2025-10-27   | 2026-10-26 |

| Radiation Test equipment            |                                |                             |            |              |            |
|-------------------------------------|--------------------------------|-----------------------------|------------|--------------|------------|
| Test Equipment                      | Manufacturer                   | Model                       | Serial No. | Date of Cal. | Due Date   |
| 3m Semi- Anechoic Chamber           | ZhongYu Electron               | 9.2(L)*6.2(W)* 6.4(H)       | MAX250     | 2025-10-27   | 2026-10-26 |
| Control Room                        | ZhongYu Electron               | 6.2(L)*2.5(W)* 2.4(H)       | MAX251     | N/A          | N/A        |
| EMI Test Receiver                   | Rohde & Schwarz                | ESU26                       | MAX203     | 2025-10-27   | 2026-10-26 |
| BiConiLog Antenna                   | SCHWARZBECK<br>MESS-ELEKTRONIK | VULB9163                    | MAX214     | 2025-10-27   | 2026-10-26 |
| Double -ridged waveguide horn       | SCHWARZBECK<br>MESS-ELEKTRONIK | BBHA 9120 D                 | MAX208     | 2025-10-27   | 2026-10-26 |
| Horn Antenna                        | ETS-LINDGREN                   | 3160                        | MAX217     | 2025-10-27   | 2026-10-26 |
| EMI Test Software                   | AUDIX                          | E3                          | N/A        | N/A          | N/A        |
| Coaxial Cable                       | MAX                            | N/A                         | MAX213     | 2025-10-27   | 2026-10-26 |
| Coaxial Cable                       | MAX                            | N/A                         | MAX211     | 2025-10-27   | 2026-10-26 |
| Coaxial cable                       | MAX                            | N/A                         | MAX210     | 2025-10-27   | 2026-10-26 |
| Coaxial Cable                       | MAX                            | N/A                         | MAX212     | 2025-10-27   | 2026-10-26 |
| Amplifier(100kHz-3GHz)              | HP                             | 8347A                       | MAX204     | 2025-10-27   | 2026-10-26 |
| Amplifier(2GHz-20GHz)               | HP                             | 84722A                      | MAX206     | 2025-10-27   | 2026-10-26 |
| Amplifier (18-26GHz)                | Rohde & Schwarz                | AFS33-18002<br>650-30-8P-44 | MAX218     | 2025-10-27   | 2026-10-26 |
| Band filter                         | Amindeon                       | 82346                       | MAX219     | 2025-10-27   | 2026-10-26 |
| Power Meter                         | Anritsu                        | ML2495A                     | MAX540     | 2025-10-27   | 2026-10-26 |
| Power Sensor                        | Anritsu                        | MA2411B                     | MAX541     | 2025-10-27   | 2026-10-26 |
| Wideband Radio Communication Tester | Rohde & Schwarz                | CMW500                      | MAX575     | 2025-10-27   | 2026-10-26 |

|                                 |                 |           |        |            |            |
|---------------------------------|-----------------|-----------|--------|------------|------------|
| Splitter                        | Agilent         | 11636B    | MAX237 | 2025-10-27 | 2026-10-26 |
| Loop Antenna                    | ZHINAN          | ZN30900A  | MAX534 | 2025-10-27 | 2026-10-26 |
| Breitband<br>hornantenne        | SCHWARZBECK     | BBHA 9170 | MAX579 | 2025-10-27 | 2026-10-26 |
| Amplifier                       | TDK             | PA-02-02  | MAX574 | 2025-10-27 | 2026-10-26 |
| Amplifier                       | TDK             | PA-02-03  | MAX576 | 2025-10-27 | 2026-10-26 |
| PSA Series Spectrum<br>Analyzer | Rohde & Schwarz | FSP       | MAX578 | 2025-10-27 | 2026-10-26 |
| Antenna tower                   | SKET            | BK-4AT    | MAX589 | 2025-10-27 | 2026-10-26 |


| <b>RF Conducted Test:</b>                            |                     |                  |                   |                     |                 |
|------------------------------------------------------|---------------------|------------------|-------------------|---------------------|-----------------|
| <b>Test Equipment</b>                                | <b>Manufacturer</b> | <b>Model</b>     | <b>Serial No.</b> | <b>Date of Cal.</b> | <b>Due Date</b> |
| MXA Signal Analyzer                                  | Agilent             | N9020A           | MAX566            | 2025-10-27          | 2026-10-26      |
| EMI Test Receiver                                    | R&S                 | ESCI 7           | MAX552            | 2025-10-27          | 2026-10-26      |
| Spectrum Analyzer                                    | Agilent             | E4440A           | MAX533            | 2025-10-27          | 2026-10-26      |
| MXG vector Signal<br>Generator                       | Agilent             | N5182A           | MAX567            | 2025-10-27          | 2026-10-26      |
| ESG Analog Signal<br>Generator                       | Agilent             | E4428C           | MAX568            | 2025-10-27          | 2026-10-26      |
| USB RF Power<br>Sensor                               | DARE                | RPR3006W         | MAX569            | 2025-10-27          | 2026-10-26      |
| RF Switch Box                                        | Shongyi             | RFSW3003328      | MAX571            | 2025-10-27          | 2026-10-26      |
| Programmable<br>Constant Temp &<br>Humi Test Chamber | WEWON               | WHTH-150L-40-880 | MAX572            | 2025-10-27          | 2026-10-26      |

Note: The Cal.Interval was one year.

## 4 TEST CONDITIONS AND RESULTS

### 4.1 AC Power Conducted Emission

#### TEST CONFIGURATION

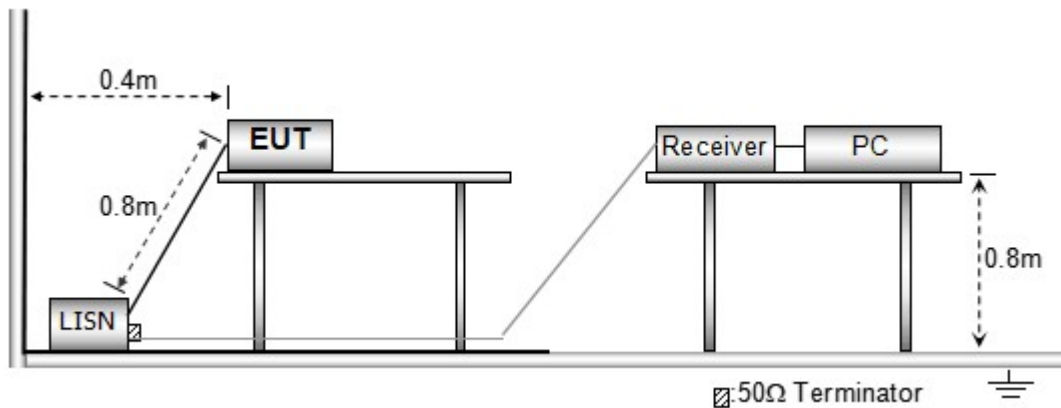

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.

#### TEST RESULTS

The EUT is powered by the Battery, So this test item is not applicable for the EUT.

## 4.2 Radiated Emission

### Limit

For intentional device, according to 15.209(a) the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table.

| Frequency (MHz) | Distance (Meters) | Radiated (dBμV/m)                          | Radiated (μV/m)       |
|-----------------|-------------------|--------------------------------------------|-----------------------|
| 0.009-0.49      | 3                 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 3                 | $20\log(24000/F(\text{KHz}))+40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 3                 | $20\log(30)+40\log(30/3)$                  | 30                    |
| 30-88           | 3                 | 40.0                                       | 100                   |
| 88-216          | 3                 | 43.5                                       | 150                   |
| 216-960         | 3                 | 46.0                                       | 200                   |
| Above 960       | 3                 | 54.0                                       | 500                   |

In addition to the provisions of 15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:


| Funda-<br>mental fre-<br>quency<br>(MHz) | Field strength of funda-<br>mental (microvolts/<br>meter) | Field strength of<br>spurious emissions<br>(microvolts/meter) |
|------------------------------------------|-----------------------------------------------------------|---------------------------------------------------------------|
| 40.66–<br>40.70.                         | 2,250 .....                                               | 225                                                           |
| 70–130 .....                             | 1,250 .....                                               | 125                                                           |
| 130–174 ....                             | <sup>1</sup> 1,250 to 3,750 .....                         | <sup>1</sup> 125 to 375                                       |
| 174–260 ....                             | 3,750 .....                                               | 375                                                           |
| 260–470 ....                             | <sup>1</sup> 3,750 to 12,500 .....                        | <sup>1</sup> 375 to 1,250                                     |
| Above 470                                | 12,500 .....                                              | 1,250                                                         |

<sup>1</sup> Linear interpolations.


[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 260–470 MHz,  $20\log(41.6667\cdot 433.890-7083.3333)=80.82\text{dB}\mu\text{V/m}$  The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

### TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

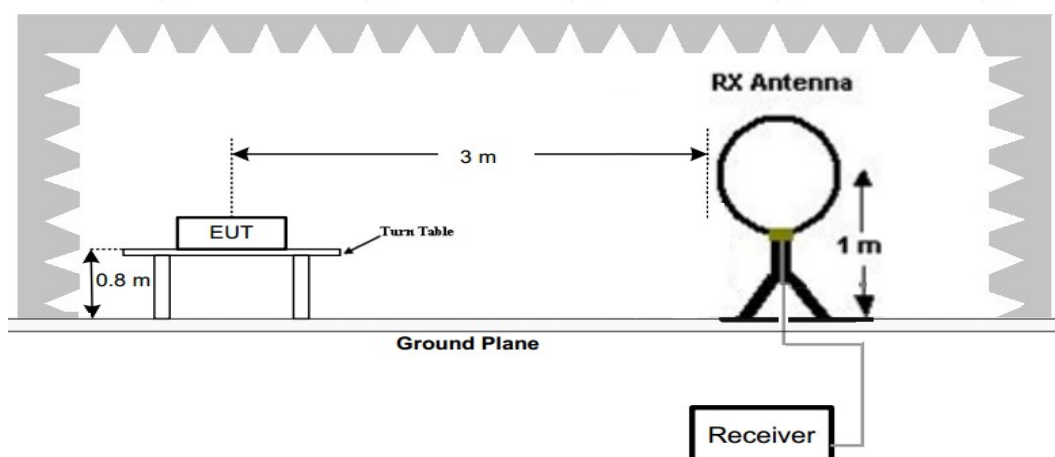

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

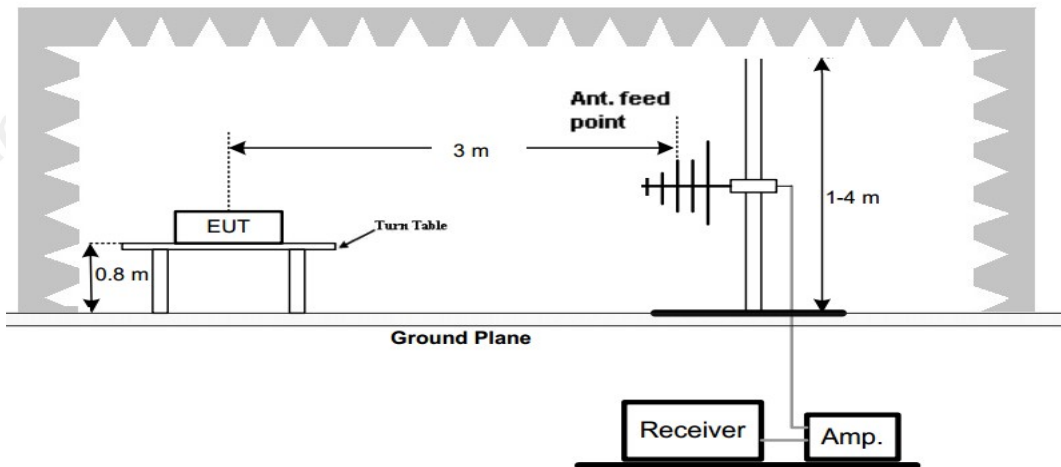

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

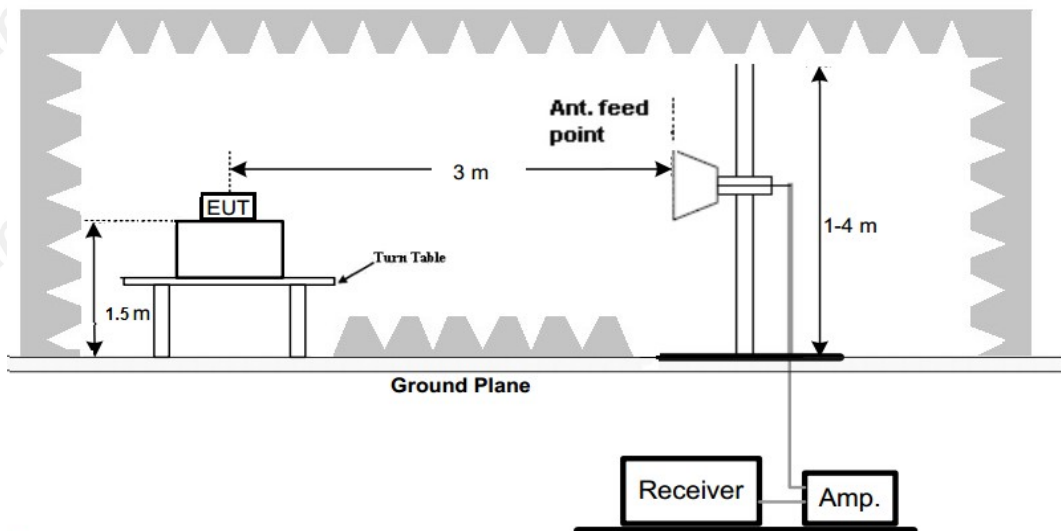

**Test Procedure**

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

**TEST RESULTS**

The emissions from 30MHz to 5GHz are measured peak and average level, below 1 GHz measured QP level, detailed test data please see below. Besides, we tested 3 directions and recorded the worst data.

Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

**Radiated Spurious Emission (Between 30MHz – 1GHz)**

Horizontal




| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 216.783         | 46.27          | -16.13        | 30.14          | 46.00          | -15.86      | peak     |
| 2   | 325.596         | 42.98          | -11.00        | 31.98          | 46.00          | -14.02      | peak     |
| 3 * | 434.065         | 80.72          | -8.53         | 72.19          | 46.00          | 26.19       | peak     |
| 4 ! | 543.274         | 49.75          | -6.89         | 42.86          | 46.00          | -3.14       | peak     |
| 5 ! | 651.942         | 46.96          | -4.08         | 42.88          | 46.00          | -3.12       | peak     |
| 6 X | 869.130         | 60.80          | 0.17          | 60.97          | 46.00          | 14.97       | peak     |

| Fundamental and Harmonics Result |                     |                    |                        |                    |                    |               |               |            |
|----------------------------------|---------------------|--------------------|------------------------|--------------------|--------------------|---------------|---------------|------------|
| Frequency MHz                    | Peak Level (dBuV/m) | AV Factor (dBuV/m) | Average Level (dBuV/m) | Limitd PK (dBuV/m) | Limitd AV (dBuV/m) | Margin PK(dB) | Margin AV(dB) | Conclusion |
| 434.065                          | 72.19               | -11.67             | 60.52                  | 100.8              | 80.8               | -28.61        | -20.28        | PASS       |
| 869.130                          | 60.97               | -11.67             | 49.30                  | 80.8               | 60.8               | -19.83        | -11.50        | PASS       |

**Remarks:**

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.AV Level (dBuV/m)= PK Level (dBuV/m)+ AV Factor(dBuV/m)
- 4.Margin(dB) = Level (dBuV) - Limit (dBuV)

Vertical

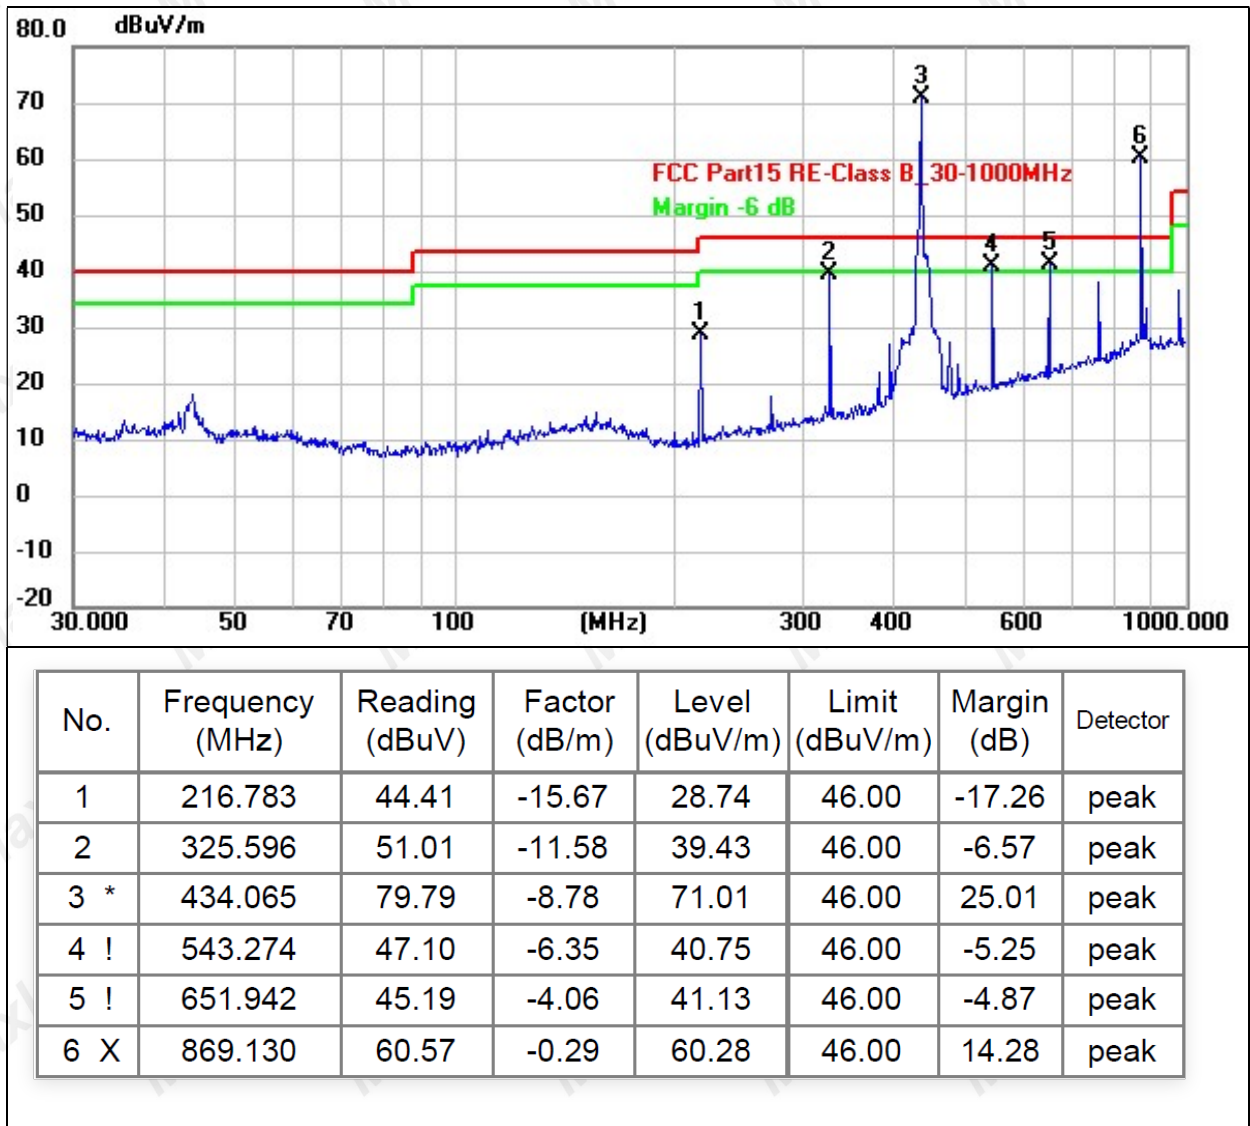

| Fundamental and Harmonics Result |                     |                    |                        |                    |                    |               |               |            |
|----------------------------------|---------------------|--------------------|------------------------|--------------------|--------------------|---------------|---------------|------------|
| Frequency MHz                    | Peak Level (dBuV/m) | AV Factor (dBuV/m) | Average Level (dBuV/m) | Limitd PK (dBuV/m) | Limitd AV (dBuV/m) | Margin PK(dB) | Margin AV(dB) | Conclusion |
| 434.065                          | 71.01               | -11.67             | 59.34                  | 100.8              | 80.8               | -29.79        | -21.46        | PASS       |
| 869.130                          | 60.28               | -11.67             | 48.61                  | 80.8               | 60.8               | -20.52        | -12.19        | PASS       |

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.AV Level (dBuV/m)= PK Level (dBuV/m)+ AV Factor(dBuV/m)
- 4.Margin(dB) = Level (dBuV) - Limit (dBuV)

**Radiated Spurious Emission ( 1GHz to 10<sup>th</sup> harmonics)**

| Frequency<br>MHz | Peak Level<br>dBuV/m | Duty cycle<br>factor | Average<br>Level<br>dBuV/m | Limit |      | Margin dB |        | Polarization |
|------------------|----------------------|----------------------|----------------------------|-------|------|-----------|--------|--------------|
|                  |                      |                      |                            | PK    | AV   | PK        | AV     |              |
| 1301.75          | 50.55                | -11.67               | 38.88                      | 74.0  | 54.0 | -23.45    | -15.12 | Vertical     |
| 1735.52          | 40.46                | -11.67               | 28.79                      | 74.0  | 54.0 | -33.54    | -25.21 | Vertical     |
| 2603.05          | 35.39                | -11.67               | 23.72                      | 74.0  | 54.0 | -38.61    | -30.28 | Vertical     |
| 3037.41          | 30.48                | -11.67               | 18.81                      | 74.0  | 54.0 | -43.52    | -35.19 | Vertical     |
| 3471.30          | 25.57                | -11.67               | 13.90                      | 74.0  | 54.0 | -48.43    | -40.10 | Vertical     |
| 3905.28          | 20.18                | -11.67               | 8.51                       | 74.0  | 54.0 | -53.82    | -45.49 | Vertical     |
| 1301.75          | 45.56                | -11.67               | 33.89                      | 74.0  | 54.0 | -28.44    | -20.11 | Horizontal   |
| 1735.52          | 40.15                | -11.67               | 28.48                      | 74.0  | 54.0 | -33.85    | -25.52 | Horizontal   |
| 2603.05          | 35.44                | -11.67               | 23.77                      | 74.0  | 54.0 | -38.56    | -30.23 | Horizontal   |
| 3037.41          | 30.17                | -11.67               | 18.50                      | 74.0  | 54.0 | -43.83    | -35.50 | Horizontal   |
| 3471.30          | 25.53                | -11.67               | 13.86                      | 74.0  | 54.0 | -48.47    | -40.14 | Horizontal   |
| 3905.28          | 21.22                | -11.67               | 9.55                       | 74.0  | 54.0 | -52.78    | -44.45 | Horizontal   |

**Notes:**


1. Average emission Level = Peak Level + Duty cycle factor

2. the Duty Cycle can calculate as below:


$$\text{Duty Cycle} = (6.1695 + 4.3662) / 40.40 = 0.261$$

$$\text{AV Factor} = 20 * \log(\text{Duty Cycle}) = 20 * \log(0.261) = -11.67$$


(The plot of Duty Cycle See the follow page)

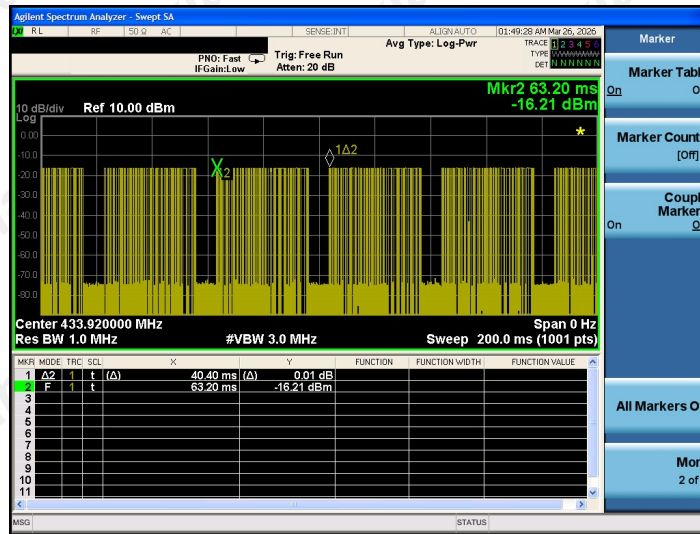

(Transmit cycle: 40.40ms)

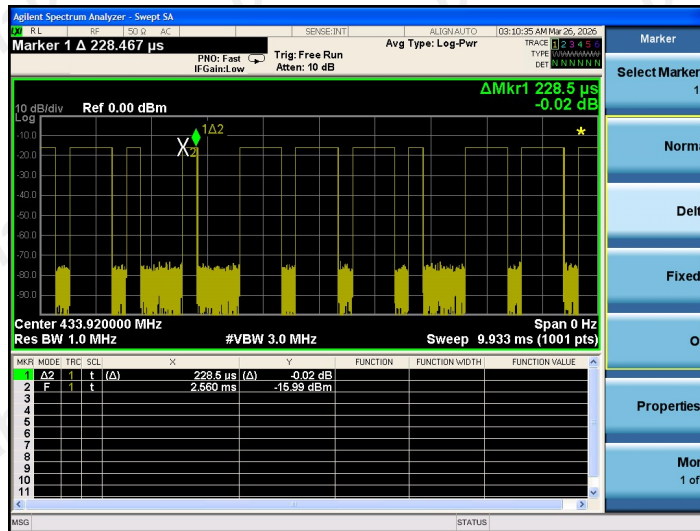

(Time per burst: 0.2285ms\*27pcs=6.1695ms)

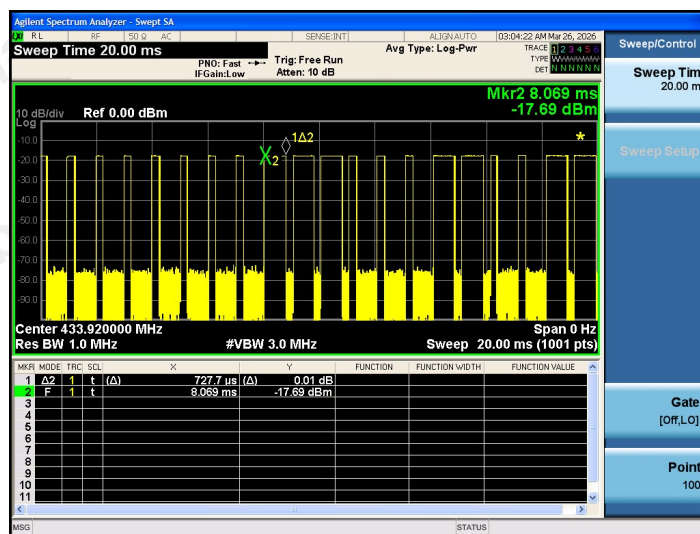


(Time per burst: 0.7277ms\*6pcs=4.3662ms)

### 4.3 20dB Bandwidth

#### Limit

According to 47 CFR 15.231(c) The bandwidth of the emission shall be no wider than 0.25% of the centre frequency for devices operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.

#### Test Configuration



#### Test Procedure

The 20dB bandwidth and 99% bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.


The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

The occupied bandwidth (OBW), that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

#### Test Results

| Modulation | Channel Frequency (MHz) | 99% OBW (KHz) | 20dB bandwidth (KHz) | Limit (KHz)                     | Result |
|------------|-------------------------|---------------|----------------------|---------------------------------|--------|
| ASK        | 433.92                  | 599.96        | 49.38                | $0.25\% \times 433.92 = 1084.8$ | Pass   |

Test plot as follows:

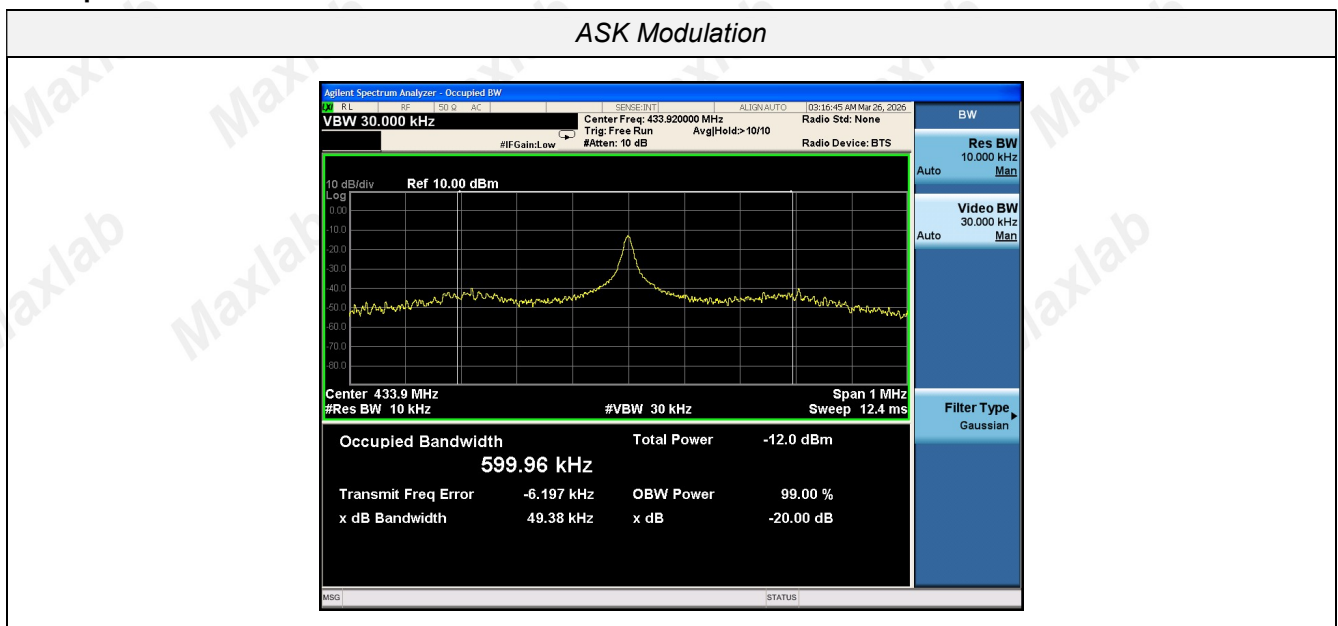


## 4.4 Deactivation Time

### Limit

According to FCC §15.231(a)(2), A transmitter activated automatically shall cease transmission within 5 seconds after activation.

### Test Configuration




### Test Procedure

1. The EUT was placed on a wooded table which is 0.8m height and close to receiver antenna of spectrum analyzer.
2. The spectrum analyzer resolution bandwidth was set to 1 MHz and video bandwidth was set to 1 MHz to encompass all significant spectral components during the test. The spectrum analyzer was operated in linear scale and zero span mode after tuning to the transmitter carrier frequency.

## TEST RESULTS

Note: The transmitter was automatically activated, and the carrier frequency 433.92MHz :

| Frequency<br>(MHz) | One transmission time<br>(S) | Limit(S) | Result |
|--------------------|------------------------------|----------|--------|
| 433.92             | 1.240                        | 5        | Pass   |

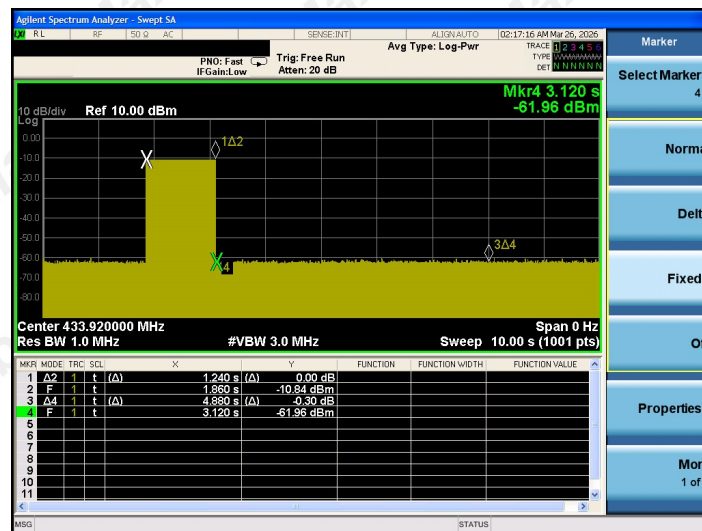

## 4.5 Antenna Requirement

### Standard Applicable

According to FCC Part 15C 15.203

- a) An intentional radiator shall be de-signed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
- b) The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Refer to statement below for compliance.**


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Antenna Connected Construction

The antenna used in this product is a PCB antenna, The directional gains of antenna used for transmitting is 2.34dBi.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, MAXLAB Testing Co.,Ltd. does not assume any responsibility.

## **5 Test Setup Photos of the EUT**

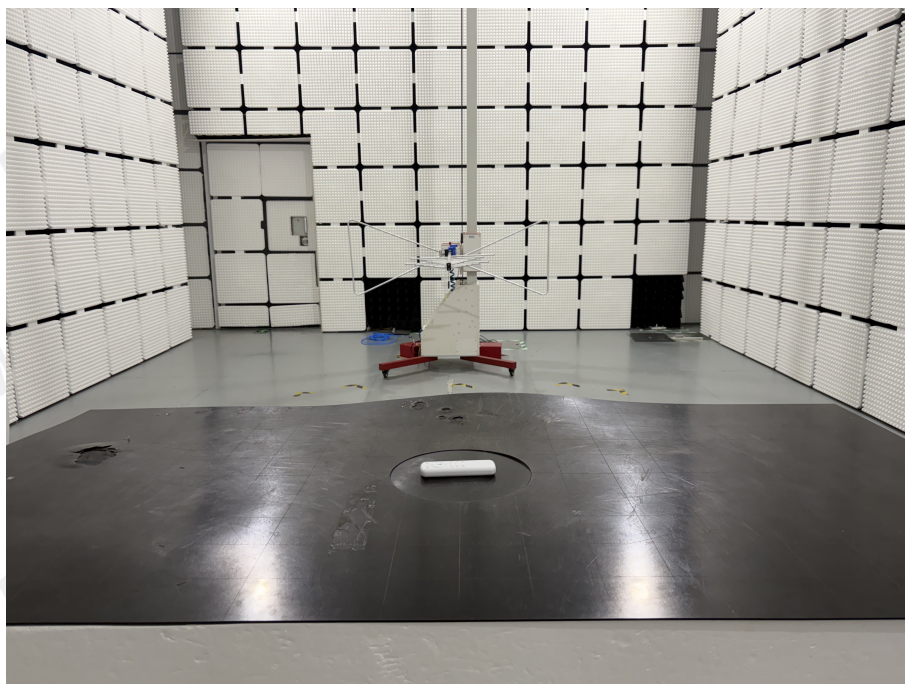

## **6 Photos of the EUT**

Reference to the report ANNEX A of external photos and ANNEX B of internal photos.

**\*\*\*\*\* End of Report \*\*\*\*\***