

TEST REPORT

Applicant : EFAN TECH (SHENZHEN) CO.,LTD
Address : Room 704, Block A, Building 3, Tongtai Headquarters, 6259 Baoan Avenue, Fuhai Street, Baoan District, Shenzhen, 518000 China
Manufacturer : EFAN TECH (SHENZHEN) CO.,LTD
Address : Room 704, Block A, Building 3, Tongtai Headquarters, 6259 Baoan Avenue, Fuhai Street, Baoan District, Shenzhen, 518000 China
Product Name : Touchscreen display
Model Number : NP71, DCMWM490-BLK
Trademark : N/A
FCC ID : 2BLLA-NP71
Test Date : Jul. 16, 2026 to Sep. 10, 2026
Date of Report : Sep. 10, 2026

Test Result : This device described above has been tested by NTT, and the test results show that the equipment under test (EUT) is in compliance with the Standard requirements. And it is applicable only to the tested sample identified in the report.


Test Procedure Used:

Standards : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
KDB 558074 D01 15.247 Meas Guidance v05r02

Prepared by(Test Engineer):
Cindy Qin



Reviewer(Supervisor):
Ken Wu



Approved(Manager):
Abel Yu




TABLE OF CONTENT

1. General Information	5
1.1. Description of Device (EUT)	5
1.2. Channel List	5
1.3. Summary of test result	6
1.4. Special Accessories and Auxiliary Equipment	6
1.5. Test mode	6
1.6. Test configuration	7
1.7. Block Diagram	7
1.8. Test Conditions	7
1.9. Measurement Uncertainty (95% confidence levels, k=2)	8
1.10. Test Facility	8
1.11. Test Equipment	9
2. Conducted emission at the mains terminals test	11
2.1. Limit	11
2.2. Test Setup	11
2.3. Test Procedure	11
2.4. Test Result	12
3. Radiated Spurious Emissions	14
3.1. Limit	14
3.2. Test Setup	15
3.3. Test Procedure	17
3.4. Test Result	18
4. Maximum Peak Output Power	23
4.1. Limit	23
4.2. Test Setup	23
4.3. Test Procedure	23
4.4. Test Result	23
5. -20 dB Bandwidth Measurement	27
5.1. Limit	27
5.2. Test Setup	27
5.3. Test Procedure	27
5.4. Test Result	27
6. Carrier Frequency Separation Test	31
6.1. Limit	31
6.2. Test Setup	31
6.3. Test Procedure	31
6.4. Test Result	31
7. Number of Hopping Channel Test	35
7.1. Limit	35
7.2. Test Setup	35
7.3. Test Procedure	35
7.4. Test Result	35
8. Dwell Time Test	37
8.1. Limit	37
8.2. Test setup	37
8.3. Test Procedure	37
8.4. Test Result	37
9. Conducted Spurious Emissions and Band Edge Requirement	44

9.1. Limit.....	44
9.2. Test Setup	44
9.3. Test Procedure	44
9.4. Test Result.....	45
10. Antenna Requirement	52
10.1. Test Standard and Requirement	52
10.2. Antenna Connected Construction	52
11. TEST SETUP & EUT PHOTOGRAPH	53

[illegible]

1. General Information

1.1. Description of Device (EUT)

EUT Name : Touchscreen display
 Model No. : NP71, DCMWM490-BLK
 Model Difference : All the model are the same circuit and RF module, only the model names are different. Test sample model: NP71
 Power supply : DC-5V
 Adapter Input: DC-12-24V
 Adapter output: 5V 2A
 Operation frequency : 2402-2480MHz
 Modulation : GFSK, $\pi/4$ -DQPSK, 8DPSK
 Antenna Type : PCB antenna, Maximum Gain is 1.1 dBi
 Intend use environment : Residential, commercial and light industrial environment

1.2. Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

1.3. Summary of test result

RF PART		
Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth 99% Occupied Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	PASS
Remark: N/A is an abbreviation for Not Applicable. Measurement Uncertainty is not taken into account for conformity statement		

1.4. Special Accessories and Auxiliary Equipment

Description	Manufacturer	Model No.	Hardware Version	Software Version
Adapter	JIYIN	JY-05100C	/	/

1.5. Test mode

The special RF test software was used to control EUT work in Continuous BT TX mode, and select test channel, wireless mode.

Test mode	Low channel	Middle channel	High channel
GFSK	2402MHz	2441MHz	2480MHz
Π/4-DQPSK	2402MHz	2441MHz	2480MHz
8DPSK	2402MHz	2441MHz	2480MHz


Note: Only the worst Data DH1/2DH1/3DH1 Record in the report

1.6. Test configuration


Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	
Test Software	FCC_assist_1.0.4
Power level setup	0 dBm

1.7. Block Diagram


Conducted Emission



Radiated Emission



RF Conducted Test



1.8. Test Conditions

Category	Normal Conditions	Extreme Conditions
Temperature range	15-35°C	N/A
Humidity range	20-75%	N/A
Pressure range	86-106kPa	N/A
Power supply	DC 5V	N/A
Note: N/A is an abbreviation for Not Applicable.		

1.9. Measurement Uncertainty (95% confidence levels, k=2)

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9KHz~30MHz)	±4.51dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Remark:When making a conformity declaration based on test results for regulations/standards or specifications,the default is to use Clause 4.2.1of ILAC-G8:09/2019 and the guidelines on decision rules and conformity declaration in IEC Guide 115:2023.	

1.10. Test Facility

Site Description	
Name of Firm	: Shenzhen NTT Testing Technology Co.,Ltd.
Site Location	: 1B, Building 2, Factory Building & 103, Building 3, Factory Building, Dayang Industrial Park No.4, Industrial Avenue, Tangwei Community, Fuhai Sub-district, Bao 'an District, Shenzhen City, China
FCC Designation Number	: CN3446
FCC Test Firm Registration Number	: 129414

1.11. Test Equipment

Conducted Test Site

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	HSRCE944	/	HTEC	2025/04/30	2028/04/29
EMI Test Receiver	ESCI	100881/003	ROHDE&SCHWARZ	2026/09/04	2027/09/03
LISN	AMN6500	101185	ROHDE&SCHWARZ	2026/09/04	2027/09/03
LISN	NNLK 8129	00603	SCHWARZBECK	2026/09/04	2027/09/03
Cable	RG223-2M	/	RG	2026/09/04	2027/09/03

Radiated Test Site(Below 1G and Above 1G)&RF Test Site

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2025/07/24	2028/07/23
EMI Test Receiver	ESPI	101018	ROHDE&SCHWARZ	2026/09/04	2027/09/03
Amplifier (30MHz-1GHz)	BBV 9745	00431	SCHWARZBECK	2026/09/04	2027/09/03
Bilog Antenna (30MHz-1GHz)	VULB9168	1858	SCHWARZBECK	2026/09/05	2027/09/04
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHWARZBECK	2026/09/05	2027/09/04
Preamplifier (1GHz-18GHz)	BBV 9718D	0024	SCHWARZBECK	2026/09/04	2027/09/03
Spectrum Analyzer (10Hz-40GHz)	FSV 40	100952	ROHDE&SCHWARZ	2026/09/04	2027/09/03
Preamplifier (18GHz-40GHz)	BBV 9721	0056	SCHWARZBECK	2026/09/04	2027/09/03
Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2026/09/05	2027/09/04
Loop Antenna (9KHz-30MHz)	FMZB 1513-60	00115	SCHWARZBECK	2026/09/04	2027/09/03
MXG Signal Analyzer	N9020A	MY49100730	Agilent	2026/09/04	2027/09/03
MXG Vector Signal Generator	N5182A	MY50144920	Agilent	2026/09/04	2027/09/03
WIDEBAND RADIO COMMUNICATION TESTER	CMW500	/	ROHDE&SCHWARZ	2026/09/07	2027/09/06
Power Sensor	MW100-RFC B-2	MW260105N TT-64	MWRFTest	2026/09/04	2027/09/03

RF Swith	MW100-RFC B-1	MW260105N TT-64	MWRFTest	2026/09/04	2027/09/03
Cable	RG223-3M	/	DA	2026/09/04	2027/09/03
Cable	RG223-12M	/	DA	2026/09/04	2027/09/03
Cable	SFT205-NM NMSW-2.5M	/	DA	2026/09/04	2027/09/03
Cable	SFT205-NM NM-12M	/	DA	2026/09/04	2027/09/03
Cable	UCA500-NJ WSM-1.5M	017	MWRFTest	2026/09/04	2027/09/03

Test software

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ-EMC	Ver.EMC-CON 3A1.1+
2	EMC radiation test system	FALA	EZ-EMC	Ver.FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

2. Conducted emission at the mains terminals test

2.1. Limit


Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

2.2. Test Setup

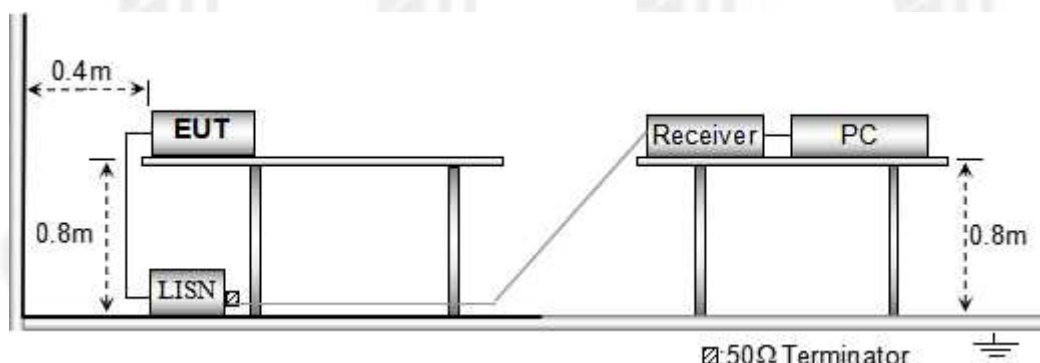


2.3. Test Procedure

1. The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
2. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
3. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
4. LISN at least 80 cm from nearest part of EUT chassis.
5. For the actual test configuration, please refer to the related Item - EUT Test Photos.

2.4. Test Result

Conducted Emission At The Mains Terminals Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Line
Test Voltage :	DC 5V from Adapter Input AC 120V/60Hz	Test Mode:	GFSK(CH00)

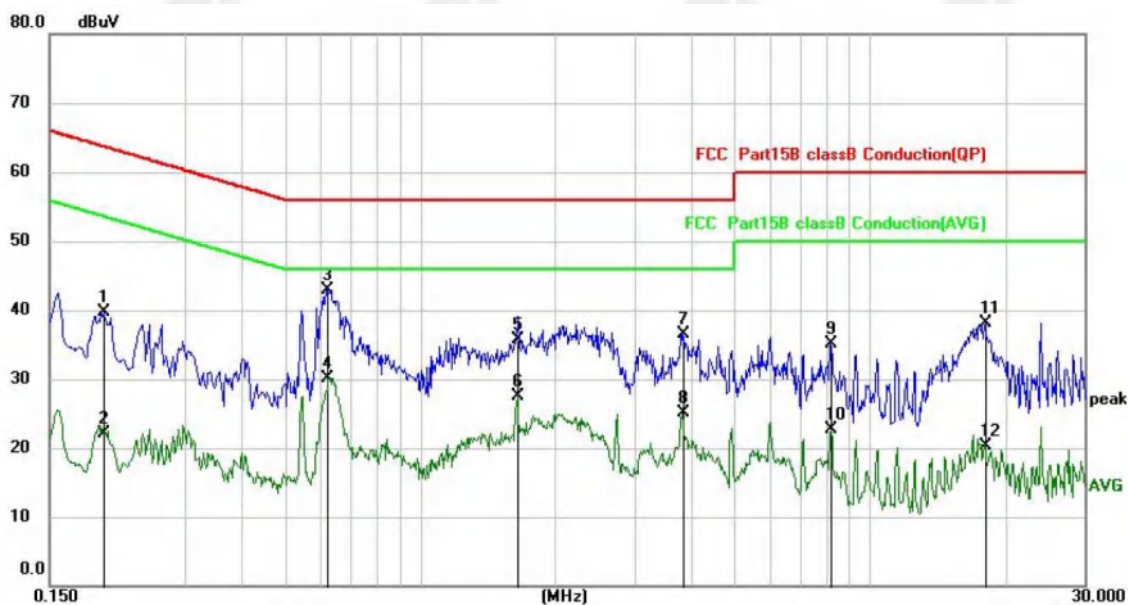


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.1980	29.01	10.76	39.77	63.69	-23.92	QP
2	0.1980	11.25	10.76	22.01	53.69	-31.68	AVG
3 *	0.6219	32.40	10.46	42.86	56.00	-13.14	QP
4	0.6219	19.68	10.46	30.14	46.00	-15.86	AVG
5	1.6419	25.19	10.47	35.66	56.00	-20.34	QP
6	1.6419	17.13	10.47	27.60	46.00	-18.40	AVG
7	3.8340	25.99	10.49	36.48	56.00	-19.52	QP
8	3.8340	14.52	10.49	25.01	46.00	-20.99	AVG
9	8.1700	24.49	10.54	35.03	60.00	-24.97	QP
10	8.1700	12.23	10.54	22.77	50.00	-27.23	AVG
11	18.0900	27.18	10.85	38.03	60.00	-21.97	QP
12	18.0900	9.43	10.85	20.28	50.00	-29.72	AVG

Note:

1. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
2. Margin = Reading level + Correct Factor - Limit
3. All the modes have tested and recorded the worst mode(GFSK) in the report

Conducted Emission At The Mains Terminals Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Neutral
Test Voltage :	DC 5V from Adapter Input AC 120V/60Hz	Test Mode:	GFSK(CH00)

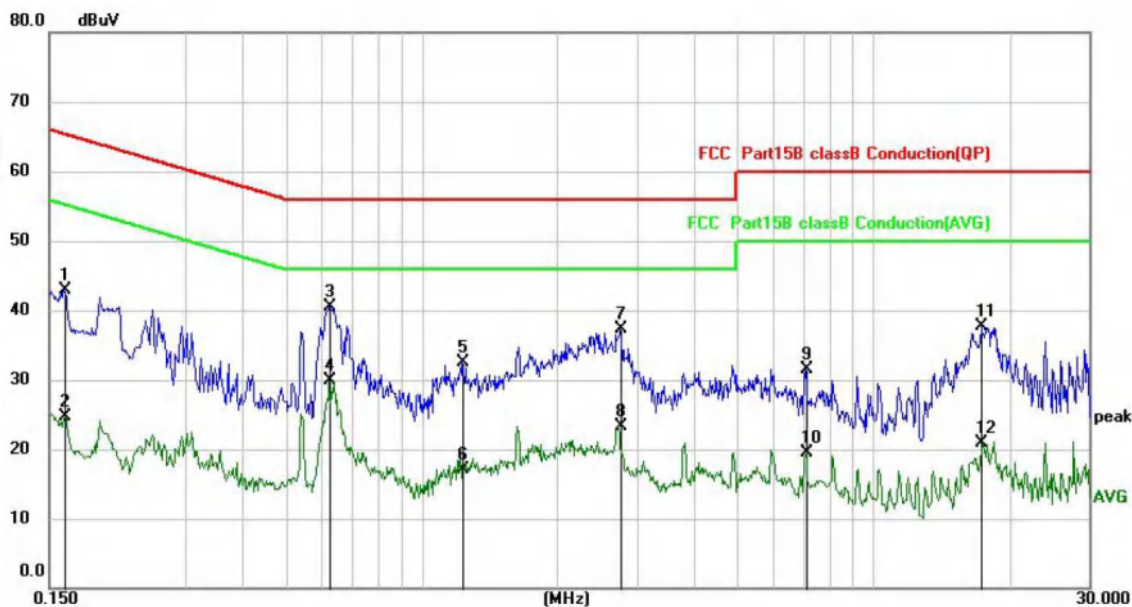

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1620	32.12	10.85	42.97	65.36	-22.39	QP
2		0.1620	13.88	10.85	24.73	55.36	-30.63	AVG
3	*	0.6260	30.02	10.46	40.48	56.00	-15.52	QP
4		0.6260	19.35	10.46	29.81	46.00	-16.19	AVG
5		1.2300	22.14	10.46	32.60	56.00	-23.40	QP
6		1.2300	6.71	10.46	17.17	46.00	-28.83	AVG
7		2.7540	26.87	10.48	37.35	56.00	-18.65	QP
8		2.7540	12.91	10.48	23.39	46.00	-22.61	AVG
9		7.0700	20.93	10.55	31.48	60.00	-28.52	QP
10		7.0700	9.04	10.55	19.59	50.00	-30.41	AVG
11		17.3379	26.83	10.79	37.62	60.00	-22.38	QP
12		17.3379	10.07	10.79	20.86	50.00	-29.14	AVG

Note:

1. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
2. Margin = Reading level + Correct Factor - Limit
3. All the modes have tested and recorded the worst mode(GFSK) in the report

3. Radiated Spurious Emissions

3.1. Limit

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;
 ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024
 Test Result: PASS
 Measurement Distance: 3m

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log(2400/F(\text{kHz})) + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log(24000/F(\text{kHz})) + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log(30) + 40$
30 ~ 88	100	3	100	$20\log(100)$
88 ~ 216	150	3	150	$20\log(150)$
216 ~ 960	200	3	200	$20\log(200)$
Above 960	500	3	500	$20\log(500)$


3.2. Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.



The test setup for emission measurement below 30MHz.

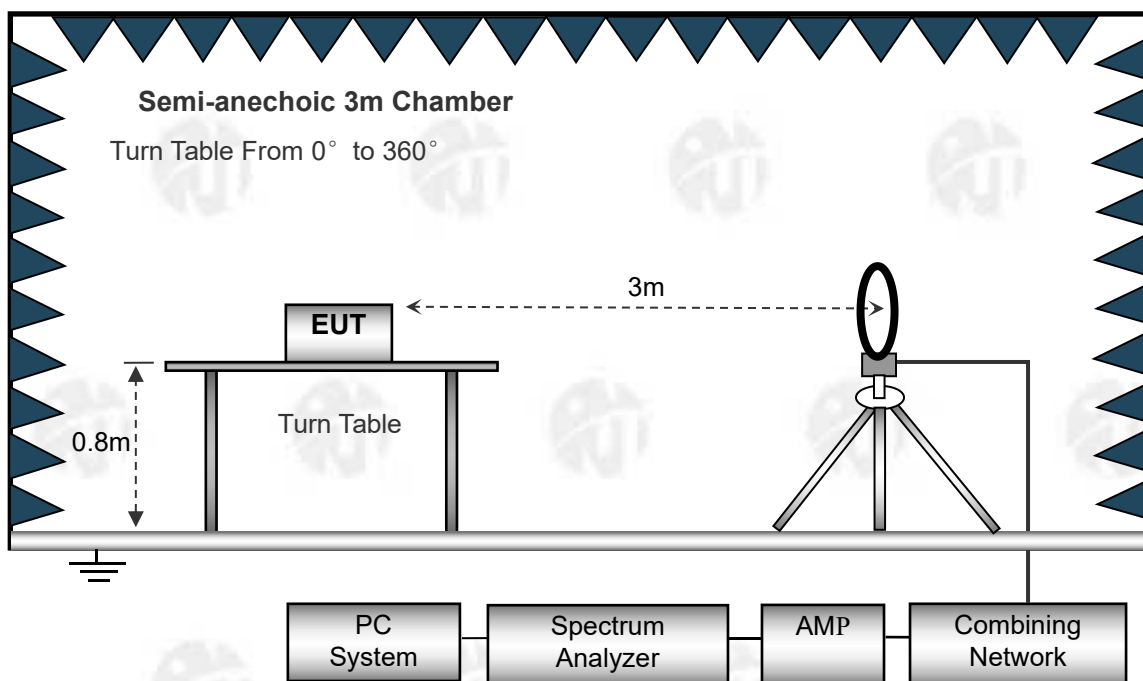

The test setup for emission measurement from 30 MHz to 1 GHz.

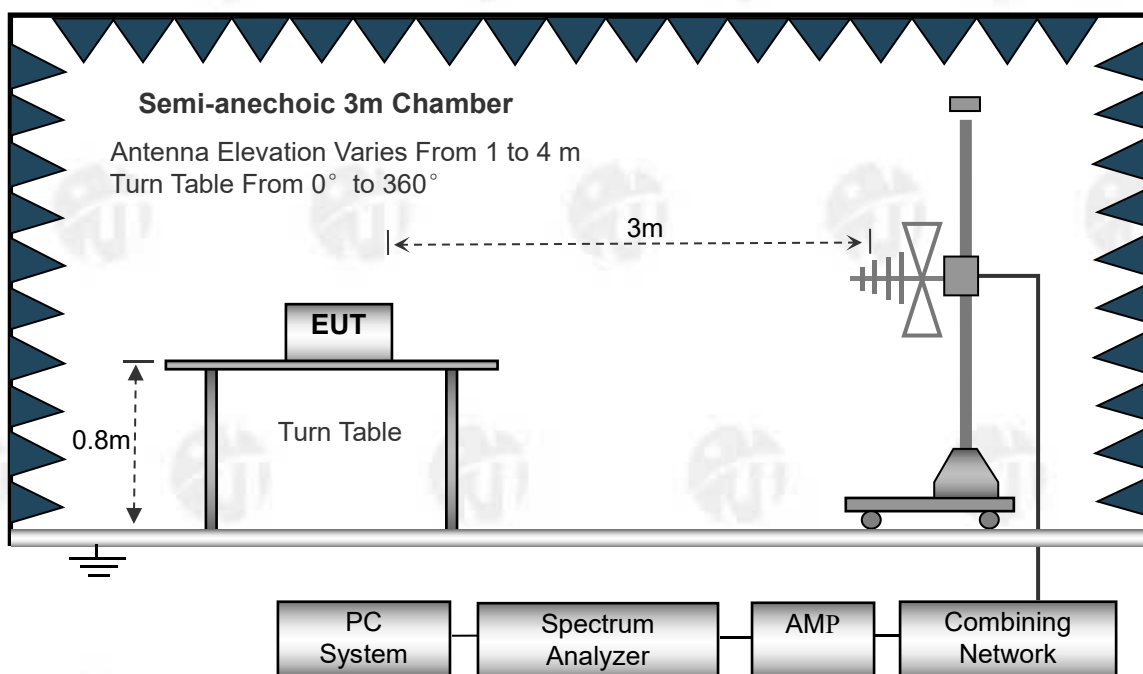

The test setup for emission measurement above 1 GHz.

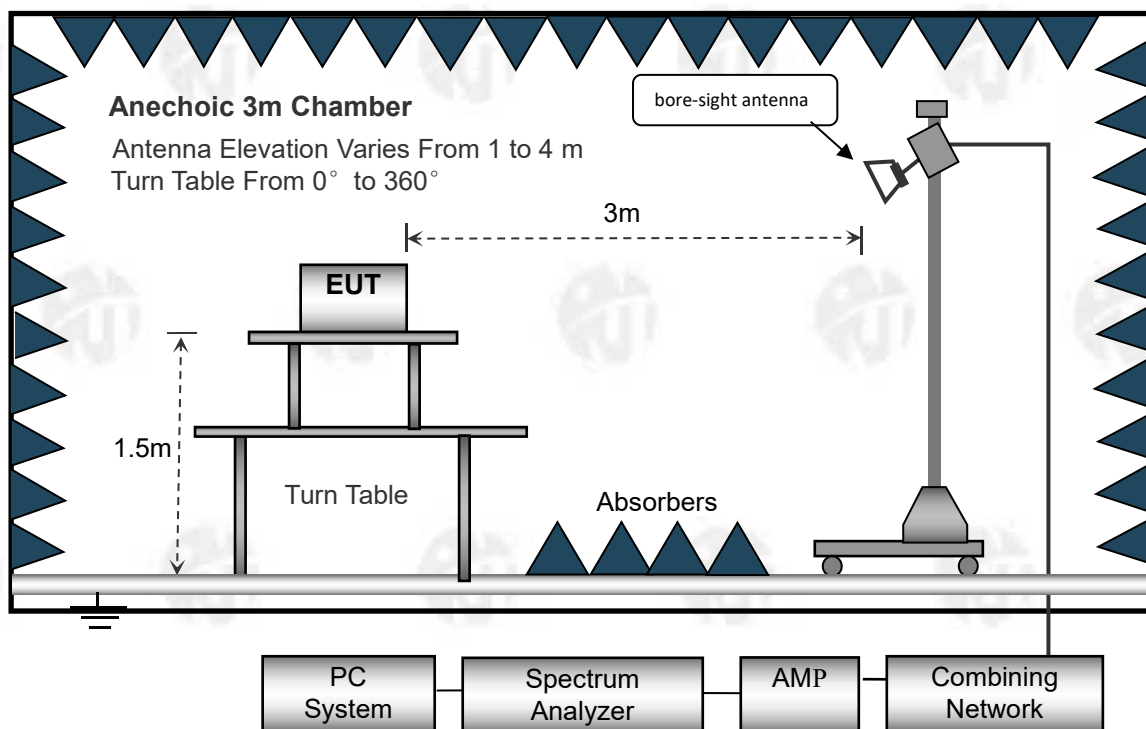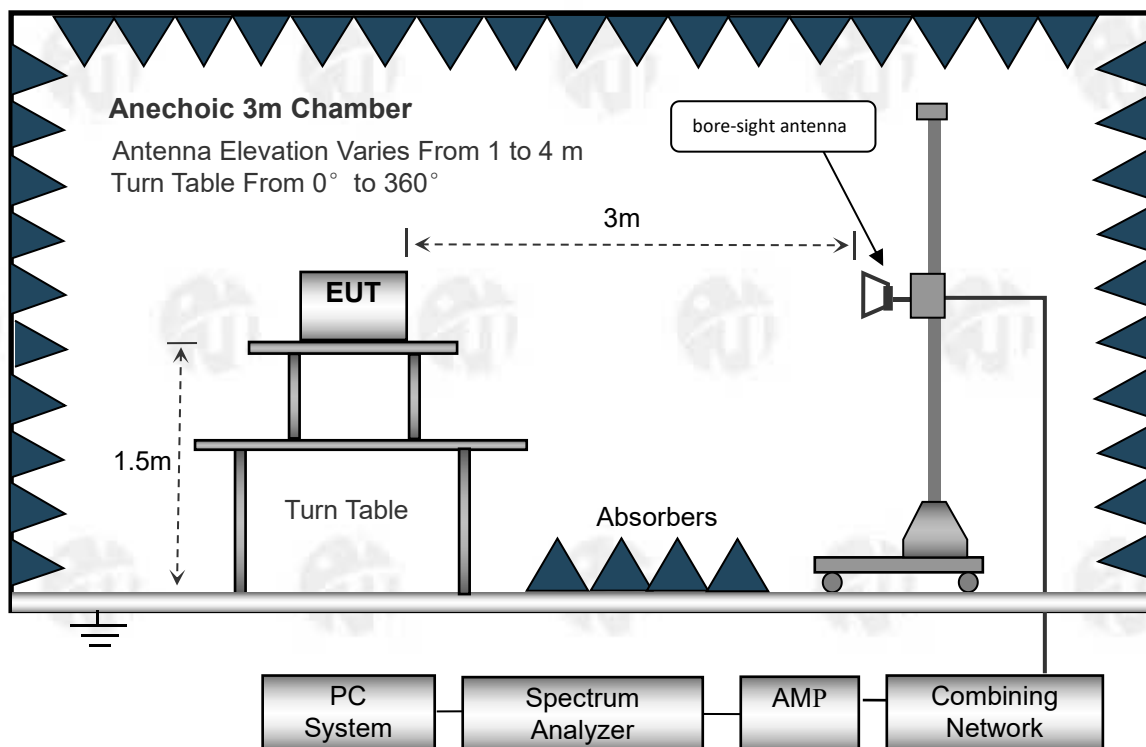

3.3. Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high - pass filter is used during radiated emissions above 1GHz measurement.


3.4. Test Result

Test Frequency: 9KHz~30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 1GHz

Radiation Emission Test Data			
Temperature:	25.1℃	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Horizontal
Test Voltage :	DC 5V from Adapter Input AC 120V/60Hz	Test Mode	GFSK(CH00)

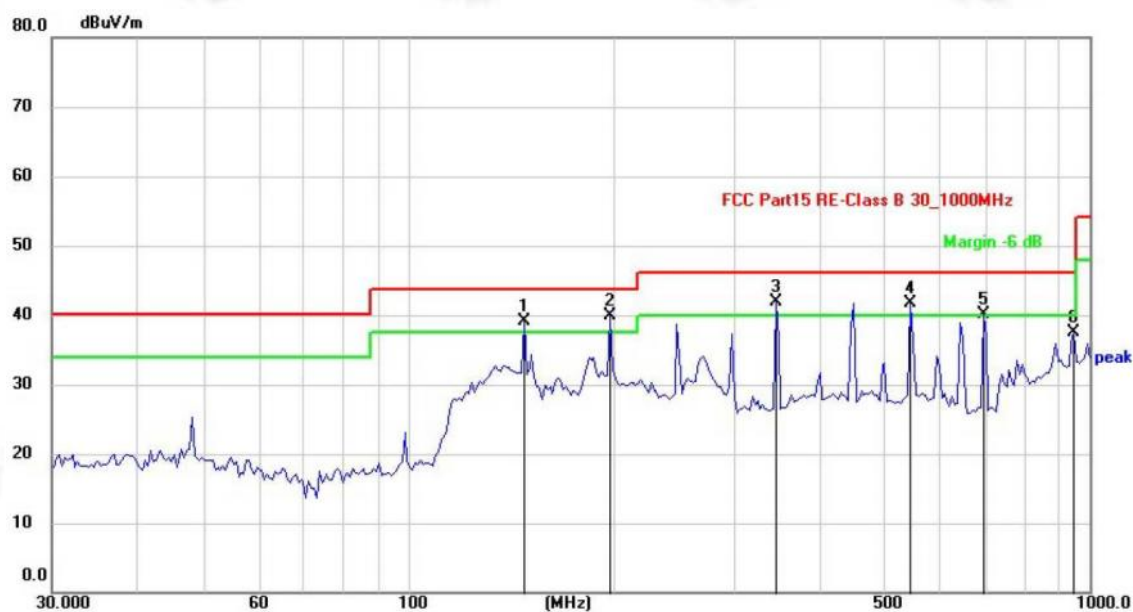

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	!	147.9214	43.79	-4.60	39.19	43.50	-4.31	QP
2	*	197.5457	46.11	-6.16	39.95	43.50	-3.55	QP
3	!	346.2015	43.75	-1.77	41.98	46.00	-4.02	QP
4	!	546.1390	39.32	2.35	41.67	46.00	-4.33	QP
5	!	698.0795	33.74	6.33	40.07	46.00	-5.93	QP
6		948.7608	28.27	9.30	37.57	46.00	-8.43	QP

Note:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

2. All the modes have tested and recorded the worst mode(GFSK) in the report

Radiation Emission Test Data			
Temperature:	25.1°C	Relative Humidity:	56%
Pressure:	1008hPa	Phase :	Vertical
Test Voltage :	DC 5V from Adapter Input AC 120V/60Hz	Test Mode	GFSK(CH00)



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		98.8324	41.54	-7.93	33.61	43.50	-9.89	QP
2	!	147.9214	42.76	-4.60	38.16	43.50	-5.34	QP
3	!	197.5459	45.79	-6.16	39.63	43.50	-3.87	QP
4		346.2015	41.68	-1.77	39.91	46.00	-6.09	QP
5	*	450.3446	42.69	0.03	42.72	46.00	-3.28	QP
6	!	645.1194	36.90	5.07	41.97	46.00	-4.03	QP

Note:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

2. All the modes have tested and recorded the worst mode(GFSK) in the report

GFSK

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2402MHz									
V	4804.00	52.52	30.55	5.77	24.66	52.40	74.00	-21.60	Pk
V	4804.00	39.00	30.55	5.77	24.66	38.88	54.00	-15.12	AV
V	7206.00	50.52	30.33	6.32	24.55	51.06	74.00	-22.94	Pk
V	7206.00	34.57	30.33	6.32	24.55	35.11	54.00	-18.89	AV
V	9608.00	48.39	30.85	7.45	24.69	49.68	74.00	-24.32	Pk
V	9608.00	33.05	30.85	7.45	24.69	34.34	54.00	-19.66	AV
V	12010.00	45.20	31.02	8.99	25.57	48.74	74.00	-25.26	Pk
V	12010.00	27.29	31.02	8.99	25.57	30.83	54.00	-23.17	AV
H	4804.00	48.73	30.55	5.77	24.66	48.61	74.00	-25.39	Pk
H	4804.00	39.97	30.55	5.77	24.66	39.85	54.00	-14.15	AV
H	7206.00	47.63	30.33	6.32	24.55	48.17	74.00	-25.83	Pk
H	7206.00	34.02	30.33	6.32	24.55	34.56	54.00	-19.44	AV
H	9608.00	48.61	30.85	7.45	24.69	49.90	74.00	-24.10	Pk
H	9608.00	30.91	30.85	7.45	24.69	32.20	54.00	-21.80	AV
H	12010.00	39.18	31.02	8.99	25.57	42.72	74.00	-31.28	Pk
H	12010.00	26.32	31.02	8.99	25.57	29.86	54.00	-24.14	AV

Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2441MHz									
V	4882.00	49.98	30.55	5.77	24.66	49.86	74.00	-24.14	Pk
V	4882.00	38.28	30.55	5.77	24.66	38.16	54.00	-15.84	AV
V	7323.00	46.08	30.33	6.32	24.55	46.62	74.00	-27.38	Pk
V	7323.00	36.67	30.33	6.32	24.55	37.21	54.00	-16.79	AV
V	9764.00	43.97	30.85	7.45	24.69	45.26	74.00	-28.74	Pk
V	9764.00	31.36	30.85	7.45	24.69	32.65	54.00	-21.35	AV
V	12205.00	40.95	31.02	8.99	25.57	44.49	74.00	-29.51	Pk
V	12205.00	29.09	31.02	8.99	25.57	32.63	54.00	-21.37	AV
H	4882.00	49.13	30.55	5.77	24.66	49.01	74.00	-24.99	Pk
H	4882.00	39.20	30.55	5.77	24.66	39.08	54.00	-14.92	AV
H	7323.00	46.97	30.33	6.32	24.55	47.51	74.00	-26.49	Pk
H	7323.00	33.63	30.33	6.32	24.55	34.17	54.00	-19.83	AV
H	9764.00	43.51	30.85	7.45	24.69	44.80	74.00	-29.20	Pk
H	9764.00	29.74	30.85	7.45	24.69	31.03	54.00	-22.97	AV
H	12205.00	39.25	31.02	8.99	25.57	42.79	74.00	-31.21	Pk
H	12205.00	30.64	31.02	8.99	25.57	34.18	54.00	-19.82	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2480MHz									
V	4960.00	49.97	30.55	5.77	24.66	49.85	74.00	-24.15	Pk
V	4960.00	35.70	30.55	5.77	24.66	35.58	54.00	-18.42	AV
V	7440.00	44.21	30.33	6.32	24.55	44.75	74.00	-29.25	Pk
V	7440.00	35.17	30.33	6.32	24.55	35.71	54.00	-18.29	AV
V	9920.00	40.62	30.85	7.45	24.69	41.91	74.00	-32.09	Pk
V	9920.00	31.65	30.85	7.45	24.69	32.94	54.00	-21.06	AV
V	12400.00	38.84	31.02	8.99	25.57	42.38	74.00	-31.62	Pk
V	12400.00	28.05	31.02	8.99	25.57	31.59	54.00	-22.41	AV
H	4960.00	47.49	30.55	5.77	24.66	47.37	74.00	-26.63	Pk
H	4960.00	38.93	30.55	5.77	24.66	38.81	54.00	-15.19	AV
H	7440.00	44.26	30.33	6.32	24.55	44.80	74.00	-29.20	Pk
H	7440.00	31.18	30.33	6.32	24.55	31.72	54.00	-22.28	AV
H	9920.00	40.58	30.85	7.45	24.69	41.87	74.00	-32.13	Pk
H	9920.00	27.31	30.85	7.45	24.69	28.60	54.00	-25.40	AV
H	12400.00	40.53	31.02	8.99	25.57	44.07	74.00	-29.93	Pk
H	12400.00	30.83	31.02	8.99	25.57	34.37	54.00	-19.63	AV

Note: 1. The testing has been conformed to 10*2480MHz=24800MHz.

2. All other emissions more than 30dB below the limit.

3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Reading + Factor

Margin=Emission Level-Limit

4. All the modes have tested and recorded the worst mode(GFSK) in the report

Radiated Band Emission Measurement:

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector or Type
GFSK	Low Channel: 2402MHz									
	H	2390	59.80	35.17	3.48	27.49	55.60	74.00	-18.40	PK
	H	2390	50.14	35.17	3.48	27.49	45.94	54.00	-8.06	AV
	H	2400	61.56	35.16	3.49	27.52	57.41	74.00	-16.59	PK
	H	2400	49.40	35.16	3.49	27.52	45.25	54.00	-8.75	AV
	V	2390	59.59	35.17	3.48	27.49	55.39	74.00	-18.61	PK
	V	2390	51.53	35.17	3.48	27.49	47.33	54.00	-6.67	AV
	V	2400	59.41	35.16	3.49	27.52	55.26	74.00	-18.74	PK
	V	2400	48.56	35.16	3.49	27.52	44.41	54.00	-9.59	AV
	High Channel: 2480MHz									
	H	2483.5	57.64	35.11	3.56	27.75	53.84	74.00	-20.16	PK
	H	2483.5	49.28	35.11	3.56	27.75	45.48	54.00	-8.52	AV
	H	2500	60.27	35.1	3.57	27.8	56.54	74.00	-17.46	PK
	H	2500	50.52	35.1	3.57	27.8	46.79	54.00	-7.21	AV
	V	2483.5	58.15	35.11	3.56	27.75	54.35	74.00	-19.65	PK
	V	2483.5	50.56	35.11	3.56	27.75	46.76	54.00	-7.24	AV
	V	2500	58.30	35.1	3.57	27.8	54.57	74.00	-19.43	PK
	V	2500	50.73	35.1	3.57	27.8	47.00	54.00	-7.00	AV

π/4-DQP SK	Low Channel: 2402MHz									
	H	2390	57.44	35.17	3.48	27.49	53.24	74.00	-20.76	PK
	H	2390	50.71	35.17	3.48	27.49	46.51	54.00	-7.49	AV
	H	2400	59.11	35.16	3.49	27.52	54.96	74.00	-19.04	PK
	H	2400	49.90	35.16	3.49	27.52	45.75	54.00	-8.25	AV
	V	2390	57.46	35.17	3.48	27.49	53.26	74.00	-20.74	PK
	V	2390	49.76	35.17	3.48	27.49	45.56	54.00	-8.44	AV
	V	2400	60.84	35.16	3.49	27.52	56.69	74.00	-17.31	PK
	V	2400	51.24	35.16	3.49	27.52	47.09	54.00	-6.91	AV
	High Channel: 2480MHz									
	H	2483.5	59.97	35.11	3.56	27.75	56.17	74.00	-17.83	PK
	H	2483.5	48.94	35.11	3.56	27.75	45.14	54.00	-8.86	AV
	H	2500	59.67	35.1	3.57	27.8	55.94	74.00	-18.06	PK
	H	2500	49.53	35.1	3.57	27.8	45.80	54.00	-8.20	AV
	V	2483.5	60.37	35.11	3.56	27.75	56.57	74.00	-17.43	PK
	V	2483.5	51.45	35.11	3.56	27.75	47.65	54.00	-6.35	AV
	V	2500	59.50	35.1	3.57	27.8	55.77	74.00	-18.23	PK
	V	2500	51.06	35.1	3.57	27.8	47.33	54.00	-6.67	AV
8DPSK	Low Channel: 2402MHz									
	H	2390	57.98	35.17	3.48	27.49	53.78	74.00	-20.22	PK
	H	2390	49.29	35.17	3.48	27.49	45.09	54.00	-8.91	AV
	H	2400	60.52	35.16	3.49	27.52	56.37	74.00	-17.63	PK
	H	2400	48.83	35.16	3.49	27.52	44.68	54.00	-9.32	AV
	V	2390	59.85	35.17	3.48	27.49	55.65	74.00	-18.35	PK
	V	2390	50.89	35.17	3.48	27.49	46.69	54.00	-7.31	AV
	V	2400	59.47	35.16	3.49	27.52	55.32	74.00	-18.68	PK
	V	2400	49.98	35.16	3.49	27.52	45.83	54.00	-8.17	AV
	High Channel: 2480MHz									
	H	2483.5	59.89	35.11	3.56	27.75	56.09	74.00	-17.91	PK
	H	2483.5	50.33	35.11	3.56	27.75	46.53	54.00	-7.47	AV
	H	2500	60.14	35.1	3.57	27.8	56.41	74.00	-17.59	PK
	H	2500	50.75	35.1	3.57	27.8	47.02	54.00	-6.98	AV
	V	2483.5	60.22	35.11	3.56	27.75	56.42	74.00	-17.58	PK
	V	2483.5	50.63	35.11	3.56	27.75	46.83	54.00	-7.17	AV
	V	2500	57.66	35.1	3.57	27.8	53.93	74.00	-20.07	PK
	V	2500	50.48	35.1	3.57	27.8	46.75	54.00	-7.25	AV

Remark:
 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit

4. Maximum Peak Output Power

4.1. Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;

ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1)	Peak Output Power	1 watt or 21dBm	2400-2483.5	PASS

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247 § 5.4

For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

4.2. Test Setup



4.3. Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. Spectrum Setting:
 RBW > the 20 dB bandwidth of the emission being measured
 Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 VBW ≥ RBW
 Sweep = auto
 Detector function = peak
 Trace = max hold


4.4. Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
GFSK	LCH	4.29	20.97	PASS
	MCH	3.39	20.97	PASS
	HCH	1.86	20.97	PASS
π/4DQPSK	LCH	6.2	20.97	PASS
	MCH	5.46	20.97	PASS
	HCH	3.9	20.97	PASS
8DPSK	LCH	6.45	20.97	PASS
	MCH	5.64	20.97	PASS
	HCH	4.26	20.97	PASS


Test Graph:

Graphs


GFSK/LCH



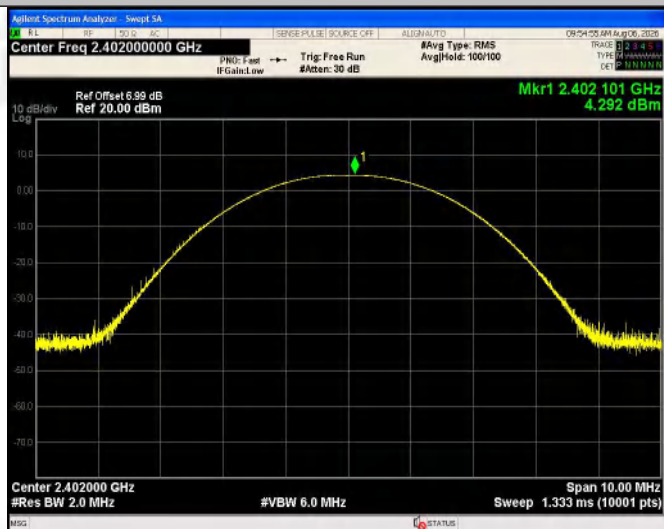





GFSK/MCH

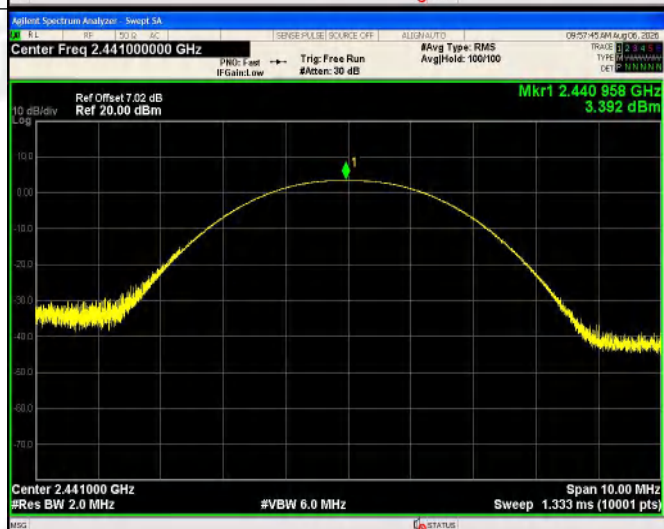

GFSK/HCH

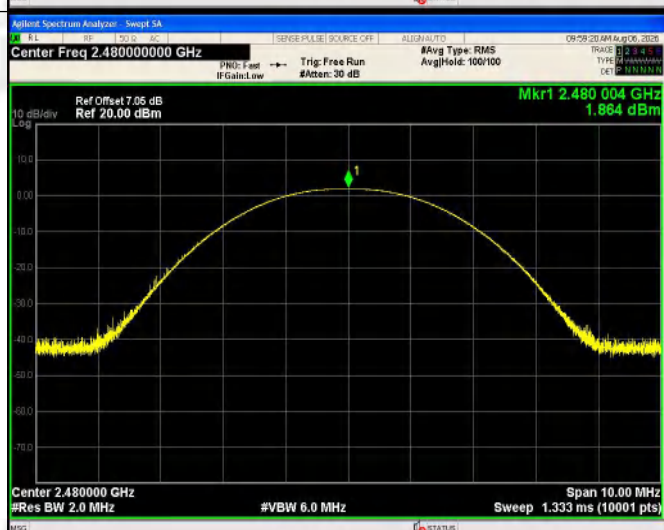

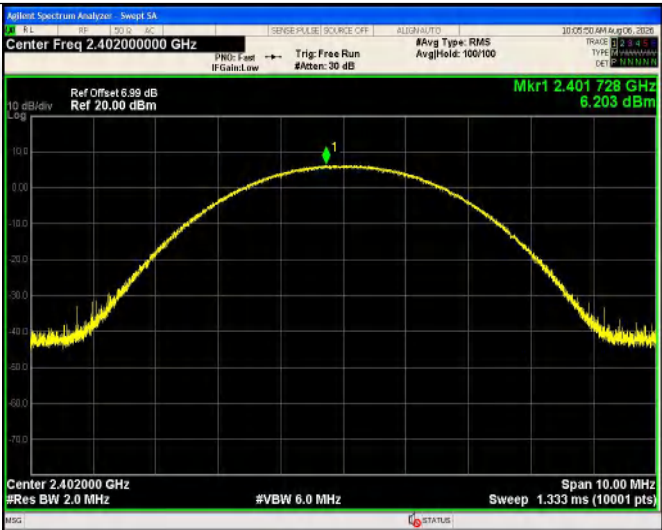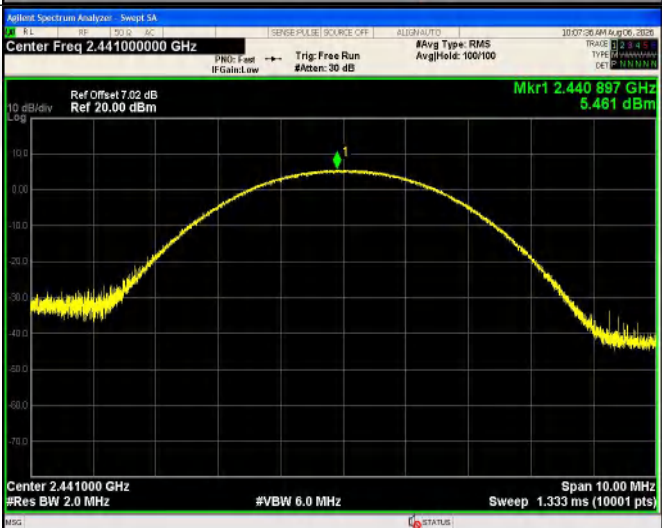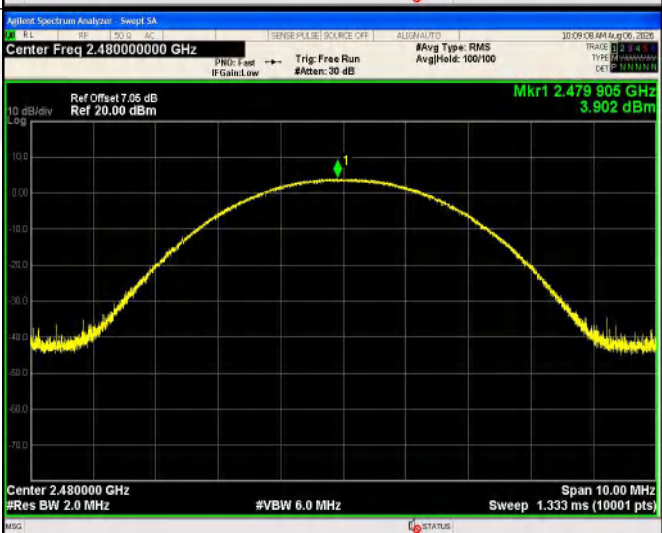$\pi/4$DQPSK/LCH	
$\pi/4$DQPSK/MCH	
$\pi/4$DQPSK/HCH	

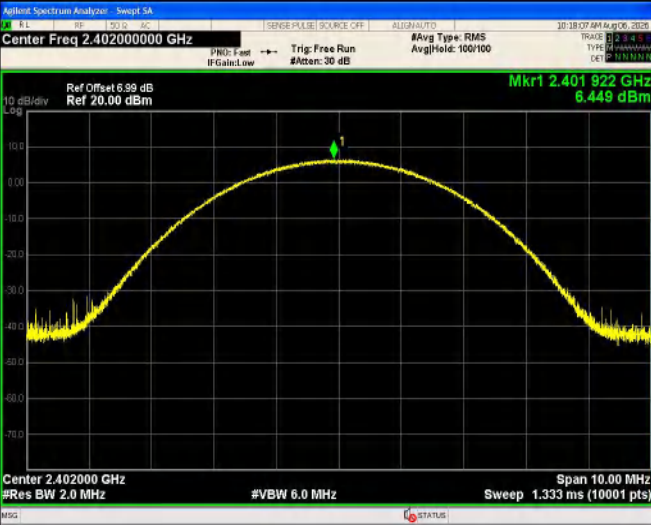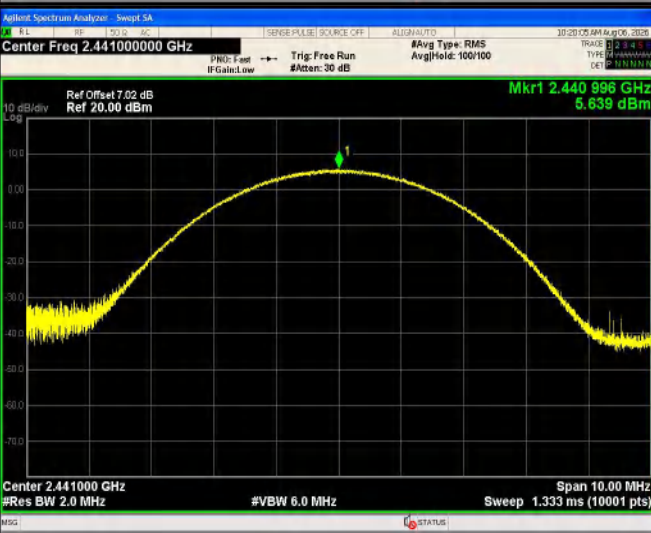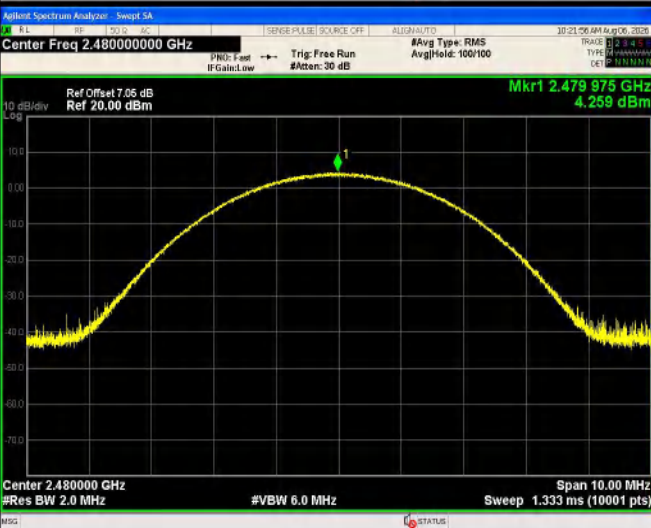8DPSK/LCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.402000000 GHz Ref Offset 6.99 dB Ref 20.00 dBm Mkr1 2.401922 GHz 6.449 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)
8DPSK /MCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.441000000 GHz Ref Offset 7.02 dB Ref 20.00 dBm Mkr1 2.440996 GHz 5.639 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)
8DPSK /HCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.480000000 GHz Ref Offset 7.06 dB Ref 20.00 dBm Mkr1 2.479975 GHz 4.259 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.333 ms (10001 pts)

5. -20 dB Bandwidth Measurement

5.1. Limit

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019; ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024

5.2. Test Setup



5.3. Test Procedure

For 20dB Bandwidth Measurement

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

For 99% Bandwidth Measurement


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1%-5% OBW, VBW $\geq$ 3RBW


5.4. Test Result


Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.893	PASS
	Mid channel	0.835	PASS
	High channel	0.875	PASS
$\pi/4$ DQPSK	Low channel	1.320	PASS
	Mid channel	1.324	PASS
	High channel	1.316	PASS
8DPSK	Low channel	1.310	PASS
	Mid channel	1.309	PASS
	High channel	1.310	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

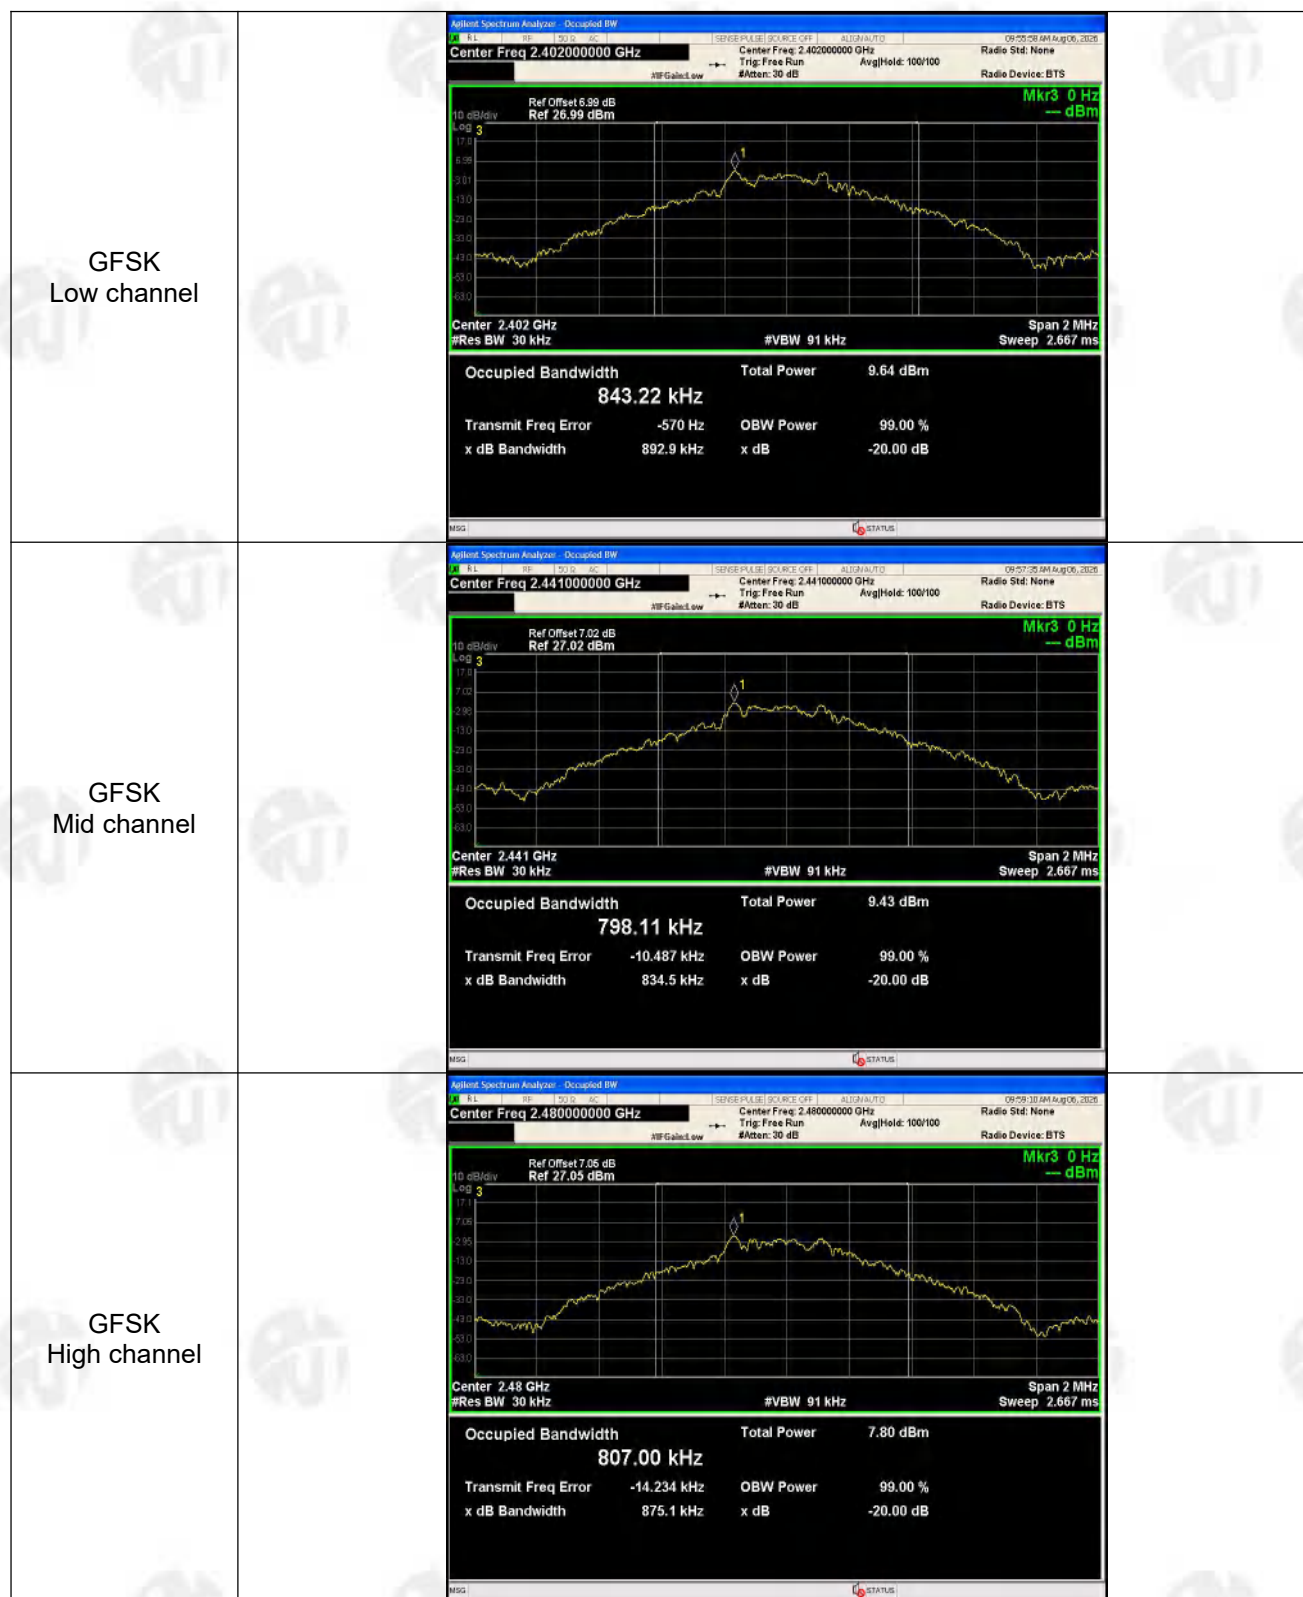

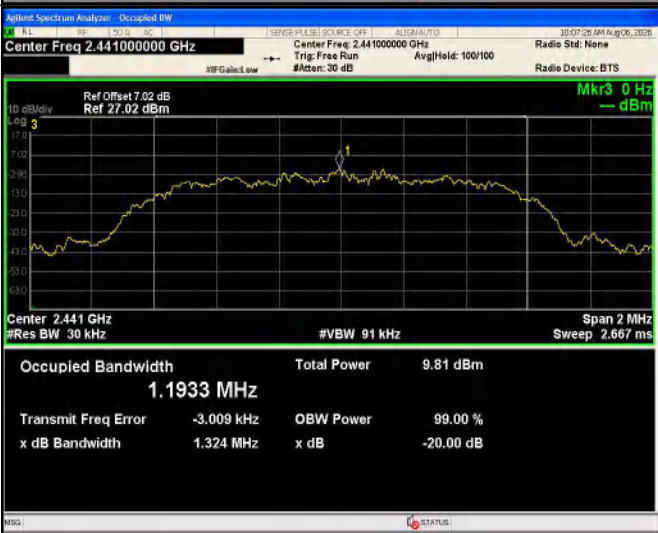$\pi/4$-DQPSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Ref Offset 6.99 dB Ref 26.99 dBm Occupied Bandwidth 1.1832 MHz Total Power 10.6 dBm Transmit Freq Error -7.144 kHz OBW Power 99.00 % x dB Bandwidth 1.320 MHz x dB -20.00 dB
$\pi/4$-DQPSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Ref Offset 7.02 dB Ref 27.02 dBm Occupied Bandwidth 1.1933 MHz Total Power 9.81 dBm Transmit Freq Error -3.009 kHz OBW Power 99.00 % x dB Bandwidth 1.324 MHz x dB -20.00 dB
$\pi/4$-DQPSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Ref Offset 7.05 dB Ref 27.05 dBm Occupied Bandwidth 1.1826 MHz Total Power 8.39 dBm Transmit Freq Error -11.060 kHz OBW Power 99.00 % x dB Bandwidth 1.316 MHz x dB -20.00 dB

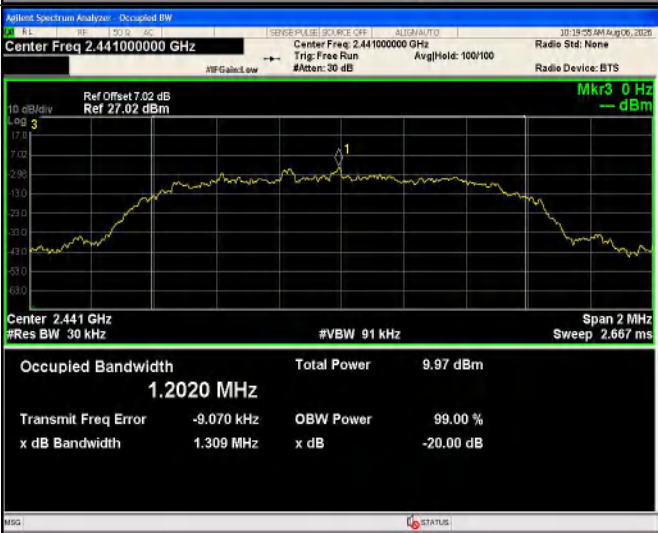8DPSK Low channel	
8DPSK Mid channel	
8DPSK High channel	

6. Carrier Frequency Separation Test

6.1. Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

6.2. Test Setup



6.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 300 kHz.
3. Set the VBW = 1 MHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

6.4. Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.001	0.595	PASS
GFSK	MCH	0.999	0.556	PASS
GFSK	HCH	1.002	0.583	PASS
$\pi/4$ DQPSK	LCH	1.005	0.880	PASS
$\pi/4$ DQPSK	MCH	1.004	0.883	PASS
$\pi/4$ DQPSK	HCH	0.999	0.877	PASS
8DPSK	LCH	1.003	0.874	PASS
8DPSK	MCH	1.000	0.872	PASS
8DPSK	HCH	1.002	0.874	PASS

Test Graph

Graphs

GFSK/LCH



GFSK/MCH



GFSK/HCH



$\pi/4$ DQPSK/LCH	 <table><tr><th>MARKER</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>SC</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ</td><td>1</td><td>f</td><td>(Δ)</td><td>1.0046 MHz (Δ)</td><td></td><td></td><td>-0.167 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.4020124 GHz</td><td></td><td></td><td>-2.498 dBm</td></tr></table>	MARKER	MODE	TRIG	SCL	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ	1	f	(Δ)	1.0046 MHz (Δ)			-0.167 dB	2	F	1	f		2.4020124 GHz			-2.498 dBm
MARKER	MODE	TRIG	SCL	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ	1	f	(Δ)	1.0046 MHz (Δ)			-0.167 dB																				
2	F	1	f		2.4020124 GHz			-2.498 dBm																				
$\pi/4$ DQPSK/MCH	 <table><tr><th>MARKER</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>SC</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ</td><td>1</td><td>f</td><td>(Δ)</td><td>1.0040 MHz (Δ)</td><td></td><td></td><td>-0.115 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.4410108 GHz</td><td></td><td></td><td>-2.368 dBm</td></tr></table>	MARKER	MODE	TRIG	SCL	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ	1	f	(Δ)	1.0040 MHz (Δ)			-0.115 dB	2	F	1	f		2.4410108 GHz			-2.368 dBm
MARKER	MODE	TRIG	SCL	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ	1	f	(Δ)	1.0040 MHz (Δ)			-0.115 dB																				
2	F	1	f		2.4410108 GHz			-2.368 dBm																				
$\pi/4$ DQPSK/HCH	 <table><tr><th>MARKER</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>SC</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ</td><td>1</td><td>f</td><td>(Δ)</td><td>999.2 kHz (Δ)</td><td></td><td></td><td>-0.097 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.4790096 GHz</td><td></td><td></td><td>-2.970 dBm</td></tr></table>	MARKER	MODE	TRIG	SCL	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ	1	f	(Δ)	999.2 kHz (Δ)			-0.097 dB	2	F	1	f		2.4790096 GHz			-2.970 dBm
MARKER	MODE	TRIG	SCL	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	Δ	1	f	(Δ)	999.2 kHz (Δ)			-0.097 dB																				
2	F	1	f		2.4790096 GHz			-2.970 dBm																				

8DPSK/LCH



8DPSK /MCH



8DPSK /HCH



7. Number of Hopping Channel Test

7.1. Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Limit	>15 channels

7.2. Test Setup



7.3. Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 100 kHz.
3. Set the VBW = 300 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.


7.4. Test Result

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥15	PASS
π/4DQPSK	Hop	79	≥15	PASS
8DPSK	Hop	79	≥15	PASS


Test Graph

Graphs


GFSK/Hop

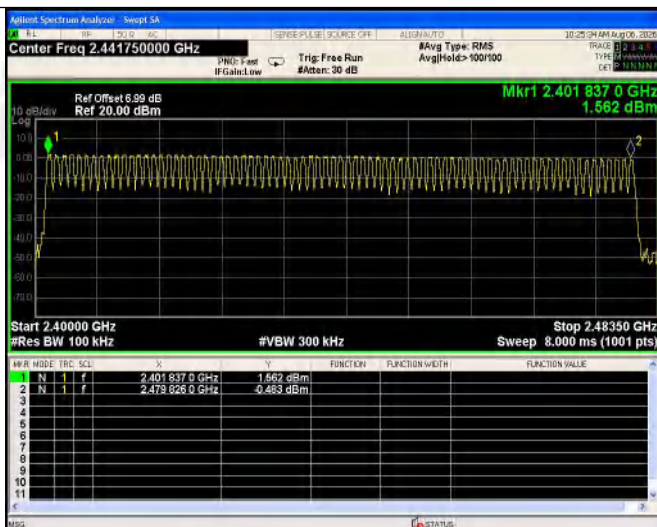

$\pi/4$ DQPSK/Hop

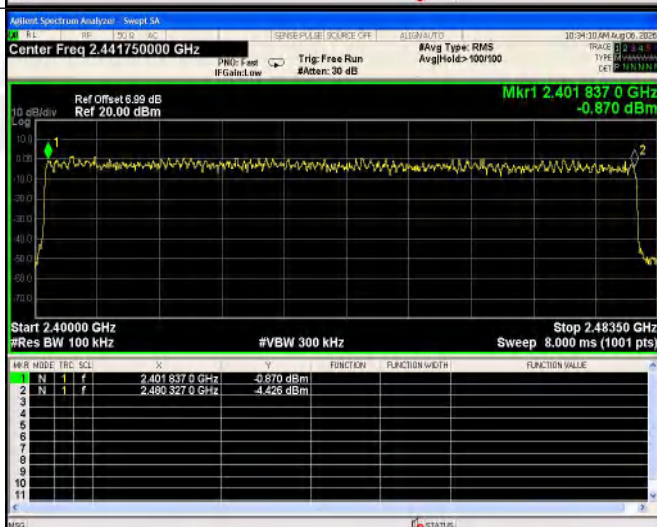

8DPSK/Hop

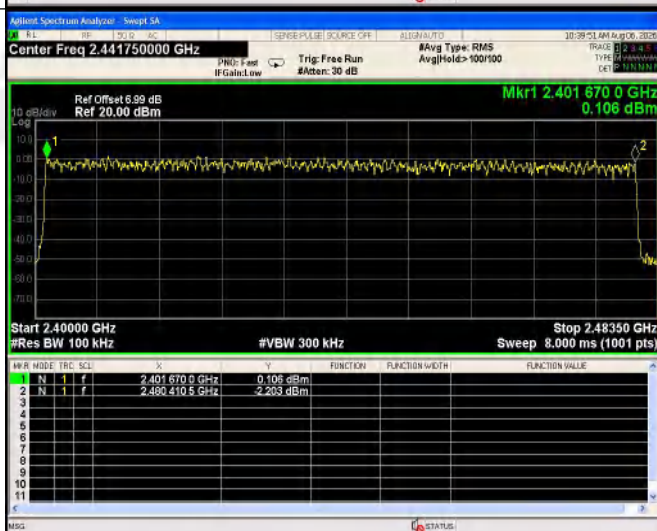

8. Dwell Time Test

8.1. Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)(iii)
Test Limit	0.4 sec

8.2. Test setup



8.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.
The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a Hopping rate of 1600 [ch*hop/s] for all channels. So the final hopping rate for all channels is $1600/6=266.67$ [ch*hop/s]
- The hops per second on one channel: 266.67 [ch*hops/s]/ 79 [ch]= 3.38 [hop/s].
The total hops for all channels within the dwell time calculation
duration: 3.38 [hop/s]* 31.6 [s*ch]= 106.67 [hop*ch].
The dwell time for all channels hopping: 106.67 [hop*ch]*Burst Width [ms/hop/ch].
9. The duration for dwell time calculation: 0.4 [s]*hopping number= 0.4 [s]* 79 [ch]= 31.6 [s*ch].
10. Pulse Time(ms)*Total Hops=Dwell Time

8.4. Test Result

Packet	Channel	Pulse Time (ms)	Burst Count (Num)	Total Dwell Time (ms)	Limit (ms)	Verdict
DH1	LCH	0.389	319	124.091	400	PASS
DH1	MCH	0.389	317	123.313	400	PASS
DH1	HCH	0.389	317	123.313	400	PASS
2DH3	LCH	1.648	166	273.568	400	PASS
2DH3	MCH	1.648	154	253.792	400	PASS
2DH3	HCH	1.648	163	268.624	400	PASS
3DH5	LCH	2.898	111	321.678	400	PASS
3DH5	MCH	2.897	103	298.391	400	PASS
3DH5	HCH	2.897	101	292.597	400	PASS


Remark: Dwell time = Pulse time * Total Hops

Remark: Mkr Delta is once pulse time.


Test Graph

Graphs


GFSK_1DH1/LCH-
One Burst

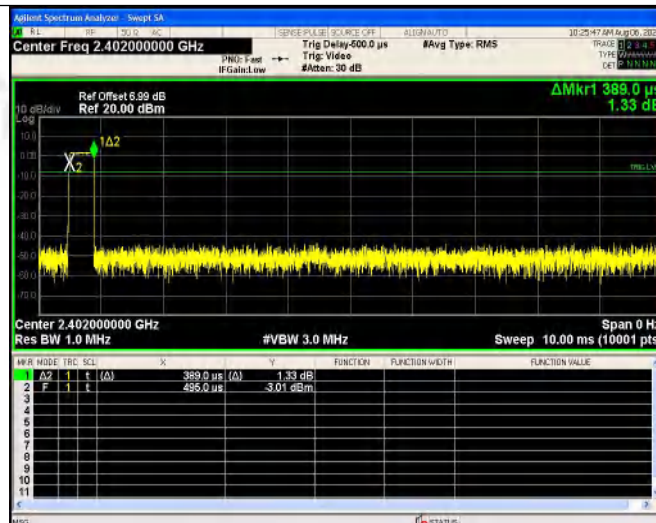




GFSK_1DH1/LCH-
Accumulated

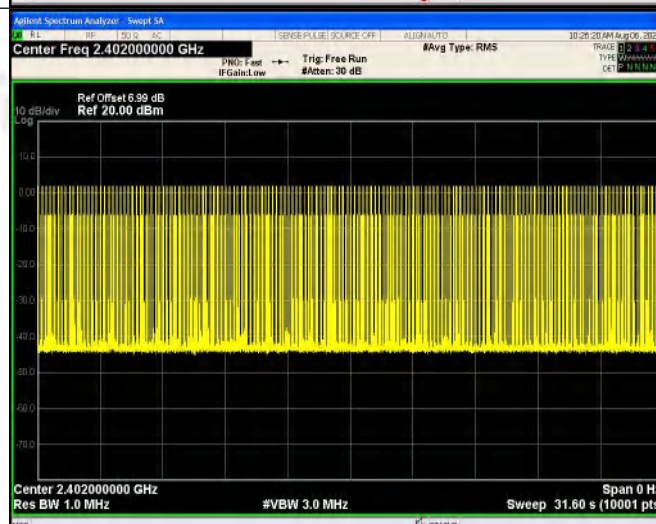


GFSK_1DH1/MCH-
One Burst

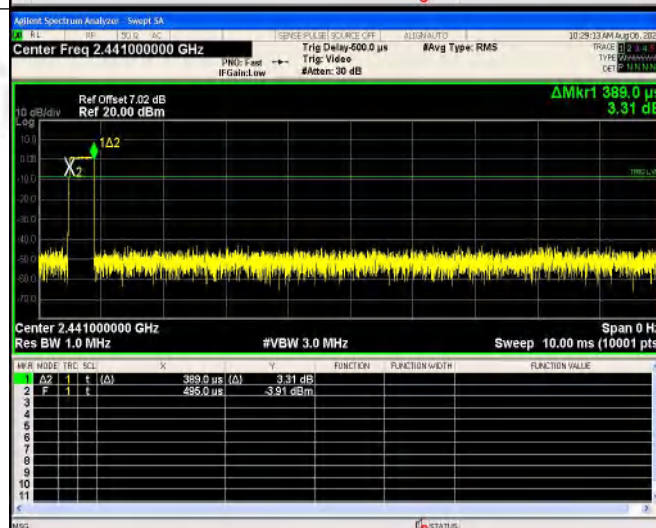

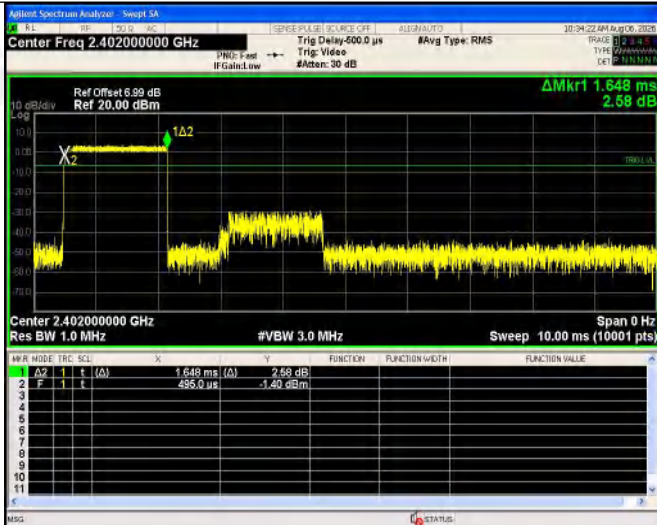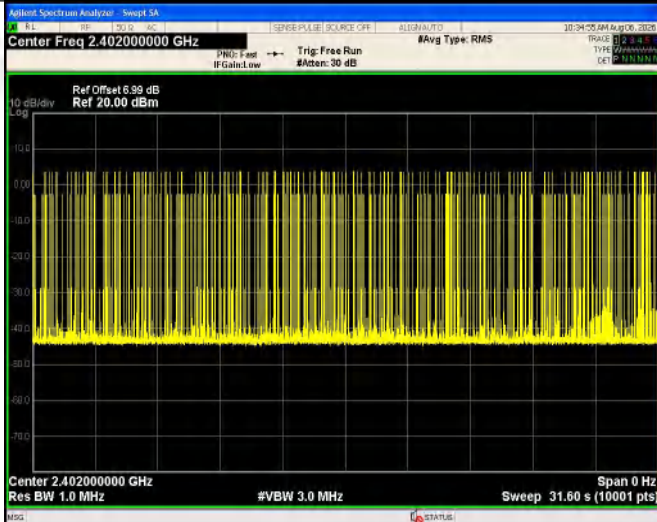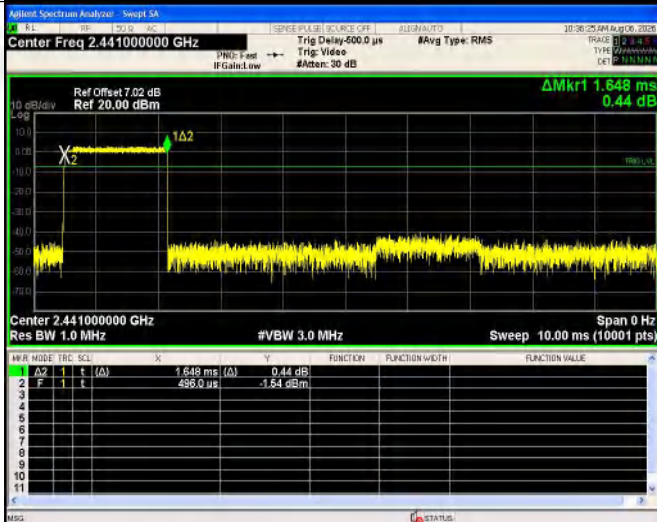


$\pi/4$ DQPSK_2DH3 /LCH- One Burst	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>t</td><td>(Δ)</td><td>1.648 ms</td><td>(Δ)</td><td></td><td>2.58 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>495.0 μs</td><td>(Δ)</td><td></td><td>-1.40 dBm</td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	1.648 ms	(Δ)		2.58 dB	2	F	1	t	(Δ)	495.0 μs	(Δ)		-1.40 dBm
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	1.648 ms	(Δ)		2.58 dB																				
2	F	1	t	(Δ)	495.0 μs	(Δ)		-1.40 dBm																				
$\pi/4$ DQPSK_2DH3 /LCH- Accumulated	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>t</td><td>(Δ)</td><td>1.648 ms</td><td>(Δ)</td><td></td><td>0.44 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>495.0 μs</td><td>(Δ)</td><td></td><td>-1.54 dBm</td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	1.648 ms	(Δ)		0.44 dB	2	F	1	t	(Δ)	495.0 μs	(Δ)		-1.54 dBm
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	1.648 ms	(Δ)		0.44 dB																				
2	F	1	t	(Δ)	495.0 μs	(Δ)		-1.54 dBm																				
$\pi/4$ DQPSK_2DH3 /MCH- One Burst	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>t</td><td>(Δ)</td><td>1.648 ms</td><td>(Δ)</td><td></td><td>0.44 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>495.0 μs</td><td>(Δ)</td><td></td><td>-1.54 dBm</td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	1.648 ms	(Δ)		0.44 dB	2	F	1	t	(Δ)	495.0 μs	(Δ)		-1.54 dBm
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	1.648 ms	(Δ)		0.44 dB																				
2	F	1	t	(Δ)	495.0 μs	(Δ)		-1.54 dBm																				

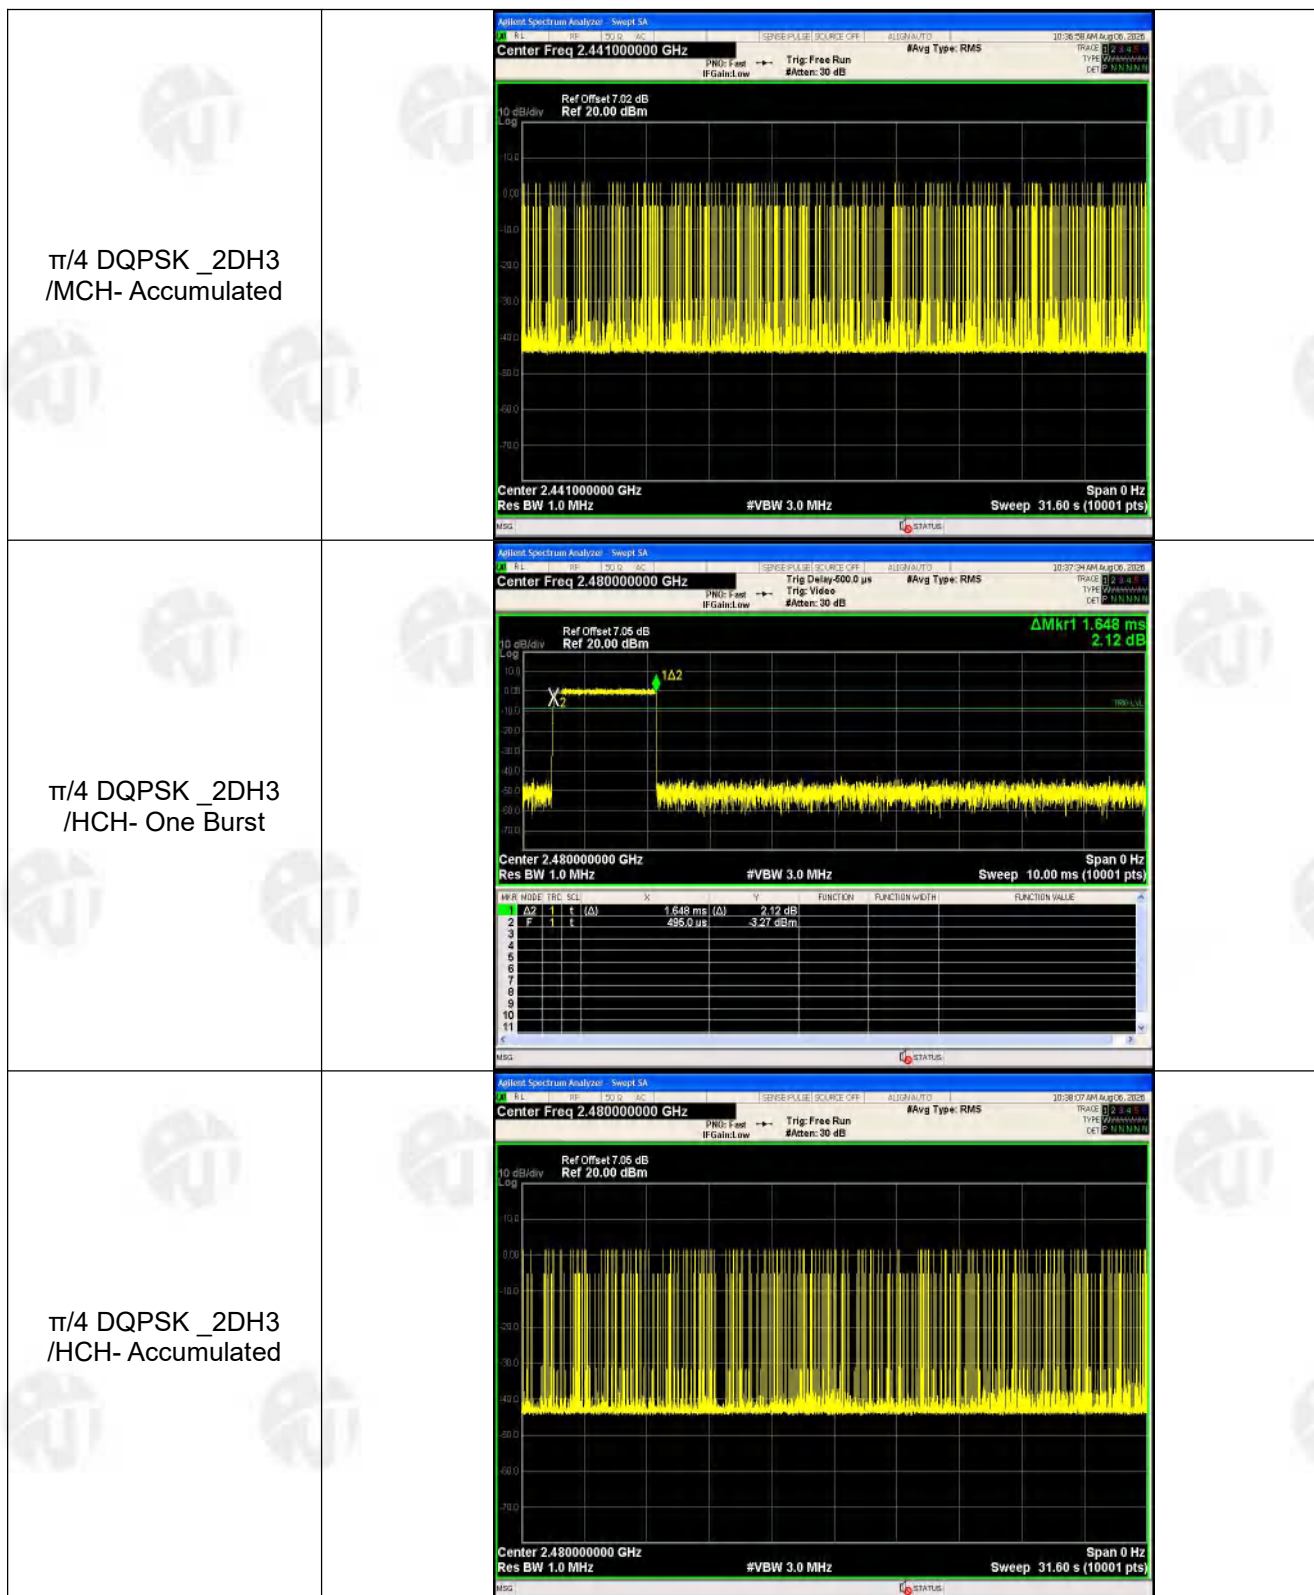


8DPSK_3DH5/LCH-
One Burst



8DPSK_3DH5/LCH-
Accumulated

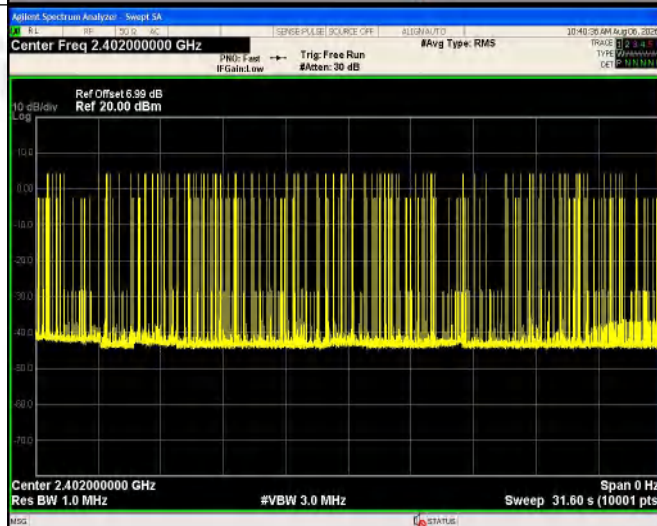

8DPSK_3DH5/MCH-
One Burst

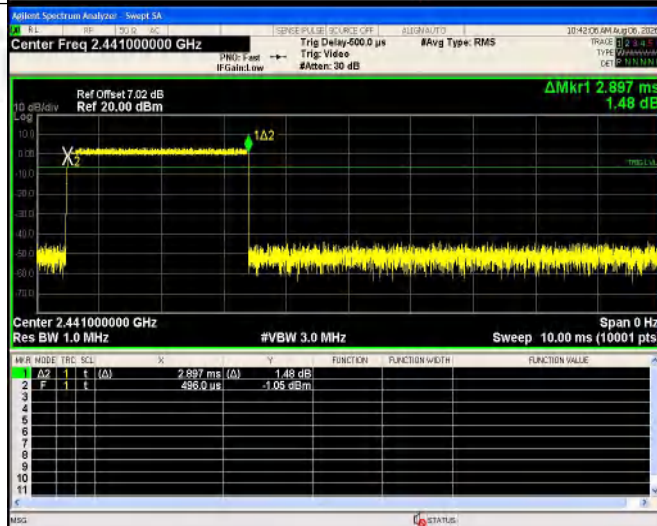

8DPSK_3DH5/MCH- Accumulated																												
8DPSK_3DH5/HCH- One Burst	<table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>A2</td><td>1</td><td>t</td><td>(Δ)</td><td>2.897 ms (Δ)</td><td>2.02 dB</td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td></td><td>495.0 μs</td><td>-2.71 dBm</td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	2.897 ms (Δ)	2.02 dB			2	F	1	t		495.0 μs	-2.71 dBm		
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	A2	1	t	(Δ)	2.897 ms (Δ)	2.02 dB																						
2	F	1	t		495.0 μs	-2.71 dBm																						
8DPSK_3DH5/HCH- Accumulated																												

9. Conducted Spurious Emissions and Band Edge Requirement

9.1. Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

9.2. Test Setup



9.3. Test Procedure


The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:

1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.


9.4. Test Result

BAND EDGE Graphs																																														
GFSK/LCH/ No Hop	<table><thead><tr><th>MKR</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4020 GHz</td><td>3.284 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4000 GHz</td><td>-52.440 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.4000 GHz</td><td>-52.440 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.3988 GHz</td><td>-47.595 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4020 GHz	3.284 dBm				2	N	1	f	2.4000 GHz	-52.440 dBm				3	N	1	f	2.4000 GHz	-52.440 dBm				4	N	1	f	2.3988 GHz	-47.595 dBm			
MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4020 GHz	3.284 dBm																																									
2	N	1	f	2.4000 GHz	-52.440 dBm																																									
3	N	1	f	2.4000 GHz	-52.440 dBm																																									
4	N	1	f	2.3988 GHz	-47.595 dBm																																									
GFSK/LCH/ Hop	<table><thead><tr><th>MKR</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4018 GHz</td><td>1.645 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4000 GHz</td><td>-53.307 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.3900 GHz</td><td>-52.551 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.3310 GHz</td><td>-51.340 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4018 GHz	1.645 dBm				2	N	1	f	2.4000 GHz	-53.307 dBm				3	N	1	f	2.3900 GHz	-52.551 dBm				4	N	1	f	2.3310 GHz	-51.340 dBm			
MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4018 GHz	1.645 dBm																																									
2	N	1	f	2.4000 GHz	-53.307 dBm																																									
3	N	1	f	2.3900 GHz	-52.551 dBm																																									
4	N	1	f	2.3310 GHz	-51.340 dBm																																									
GFSK/HCH/ No Hop	<table><thead><tr><th>MKR</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4799 GHz</td><td>1.445 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4835 GHz</td><td>-53.356 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.5000 GHz</td><td>-53.759 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.4924 GHz</td><td>-50.338 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4799 GHz	1.445 dBm				2	N	1	f	2.4835 GHz	-53.356 dBm				3	N	1	f	2.5000 GHz	-53.759 dBm				4	N	1	f	2.4924 GHz	-50.338 dBm			
MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4799 GHz	1.445 dBm																																									
2	N	1	f	2.4835 GHz	-53.356 dBm																																									
3	N	1	f	2.5000 GHz	-53.759 dBm																																									
4	N	1	f	2.4924 GHz	-50.338 dBm																																									


GFSK/HCH/
Hop



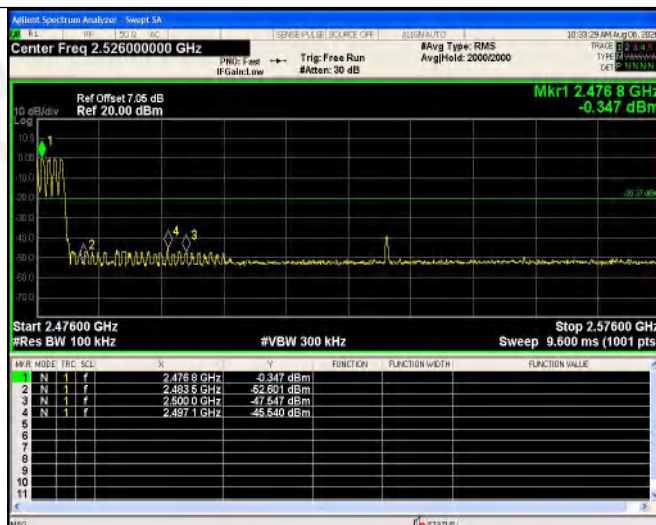


π /4DQPSK/LCH/
No Hop

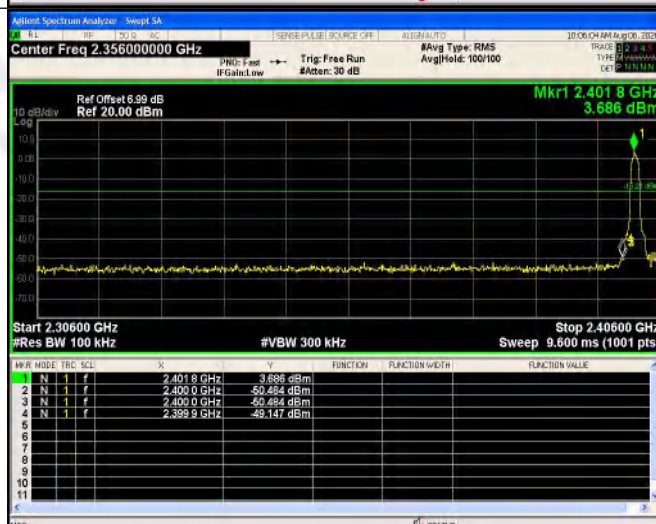


π /4DQPSK/LCH/
Hop

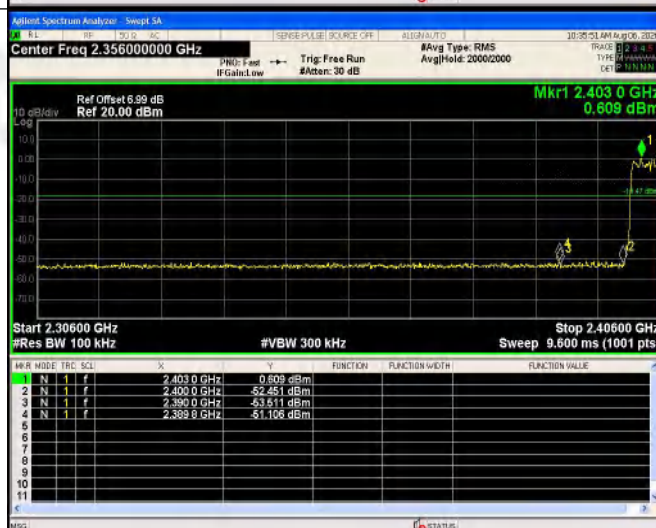


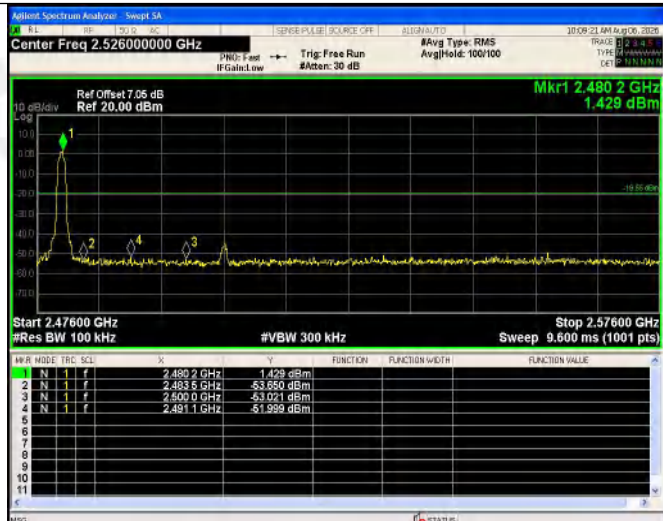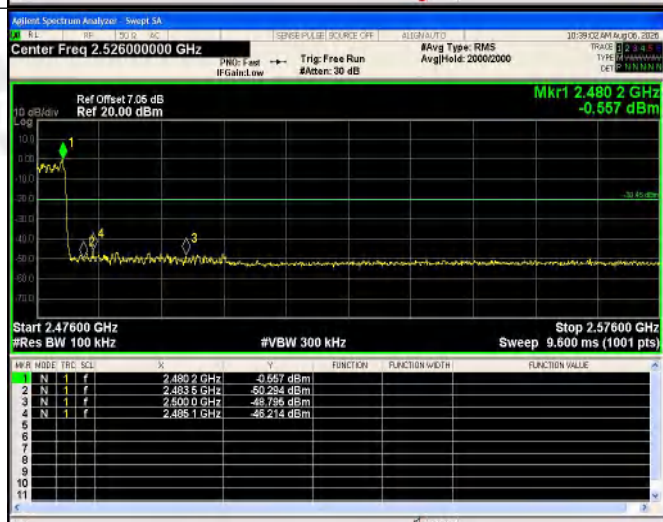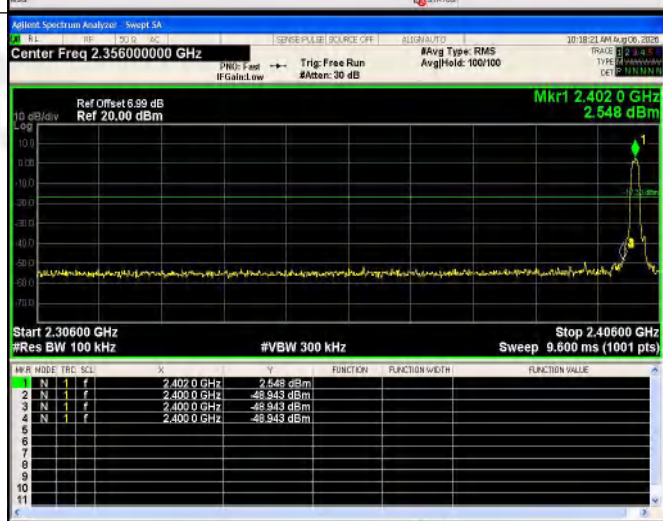$\pi/4$ DQPSK/HCH/ No Hop	 <table><thead><tr><th>N</th><th>FREQ</th><th>POWER</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>2.480 GHz</td><td>1.429 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>2.483 GHz</td><td>-53.850 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>2.500 GHz</td><td>-53.071 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>2.491 GHz</td><td>-51.999 dBm</td><td></td><td></td><td></td></tr></tbody></table>	N	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	2.480 GHz	1.429 dBm				2	2.483 GHz	-53.850 dBm				3	2.500 GHz	-53.071 dBm				4	2.491 GHz	-51.999 dBm			
N	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																										
1	2.480 GHz	1.429 dBm																													
2	2.483 GHz	-53.850 dBm																													
3	2.500 GHz	-53.071 dBm																													
4	2.491 GHz	-51.999 dBm																													
$\pi/4$ DQPSK/HCH/ Hop	 <table><thead><tr><th>N</th><th>FREQ</th><th>POWER</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>2.480 GHz</td><td>-0.557 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>2.483 GHz</td><td>-50.234 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>2.500 GHz</td><td>-48.736 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>2.495 GHz</td><td>-48.214 dBm</td><td></td><td></td><td></td></tr></tbody></table>	N	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	2.480 GHz	-0.557 dBm				2	2.483 GHz	-50.234 dBm				3	2.500 GHz	-48.736 dBm				4	2.495 GHz	-48.214 dBm			
N	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																										
1	2.480 GHz	-0.557 dBm																													
2	2.483 GHz	-50.234 dBm																													
3	2.500 GHz	-48.736 dBm																													
4	2.495 GHz	-48.214 dBm																													
8DPSK/LCH/No Hop	 <table><thead><tr><th>N</th><th>FREQ</th><th>POWER</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>2.402 GHz</td><td>2.548 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>2.400 GHz</td><td>-48.943 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>2.400 GHz</td><td>-48.943 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>2.400 GHz</td><td>-48.943 dBm</td><td></td><td></td><td></td></tr></tbody></table>	N	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	2.402 GHz	2.548 dBm				2	2.400 GHz	-48.943 dBm				3	2.400 GHz	-48.943 dBm				4	2.400 GHz	-48.943 dBm			
N	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																										
1	2.402 GHz	2.548 dBm																													
2	2.400 GHz	-48.943 dBm																													
3	2.400 GHz	-48.943 dBm																													
4	2.400 GHz	-48.943 dBm																													


8DPSK
/LCH/Hop

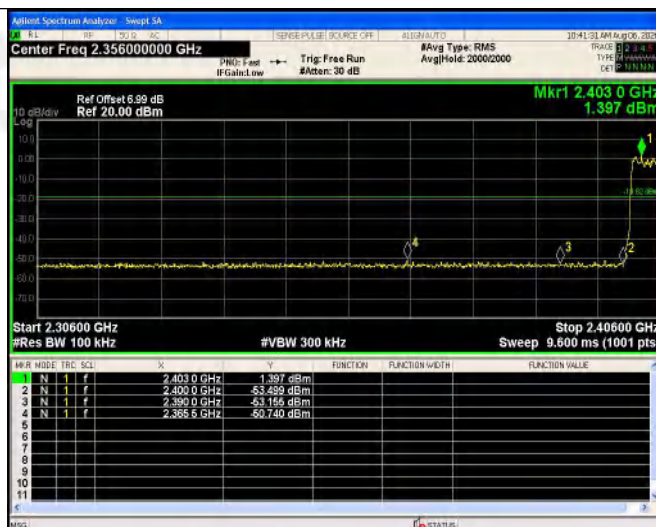

8DPSK /HCH/No
Hop

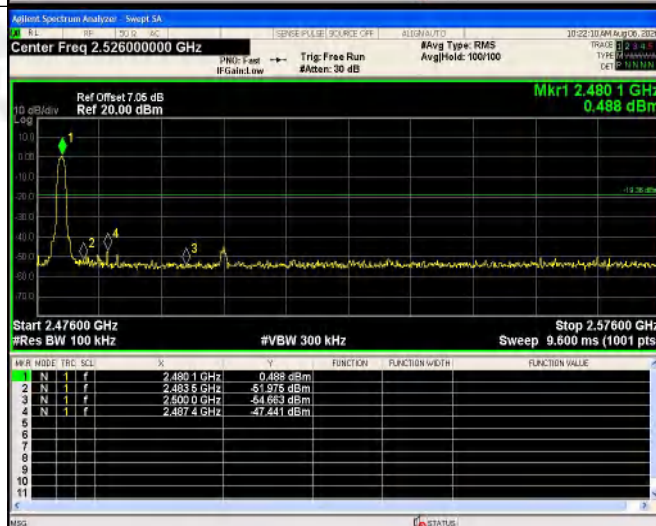


8DPSK
/HCH/Hop

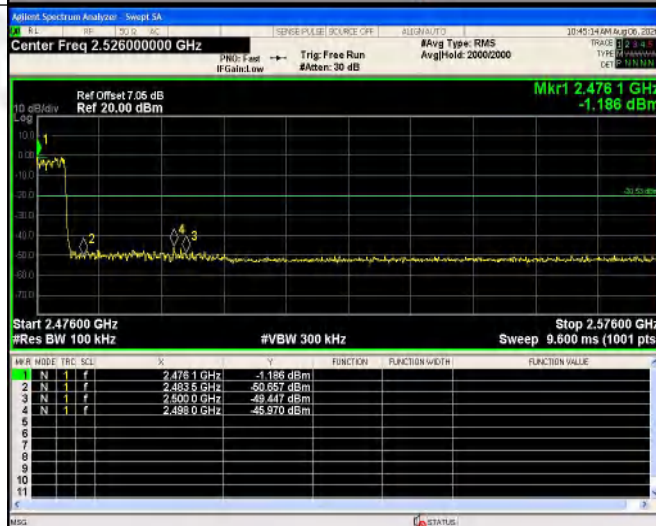


RF Conducted Spurious Emissions Graphs


GFSK/LCH



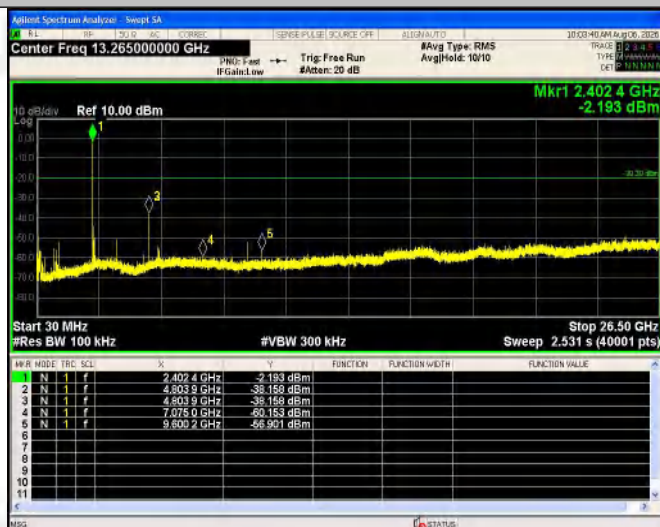


GFSK/MCH

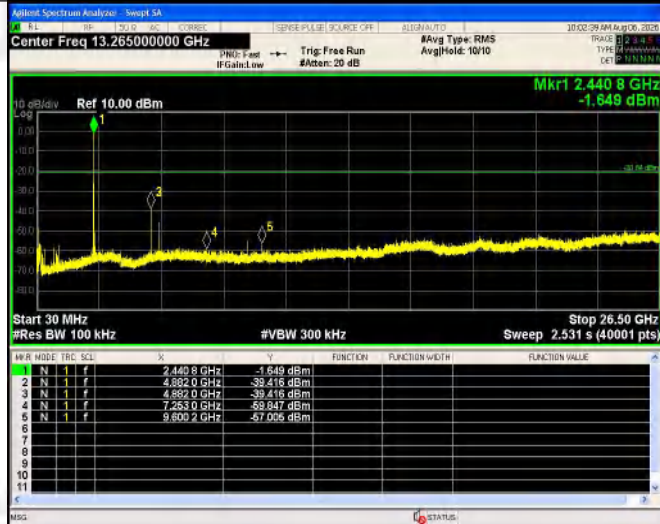


GFSK/HCH

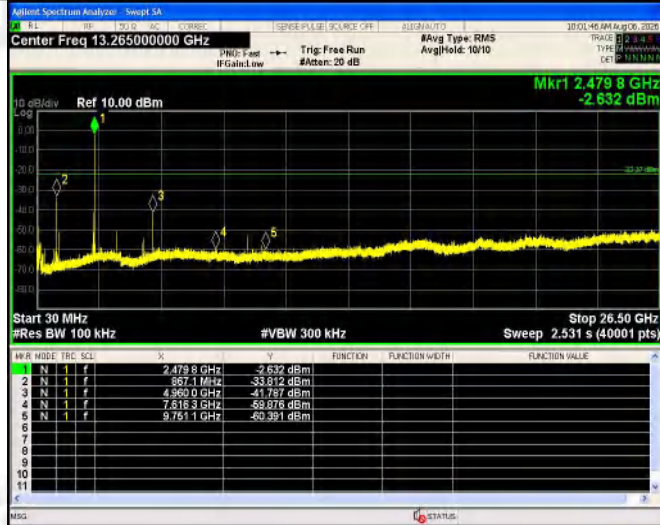


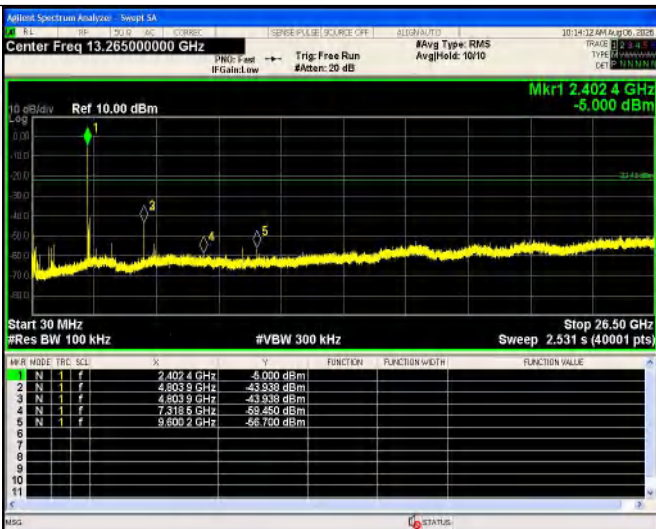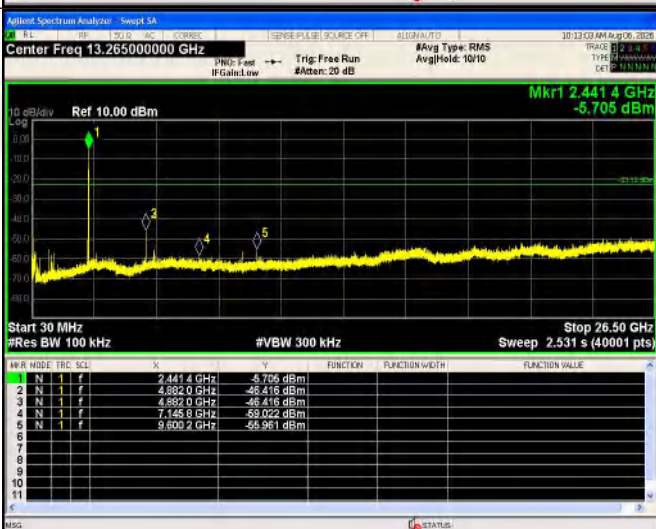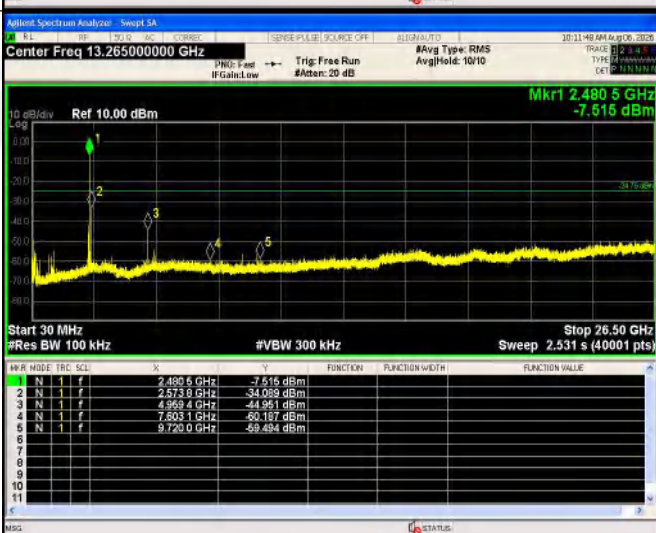$\pi/4$ DQPSK /LCH	 <table><tr><th>M/R</th><th>MODE</th><th>FREQ</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4024 GHz</td><td>1</td><td>-5.000 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>4.8039 GHz</td><td>1</td><td>-43.938 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>7.2054 GHz</td><td>1</td><td>-58.450 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>9.6069 GHz</td><td>1</td><td>-56.750 dBm</td><td></td><td></td><td></td><td></td></tr></table>	M/R	MODE	FREQ	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4024 GHz	1	-5.000 dBm					2	N	4.8039 GHz	1	-43.938 dBm					3	N	7.2054 GHz	1	-58.450 dBm					4	N	9.6069 GHz	1	-56.750 dBm				
M/R	MODE	FREQ	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	2.4024 GHz	1	-5.000 dBm																																										
2	N	4.8039 GHz	1	-43.938 dBm																																										
3	N	7.2054 GHz	1	-58.450 dBm																																										
4	N	9.6069 GHz	1	-56.750 dBm																																										
$\pi/4$ DQPSK/MCH	 <table><tr><th>M/R</th><th>MODE</th><th>FREQ</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4414 GHz</td><td>1</td><td>-5.705 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>4.8820 GHz</td><td>1</td><td>-46.416 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>7.3235 GHz</td><td>1</td><td>-58.022 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>9.7650 GHz</td><td>1</td><td>-56.961 dBm</td><td></td><td></td><td></td><td></td></tr></table>	M/R	MODE	FREQ	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4414 GHz	1	-5.705 dBm					2	N	4.8820 GHz	1	-46.416 dBm					3	N	7.3235 GHz	1	-58.022 dBm					4	N	9.7650 GHz	1	-56.961 dBm				
M/R	MODE	FREQ	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	2.4414 GHz	1	-5.705 dBm																																										
2	N	4.8820 GHz	1	-46.416 dBm																																										
3	N	7.3235 GHz	1	-58.022 dBm																																										
4	N	9.7650 GHz	1	-56.961 dBm																																										
$\pi/4$ DQPSK/HCH	 <table><tr><th>M/R</th><th>MODE</th><th>FREQ</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4805 GHz</td><td>1</td><td>-7.515 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>4.9610 GHz</td><td>1</td><td>-34.089 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>7.4415 GHz</td><td>1</td><td>-44.951 dBm</td><td></td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>9.9220 GHz</td><td>1</td><td>-59.494 dBm</td><td></td><td></td><td></td><td></td></tr></table>	M/R	MODE	FREQ	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4805 GHz	1	-7.515 dBm					2	N	4.9610 GHz	1	-34.089 dBm					3	N	7.4415 GHz	1	-44.951 dBm					4	N	9.9220 GHz	1	-59.494 dBm				
M/R	MODE	FREQ	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	2.4805 GHz	1	-7.515 dBm																																										
2	N	4.9610 GHz	1	-34.089 dBm																																										
3	N	7.4415 GHz	1	-44.951 dBm																																										
4	N	9.9220 GHz	1	-59.494 dBm																																										


8DPSK /LCH

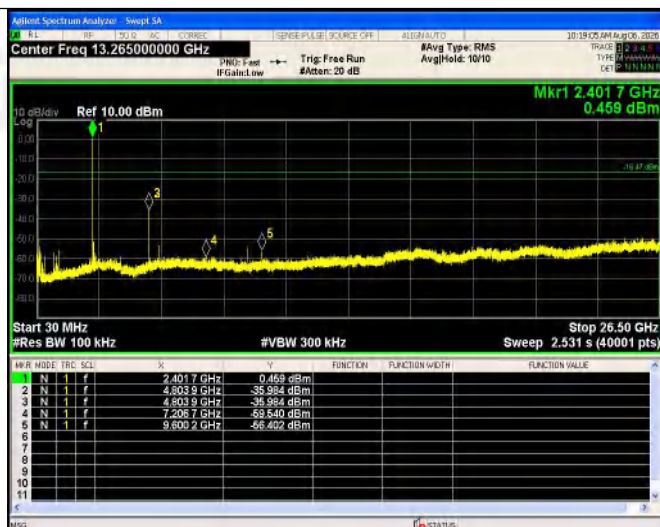

8DPSK /MCH

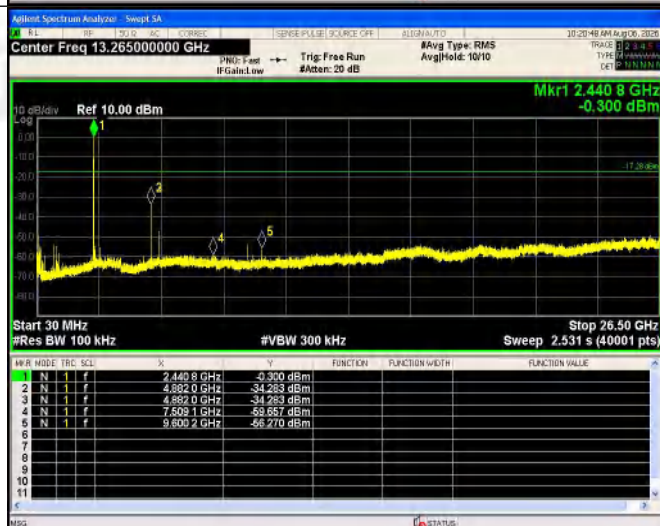

8DPSK /HCH

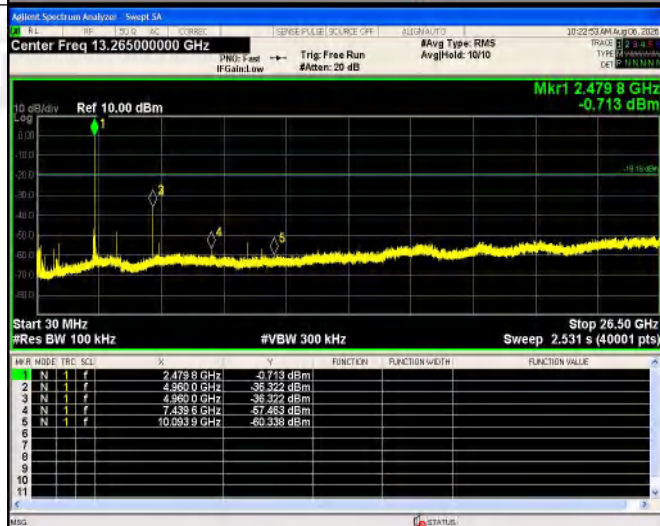

10. Antenna Requirement

10.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(b)(4)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

10.2. Antenna Connected Construction

The antenna is PCB antenna which permanently attached, and the best case gain of the antenna is 1.1dBi. It complies with the standard requirement.

11. TEST SETUP & EUT PHOTOGRAPH

Please see the attachment for details.

----- End of Report -----