

915MHz metal spring Antenna


Application: 915MHz ISM Band

Key Features:

Light weight and low profile


17.7mm(L) x 4.8mm(W) x Ø0.8mm

Omni-directional in azimuth

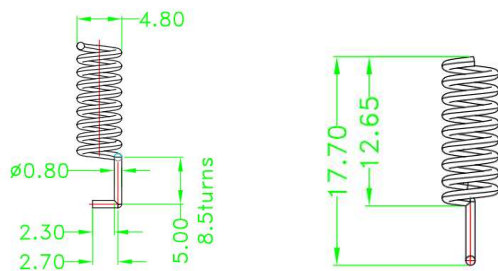

Return Loss

S11 FORWARD REFLECTION

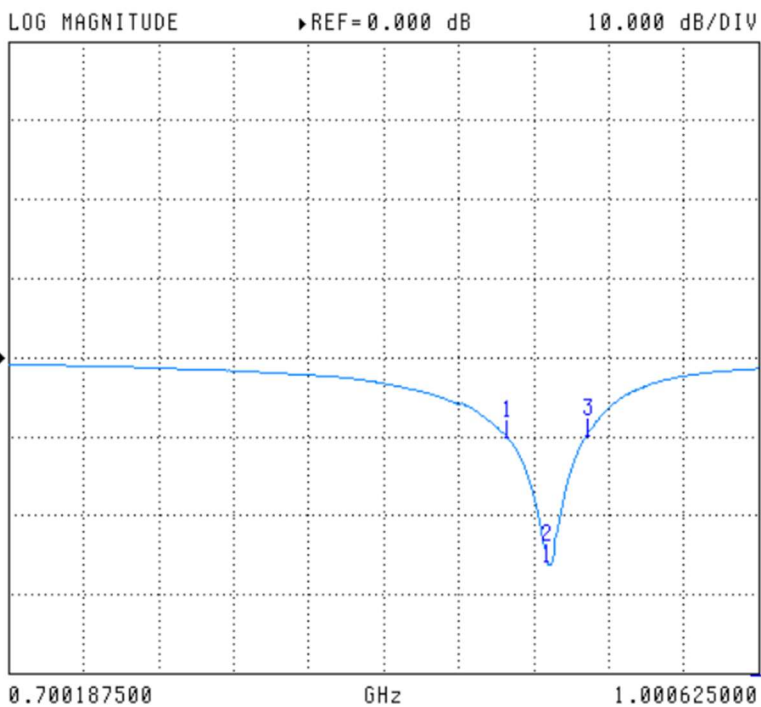

SELECT
READOUT MARKER

MARKER 1
0.900250000 GHz

▶ MARKER 2
0.916062500 GHz

MARKER 3
0.931875000 GHz

ΔREF MODE IS OFF


PRESS <ENTER>
TO SELECT

Quick Reference Data


Item	Specification
Center Frequency	915MHz
Bandwidth(typ.)	10MHz
Peak Gain(typ.)	0.5dBi
VSWR	2.0(max)
Polarization	Linear
Pattern	Omni-directional
Impedance	50 Ω

Radiation Pattern

H-Plane

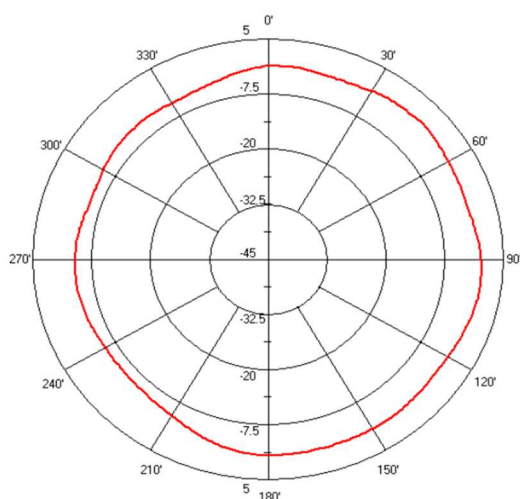

E-Plane

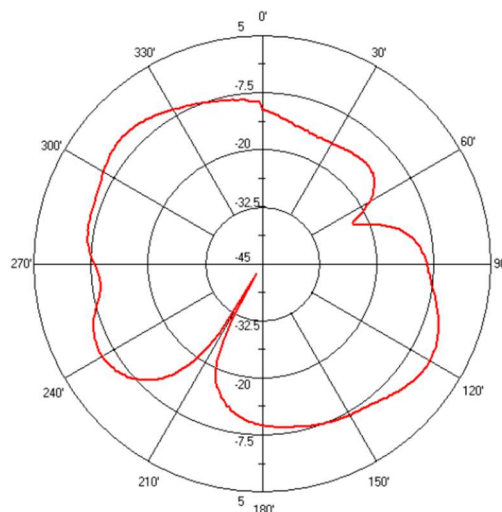

Manufacturers: SHENZHEN YUANTAI HARDWARE SPRING CO.,LTD

Address: The entire set of bungalows opposite Building 15 in the Second Industrial Zone of Huangmabu Community, Hangcheng Sub-district, Bao'an District, Shenzhen City.