


Product specification


Shenzhen Digital Cloud Technology Co.,LTD.
Room 2, Building 3, Xinkecheng Industrial Area, No. 51 Dabao Road, Bao'an District, Shenzhen City

Quick Reference Date



	Antenna module on the system board	
Frequency	2.45GHz*1	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-2.3 (Input pwr – loss pwr)	
Peak EIRP(dBm)	1.3	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	-2.3 (58.5%)	
Gain (dBi)	1.68 (Peak Gain XY-plane)	
Maximum Power (dBm)	1.3 (XY-plane)	
Minimum Power (dBm)	-4(XY-plane)	
Avg. Power (dBm)	-0.5(XY-plane)	
Max/Min Ratio (dB)	5.3(XY-plane)	
Max/Avg Ratio (dB)	1.8(XY-plane)	
Min/Avg Ratio (dB)	-3.5(XY-plane)	
Average Gain (dB)	-0.5 (Avg Gain XY-plane)	

Antenna Layout & module on the system board

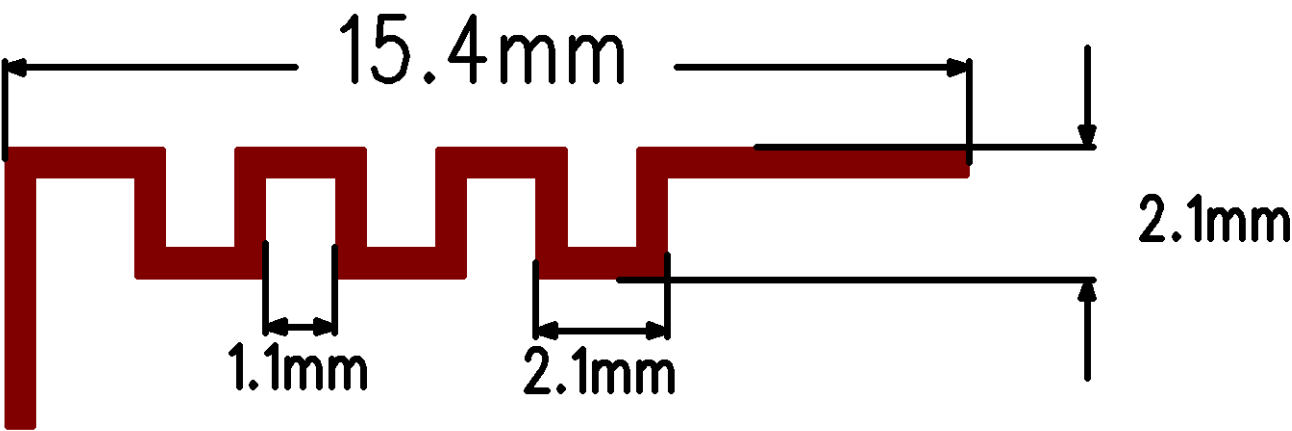


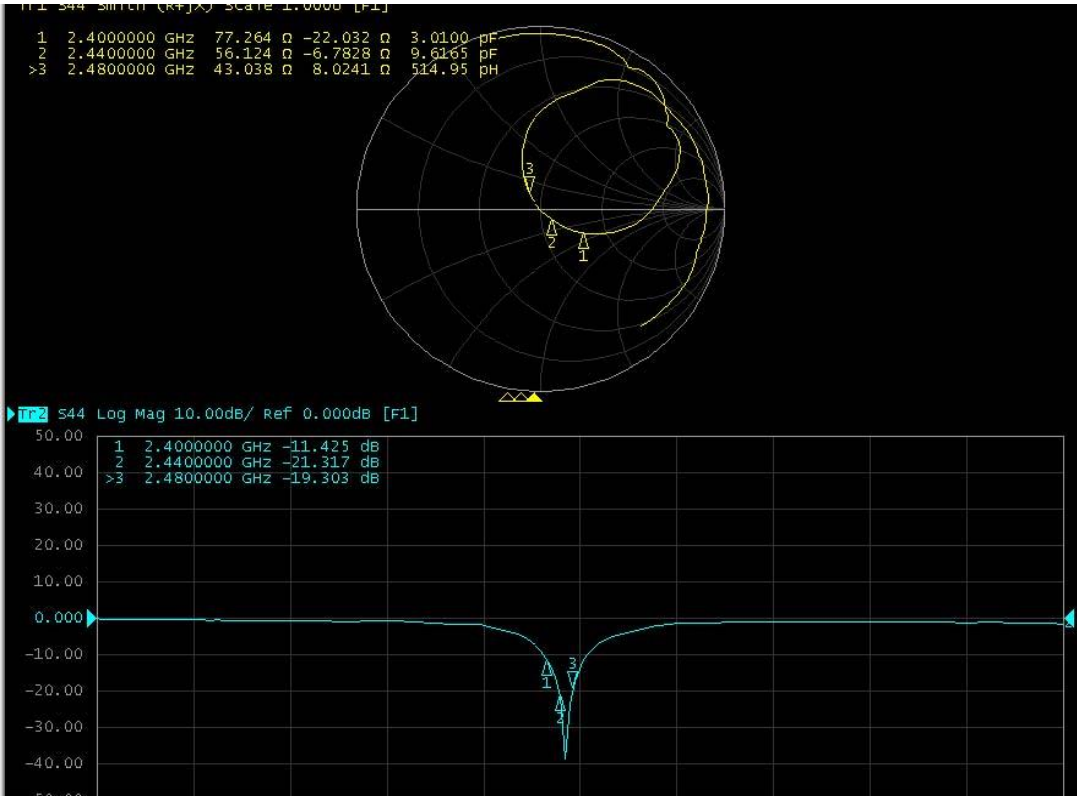




Return Loss

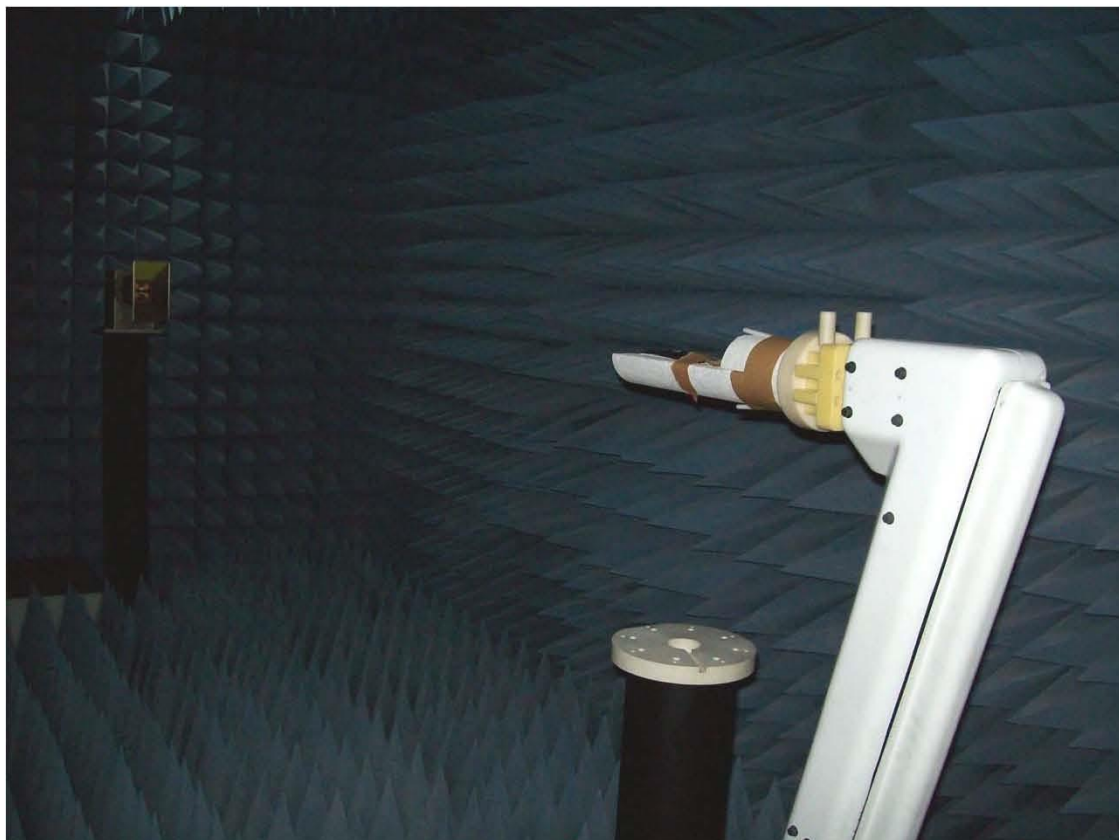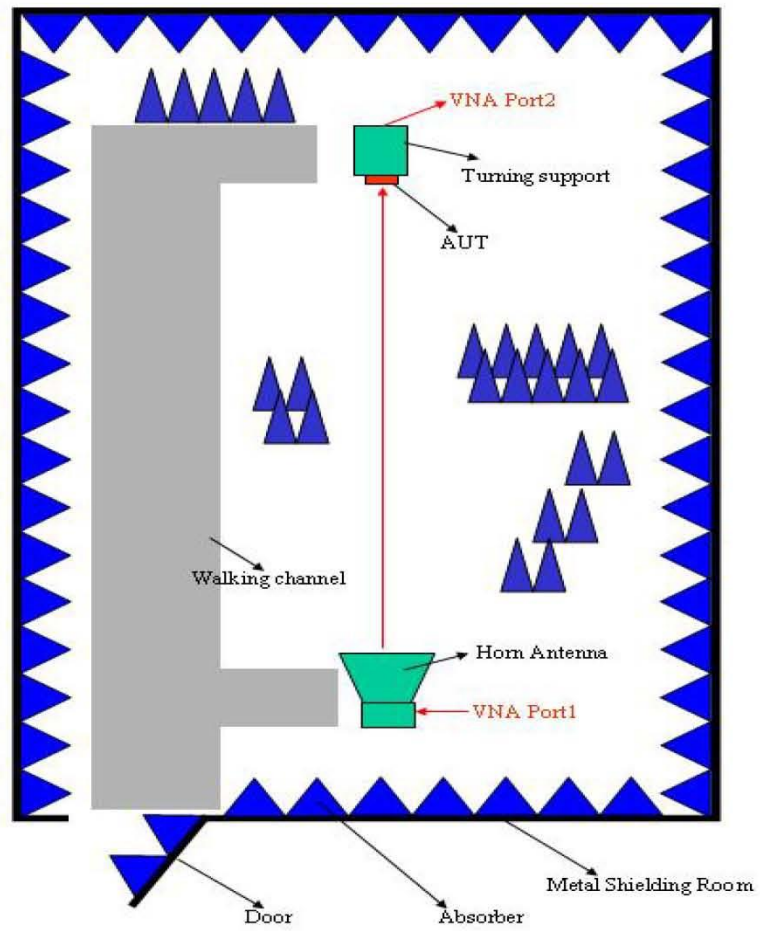

The Environment of Antenna Radiation Pattern

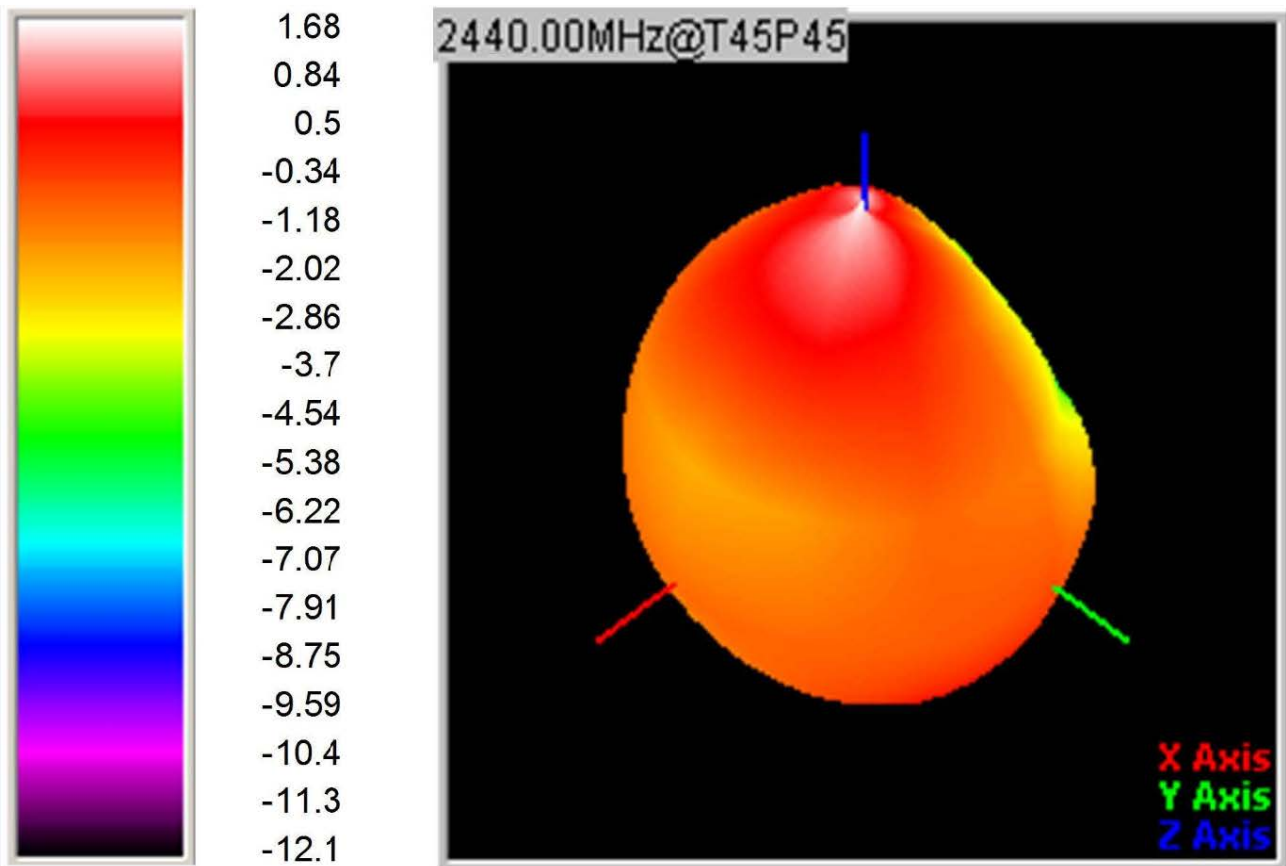

3D radiation pattern diagram

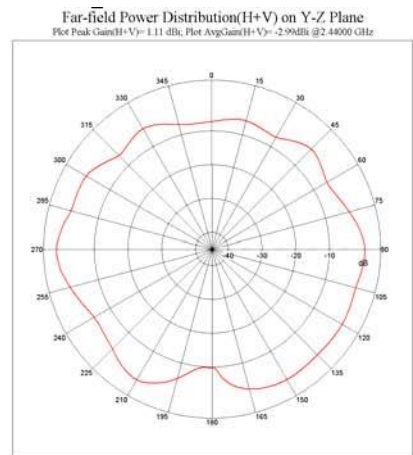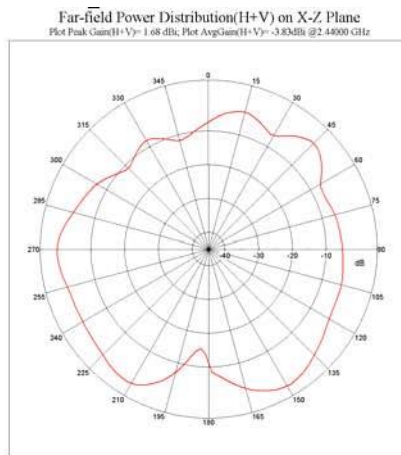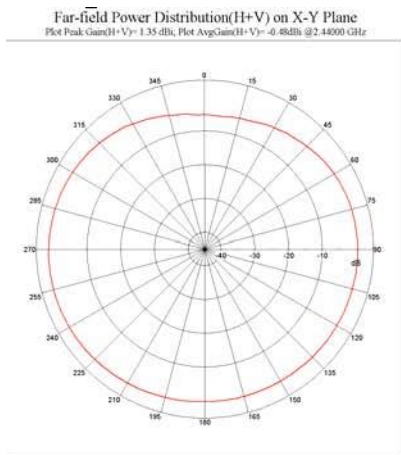

XY-plane XZ-plane YZ-plane