



Appendix Test Data for BLE (Conducted Measurement)

Product Name: Dual Band Two Way Radio

Trade Mark: TYTECH

Test Model: UVL-15W

FCC ID: 2BLTR-UVL15W

Environmental Conditions

Temperature:	23.5°C
Relative Humidity:	58%
ATM Pressure:	100.0 kPa
Test Engineer:	Allen Lai
Supervised by:	Max Zhang
NOTE	N/A

Appendix A: DTS Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	0.656	2401.676	2402.332	0.5	PASS
BLE_1M	Ant1	2440	0.700	2439.652	2440.352	0.5	PASS
BLE_1M	Ant1	2480	0.660	2479.672	2480.332	0.5	PASS
BLE_2M	Ant1	2402	1.224	2401.372	2402.596	0.5	PASS
BLE_2M	Ant1	2440	1.144	2439.444	2440.588	0.5	PASS
BLE_2M	Ant1	2480	1.352	2479.324	2480.676	0.5	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)





Test Graphs





BLE_1M-Ant1-2480-PASS



BLE_2M-Ant1-2402-PASS





BLE_2M-Ant1-2440-PASS



BLE_2M-Ant1-2480-PASS





Appendix B: Occupied Channel Bandwidth

Test Result

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	1.0344	2401.4918	2402.5262	---	---
BLE_1M	Ant1	2440	1.0285	2439.4916	2440.5201	---	---
BLE_1M	Ant1	2480	1.0263	2479.4951	2480.5214	---	---
BLE_2M	Ant1	2402	2.0763	2400.9711	2403.0474	---	---
BLE_2M	Ant1	2440	2.0692	2438.9785	2441.0477	---	---
BLE_2M	Ant1	2480	2.0699	2478.9747	2481.0446	---	---


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs



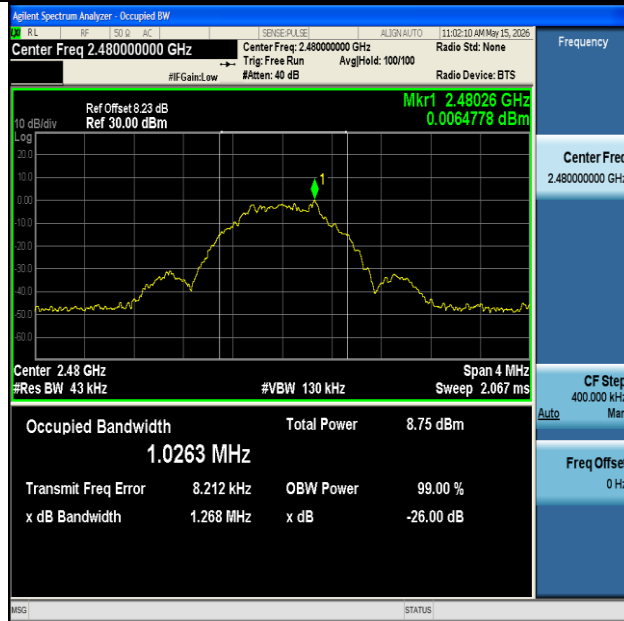

BLE_1M-Ant1-2480

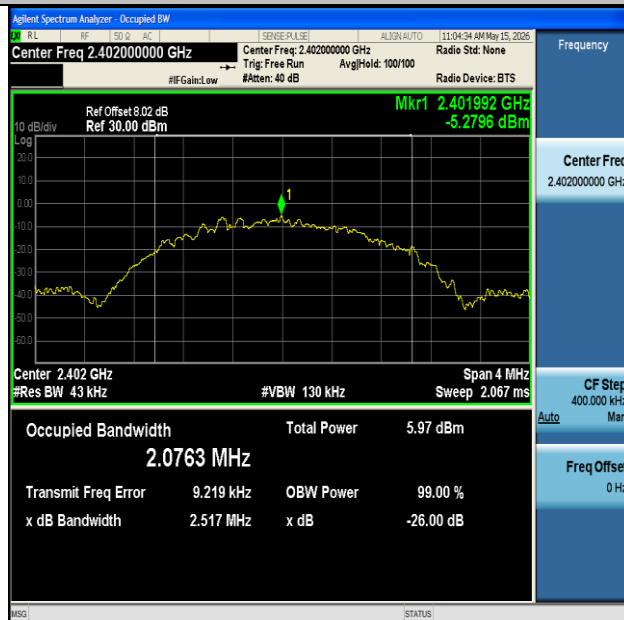

BLE_2M-Ant1-2402





BLE_2M-Ant1-2440



BLE_2M-Ant1-2480





Appendix C: Maximum peak conducted output power

Test Result Peak


Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
BLE_1M	Ant1	2402	0.21	≤30	PASS
BLE_1M	Ant1	2440	1.32	≤30	PASS
BLE_1M	Ant1	2480	1.99	≤30	PASS
BLE_2M	Ant1	2402	0.26	≤30	PASS
BLE_2M	Ant1	2440	1.49	≤30	PASS
BLE_2M	Ant1	2480	2.17	≤30	PASS

Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs Peak

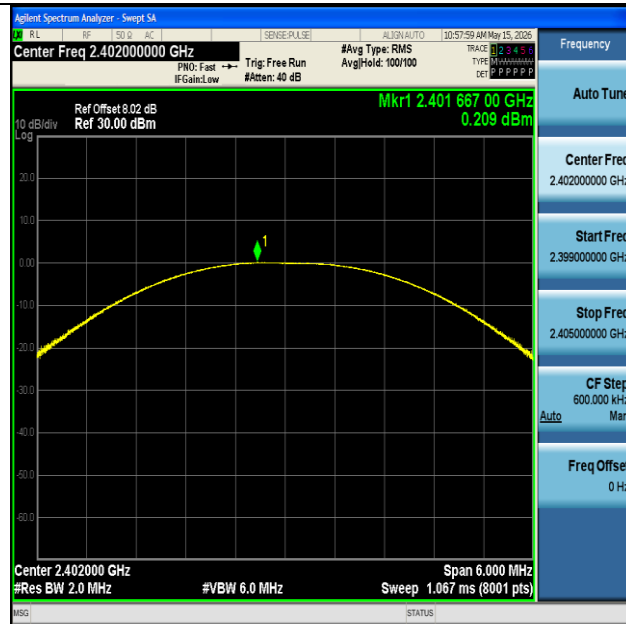


BLE_1M-Ant1-2402-PASS

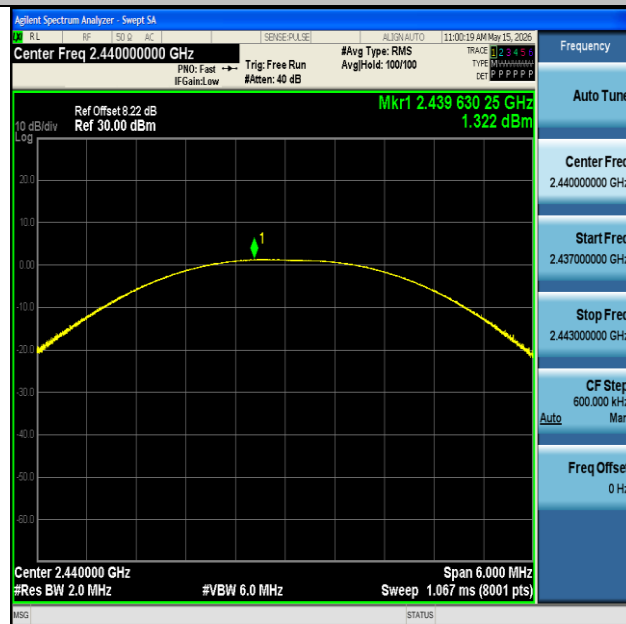


BLE_1M-Ant1-2440-PASS



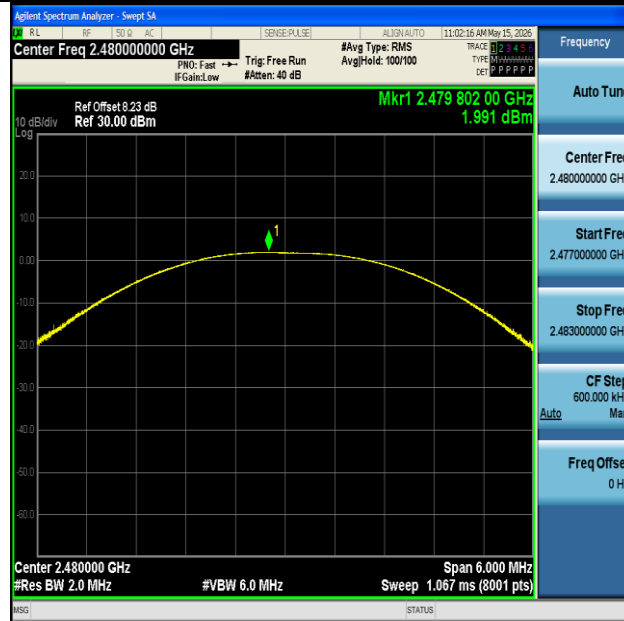


BLE_1M-Ant1-2480-PASS

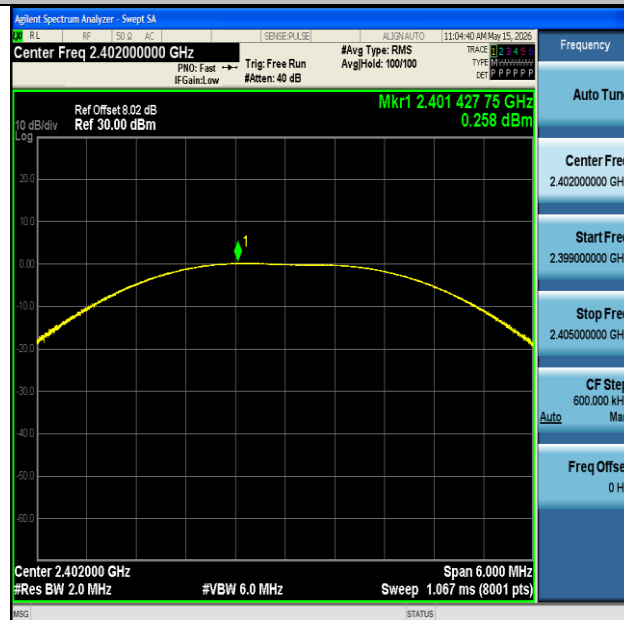


BLE_2M-Ant1-2402-PASS



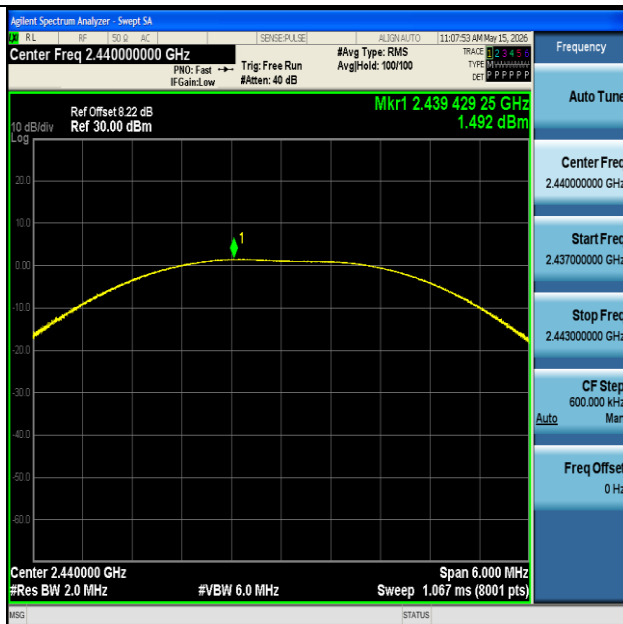

BLE_2M-Ant1-2440-PASS

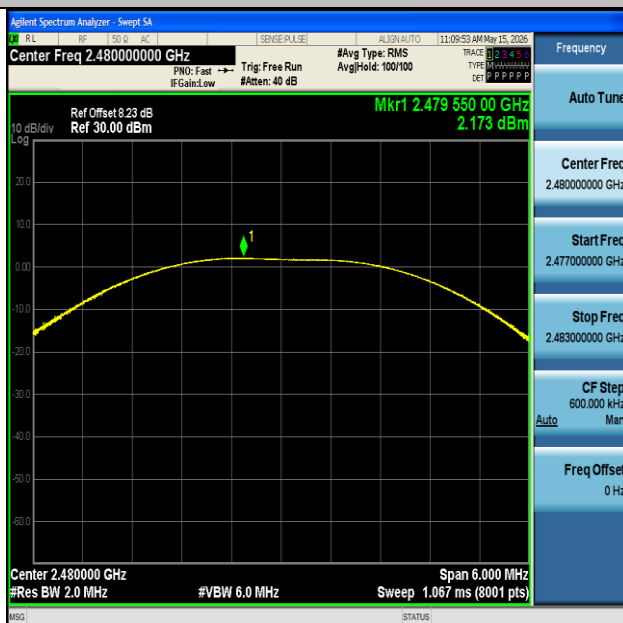

BLE_2M-Ant1-2480-PASS





Appendix D: Maximum peak power spectral density

Test Result


Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-16.10	≤8.00	PASS
BLE_1M	Ant1	2440	-15.09	≤8.00	PASS
BLE_1M	Ant1	2480	-14.22	≤8.00	PASS
BLE_2M	Ant1	2402	-19.46	≤8.00	PASS
BLE_2M	Ant1	2440	-18.23	≤8.00	PASS
BLE_2M	Ant1	2480	-17.41	≤8.00	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs

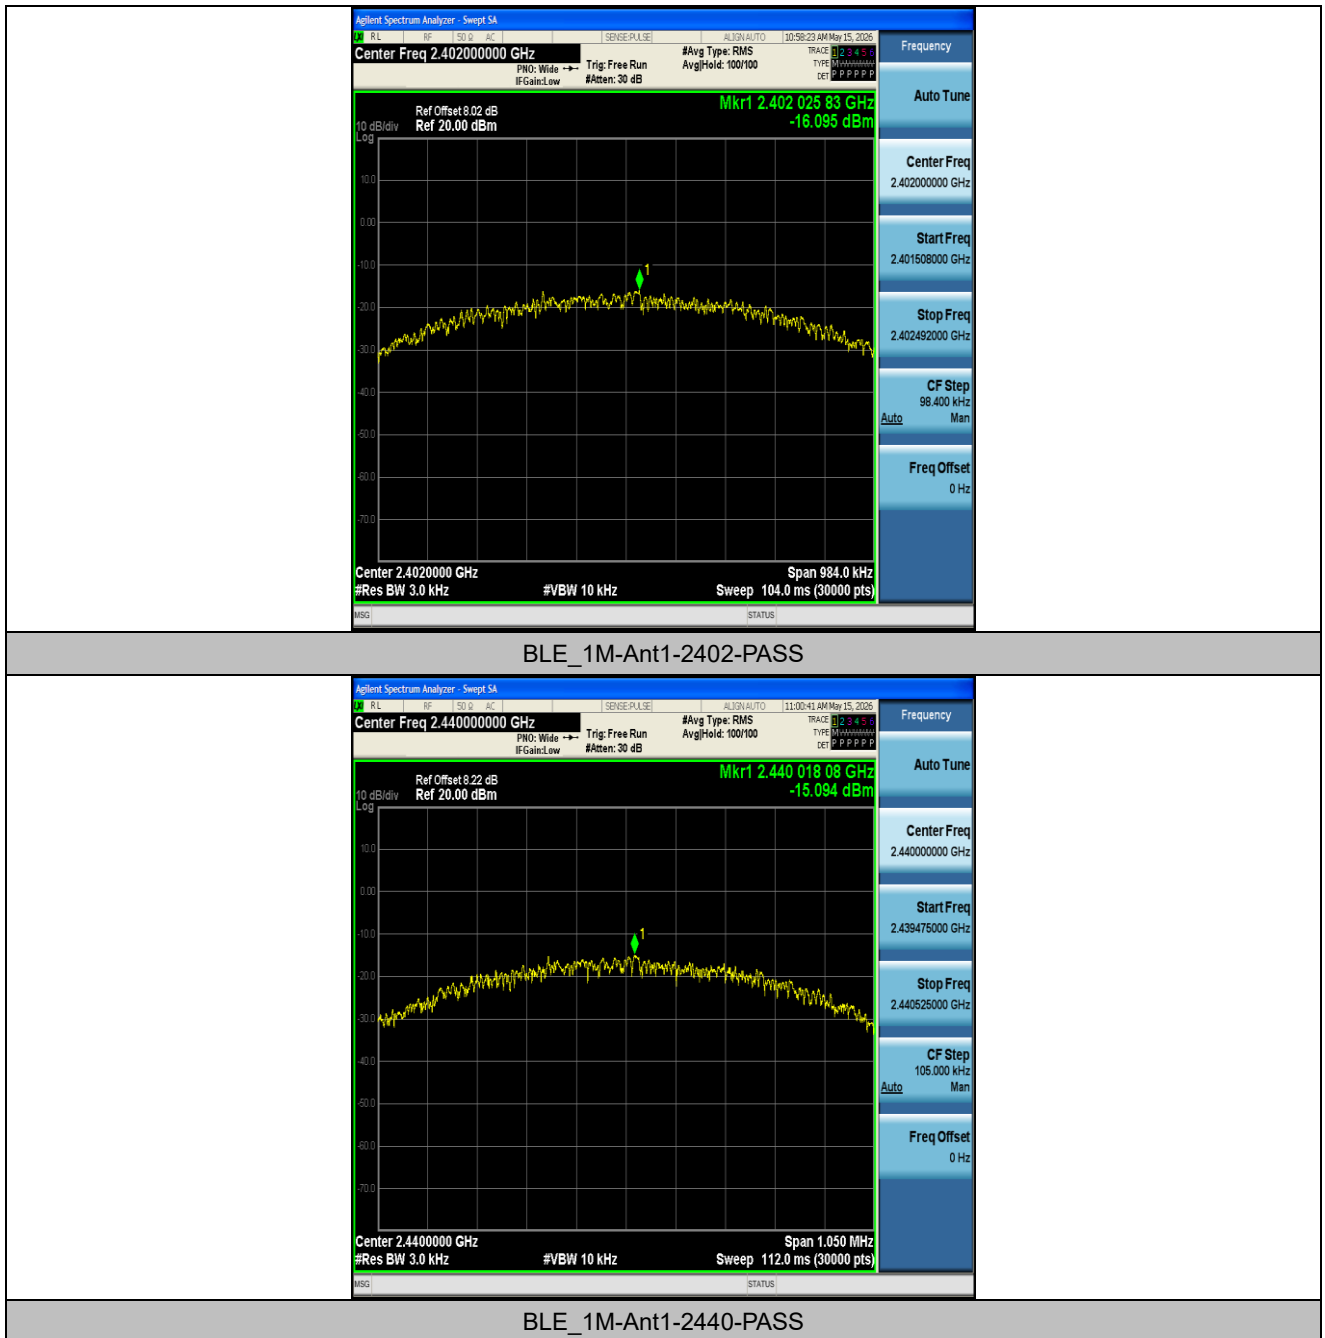

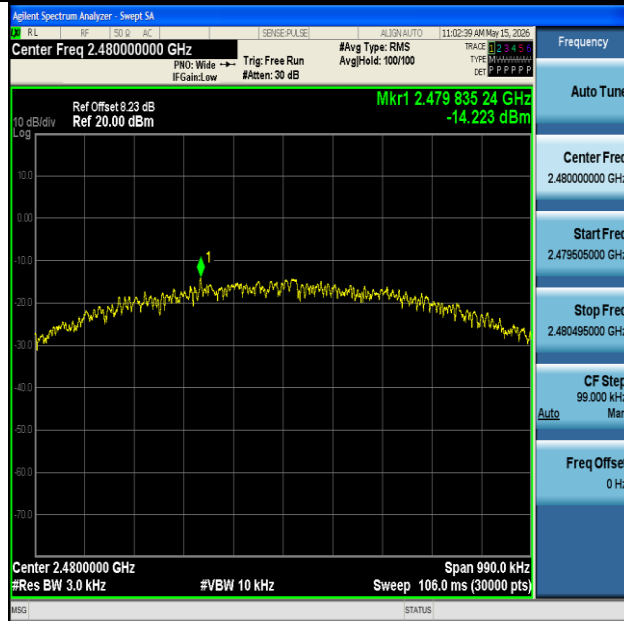


BLE_1M-Ant1-2480-PASS

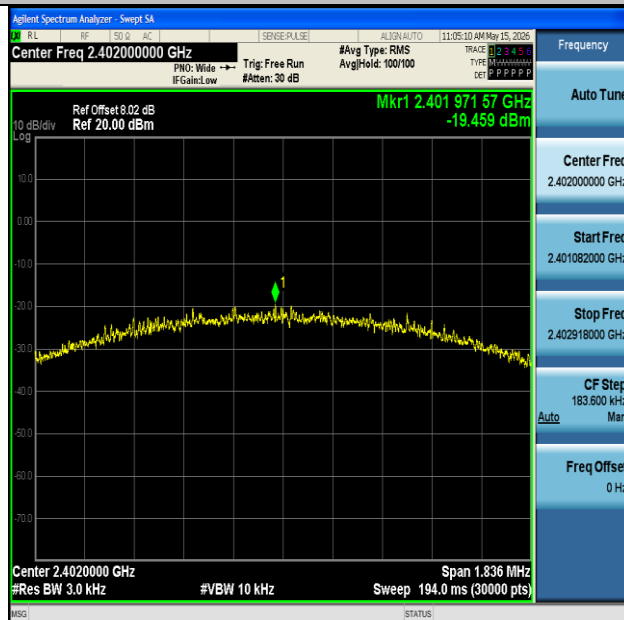


BLE_2M-Ant1-2402-PASS



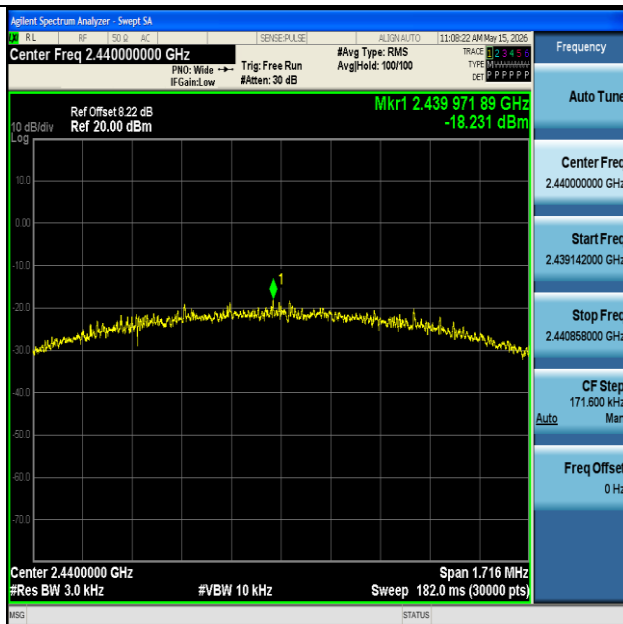

BLE_2M-Ant1-2440-PASS

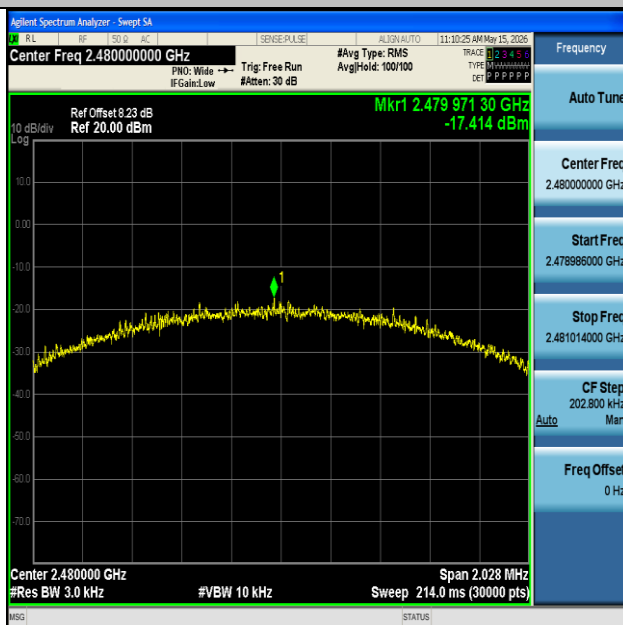

BLE_2M-Ant1-2480-PASS





Appendix E: Band edge measurements

Test Result


Test Mode	Antenna	Ch. Name	Frequency [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	Low	2402	-0.37	-37.23	≤-20.37	PASS
BLE_1M	Ant1	High	2480	0.89	-40.16	≤-19.11	PASS
BLE_2M	Ant1	Low	2402	-1.40	-33.93	≤-21.4	PASS
BLE_2M	Ant1	High	2480	0.43	-47.79	≤-19.57	PASS


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs

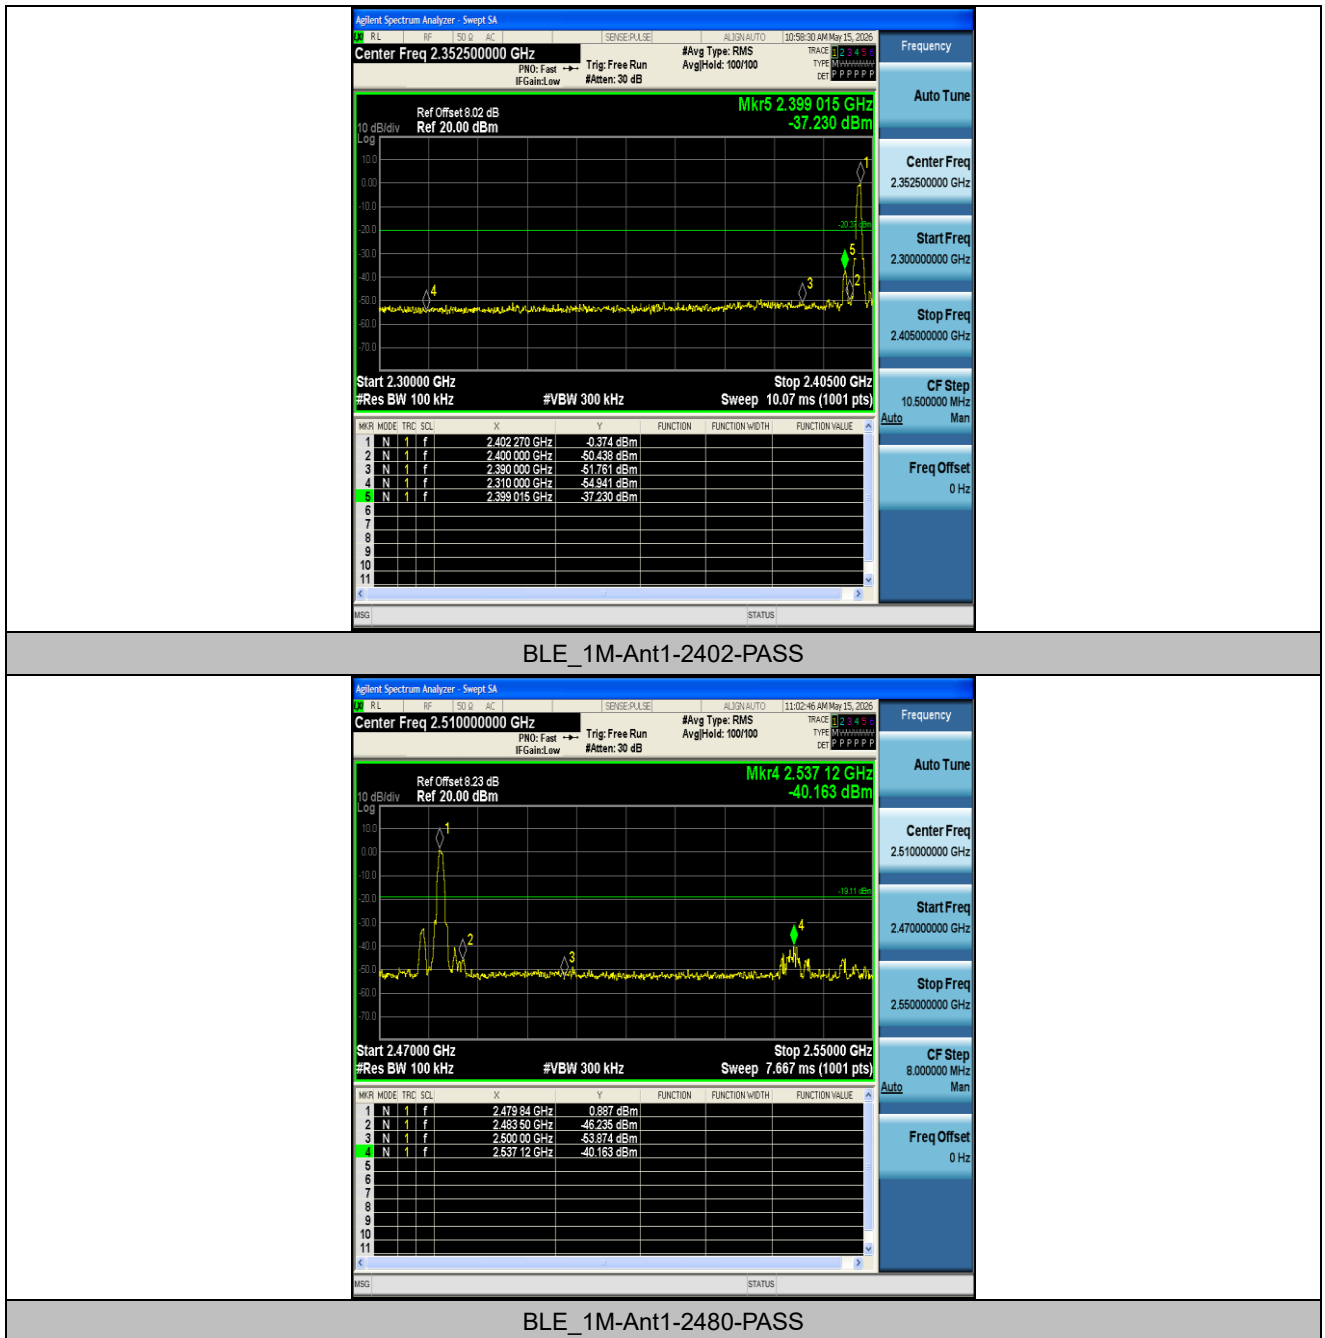

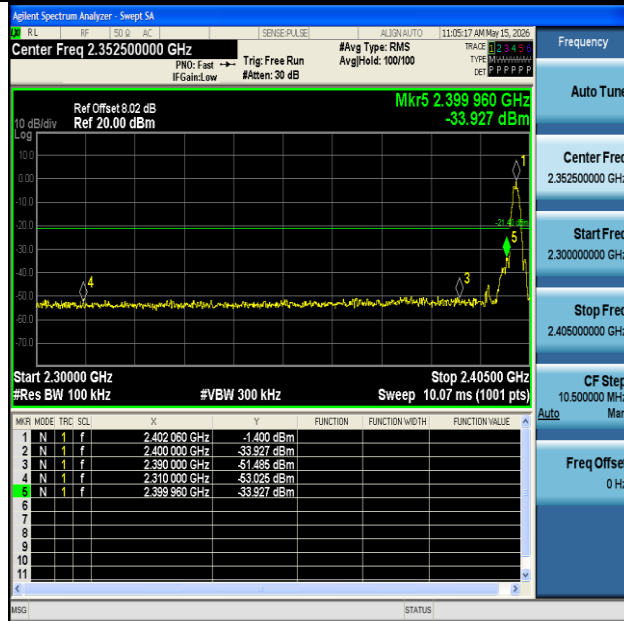

BLE_2M-Ant1-2402-PASS

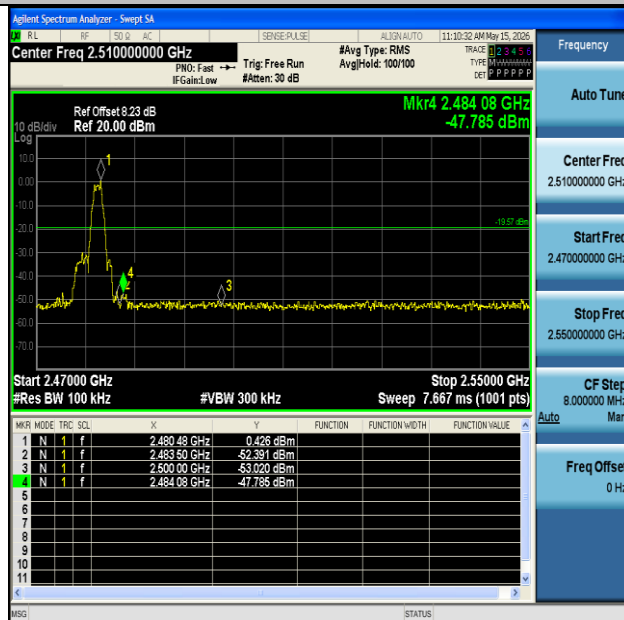

BLE_2M-Ant1-2480-PASS





Appendix F: Conducted Spurious Emission

Test Result

Test Mode	Antenna	Frequency [MHz]	Freq. Range [MHz]	Ref. Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	2402	0~Reference	-0.34	-0.34	---	PASS
BLE_1M	Ant1	2402	30~1000	-0.34	-63.55	≤-20.34	PASS
BLE_1M	Ant1	2402	1000~26500	-0.34	-38.89	≤-20.34	PASS
BLE_1M	Ant1	2440	0~Reference	0.84	0.84	---	PASS
BLE_1M	Ant1	2440	30~1000	0.84	-63.24	≤-19.16	PASS
BLE_1M	Ant1	2440	1000~26500	0.84	-38.58	≤-19.16	PASS
BLE_1M	Ant1	2480	0~Reference	1.46	1.46	---	PASS
BLE_1M	Ant1	2480	30~1000	1.46	-63.63	≤-18.54	PASS
BLE_1M	Ant1	2480	1000~26500	1.46	-37.02	≤-18.54	PASS
BLE_2M	Ant1	2402	0~Reference	-1.16	-1.16	---	PASS
BLE_2M	Ant1	2402	30~1000	-1.16	-64.32	≤-21.16	PASS
BLE_2M	Ant1	2402	1000~26500	-1.16	-37.72	≤-21.16	PASS
BLE_2M	Ant1	2440	0~Reference	-0.28	-0.28	---	PASS
BLE_2M	Ant1	2440	30~1000	-0.28	-62.85	≤-20.28	PASS
BLE_2M	Ant1	2440	1000~26500	-0.28	-38.77	≤-20.28	PASS
BLE_2M	Ant1	2480	0~Reference	0.92	0.92	---	PASS
BLE_2M	Ant1	2480	30~1000	0.92	-63.67	≤-19.08	PASS
BLE_2M	Ant1	2480	1000~26500	0.92	-38.58	≤-19.08	PASS


Note: offset(dB) in Reference test plots = cable loss(dB) + attenuator factor(dB); For spurious emissions plots from 30MHz to 26.5GHz, the cable loss and attenuator factors have been set in the 'Input Correction' of the Spectrum Analyzer during the test.






Test Graphs



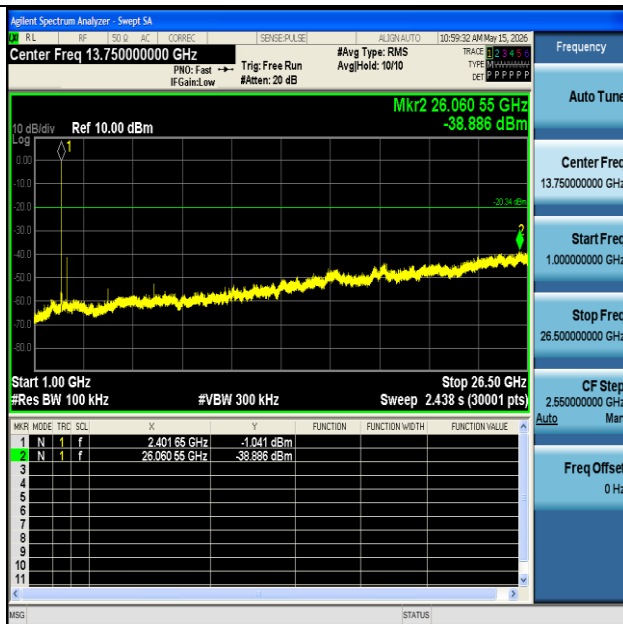


BLE_1M-Ant1-2402-1000~26500-PASS

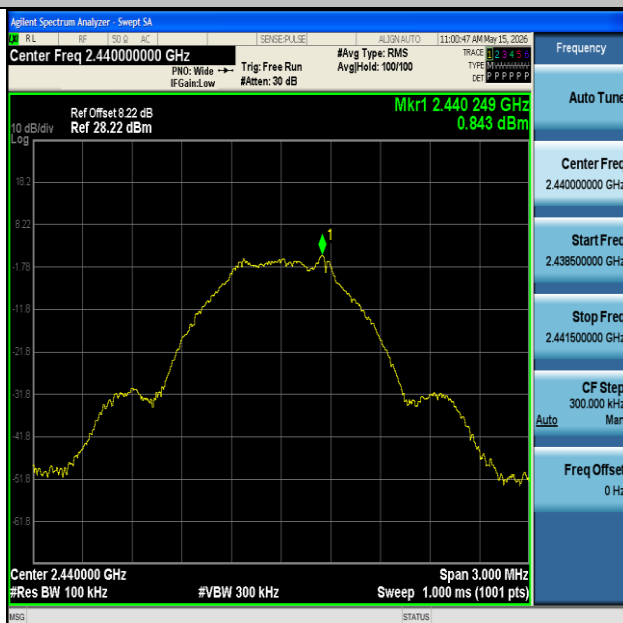


BLE_1M-Ant1-2440-0~Reference-PASS



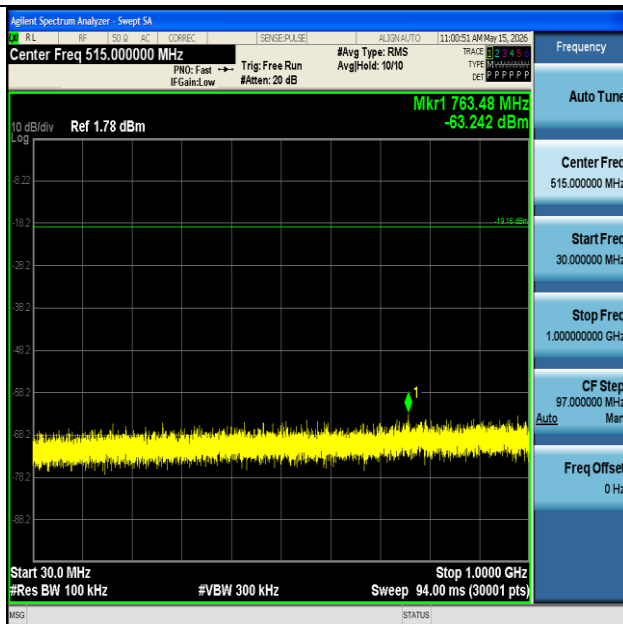

BLE_1M-Ant1-2440-30~1000-PASS

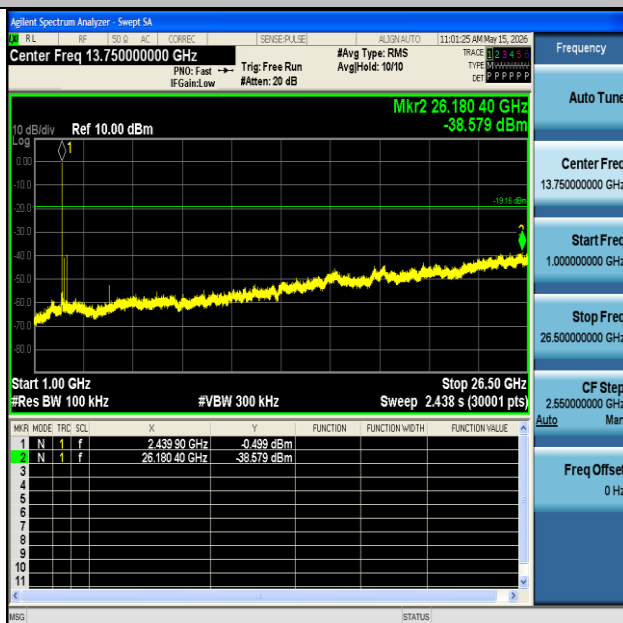


BLE_1M-Ant1-2440-1000~26500-PASS






BLE_1M-Ant1-2480-0~Reference-PASS

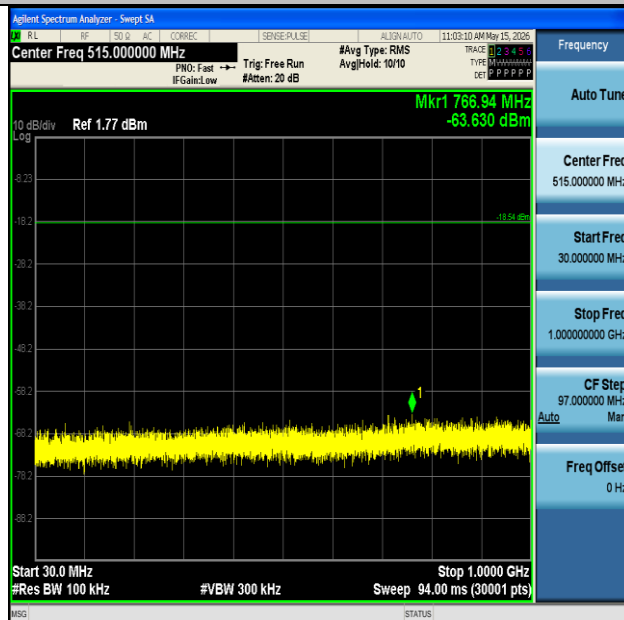

BLE_1M-Ant1-2480-30~1000-PASS



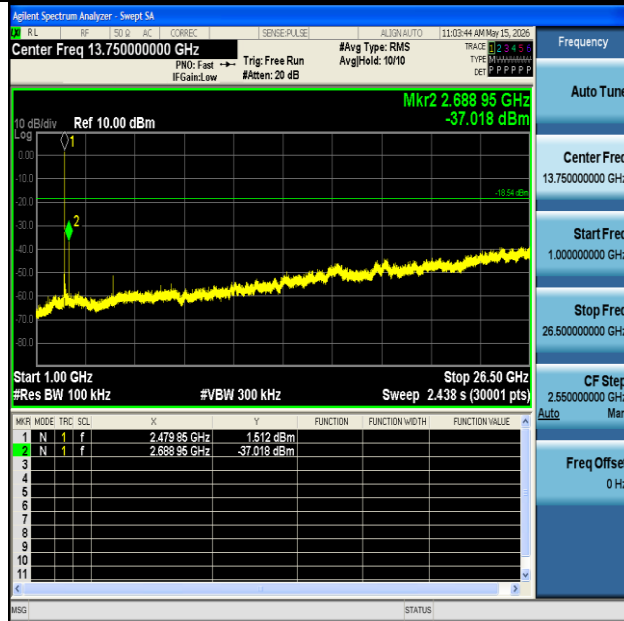


BLE_1M-Ant1-2480-1000~26500-PASS




BLE_2M-Ant1-2402-0~Reference-PASS



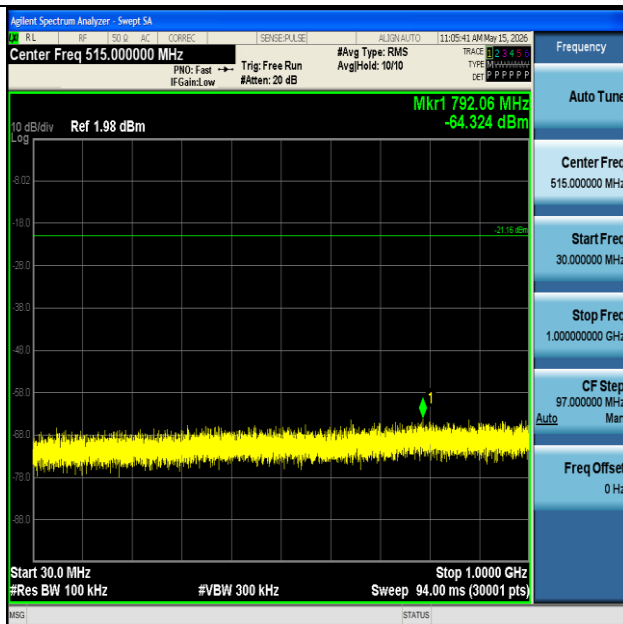


BLE_2M-Ant1-2402-30~1000-PASS

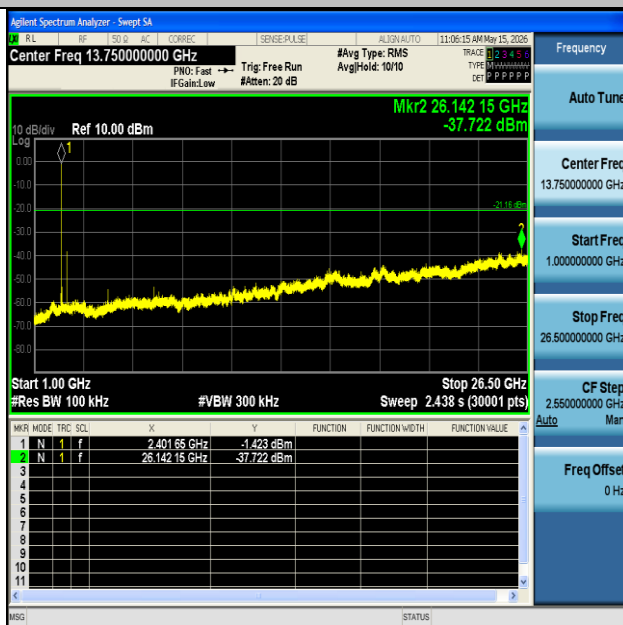


BLE_2M-Ant1-2402-1000~26500-PASS



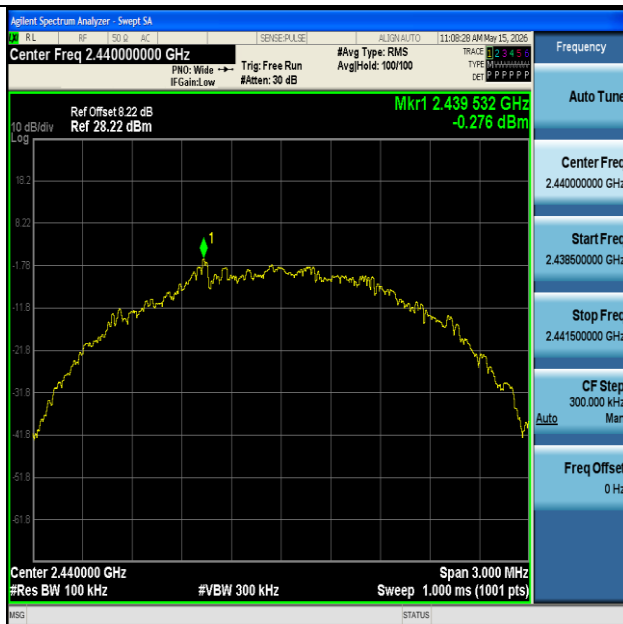


BLE_2M-Ant1-2440-0~Reference-PASS

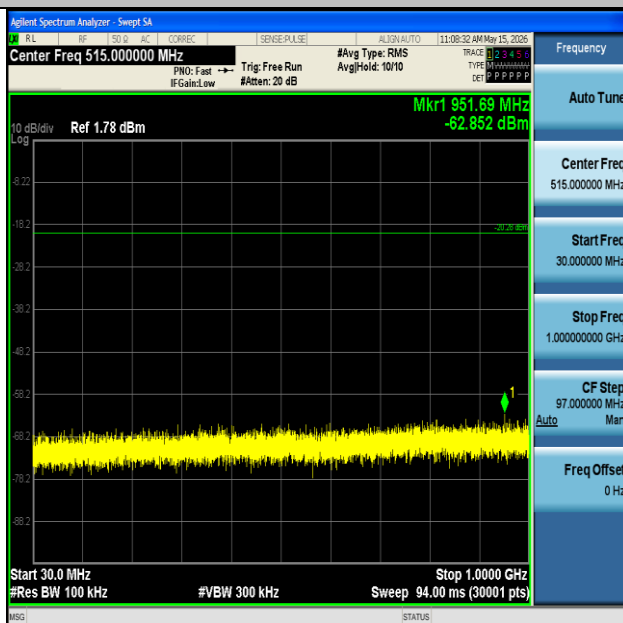


BLE_2M-Ant1-2440-30~1000-PASS



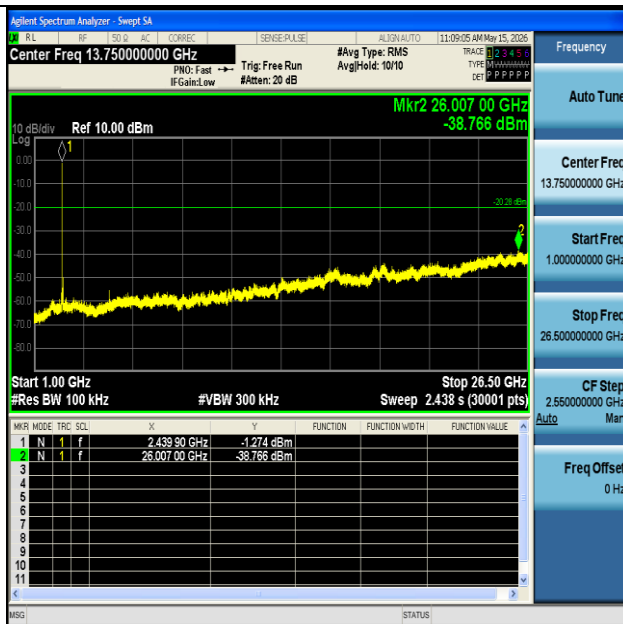


BLE_2M-Ant1-2440-1000~26500-PASS

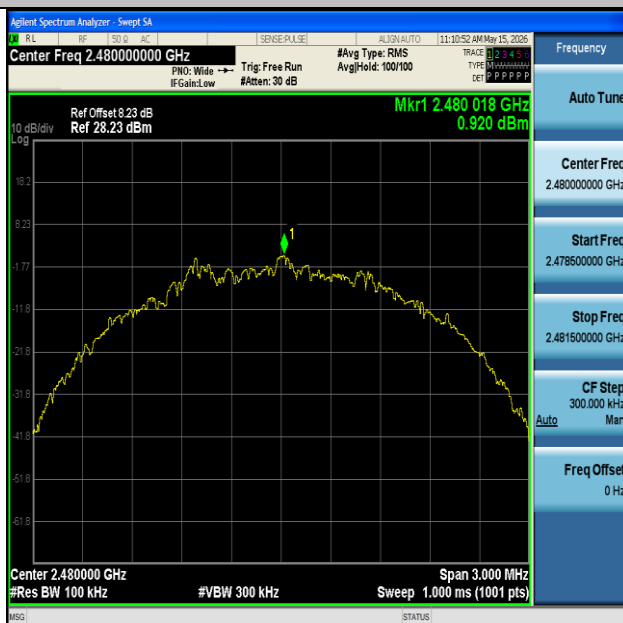


BLE_2M-Ant1-2480-0~Reference-PASS



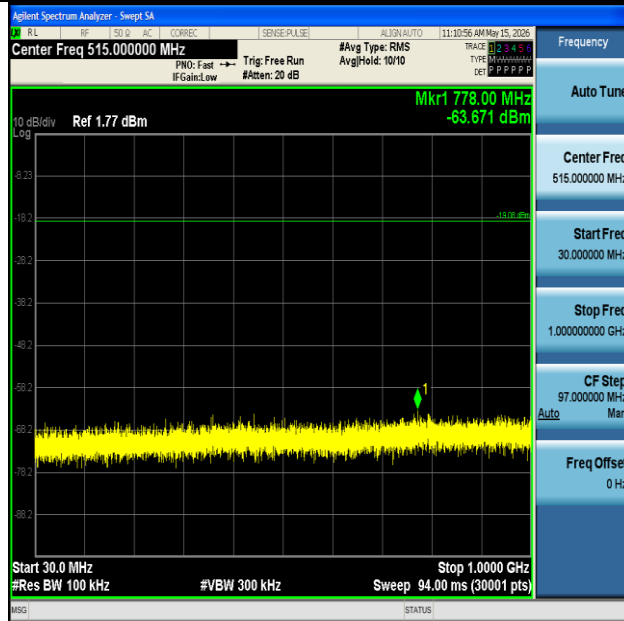

BLE_2M-Ant1-2480-30~1000-PASS

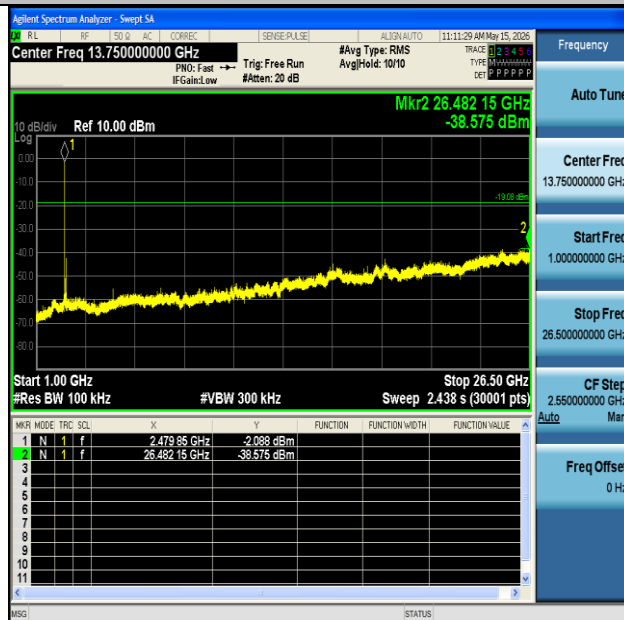

BLE_2M-Ant1-2480-1000~26500-PASS





Appendix G: Duty Cycle

Test Result

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor [dB]
BLE_1M	Ant1	2402	2.13	2.50	85.20	0.70
BLE_1M	Ant1	2440	2.13	2.50	85.20	0.70
BLE_1M	Ant1	2480	2.13	2.50	85.20	0.70
BLE_2M	Ant1	2402	1.08	2.50	43.20	3.65
BLE_2M	Ant1	2440	1.07	2.50	42.80	3.69
BLE_2M	Ant1	2480	1.08	2.50	43.20	3.65


Note: offset(dB) = cable loss(dB) + attenuator factor(dB)






Test Graphs



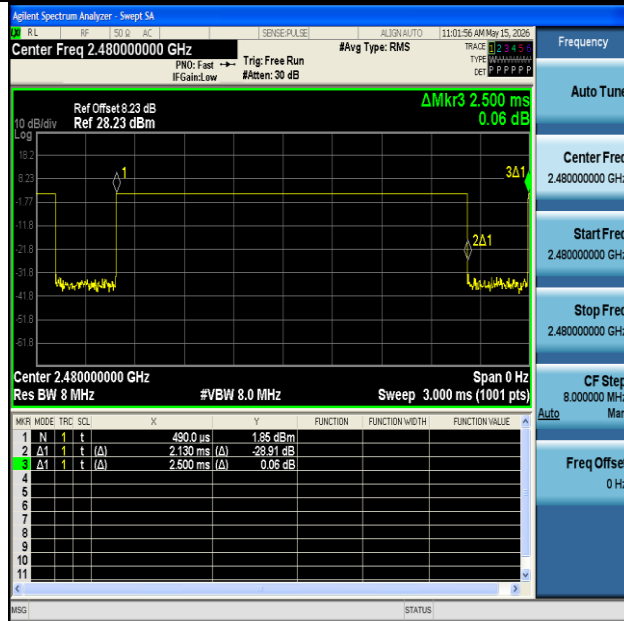


NTNV-BLE_1M-Ant1-2480

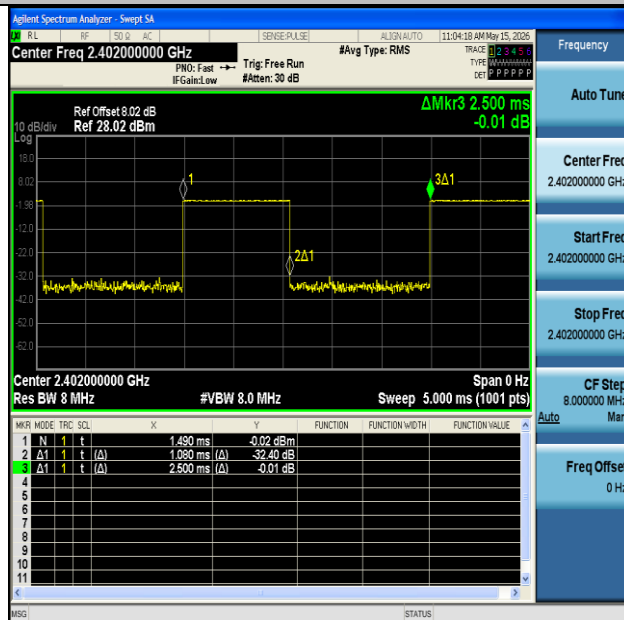


NTNV-BLE_2M-Ant1-2402



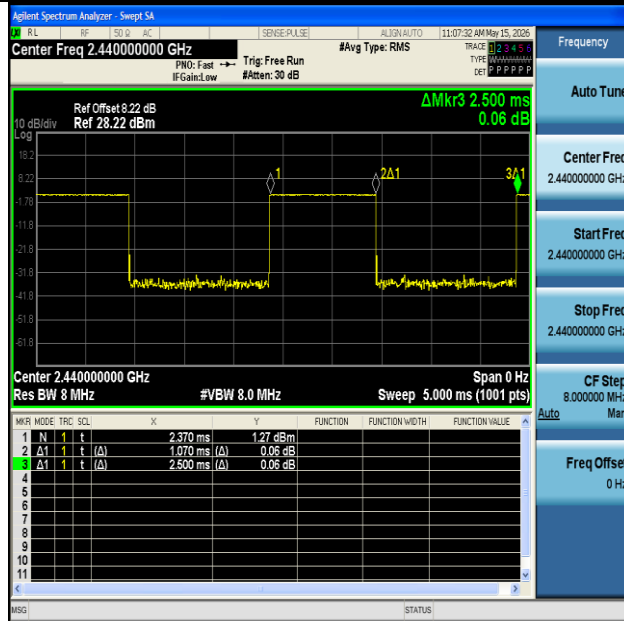

NTNV-BLE_2M-Ant1-2440

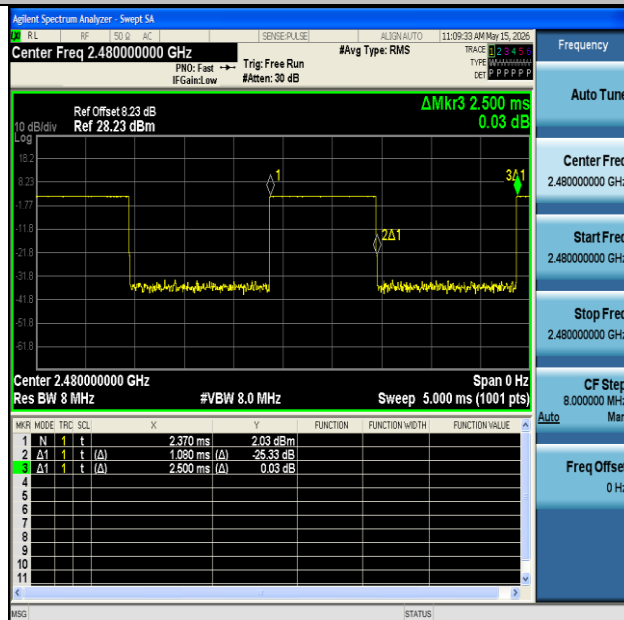

NTNV-BLE_2M-Ant1-2480

