

TEST REPORT

Product : Rugged Tablet
Trade mark : Emdoor
Model/Type reference : See Clause 3.2
Serial Number : N/A
Report Number : EED32R81404501
FCC ID : 2BLU4-M10N
Date of Issue : Sep. 17, 2025
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

Emdoor Information Co.,Ltd.

4th Floor, Block B, Haina Baichuan Headquarters Building, No. 6 Baoxing Road, Haibin Community, Xin'an Street, Bao'an District, Shenzhen, Guangdong China


Prepared by:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Park, Zone 70, Bao'an District, Shenzhen, Guangdong, China


TEL: +86-755-3368 3668**FAX: +86-755-3368 3385**

Compiled by:



Shifeng Wei

Reviewed by:



Frazer Li

Approved by:



Aaron Ma

Date:

Sep. 17, 2025

Check No.: 1518070825



1 Content

1 CONTENT	2
2 TEST SUMMARY	3
3 GENERAL INFORMATION	4
3.1 CLIENT INFORMATION	4
3.2 GENERAL DESCRIPTION OF EUT	4
3.3 TEST CONFIGURATION	5
3.4 TEST ENVIRONMENT	6
3.5 DESCRIPTION OF SUPPORT UNITS	6
3.6 TEST LOCATION	6
3.7 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	7
4 EQUIPMENT LIST	8
5 TEST RESULTS AND MEASUREMENT DATA	12
5.1 ANTENNA REQUIREMENT	12
5.2 CONDUCTED EMISSIONS	13
5.3 MAXIMUM CONDUCTED OUTPUT POWER	16
5.4 DTS BANDWIDTH	17
5.5 MAXIMUM POWER SPECTRAL DENSITY	18
5.6 BAND EDGE MEASUREMENTS AND CONDUCTED SPURIOUS EMISSION	19
5.7 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS	20
<i>Radiated Spurious Emission below 1GHz:</i>	23
<i>Radiated Spurious Emission above 1GHz:</i>	25
<i>Restricted bands:</i>	37
6 APPENDIX A	45
7 PHOTOGRAPHS OF TEST SETUP	46
8 PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	48

2 Test Summary

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	PASS
DTS Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	PASS
Band Edge Measurements	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	PASS
Radiated Spurious Emission & Restricted bands	47 CFR Part 15 Subpart C Section 15.205/15.209	PASS

Remark:

Model No.:M10N, EM-I18N, DCU110, MAS1015, EM-I16N, EM-I20J, EM-I61N, EM-I88N, EM-IS19N, EM-I10N, EM-I20N, EM-Q19, EM-I22N, EM-I10A, EM-Q225M, EM-Q225MP, EM-Q885M, EM-T11X, EM-T81X, EM-T89, EM-T19, A14,A15, EM-A15, EM-A14, EM-A15-ASH, EM-A14-AHP, EM-A14-PTL, M105Q, M805Q, EM-I14A, EM-I14M, EM-I80A, N14A, N14M, N15A, N15M, V10J, V80J, P15A, P21A, P10J , P15J, P21J, M10J, M80A, M80N, M10A, M20A, M20J, M14A, M14M, M82A, EM-Q89, EM-P18A, EM-P18J, EM-P18R, EM-P17A, EM-P17J, EM-P17R, EM-P21A, EM-P21J, EM-P21R

Only the model M10N was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being color of appearance, pack and model name.

3 General Information

3.1 Client Information

Applicant:	Emdoor Information Co.,Ltd.
Address of Applicant:	4th Floor, Block B, Haina Baichuan Headquarters Building, No. 6 Baoxing Road, Haibin Community, Xin'an Street, Bao'an District, Shenzhen, Guangdong China
Manufacturer:	Emdoor Information Co.,Ltd.
Address of Manufacturer:	4th Floor, Block B, Haina Baichuan Headquarters Building, No. 6 Baoxing Road, Haibin Community, Xin'an Street, Bao'an District, Shenzhen, Guangdong China
Factory:	Emdoor Information Co.,Ltd.
Address of Factory:	6th to 9th floors, Building 1, Emdoor Building, No. 8 Guangke 1st Road, Laokeng Community, Longtian Street, Pingshan District, Shenzhen City

3.2 General Description of EUT

Product Name:	Rugged Tablet	
Model No.:	M10N, EM-I18N, DCU110, MAS1015, EM-I16N, EM-I20J, EM-I61N, EM-I88N, EM-IS19N, EM-I10N, EM-I20N, EM-Q19, EM-I22N, EM-I10A, EM-Q225M, EM-Q225MP, EM-Q885M, EM-T11X, EM-T81X, EM-T89, EM-T19, A14,A15, EM-A15, EM-A14, EM-A15-ASH, EM-A14-AHP, EM-A14-PTL, M105Q, M805Q, EM-I14A, EM-I14M, EM-I80A, N14A, N14M, N15A, N15M, V10J, V80J, P15A, P21A, P10J , P15J, P21J, M10J, M80A, M80N, M10A, M20A, M20J, M14A, M14M, M82A, EM-Q89, EM-P18A, EM-P18J, EM-P18R, EM-P17A, EM-P17J, EM-P17R, EM-P21A, EM-P21J, EM-P21R	
Test Model No.:	M10N	
Trade mark:	N/A	
Product Type:	☐ Mobile ☒ Portable ☐ Fix Location	
Operation Frequency:	2402MHz~2480MHz	
Modulation Type:	GFSK	
Transfer Rate:	☒ 1Mbps ☒ 2Mbps	
Number of Channel:	40	
Antenna Type:	FPC antenna	
Antenna Gain:	ANT1(AUX): 1.84dBi ANT2(MAIN): 2.10dBi	
Power Supply:	Adapter:	Model: WTD48-1204000-G Input: 100 ~240V, 50/60Hz, 1.6A(max) Output: 12V, 4A
Test Voltage:	DC 12V	
Sample Received Date:	Aug. 16, 2025	
Sample tested Date:	Aug. 16, 2025 to Sep. 02, 2025	

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency(MHz)
The lowest channel (CH0)	2402
The middle channel (CH19)	2440
The highest channel (CH39)	2480

3.3 Test Configuration

EUT Test Software Settings:				
Test Software:		DRTU APP		
EUT Power Grade:		Default (Power level is built-in set parameters and cannot be changed and selected)		
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.				
Test Mode	Modulation	Rate	Channel	Frequency(MHz)
Mode a	GFSK	1Mbps	CH0	2402
Mode b	GFSK	1Mbps	CH19	2440
Mode c	GFSK	1Mbps	CH39	2480
Mode d	GFSK	2Mbps	CH0	2402
Mode e	GFSK	2Mbps	CH19	2440
Mode f	GFSK	2Mbps	CH39	2480

3.4 Test Environment

Operating Environment:	
Radiated Spurious Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
Conducted Emissions:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar
RF Conducted:	
Temperature:	22~25.0 °C
Humidity:	50~55 % RH
Atmospheric Pressure:	1010mbar

3.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

3.6 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd
Hongwei Industrial Park, Zone 70, Bao'an District, Shenzhen, Guangdong, China
Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385
No tests were sub-contracted.
Designation Number: CN1164
Test Firm Registration Number: 260439

3.7 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-40GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.3dB (30MHz-1GHz)
		4.5dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz-150kHz)
		3.1dB (150kHz-30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

4 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	12-05-2024	12-04-2025
Signal Generator	Keysight	N5182B	MY53051549	11-30-2024	11-29-2025
DC Power	Keysight	E3642A	MY56376072	11-30-2024	11-29-2025
Communication test set	R&S	CMW500	169004	03-03-2025	03-02-2026
RF control unit(power unit)	JS Tonscend	JS0806-2	22G8060592	07-20-2025	07-19-2026
Wi-Fi 7GHz Band Extender	JS Tonscend	TS-WF7U2	2206200002	05-12-2025	05-11-2026
High-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ20150611879	11-30-2024	11-29-2025
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	05-26-2025	05-25-2026
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	V3.3.20	---	---
Spectrum Analyzer	R&S	FSV3044	101509	02-14-2025	02-13-2026

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-08-2025	04-07-2026
Temperature/ Humidity Indicator	Defu	TH128	/	03-31-2025	03-30-2026
LISN	R&S	ENV216	100098	09-19-2024	09-18-2025
Barometer	changchun	DYM3	1188	---	---
Test software	Fara	EZ-EMC	EMC-CON 3A1.1	---	---
Capacitive voltage probe	Schwarzbeck	CVP 9222C	00124	06-07-2025	06-06-2026
ISN	TESEQ	ISN T800	30297	12-05-2024	12-04-2025

3M Semi-anechoic Chamber (2)- Radiated disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	01/13/2024	01/12/2027
Receiver	R&S	ESC17	100938-003	09/07/2024 09/03/2025	09/06/2025 09/02/2026
Spectrum Analyzer	R&S	FSV40	101200	08/11/2025	08/10/2026
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-618	05/14/2025	05/13/2026
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04/07/2025	04/06/2026
Microwave Preamplifier	Tonscend	EMC051845SE	980380	12/05/2024	12/04/2025
Horn Antenna	A.H.SYSTEMS	SAS-574	374	07/02/2023	07/01/2026
Horn Antenna	ETS-LINGREN	BBHA 9120D	9120D-1869	04/07/2025	04/06/2026
Preamplifier	Agilent	11909A	12-1	03/03/2025	03/02/2026
Preamplifier	CD	PAP-1840-60	6041.6042	05/26/2025	05/25/2026
Test software	Fara	EZ-EMC	EMEC-3A1-Pre	---	---
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---


3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Fully Anechoic Chamber	TDK	FAC-3	---	01-09-2024	01-08-2027
Receiver	Keysight	N9038A	MY57290136	01-04-2025	01-03-2026
Spectrum Analyzer	Keysight	N9020B	MY57111112	01-14-2025	01-13-2026
Spectrum Analyzer	Keysight	N9030B	MY57140871	01-14-2025	01-13-2026
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-12-2025	04-11-2026
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-12-2025	04-11-2026
Horn Antenna	ETS-LINDGREN	3117	57407	06-29-2025	06-28-2026
Preamplifier	EMCI	EMC001330	980563	03-03-2025	03-02-2026
Preamplifier	Tonscend	TAP-011858	AP21B806112	07-07-2025	07-06-2026
Preamplifier	Tonscend	EMC051845SE	980380	12-05-2024	12-04-2025
Communication test set	R&S	CMW500	102898	01-04-2025	01-03-2026
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	03-31-2025	03-30-2026
RSE Automatic test software	JS Tonscend	JS36-RSE	V4.0.0.0	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	Please see Internal photos
ANT1(AUX): The antenna is PIFA antenna. The best case gain of the antenna is 1.84dBi. ANT2(MAIN):The antenna is PIFA antenna. The best case gain of the antenna is 2.10dBi.	

5.2 Conducted Emissions

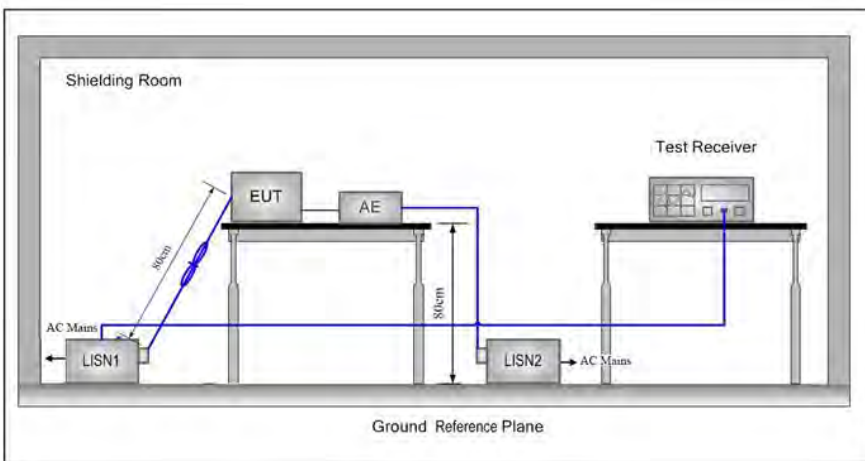
Test Requirement:	47 CFR Part 15C Section 15.207																
Test Method:	ANSI C63.10: 2013																
Test Frequency Range:	150kHz to 30MHz																
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto																
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * Decreases with the logarithm of the frequency.			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
Test Setup:																	
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.																
Test Mode:	All modes were tested, only the worst case mode a was recorded in the report.																

Test Results:

Pass

Measurement Data

Live line:

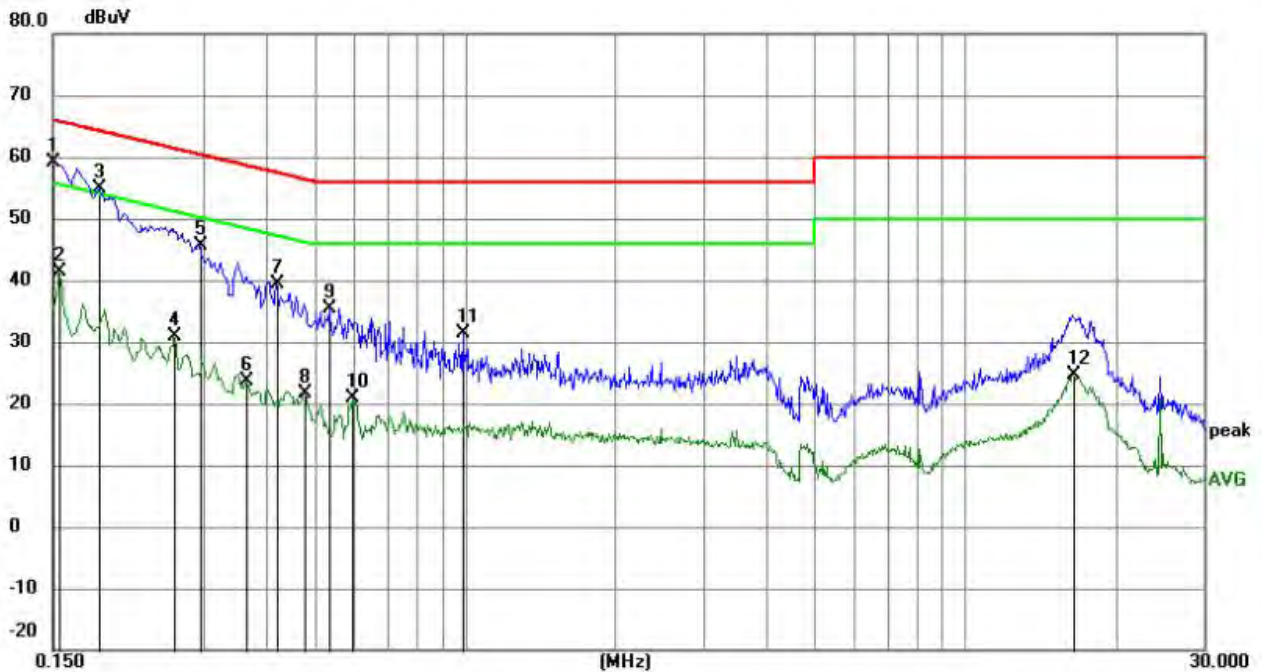


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	48.89	10.28	59.17	66.00	-6.83	QP	
2		0.1545	31.22	10.28	41.50	55.75	-14.25	AVG	
3		0.1860	44.60	10.23	54.83	64.21	-9.38	QP	
4		0.2625	20.74	10.16	30.90	51.35	-20.45	AVG	
5		0.2940	35.57	10.13	45.70	60.41	-14.71	QP	
6		0.3660	13.61	10.10	23.71	48.59	-24.88	AVG	
7		0.4200	29.33	10.09	39.42	57.45	-18.03	QP	
8		0.4785	11.47	10.08	21.55	46.37	-24.82	AVG	
9		0.5370	25.26	10.09	35.35	56.00	-20.65	QP	
10		0.5955	10.71	10.10	20.81	46.00	-25.19	AVG	
11		0.9915	21.12	10.18	31.30	56.00	-24.70	QP	
12		16.4805	14.84	9.84	24.68	50.00	-25.32	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

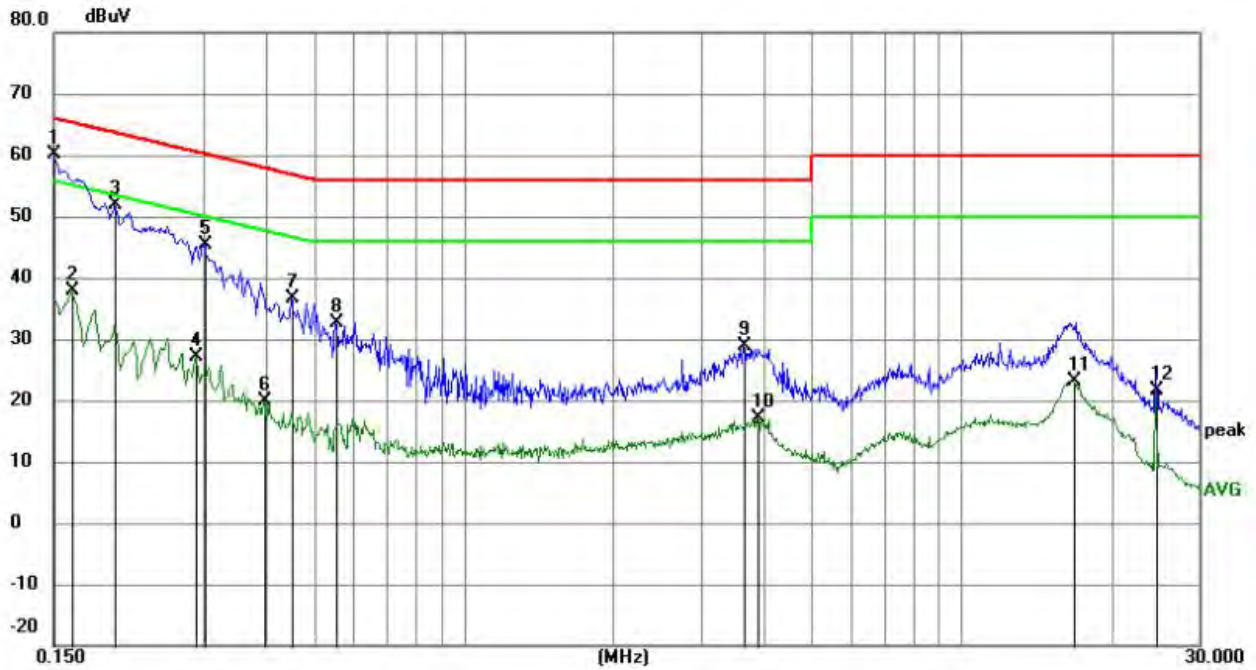


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1500	49.95	10.28	60.23	66.00	-5.77	QP	
2		0.1635	27.65	10.26	37.91	55.28	-17.37	AVG	
3		0.1995	41.74	10.21	51.95	63.63	-11.68	QP	
4		0.2895	17.06	10.14	27.20	50.54	-23.34	AVG	
5		0.3030	35.22	10.13	45.35	60.16	-14.81	QP	
6		0.3975	9.82	10.09	19.91	47.91	-28.00	AVG	
7		0.4515	26.45	10.08	36.53	56.85	-20.32	QP	
8		0.5550	22.57	10.09	32.66	56.00	-23.34	QP	
9		3.6600	18.89	10.11	29.00	56.00	-27.00	QP	
10		3.8895	6.99	10.10	17.09	46.00	-28.91	AVG	
11		16.7820	13.36	9.84	23.20	50.00	-26.80	AVG	
12		24.5760	11.75	9.81	21.56	50.00	-28.44	AVG	


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


5.3 Maximum Conducted Output Power

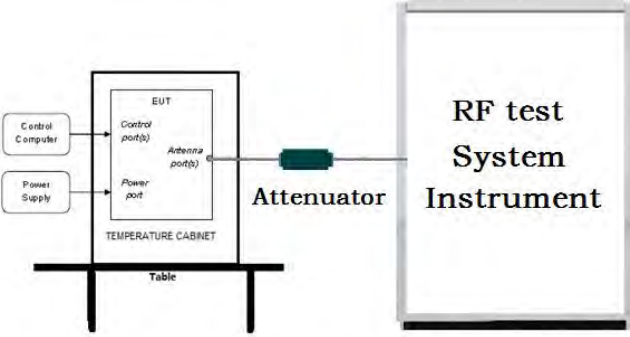Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10 2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set the RBW $\geq$ DTS bandwidth. b) Set VBW $\geq 3 \times$ RBW. c) Set span $\geq 3 \times$ RBW d) Sweep time = auto couple. e) Detector = peak. f) Trace mode = max hold. g) Allow trace to fully stabilize. h) Use peak marker function to determine the peak amplitude level.
Limit:	30dBm
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix A


5.4 DTS Bandwidth

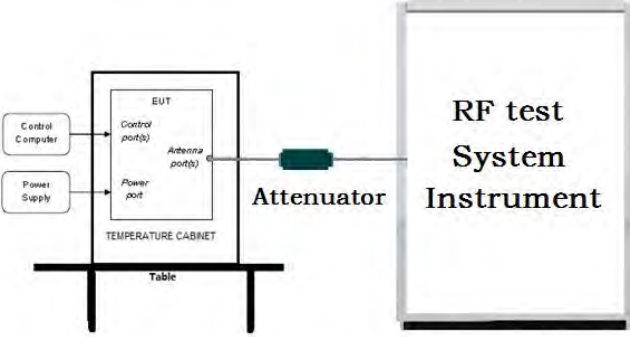Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10 2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set RBW = 100 kHz. b) Set the VBW $\geq [3 \times \text{RBW}]$. c) Detector = peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
Limit:	$\geq 500 \text{ kHz}$
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix A

5.5 Maximum Power Spectral Density



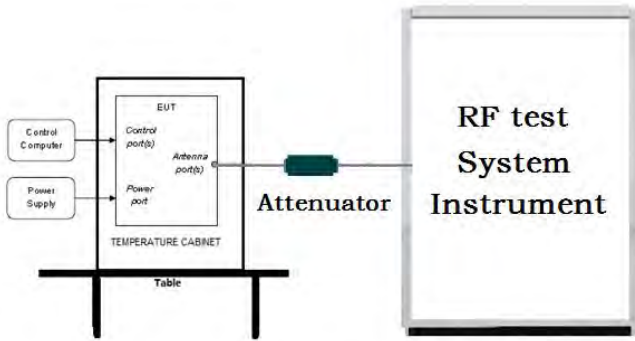
Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10 2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set analyzer center frequency to DTS channel center frequency. b) Set the span to 1.5 times the DTS bandwidth. c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$. d) Set the VBW $\geq [3 \times \text{RBW}]$. e) Detector = peak. f) Sweep time = auto couple. g) Trace mode = max hold. h) Allow trace to fully stabilize. i) Use the peak marker function to determine the maximum amplitude level within the RBW. j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.
Limit:	$\leq 8.00 \text{ dBm/3kHz}$
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix A

5.6 Band Edge measurements and Conducted Spurious Emission

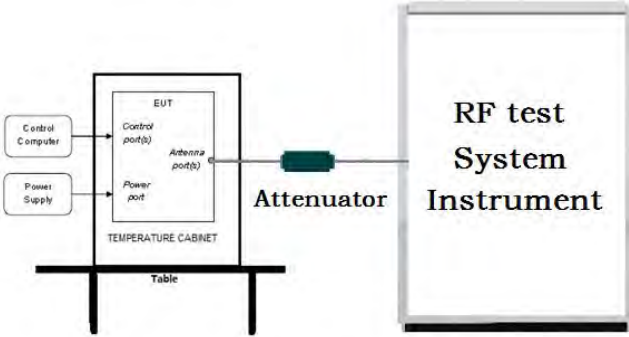Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	a) Set RBW =100KHz. b) Set VBW = 300KHz. c) Sweep time = auto couple. d) Detector = peak. e) Trace mode = max hold. f) Allow trace to fully stabilize. g) Use peak marker function to determine the peak amplitude level.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Refer to clause 5.3
Test Results:	Refer to Appendix A

5.7 Radiated Spurious Emission & Restricted bands

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10kHz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

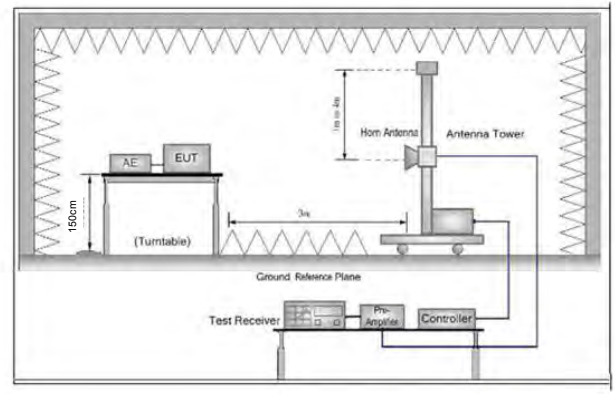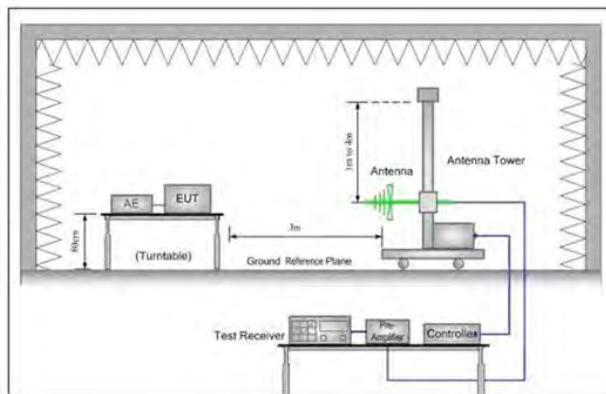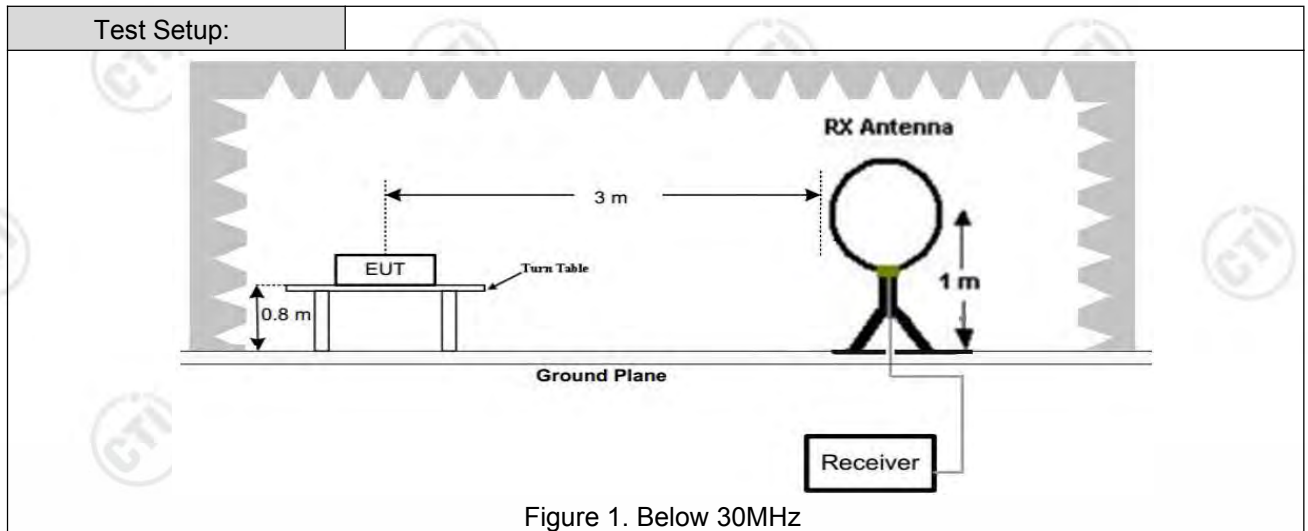

Test Procedure:


- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- Note: For the radiated emission test above 1GHz:
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both

	horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz) h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Refer to clause 5.3
Test Results:	Pass


Radiated Spurious Emission below 1GHz:

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case highest channel of GFSK 1M was recorded in the report.

Test Graph
Horizontal:

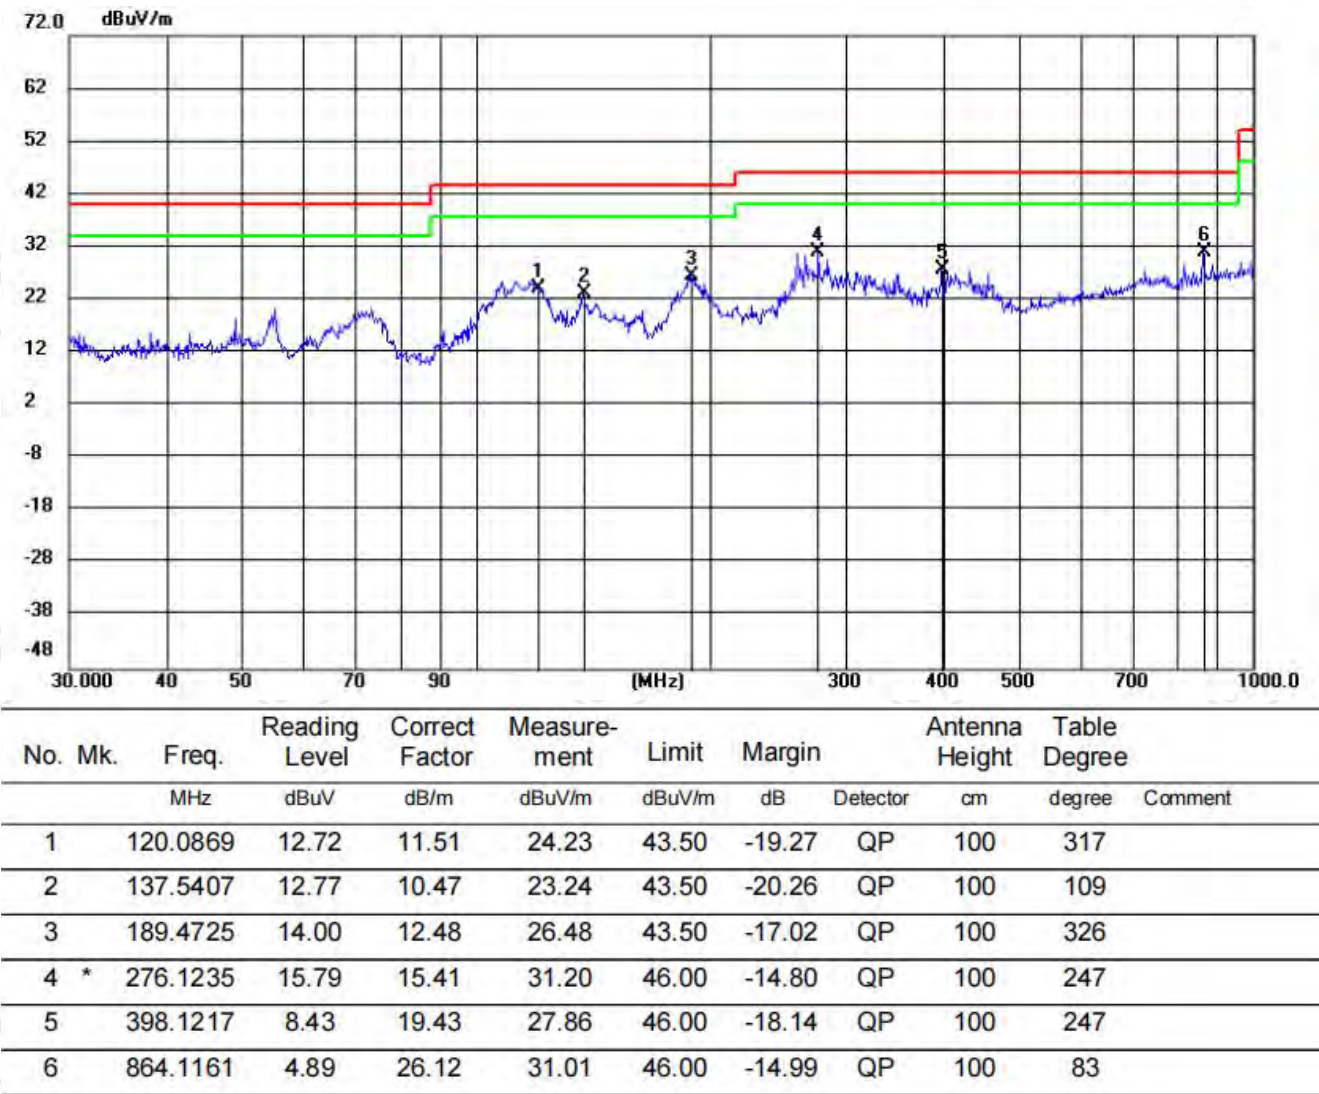

Test Graph
Vertical:

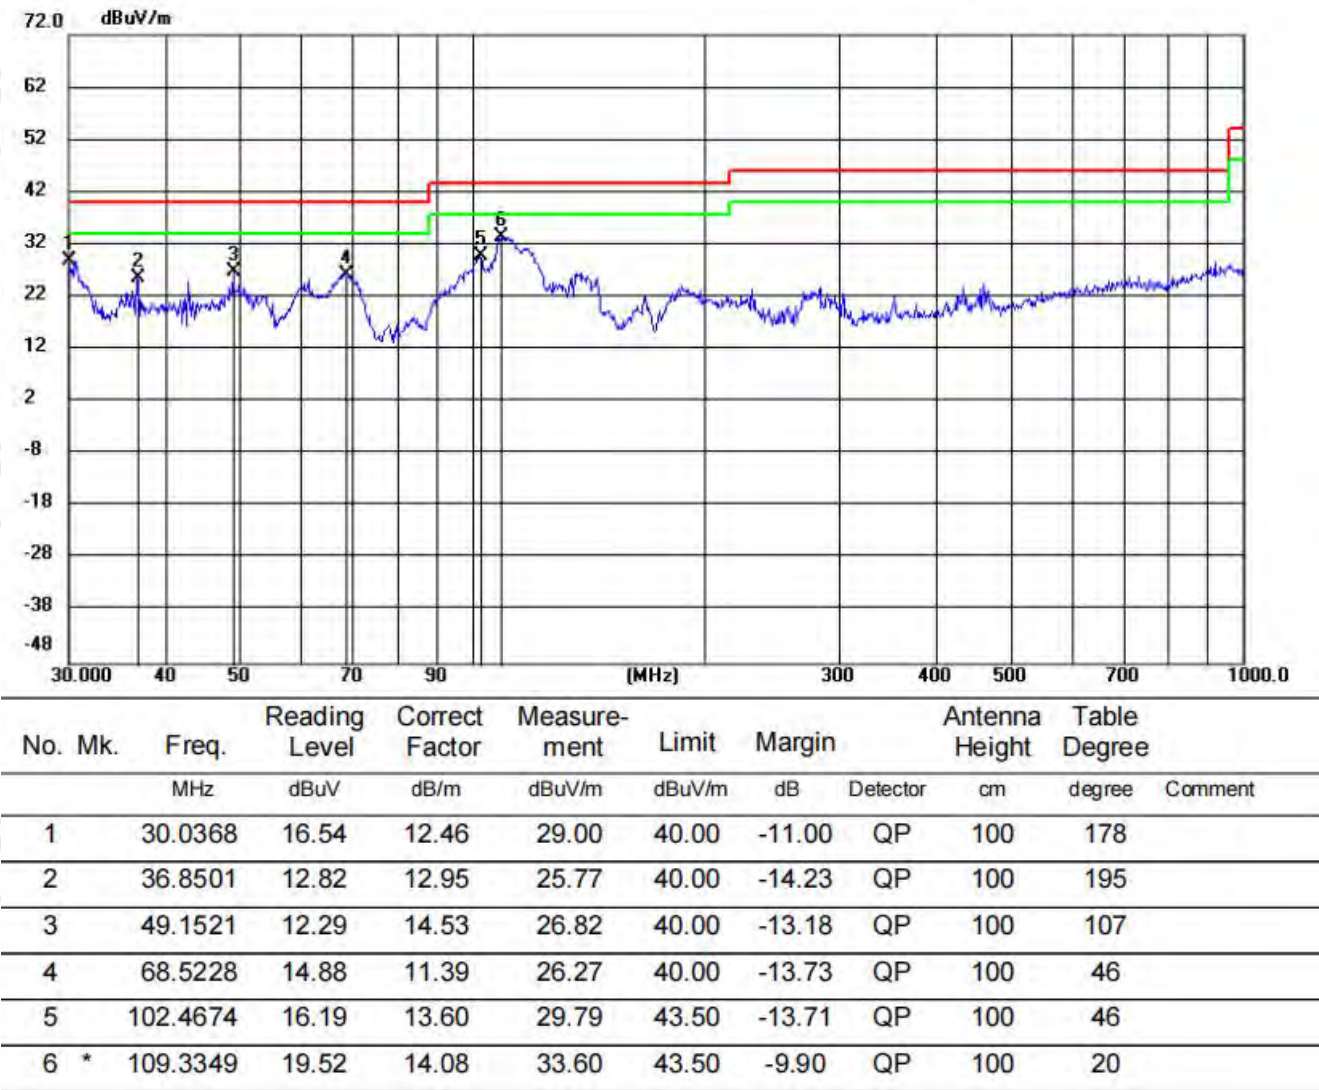

Radiated Spurious Emission above 1GHz:

EUT_Name		Test_Model	
Test_Mode	8DPSK Transmitting	Test_Frequency	2402Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/23
Remark	22.1°C50.8%\		

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1210.1473	11.62	36.21	47.83	74.00	26.17	PASS	Horizontal	PK
2	1709.7807	14.11	36.25	50.36	74.00	23.64	PASS	Horizontal	PK
3	3152.1101	-14.61	53.78	39.17	74.00	34.83	PASS	Horizontal	PK
4	4391.0927	-10.07	50.45	40.38	74.00	33.62	PASS	Horizontal	PK
5	6049.3533	-5.02	46.94	41.92	74.00	32.08	PASS	Horizontal	PK
6	10255.1337	1.98	44.58	46.56	74.00	27.44	PASS	Horizontal	PK

EUT_Name		Test_Model	
Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2402Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/23
Remark	22.1°C50.8%\		

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1386.4258	12.81	36.73	49.54	74.00	24.46	PASS	Vertical	PK
2	1967.2645	14.63	36.78	51.41	74.00	22.59	PASS	Vertical	PK
3	3334.1223	-14.04	52.99	38.95	74.00	35.05	PASS	Vertical	PK
4	5055.437	-7.95	49.29	41.34	74.00	32.66	PASS	Vertical	PK
5	6809.254	-3.59	46.80	43.21	74.00	30.79	PASS	Vertical	PK
6	9709.0973	1.27	44.94	46.21	74.00	27.79	PASS	Vertical	PK

EUT_Name		Test_Model	
Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2440Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/23
Remark	22.1°C50.8%\		

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1236.5491	11.55	36.52	48.07	74.00	25.93	PASS	Horizontal	PK
2	1772.7182	14.36	36.76	51.12	74.00	22.88	PASS	Horizontal	PK
3	3345.8231	-14.01	53.51	39.50	74.00	34.50	PASS	Horizontal	PK
4	4992.3828	-8.13	49.56	41.43	74.00	32.57	PASS	Horizontal	PK
5	7283.7856	-2.91	47.47	44.56	74.00	29.44	PASS	Horizontal	PK
6	11171.6948	2.10	45.05	47.15	74.00	26.85	PASS	Horizontal	PK

EUT_Name		Test_Model	
Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2440Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/23
Remark	22.1°C50.8%\		

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1229.6153	11.51	38.05	49.56	74.00	24.44	PASS	Vertical	PK
2	1783.1189	14.26	36.55	50.81	74.00	23.19	PASS	Vertical	PK
3	3268.4679	-14.10	53.42	39.32	74.00	34.68	PASS	Vertical	PK
4	4926.0784	-8.15	49.01	40.86	74.00	33.14	PASS	Vertical	PK
5	7650.41	-2.27	46.80	44.53	74.00	29.47	PASS	Vertical	PK
6	11711.2307	2.61	45.02	47.63	74.00	26.37	PASS	Vertical	PK

EUT_Name		Test_Model	
Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/23
Remark	22.1°C50.8%\		

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1096.9398	11.30	37.84	49.14	74.00	24.86	PASS	Horizontal	PK
2	1597.7732	13.72	35.83	49.55	74.00	24.45	PASS	Horizontal	PK
3	3393.2762	-13.98	54.25	40.27	74.00	33.73	PASS	Horizontal	PK
4	5052.8369	-8.02	49.99	41.97	74.00	32.03	PASS	Horizontal	PK
5	7723.8649	-1.57	46.75	45.18	74.00	28.82	PASS	Horizontal	PK
6	11314.0543	2.40	46.19	48.59	74.00	25.41	PASS	Horizontal	PK

EUT_Name		Test_Model	
Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/23
Remark	22.1°C50.8%\		

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1139.2093	11.43	37.31	48.74	74.00	25.26	PASS	Vertical	PK
2	1911.5274	14.81	36.02	50.83	74.00	23.17	PASS	Vertical	PK
3	3446.5798	-13.86	53.45	39.59	74.00	34.41	PASS	Vertical	PK
4	4912.4275	-8.23	50.21	41.98	74.00	32.02	PASS	Vertical	PK
5	7781.0687	-1.84	46.82	44.98	74.00	29.02	PASS	Vertical	PK
6	11296.5031	2.44	45.25	47.69	74.00	26.31	PASS	Vertical	PK

EUT_Name		Test_Model	
Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2402Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/23
Remark	22.1°C50.8%\		

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1132.2755	11.43	37.09	48.52	74.00	25.48	PASS	Horizontal	PK
2	1587.2391	13.64	36.74	50.38	74.00	23.62	PASS	Horizontal	PK
3	3250.9167	-14.11	54.00	39.89	74.00	34.11	PASS	Horizontal	PK
4	4881.8755	-8.36	50.11	41.75	74.00	32.25	PASS	Horizontal	PK
5	7755.717	-1.50	47.18	45.68	74.00	28.32	PASS	Horizontal	PK
6	11976.4484	3.12	44.68	47.80	74.00	26.20	PASS	Horizontal	PK

EUT_Name		Test_Model	
Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2402Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/23
Remark	22.1°C50.8%\		

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1201.6134	11.67	36.68	48.35	74.00	25.65	PASS	Vertical	PK
2	1643.9096	14.04	36.32	50.36	74.00	23.64	PASS	Vertical	PK
3	3315.9211	-14.06	53.84	39.78	74.00	34.22	PASS	Vertical	PK
4	4914.3776	-8.22	49.82	41.60	74.00	32.40	PASS	Vertical	PK
5	7772.6182	-1.73	46.03	44.30	74.00	29.70	PASS	Vertical	PK
6	11966.0477	3.11	44.77	47.88	74.00	26.12	PASS	Vertical	PK

EUT_Name		Test_Model	
Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2440Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/23
Remark	22.1°C50.8%\		

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1117.0745	11.29	37.41	48.70	74.00	25.30	PASS	Horizontal	PK
2	1699.5133	14.08	36.50	50.58	74.00	23.42	PASS	Horizontal	PK
3	3341.9228	-14.02	54.01	39.99	74.00	34.01	PASS	Horizontal	PK
4	5438.9626	-6.49	48.71	42.22	74.00	31.78	PASS	Horizontal	PK
5	7767.4178	-1.66	46.53	44.87	74.00	29.13	PASS	Horizontal	PK
6	12348.2732	4.15	44.17	48.32	74.00	25.68	PASS	Horizontal	PK

EUT_Name		Test_Model	
Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2440Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/23
Remark	22.1°C50.8%\		

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1099.6066	11.30	37.32	48.62	74.00	25.38	PASS	Vertical	PK
2	1690.446	14.02	36.76	50.78	74.00	23.22	PASS	Vertical	PK
3	3568.1379	-13.59	52.56	38.97	74.00	35.03	PASS	Vertical	PK
4	4898.1265	-8.29	49.26	40.97	74.00	33.03	PASS	Vertical	PK
5	6705.8971	-3.34	48.02	44.68	74.00	29.32	PASS	Vertical	PK
6	11354.357	2.29	45.92	48.21	74.00	25.79	PASS	Vertical	PK

EUT_Name		Test_Model	
Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/23
Remark	22.1°C50.8%\		

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1151.2101	11.50	37.10	48.60	74.00	25.40	PASS	Horizontal	PK
2	1747.6498	14.08	36.21	50.29	74.00	23.71	PASS	Horizontal	PK
3	3813.8543	-12.34	52.53	40.19	74.00	33.81	PASS	Horizontal	PK
4	5063.8876	-7.89	49.37	41.48	74.00	32.52	PASS	Horizontal	PK
5	7500.9001	-2.32	46.94	44.62	74.00	29.38	PASS	Horizontal	PK
6	10830.422	1.88	44.23	46.11	74.00	27.89	PASS	Horizontal	PK

EUT_Name		Test_Model	
Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/23
Remark	22.1°C50.8%\		

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1099.34	11.30	38.29	49.59	74.00	24.41	PASS	Vertical	PK
2	1604.707	13.73	36.76	50.49	74.00	23.51	PASS	Vertical	PK
3	3483.6322	-13.89	53.39	39.50	74.00	34.50	PASS	Vertical	PK
4	4781.1187	-8.62	50.56	41.94	74.00	32.06	PASS	Vertical	PK
5	7812.9209	-1.97	46.88	44.91	74.00	29.09	PASS	Vertical	PK
6	10972.7815	2.03	43.58	45.61	74.00	28.39	PASS	Vertical	PK


Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

Restricted bands:
Test plot as follows:

EUT_Name		Test_Model	
Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2402Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/26
Remark	22.1°C50.8%\		


Test Graph

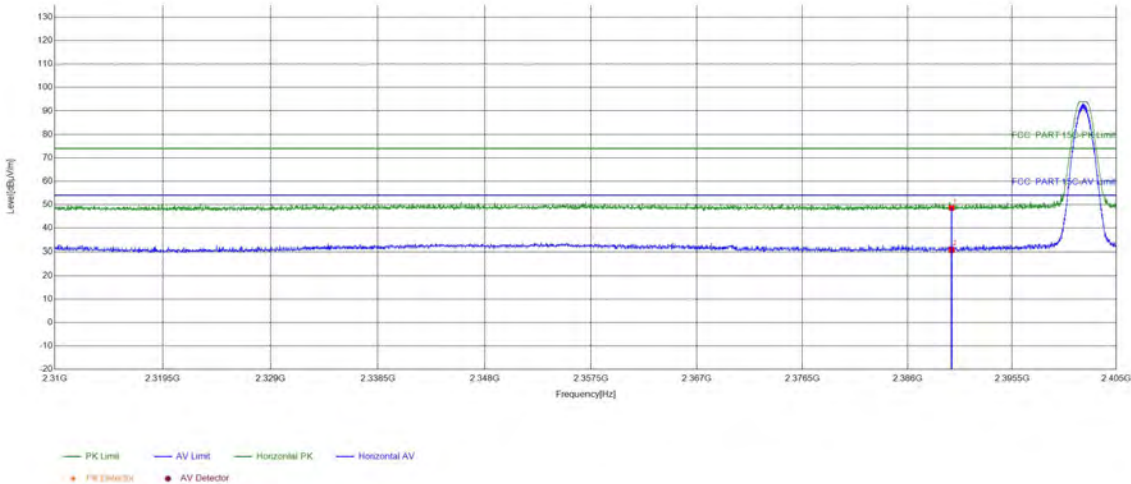

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	32.61	48.57	74.00	25.43	PASS	Horizontal	PK
2	2390	15.96	14.86	30.82	54.00	23.18	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2402Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/26
Remark	22.1°C50.8%\		


Test Graph

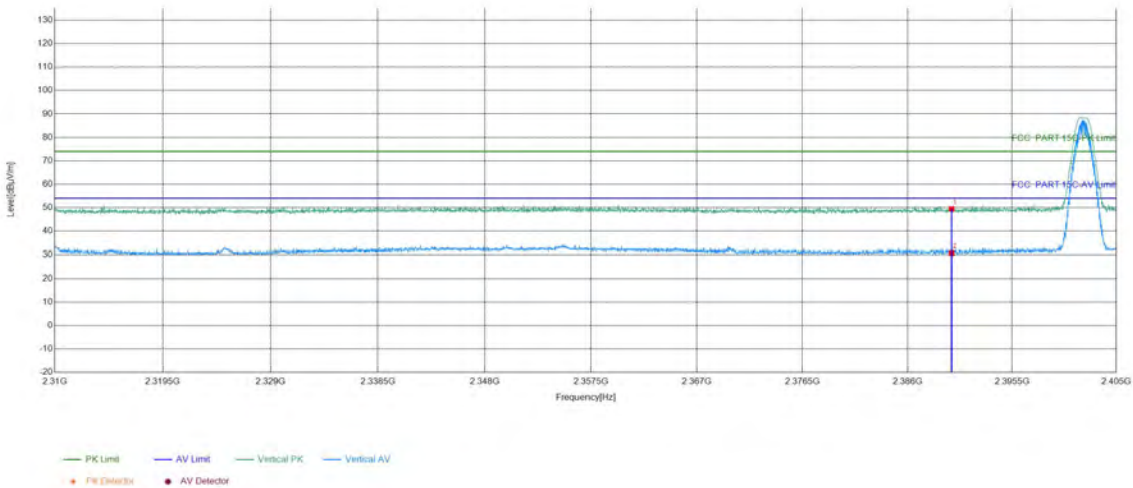

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	33.51	49.47	74.00	24.53	PASS	Vertical	PK
2	2390	15.96	14.79	30.75	54.00	23.25	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/26
Remark	22.1°C50.8%\		


Test Graph

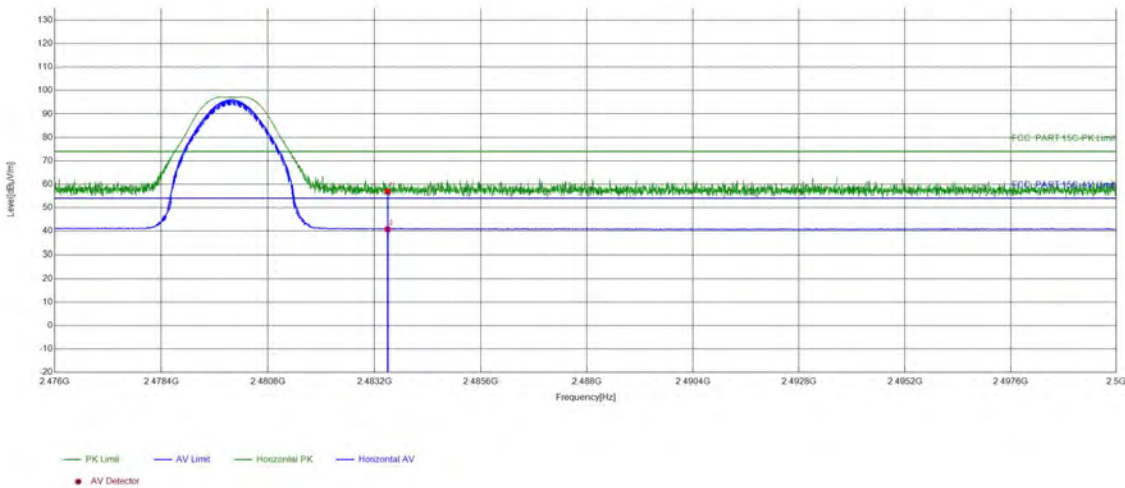

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	40.60	56.89	74.00	17.11	PASS	Horizontal	PK
2	2483.5	16.29	24.51	40.80	54.00	13.20	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/26
Remark	22.1°C50.8%\		


Test Graph

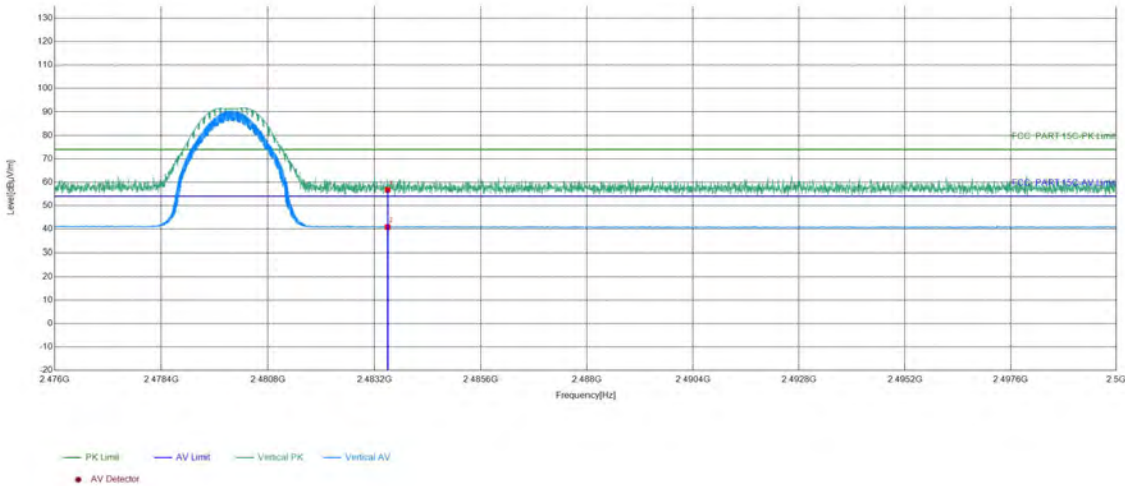

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	40.43	56.72	74.00	17.28	PASS	Vertical	PK
2	2483.5	16.29	24.63	40.92	54.00	13.08	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2402Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/26
Remark	22.1°C50.8%\		


Test Graph

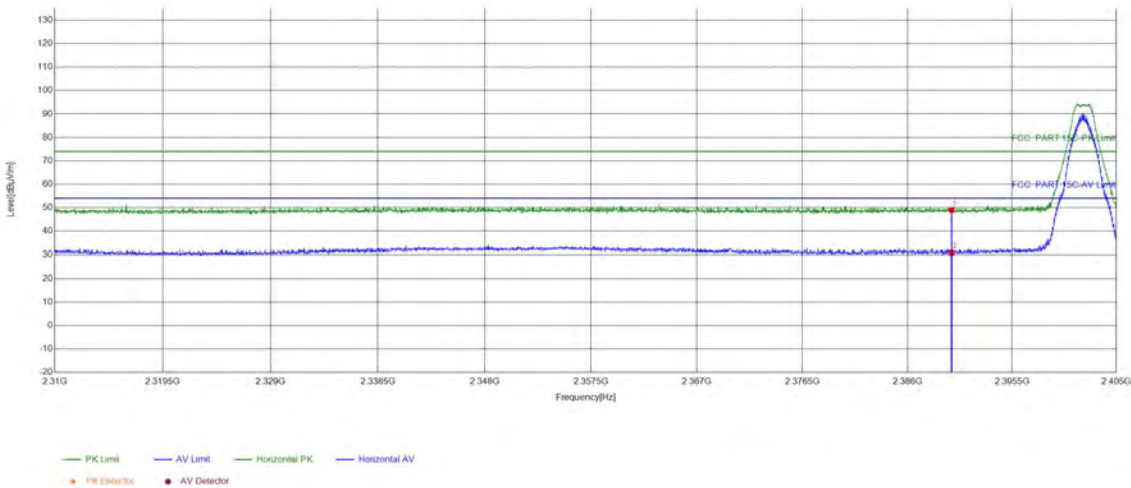

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	33.01	48.97	74.00	25.03	PASS	Horizontal	PK
2	2390	15.96	15.00	30.96	54.00	23.04	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2402Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/26
Remark	22.1°C50.8%\		


Test Graph

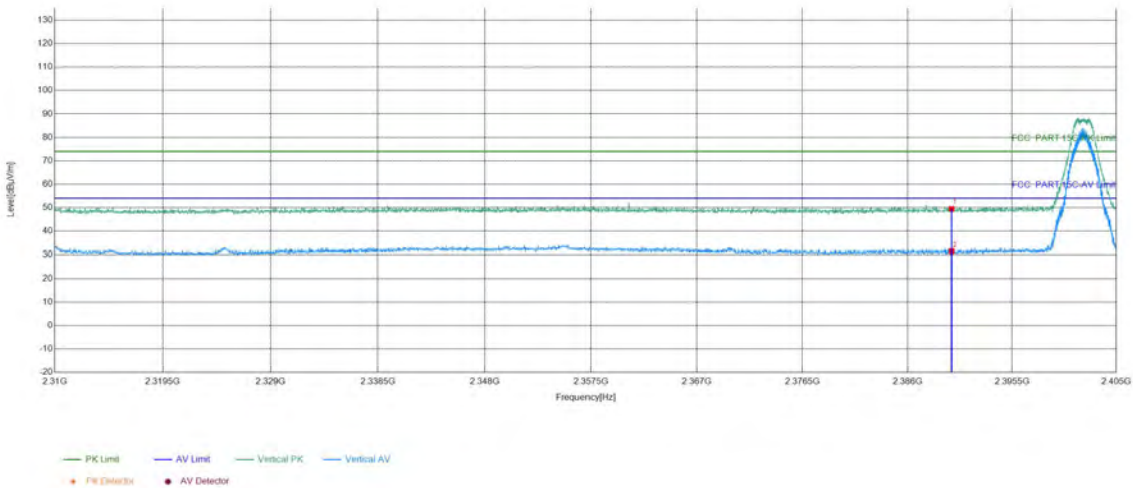

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	33.57	49.53	74.00	24.47	PASS	Vertical	PK
2	2390	15.96	15.62	31.58	54.00	22.42	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/26
Remark	22.1°C50.8%\		


Test Graph

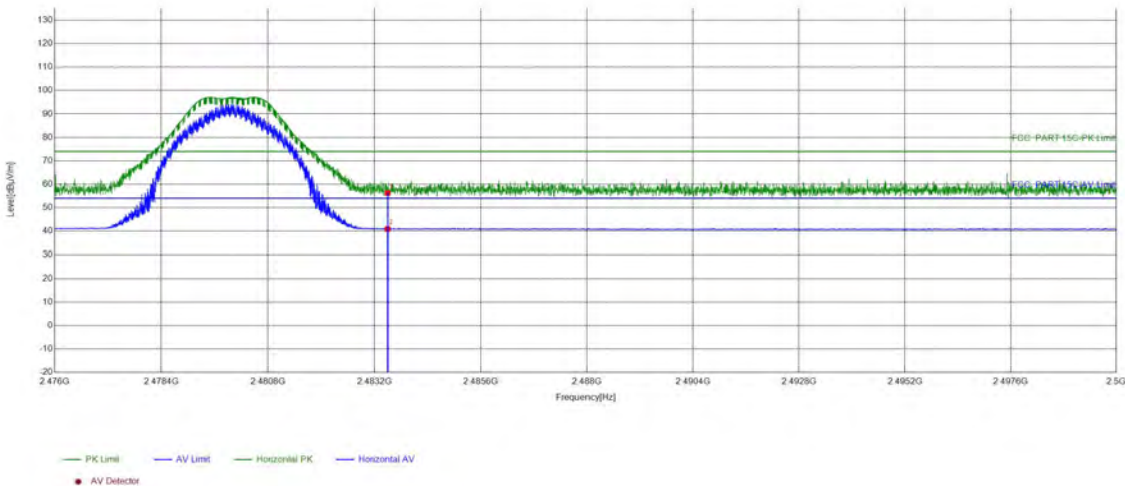

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	39.97	56.26	74.00	17.74	PASS	Horizontal	PK
2	2483.5	16.29	24.64	40.93	54.00	13.07	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2480Mhz
Tset_Engineer	chenjun	Test_Date	2025/08/26
Remark	22.1°C50.8%\		

Test Graph

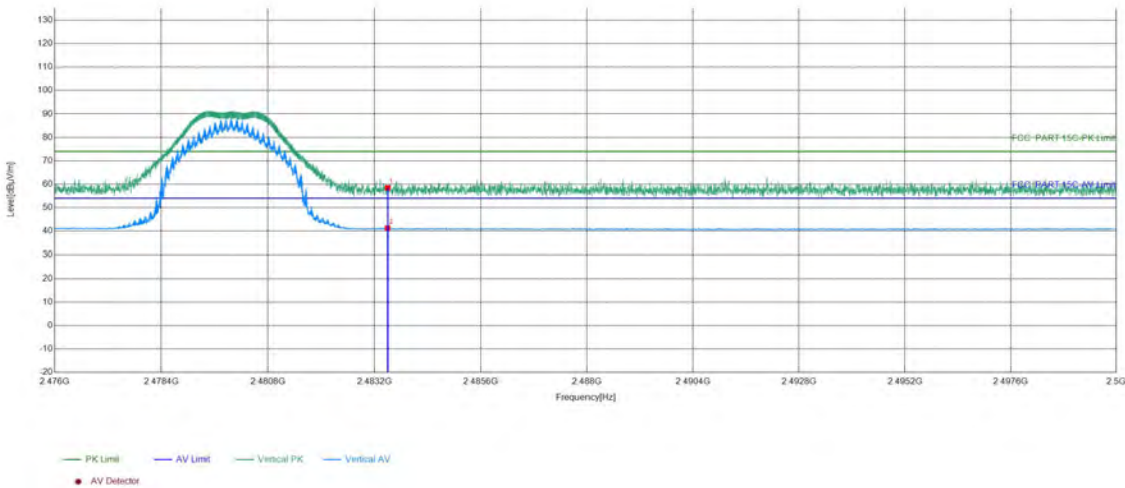

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	42.16	58.45	74.00	15.55	PASS	Vertical	PK
2	2483.5	16.29	24.93	41.22	54.00	12.78	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading -Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: Bluetooth LE of EED32R81404501

7 PHOTOGRAPHS OF TEST SETUP



Radiated spurious emission Test Setup-1(Below 1GHz)



Radiated spurious emission Test Setup-2(Above 1GHz)



Radiated spurious emission Test Setup-3(Above 1GHz)
There are absorbing materials under the ground.



Conducted Emissions Test Setup


8 PHOTOGRAPHS OF EUT Constructional Details




View of Product-01




View of Product-02

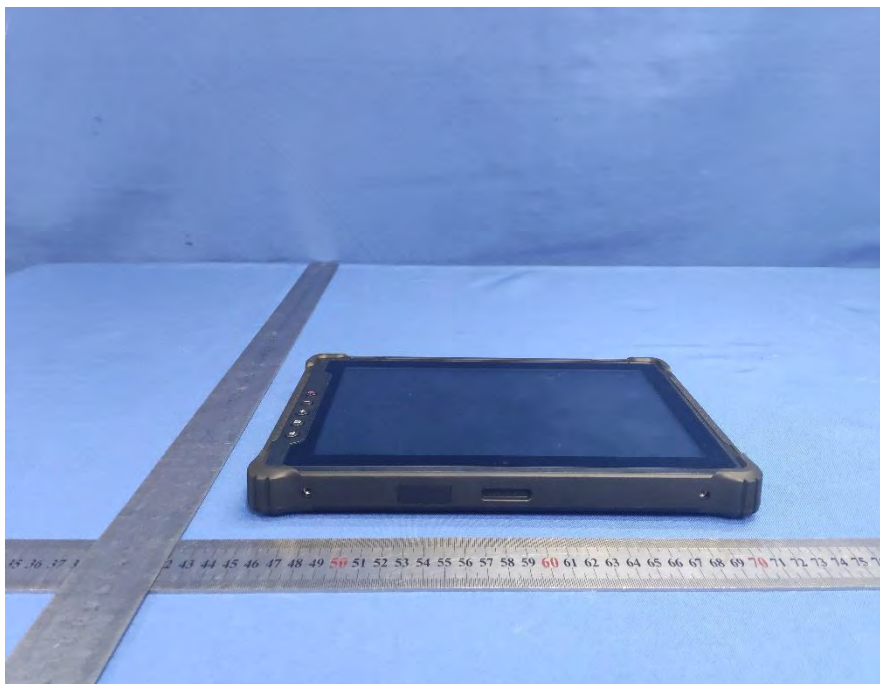


View of Product-03

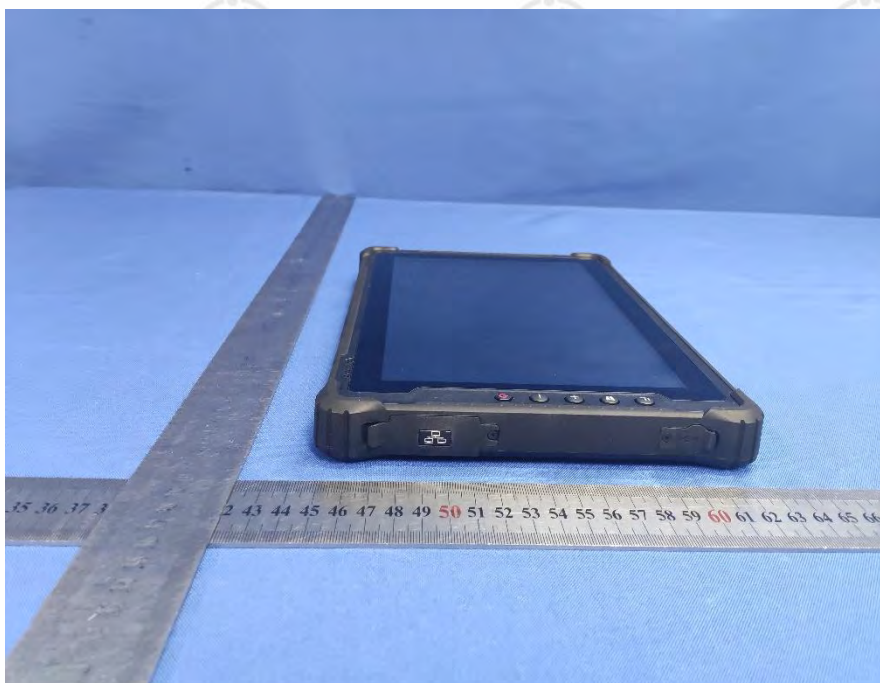


View of Product-04

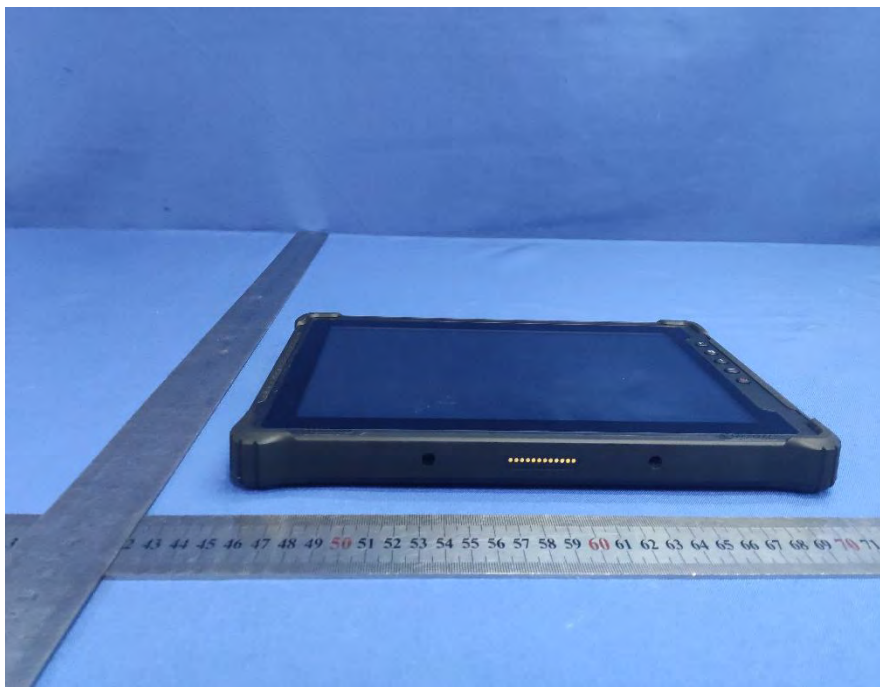


View of Product-05

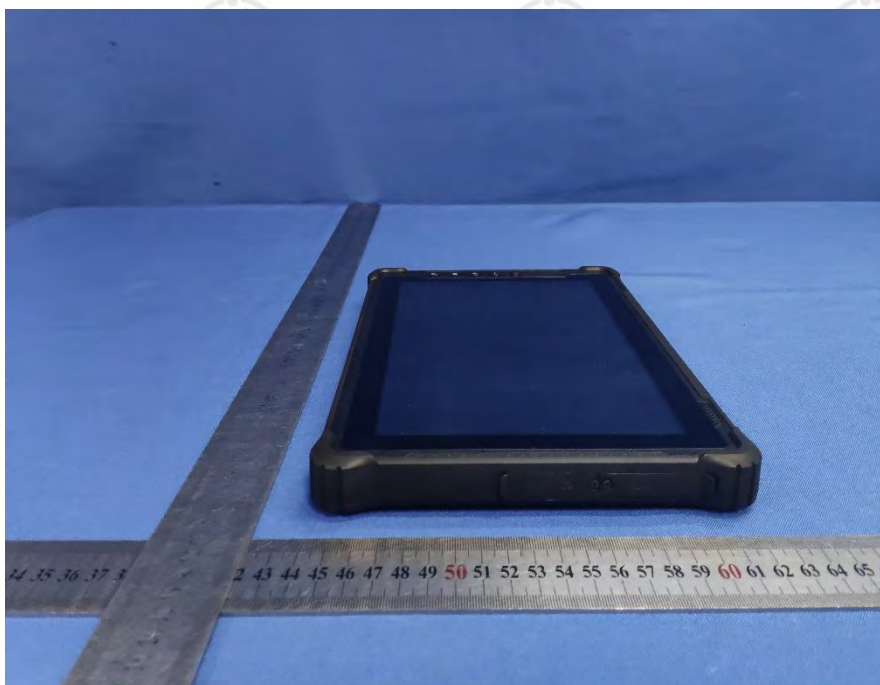

View of Product-06

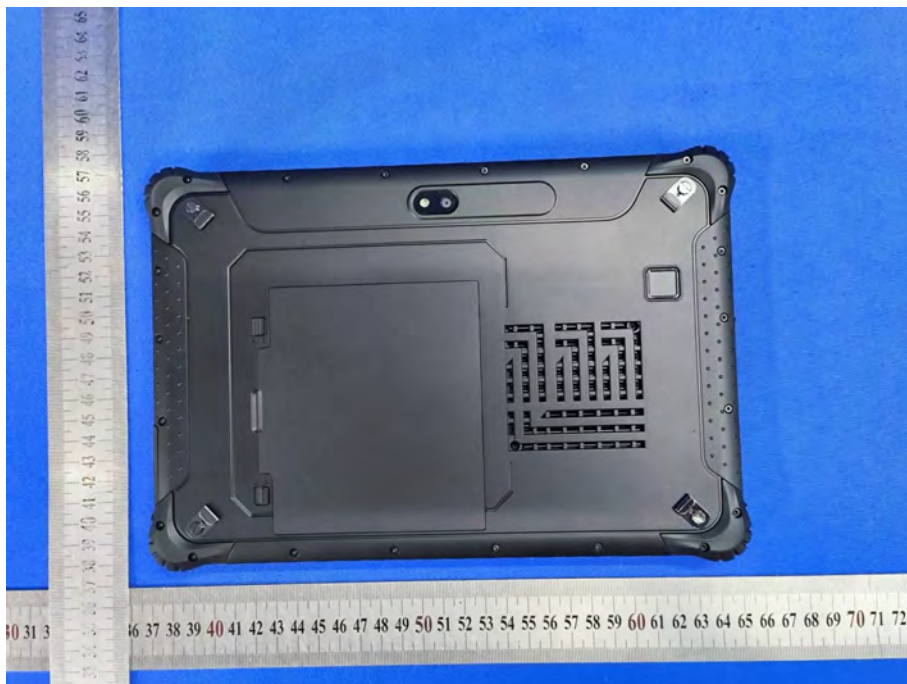

View of Product-07

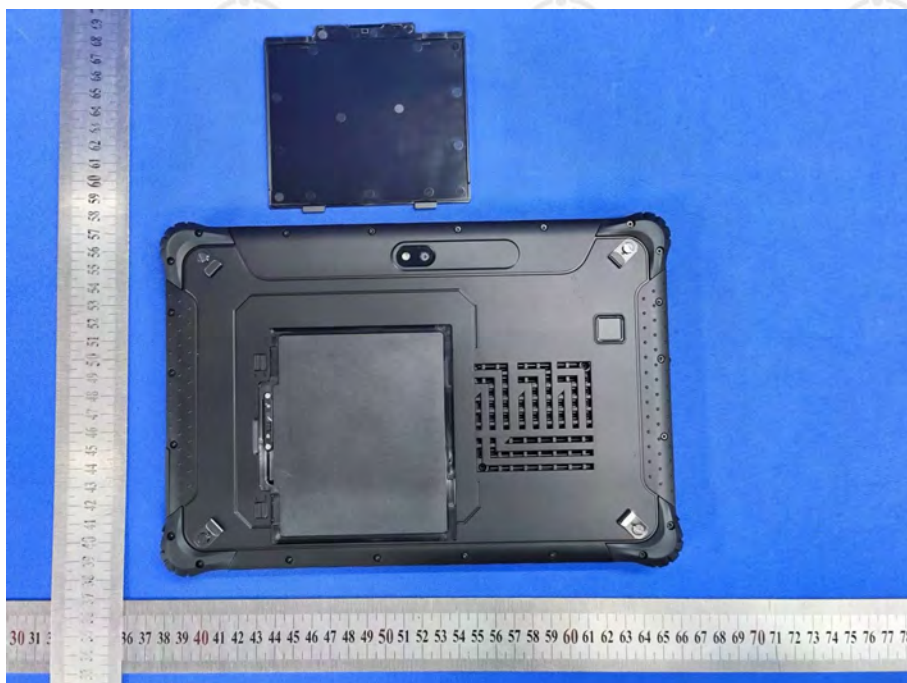

View of Product-08




View of Product-9



View of Product-10




View of Product-11

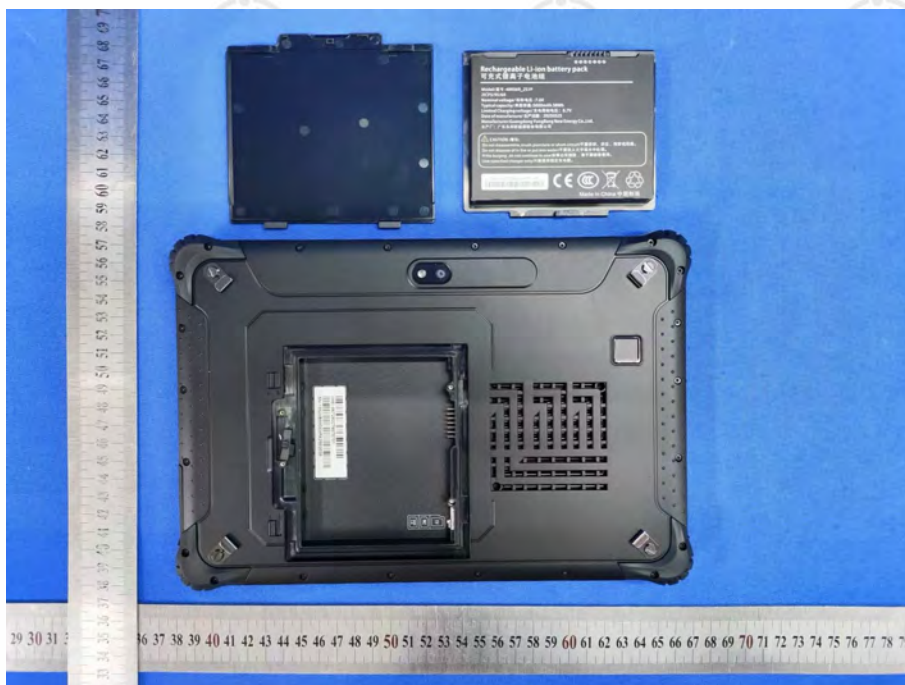

View of Product-12



View of Product-13

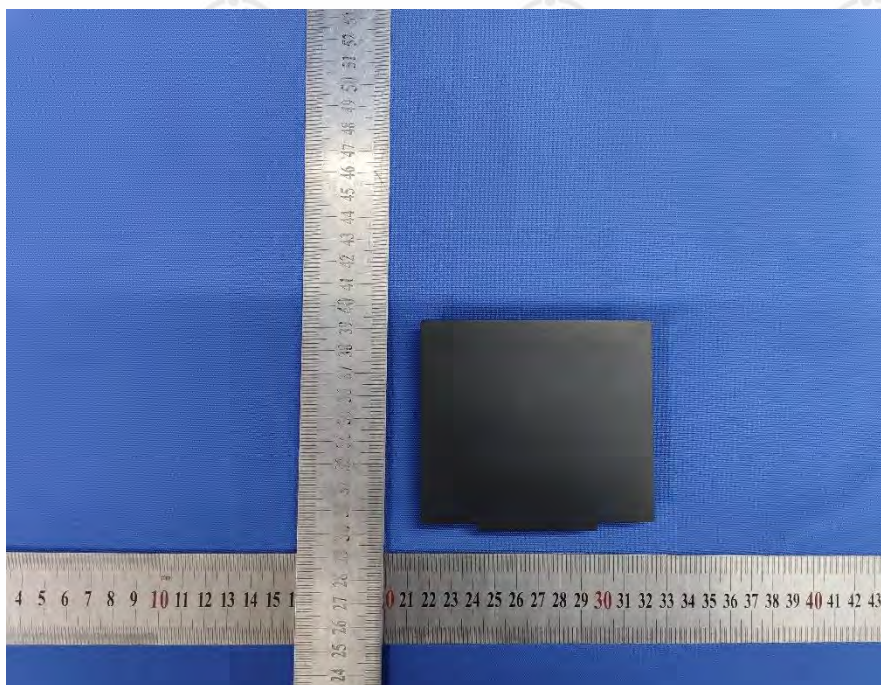

View of Product-14



View of Product-15



View of Product-16



View of Product-17



View of Product-18



View of Product-19




View of Product-20




View of Product-21




View of Product-22

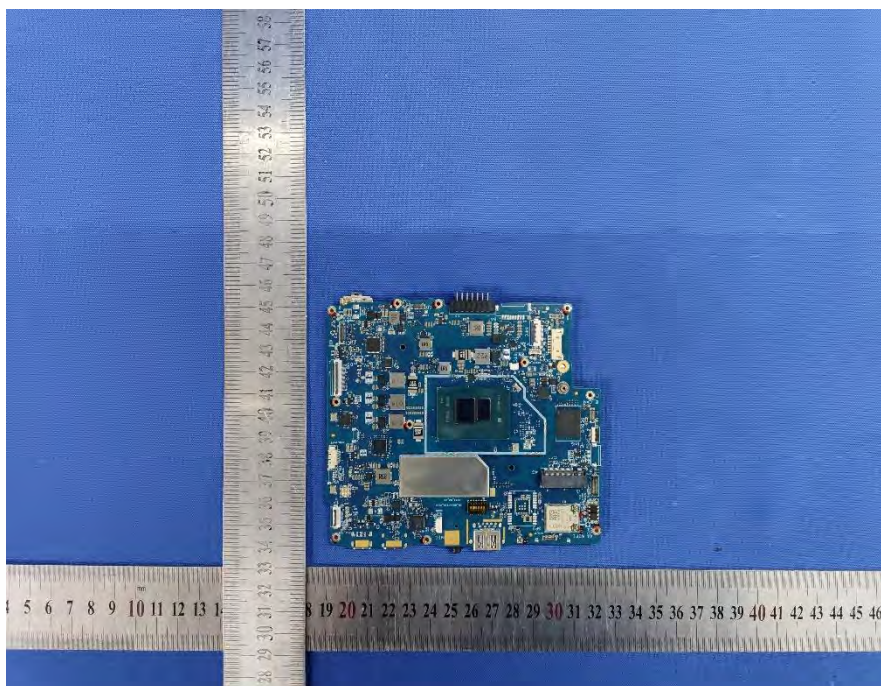


View of Product-23

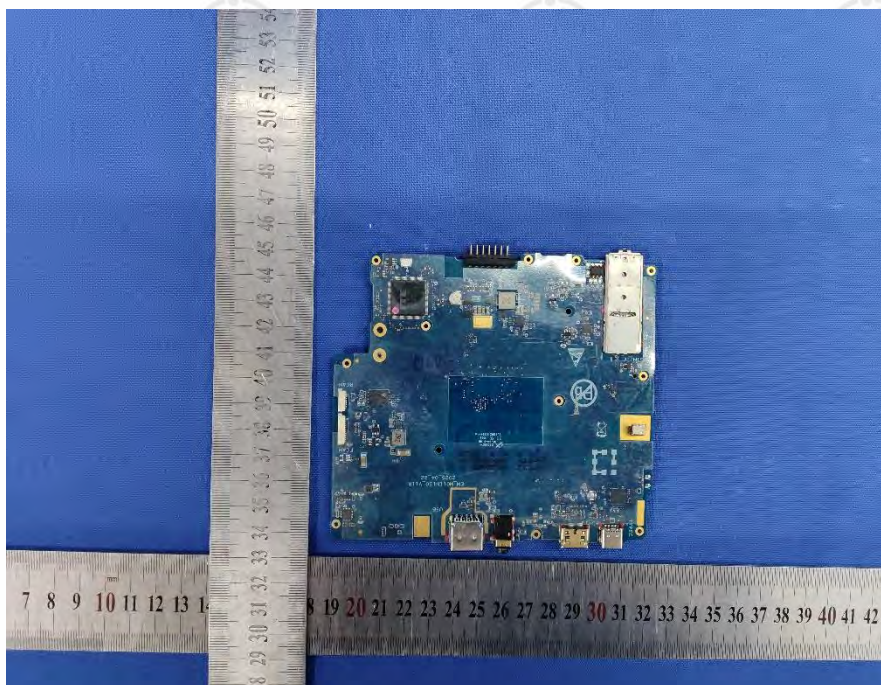


View of Product-24

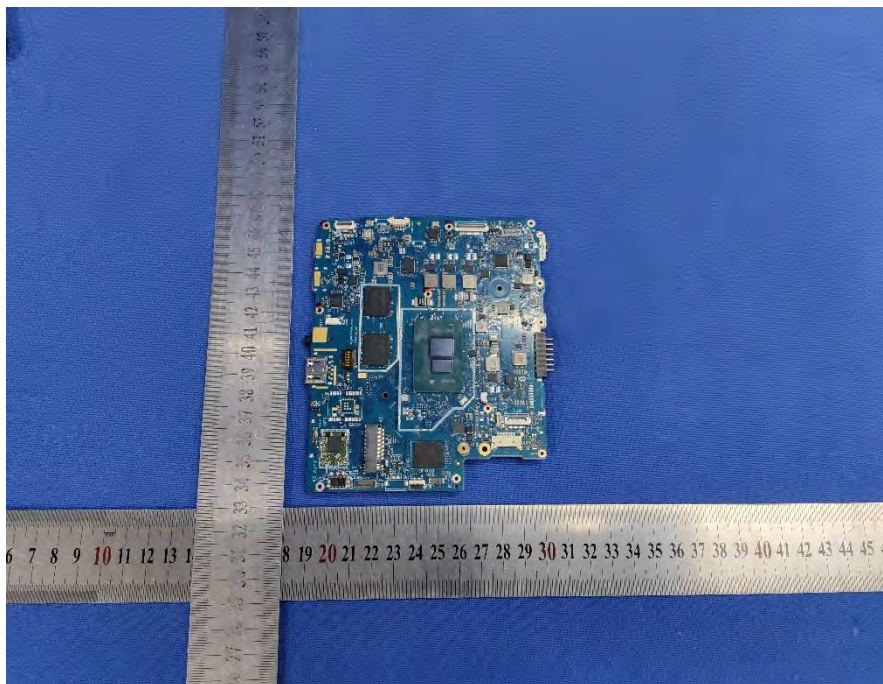


View of Product-25

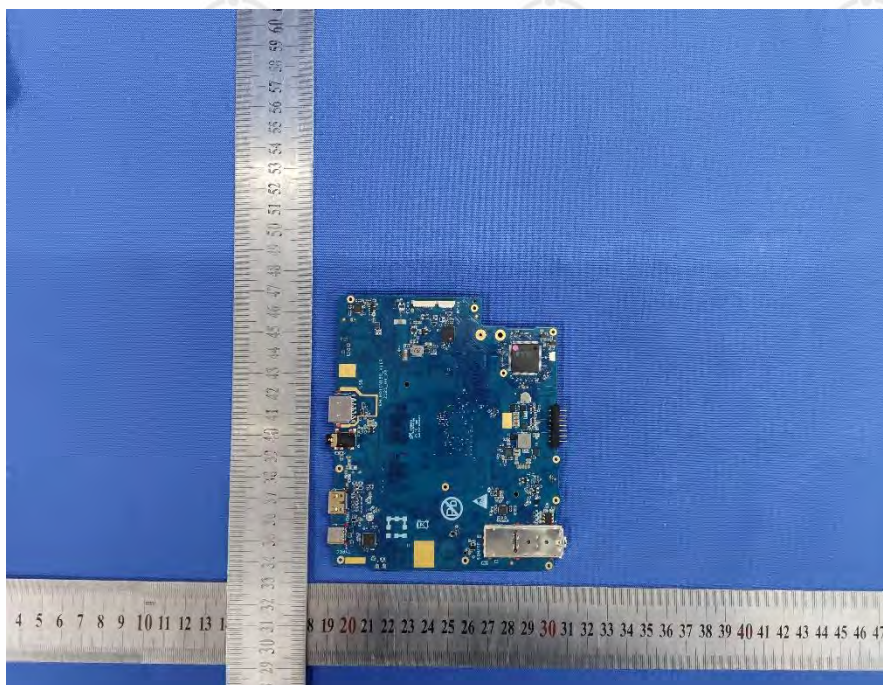


View of Product-26

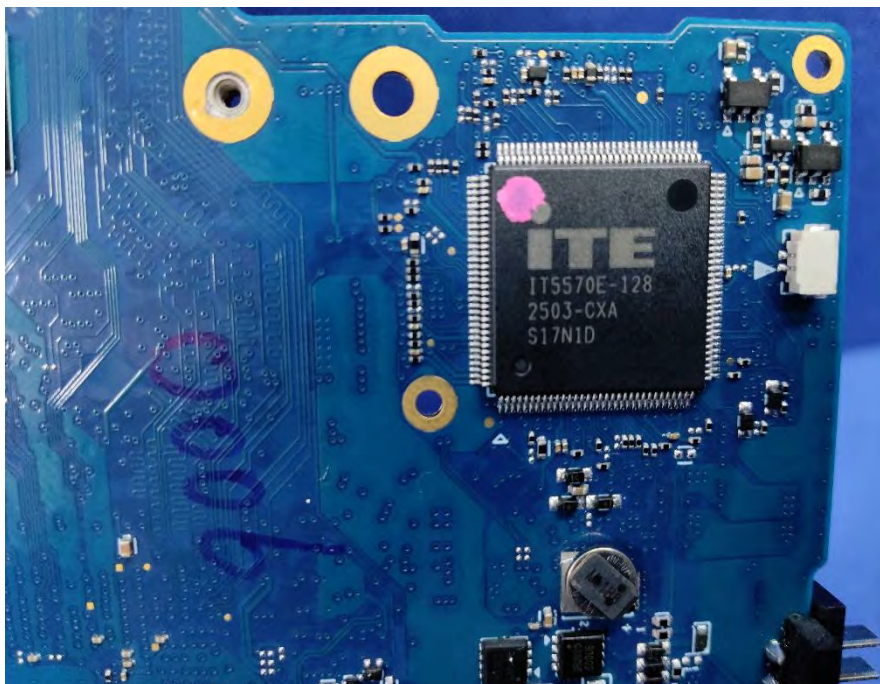


View of Product-27

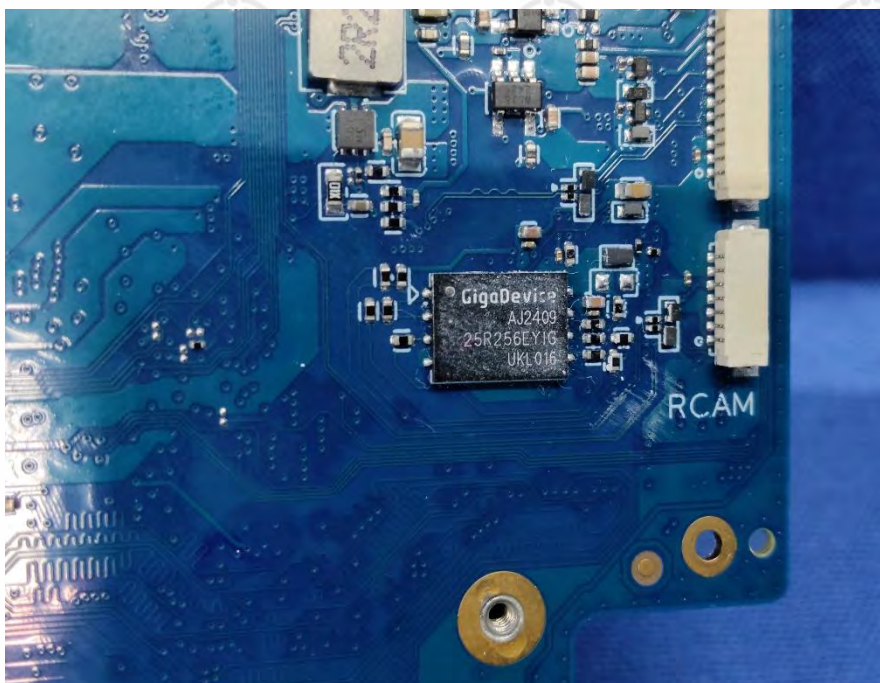


View of Product-28

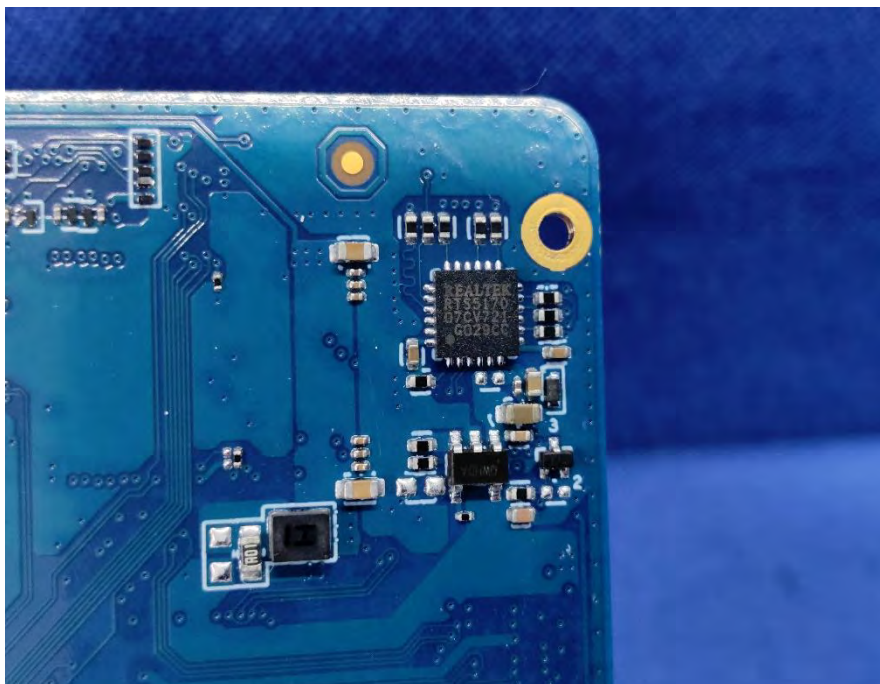


View of Product-29

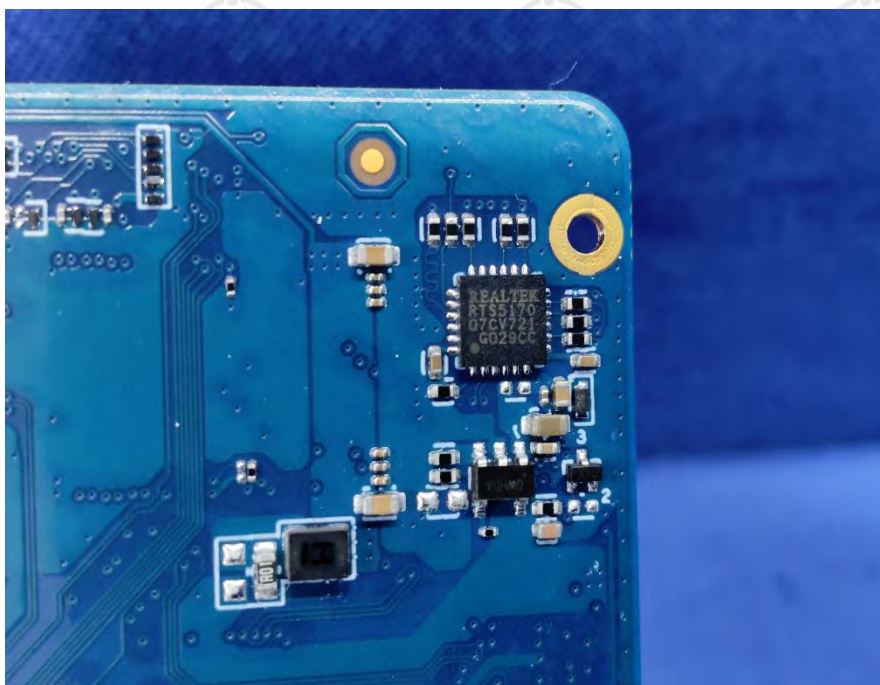


View of Product-30

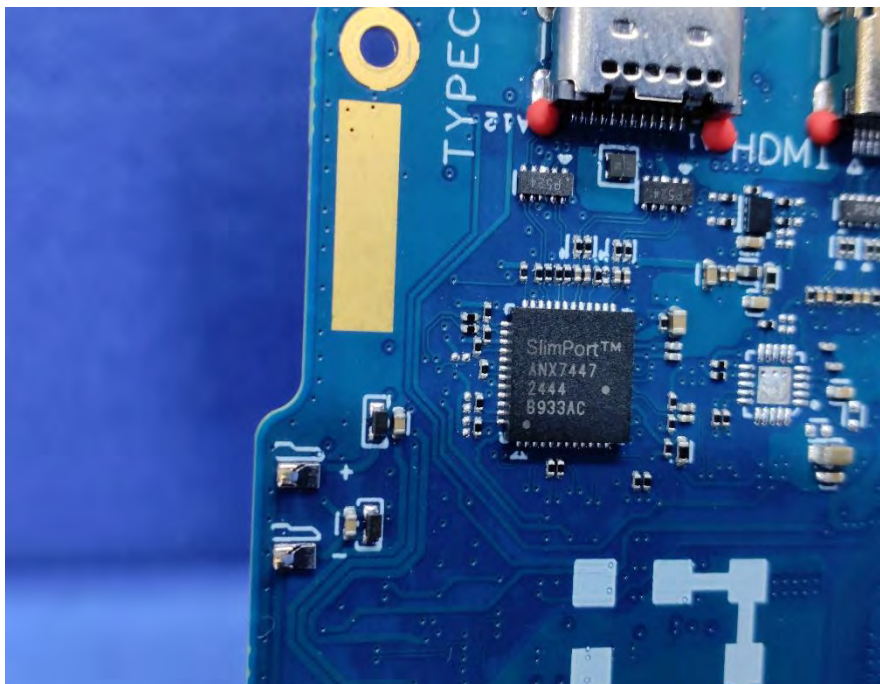


View of Product-31

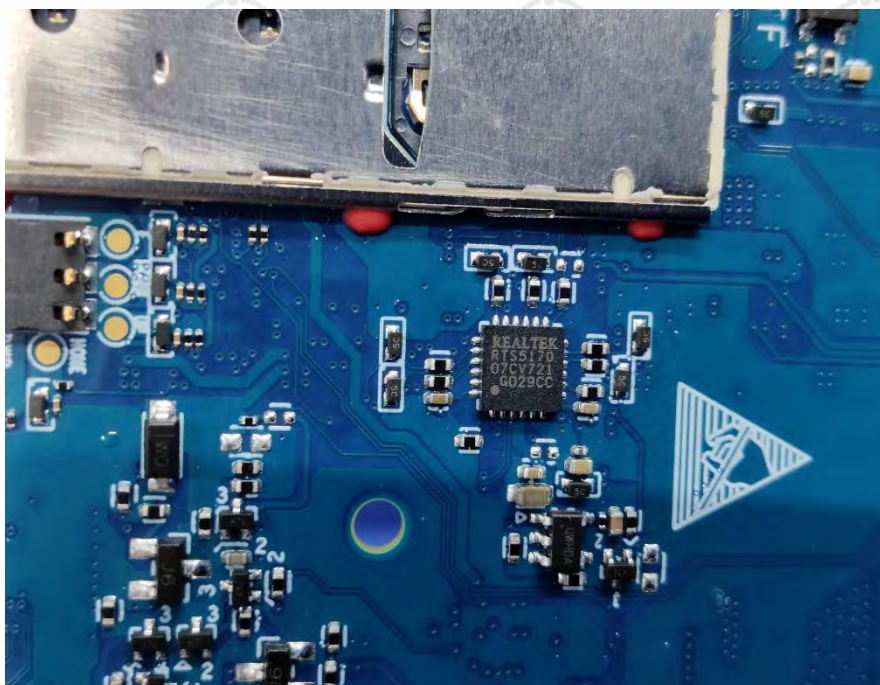


View of Product-32

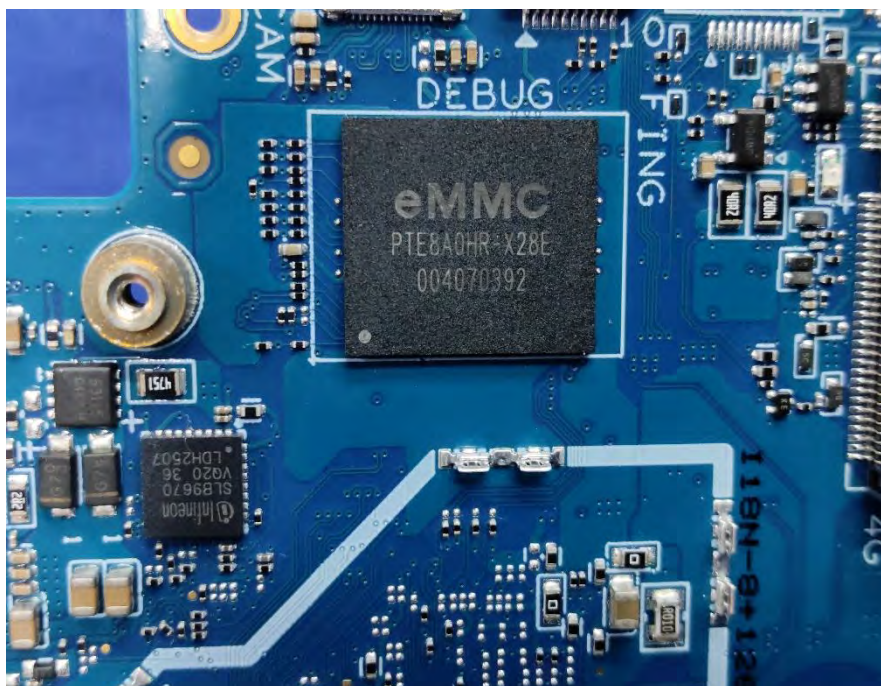


View of Product-33

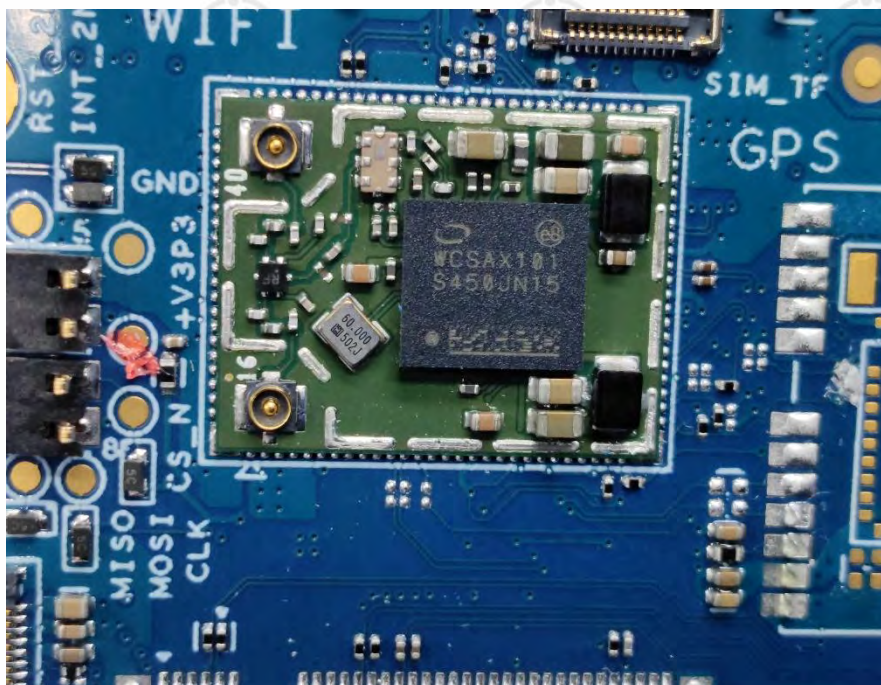


View of Product-34

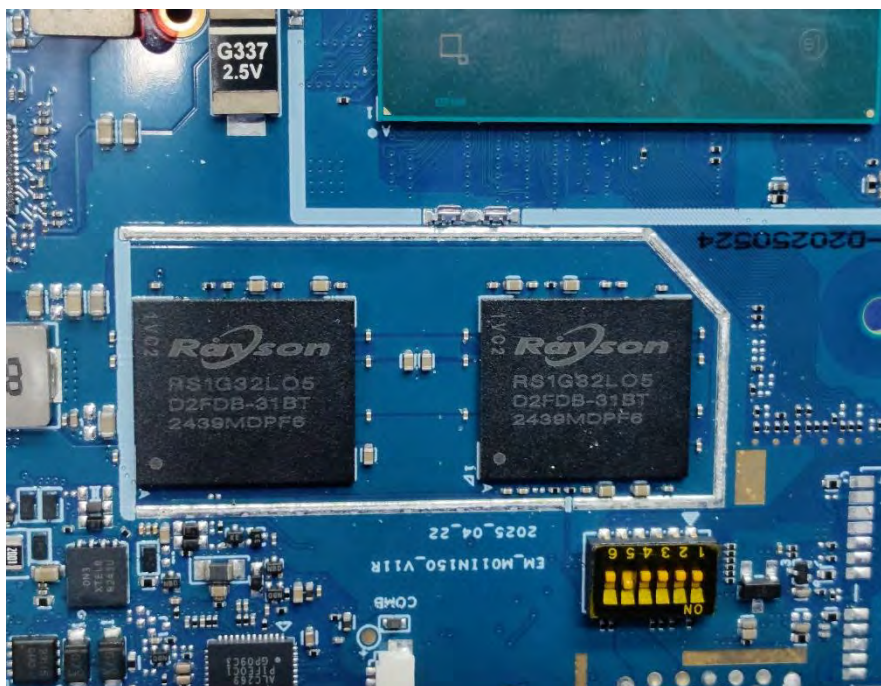


View of Product-35

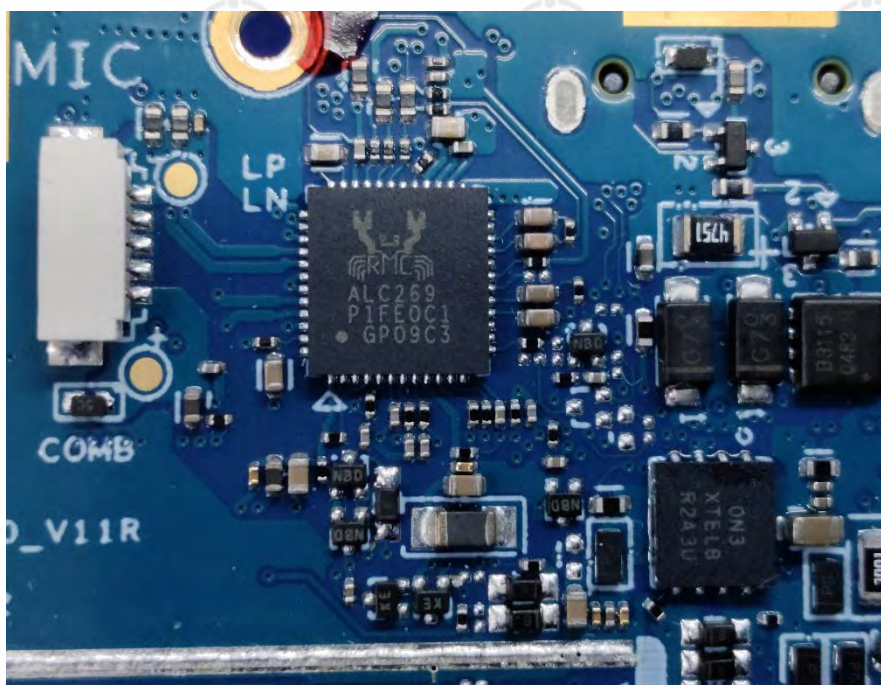

View of Product-36

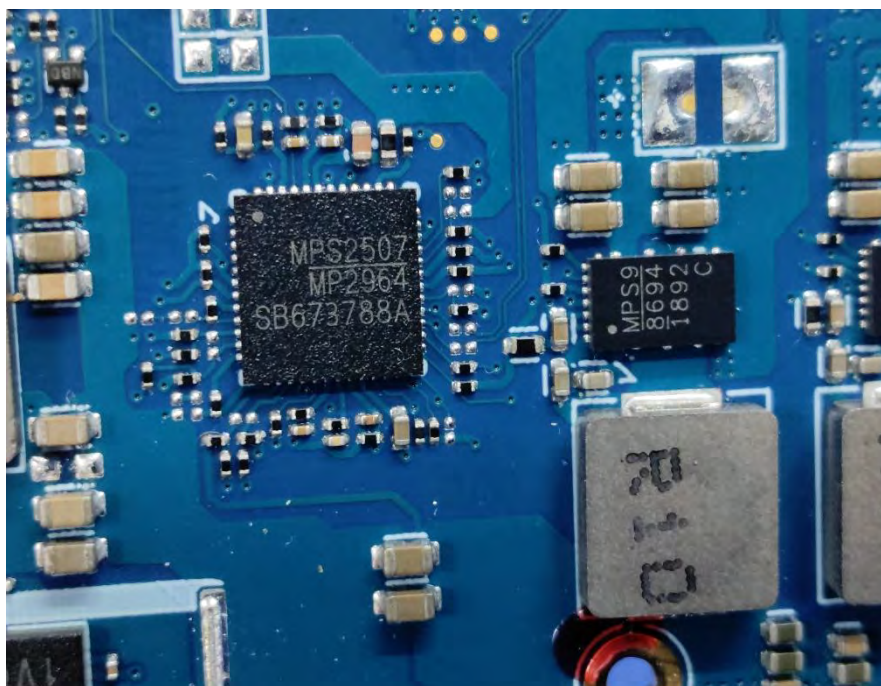


View of Product-37

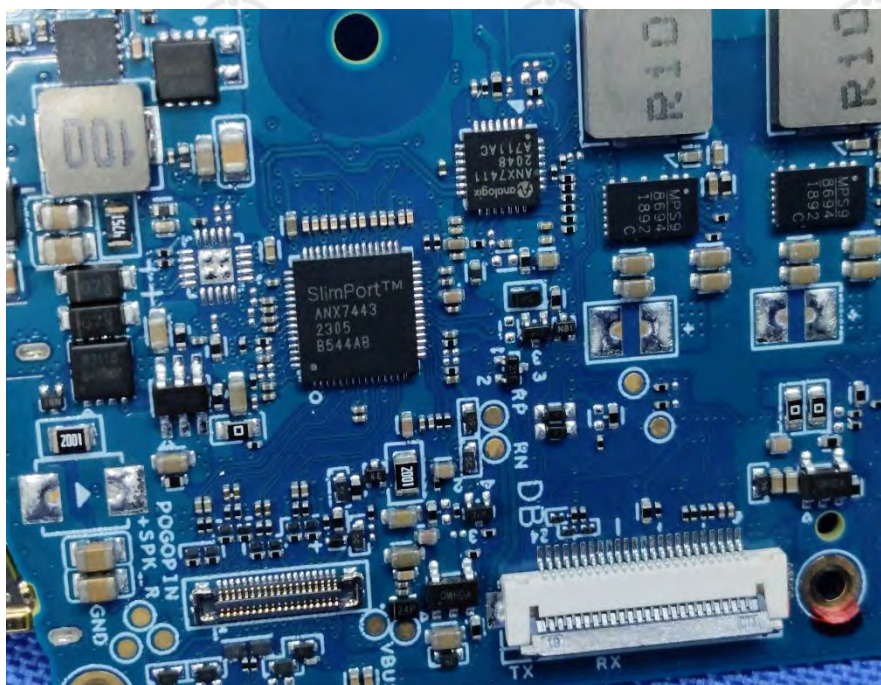


View of Product-38



View of Product-39

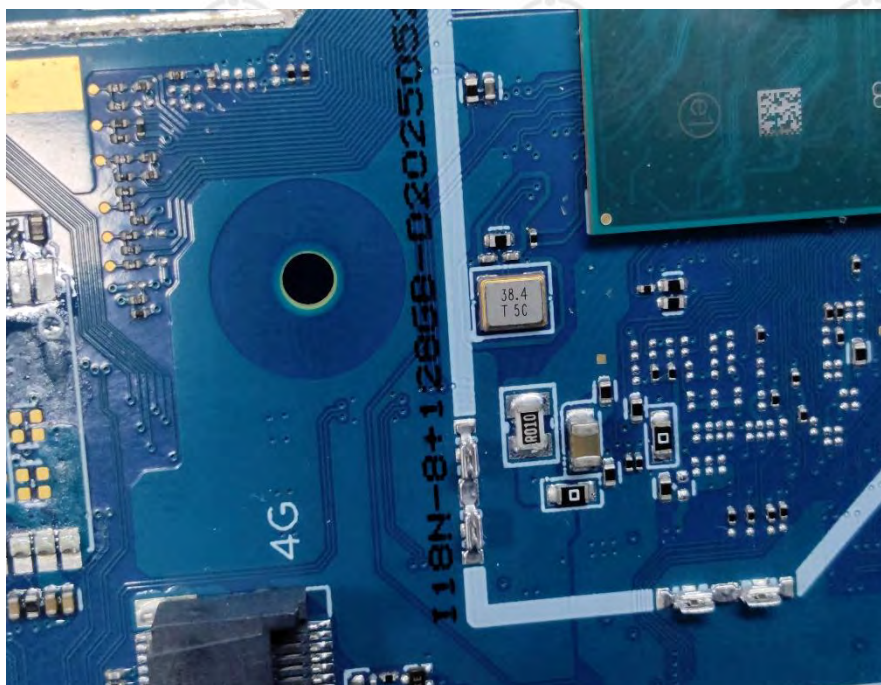


View of Product-40

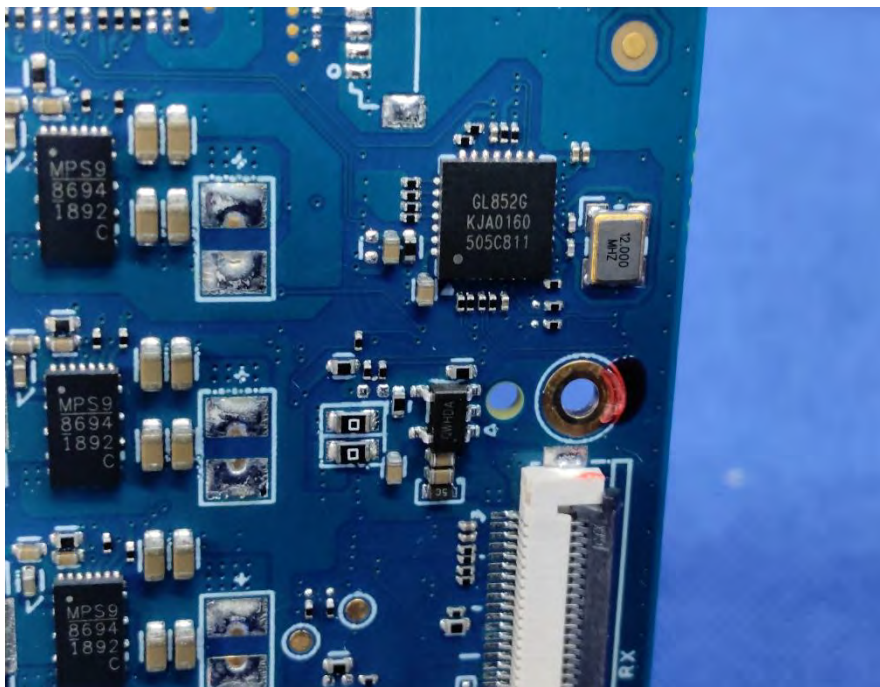


View of Product-41




View of Product-42

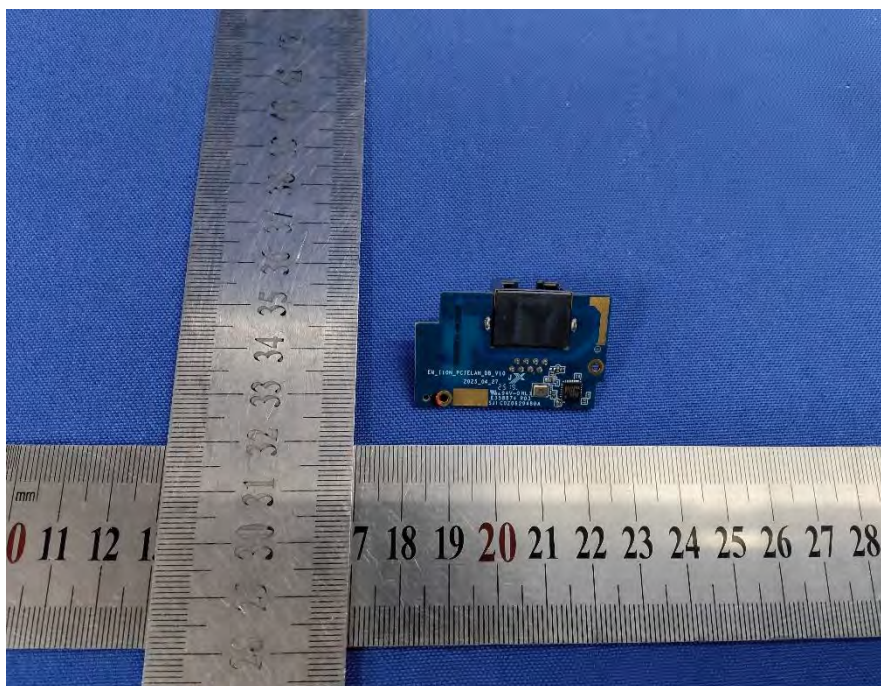

View of Product-43

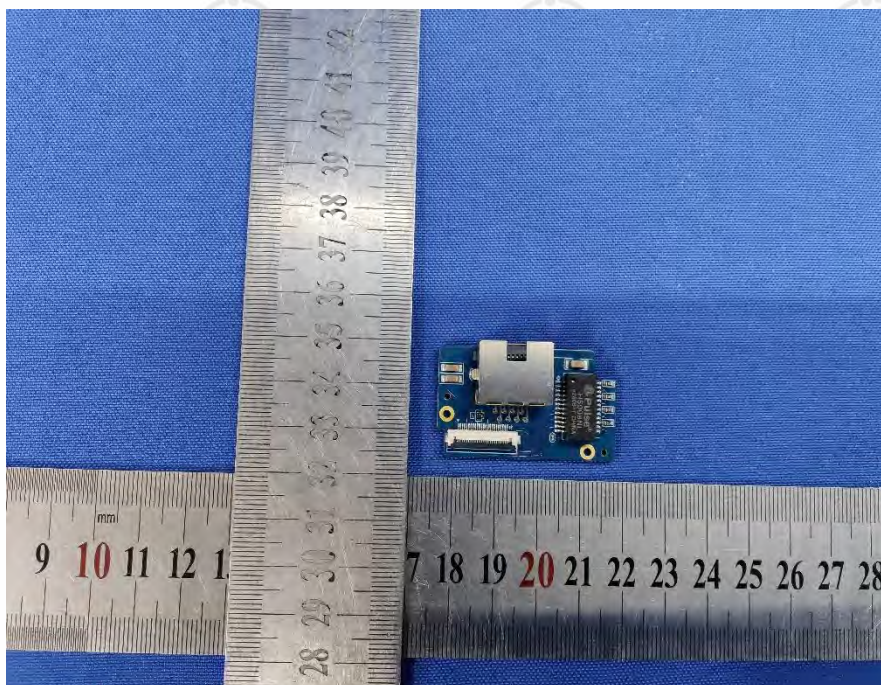


View of Product-44

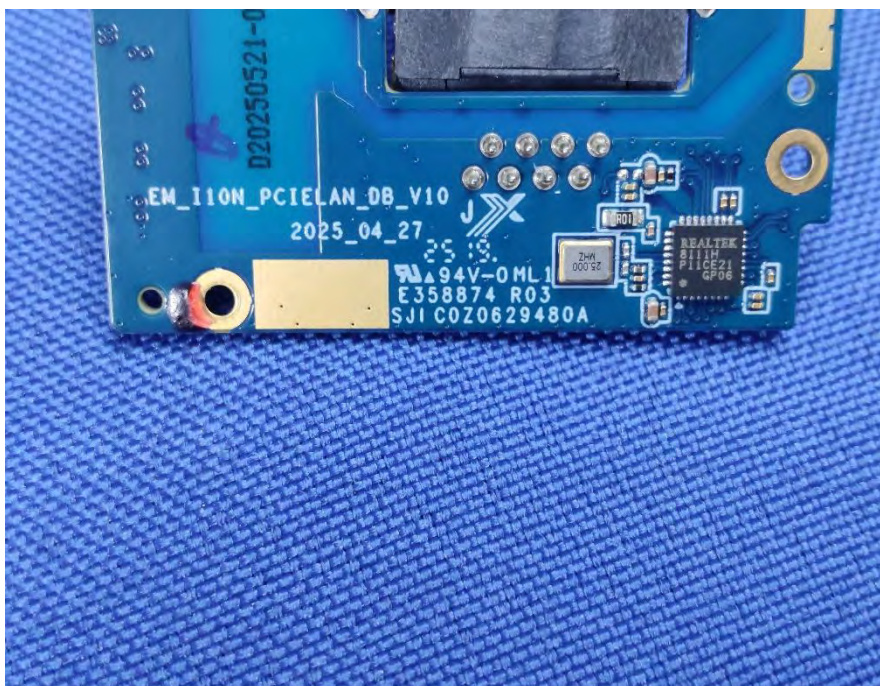

View of Product-45



View of Product-46

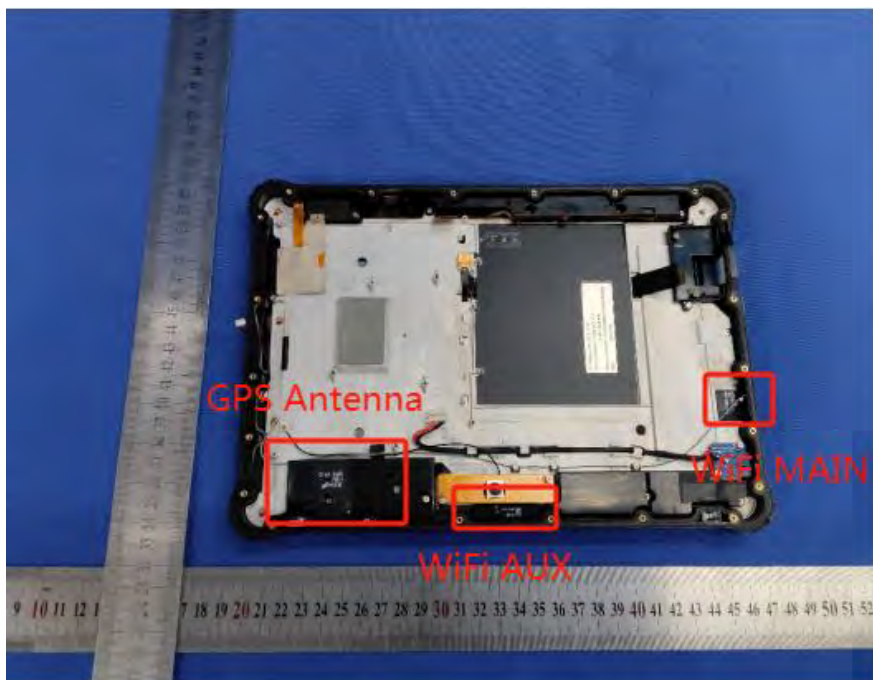

View of Product-47



View of Product-48

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***