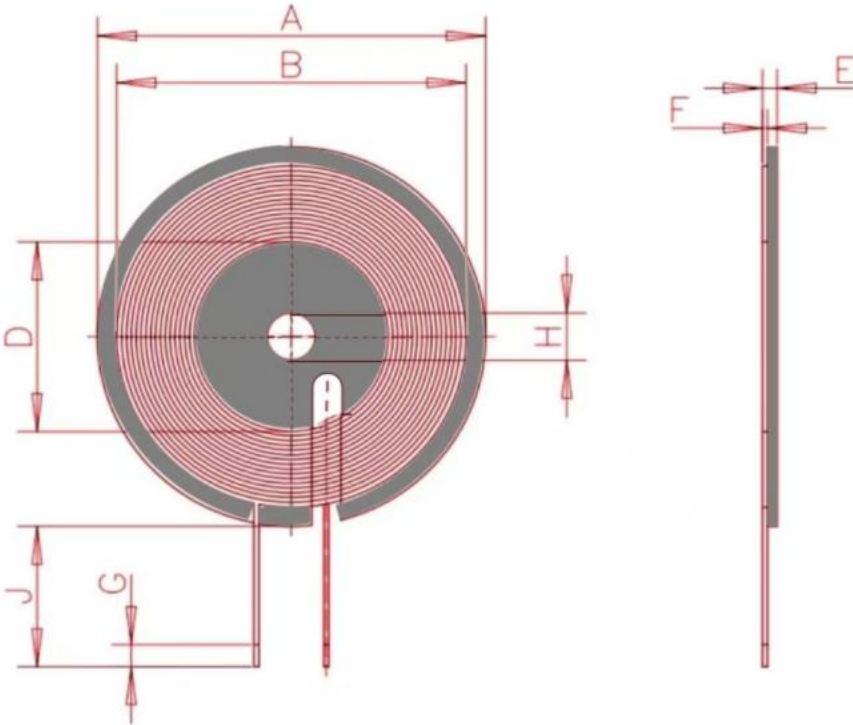
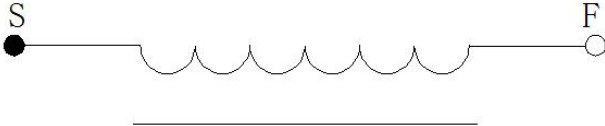


SPECIFICATION

產品型號: DESC		Φ20.5x39-6.8uH-0.08X80P*15mm		版本 Rev: A.0	廠商 man facturer: SHENZHEN YIZHI TECHNOLOGY CO. LTD	客户料号 CUST P/N: 041-0000-0013
一、尺寸 DIMENSION:(mm) 					A	40±0.5
					B	39.0±1.0
					D	20.5±0.5
					E	1.8±0.2
					F	0.8±0.1
					J	15±2
					H	5.1±0.3
					G	3±1
二、原理图 SCHEMATIC DIAGRAM: 					note: 1.Cross outlet; 2.The outlet position is reinforced with glue 3.The coil is attached to a circular hard disk with grooves 4.No back glue	
三、绕线参数 Winding Specification:						
序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction	
1	S	F	hot-wire anemometer/ 0.08*80P	10Ts	CCW	
四、电气特性 ELECTRICAL CHARACTERISTICS:						
温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%						
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS	
1	IND.	S-F	4.2uH +10%Individual coil	100KHz/0.25V	LCZ METER 1062B	
2	IND.	S-F	6.8uH +10%Magnetized sheet	100KHz/0.25V	LCZ METER 1062B	
3	DCR	S-F	≤55mΩ	100KHz/0.25V	LCZ METER 502B	
4	Q 值	S-F	≥70	100KHz/0.25V	LCZ METER 502B	
拟制/日期 PREPARED BY/DATE				审核/日期 CHECKED BY/DATE		
林素玲 2024.10.15				安帅印 2024.10.15		