

TEST REPORT

Report No.: BCTC2411818951E

Applicant: Zanchengrongke(Shenzhen)Technology Co., Ltd.

Product Name: M008

Test Model: M008

Tested Date: 2024-11-01 to 2024-11-05

Issued Date: 2024-11-19

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2BLZU-M008

Product Name: M008

Trademark: N/A

Model/Type Reference: M008

Prepared For: Zanchengrongke(Shenzhen)Technology Co., Ltd.

Address: Room B208,No.6,Zaohekeng Industrial Park,JianzhuRoad,Nanwan Street,
Longgang District,Shenzhen Guangdong China

Manufacturer: Zanchengrongke(Shenzhen)Technology Co., Ltd.

Address: Room B208,No.6,Zaohekeng Industrial Park,JianzhuRoad,Nanwan Street,
Longgang District,Shenzhen Guangdong China

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei,
Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2024-11-01

Sample Tested Date: 2024-11-01 to 2024-11-05


Report No.: BCTC2411818951E

Test Standards: FCC PART 15B
ANSI C63.4:2014

Test Results: PASS

This device complies with part 15 of the FCC Rules, Operation is subject to the condition that this device does not cause harmful interference

Tested by:



Brave Zeng / Project Handler

Approved by:



Zero Zhou /Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	4
2. Test Summary	5
3. Measurement Uncertainty	6
4. Product Information And Test Setup	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Test Mode	8
5. Test Facility And Test Instrument Used	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. Conducted Emissions	10
6.1 Block Diagram Of Test Setup	10
6.2 Limit	10
6.3 Test procedure	10
6.4 Test Result	11
7. Radiated Disturbance Test	13
7.1 Block Diagram Of Test Setup	13
7.2 Limits	13
7.3 Test Procedure	14
7.4 Test Results	15
8. EUT Photographs	19
9. EUT Test Setup Photographs	26

1. Version

Report No.	Issue Date	Description	Approved
BCTC2411818951E	2024-11-19	Original	Valid

TEST
TC
OVER
t See

2. Test Summary

The Product has been tested according to the following specifications:

Standard	Test Item	Test result
FCC 15.107	Conducted Emission	Pass
FCC 15.109	Radiated Emission	Pass



3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Value (dB)
Disturbance voltages (9KHz-150KHz)	3.50
Disturbance voltages (150KHz-30MHz)	3.20
Radiated disturbance (30MHz-200MHz)	4.60
Radiated disturbance (200MHz-1000MHz)	5.20
Radiated disturbance (1GHz -6GHz)	5.30
Radiated disturbance (6GHz -18GHz)	5.50

CO., LTD.

4. Product Information And Test Setup

4.1 Product Information

Ratings:	DC 3.7V Form battery DC 5V Form adapter
battery:	DC 3.7V,200mAh
The highest frequency of the internal sources of the EUT is:	☐ less than 1.705 MHz, the measurement shall only be made up to 30 MHz. ☐ between 1.705 MHz and 108 MHz, the measurement shall only be made up to 1 GHz. ☐ between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. ☒ between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz. ☐ above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40GHz, whichever is less.

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord	Calibration
1.	adapter	---	---	---	---	---	---

Notes:


1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Test Mode

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Mode	
Mode 1:	Signal detection
Mode 2:	Charging

Test item	Test Mode	Test Voltage
Conducted Emission(150KHz-30MHz) Class B	Mode 2	DC 5V Form adapter
Radiated Emission(30MHz-6GHz) Class B	Mode 1 Mode 2*	DC 3.7V Form battery
All test mode were tested and passed, only Conducted Emissions, Radiated Emissions shows (*) is the worst case mode which were recorded in this report.		

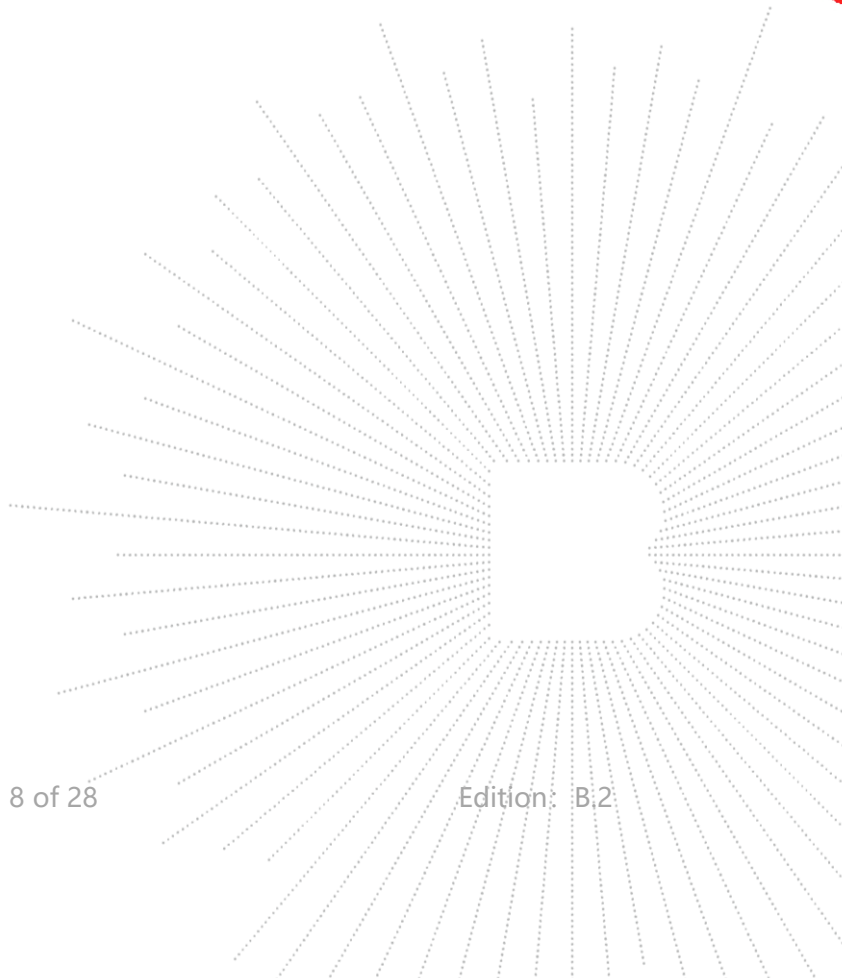

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

5.2 Test Instrument Used


Conducted emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
LISN	R&S	ENV216	101375	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CO N 3A1	\	\
Pulse limiter	Schwarzbeck	VTSD 9561-F	01323	May 16, 2024	May 15, 2025

Radiated disturbance					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 16, 2024	May 15, 2025
Receiver	R&S	ESR3	102075	May 16, 2024	May 15, 2025
Receiver	R&S	ESRP	101154	May 16, 2024	May 15, 2025
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 16, 2024	May 15, 2025
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 21, 2024	May 20, 2025
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 21, 2024	May 20, 2025
Amplifier	SKET	LAPA_01G18G-45 dB	SK2021040 901	May 16, 2024	May 15, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 21, 2024	May 20, 2025
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 16, 2024	May 15, 2025
Horn Antenn(18GHz -40GHz)	Schwarzbeck	BBHA9170	00822	May 21, 2024	May 20, 2025
Spectrum Analyzer9kHz- 40GHz	R&S	FSP40	100363	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

For mains ports:

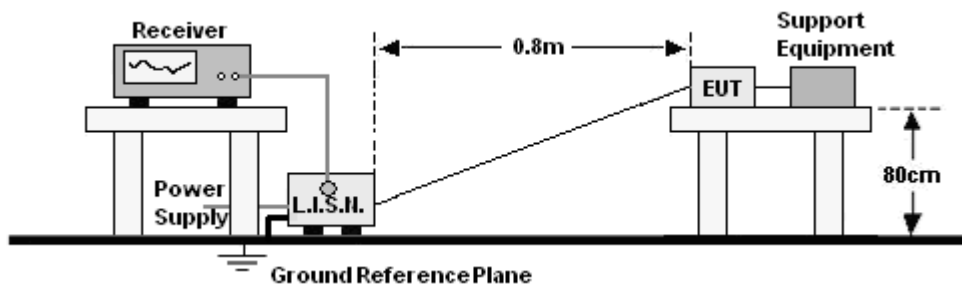

6.2 Limit

Limits for Conducted emissions at the mains ports of Class B MME

Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56*	56 to 46*
0,5 to 5	56	46
5 to 30	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.


6.3 Test procedure

For mains ports:

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Line
Test Voltage :	DC 5V Form adapter	Test Mode:	Mode 2

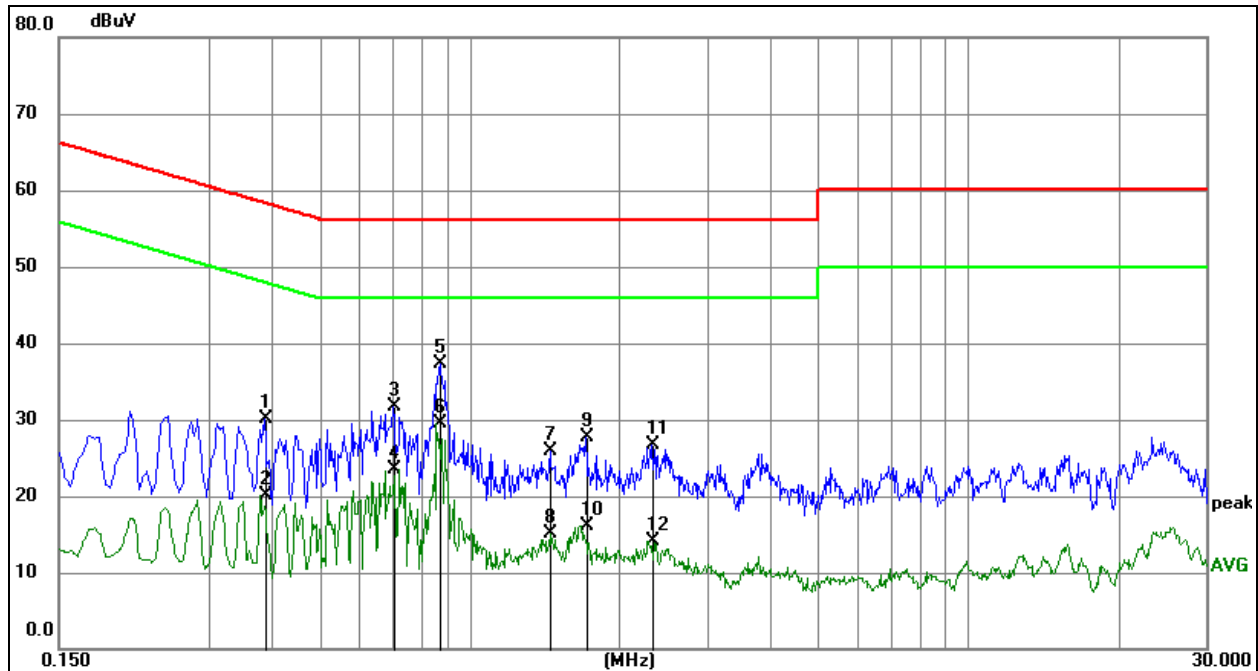


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3885	19.56	10.61	30.17	58.10	-27.93	QP
2	0.3885	9.44	10.61	20.05	48.10	-28.05	AVG
3	0.7035	21.02	10.65	31.67	56.00	-24.33	QP
4	0.7035	12.78	10.65	23.43	46.00	-22.57	AVG
5	0.8745	26.64	10.62	37.26	56.00	-18.74	QP
6 *	0.8745	18.97	10.62	29.59	46.00	-16.41	AVG
7	1.4505	15.31	10.68	25.99	56.00	-30.01	QP
8	1.4505	4.48	10.68	15.16	46.00	-30.84	AVG
9	1.7115	16.91	10.72	27.63	56.00	-28.37	QP
10	1.7115	5.42	10.72	16.14	46.00	-29.86	AVG
11	2.3280	15.88	10.82	26.70	56.00	-29.30	QP
12	2.3280	3.29	10.82	14.11	46.00	-31.89	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Neutral
Test Voltage :	DC 5V Form adapter	Test Mode:	Mode 2

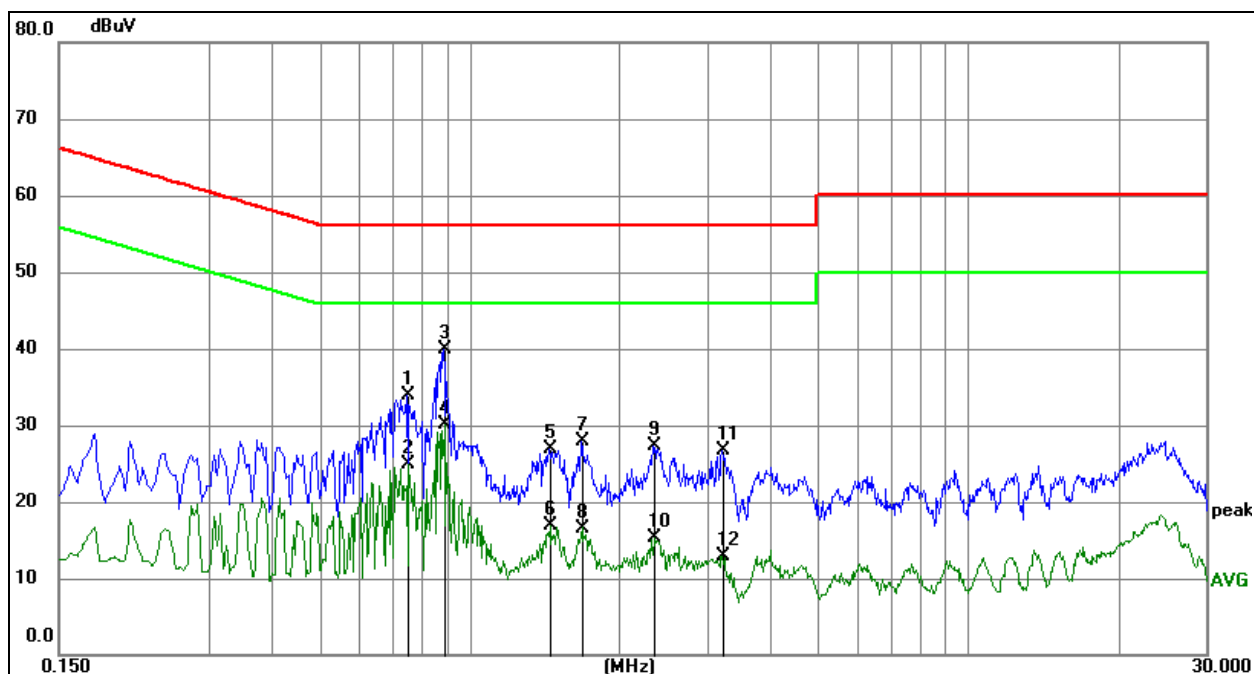

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.7485	23.18	10.65	33.83	56.00	-22.17	QP
2	0.7485	14.28	10.65	24.93	46.00	-21.07	AVG
3	0.8880	29.36	10.61	39.97	56.00	-16.03	QP
4 *	0.8880	19.55	10.61	30.16	46.00	-15.84	AVG
5	1.4460	16.33	10.66	26.99	56.00	-29.01	QP
6	1.4460	6.24	10.66	16.90	46.00	-29.10	AVG
7	1.6800	17.18	10.72	27.90	56.00	-28.10	QP
8	1.6800	5.88	10.72	16.60	46.00	-29.40	AVG
9	2.3370	16.40	10.82	27.22	56.00	-28.78	QP
10	2.3370	4.52	10.82	15.34	46.00	-30.66	AVG
11	3.2235	15.76	10.92	26.68	56.00	-29.32	QP
12	3.2235	1.96	10.92	12.88	46.00	-33.12	AVG


7. Radiated Disturbance Test

7.1 Block Diagram Of Test Setup

30MHz ~ 1GHz:

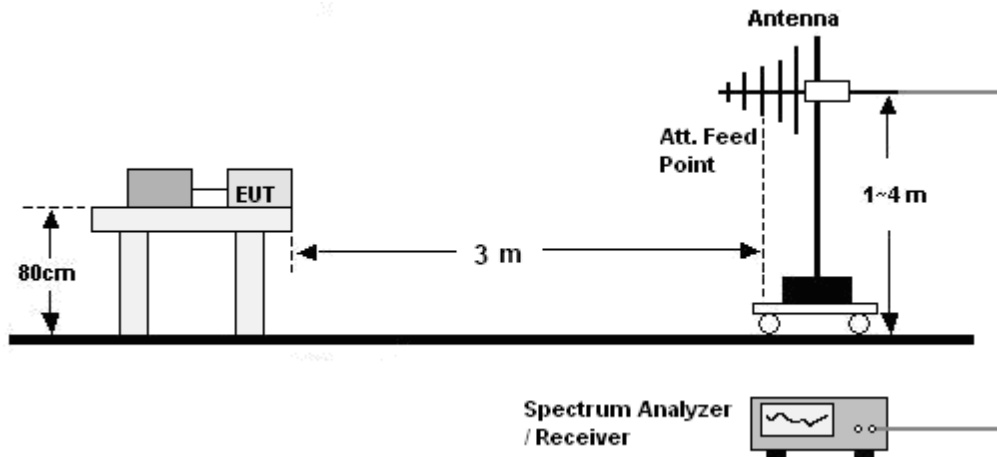

Above 1GHz:

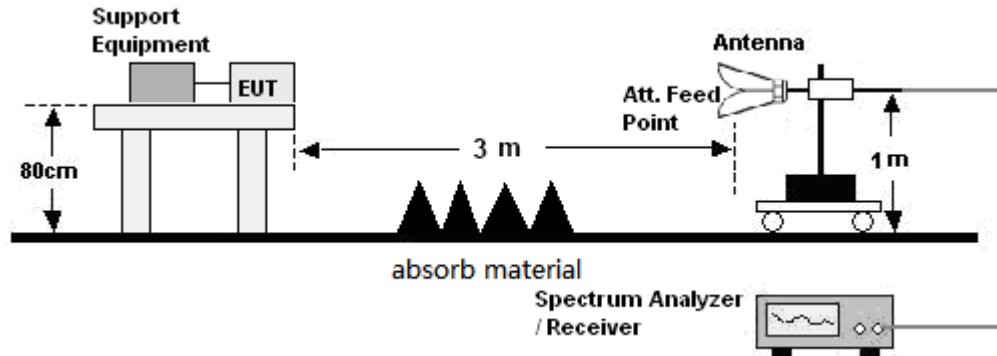

7.2 Limits

Limits for Class B devices

Frequency (MHz)	limits at 3m dB(μ V/m)		
	QP Detector	PK Detector	AV Detector
30-88	40.0	--	--
88-216	43.5	--	--
216-960	46.0	--	--
960 to 1000	54.0	--	--
Above 1000	--	74.0	54.0

Note: The lower limit shall apply at the transition frequencies.


7.3 Test Procedure

30MHz ~ 1GHz:

- a. The Product was placed on the nonconductive turntable 0.8m above the ground in a semi anechoic chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.


Above 1GHz:

- a. The Product was placed on the non-conductive turntable 0.8 m above the ground in a full anechoic chamber..
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

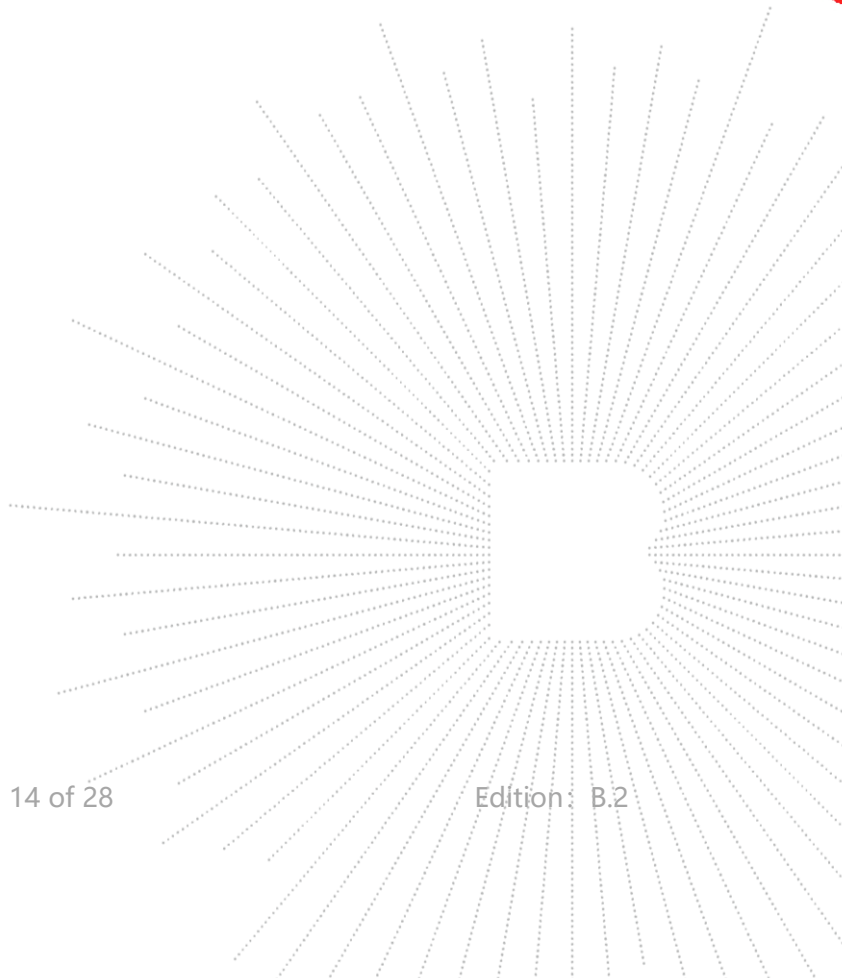

7.4 Test Results


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Voltage :	DC 3.7V Form battery	Test Mode:	Mode 2

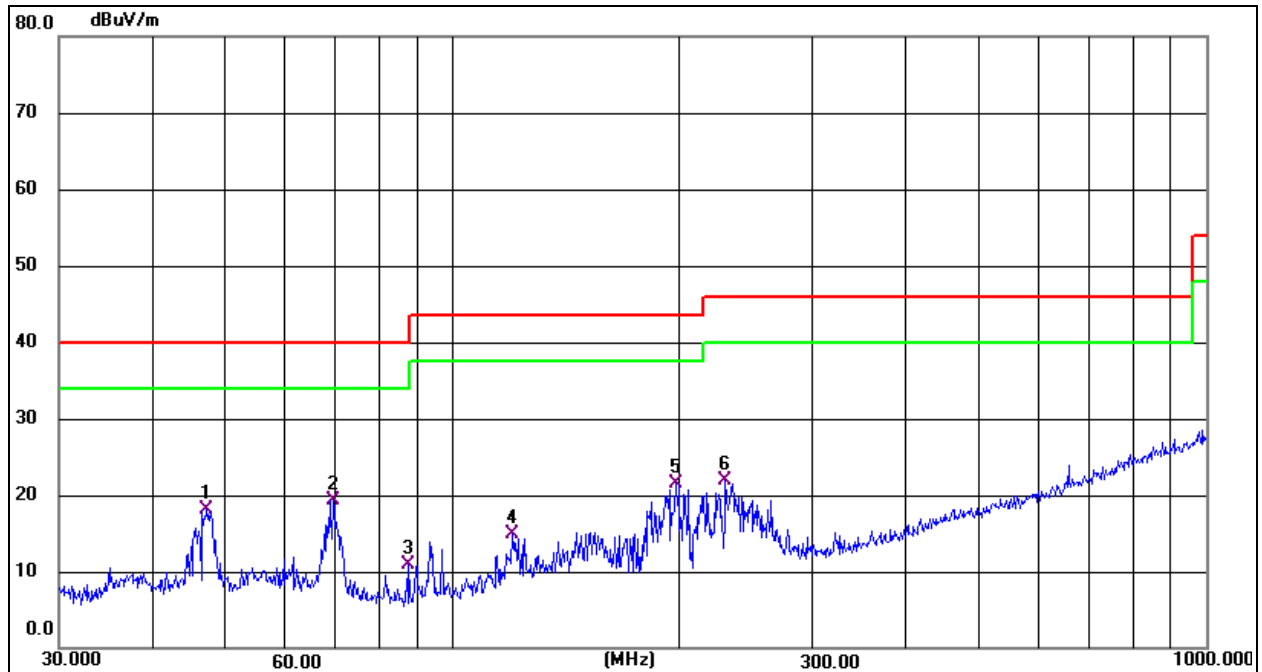

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	47.1599	34.93	-16.85	18.08	40.00	-21.92	QP
2 *	69.3568	38.12	-18.73	19.39	40.00	-20.61	QP
3	87.4177	30.62	-19.66	10.96	40.00	-29.04	QP
4	119.8556	31.73	-16.86	14.87	43.50	-28.63	QP
5	197.8928	38.78	-17.32	21.46	43.50	-22.04	QP
6	230.0985	38.43	-16.43	22.00	46.00	-24.00	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Voltage :	DC 3.7V Form battery	Test Mode:	Mode 2

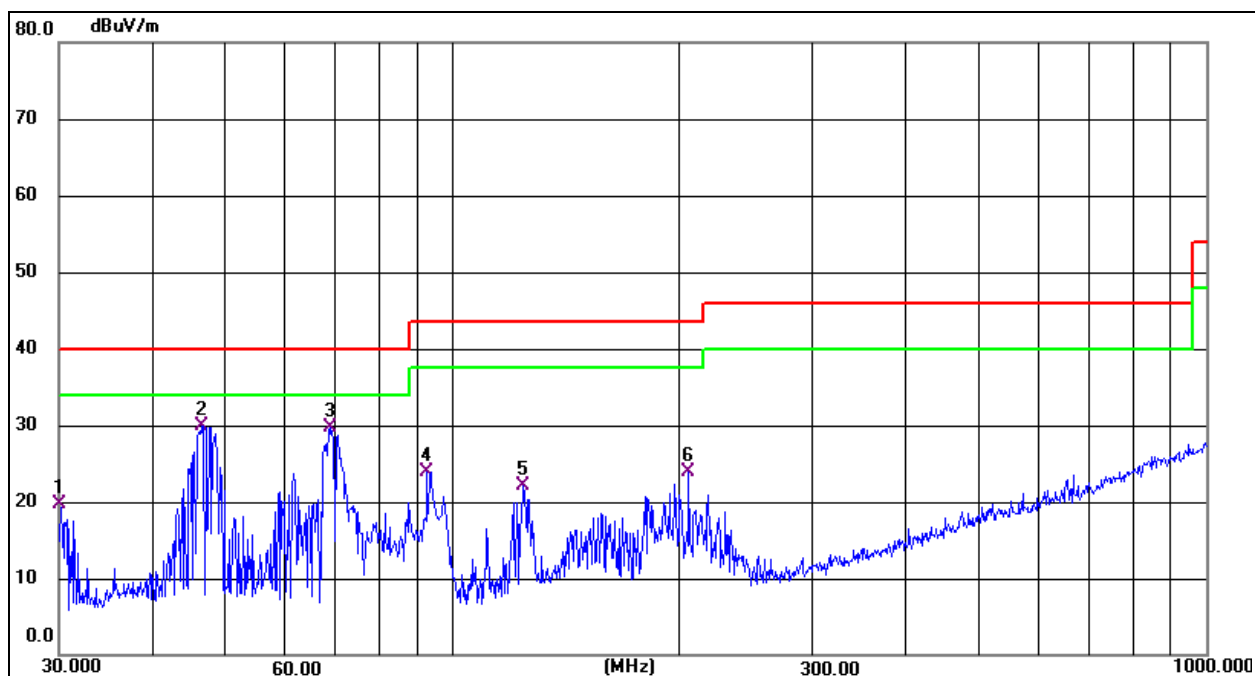


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.0000	37.91	-18.30	19.61	40.00	-20.39	QP
2 *	46.3402	46.86	-16.87	29.99	40.00	-10.01	QP
3	68.6310	48.28	-18.61	29.67	40.00	-10.33	QP
4	92.4624	43.34	-19.40	23.94	43.50	-19.56	QP
5	123.6985	38.58	-16.53	22.05	43.50	-21.45	QP
6	205.6751	41.22	-17.27	23.95	43.50	-19.55	QP

Above 1GHz:

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Voltage :	DC 3.7V Form battery	Test Mode:	Mode 2

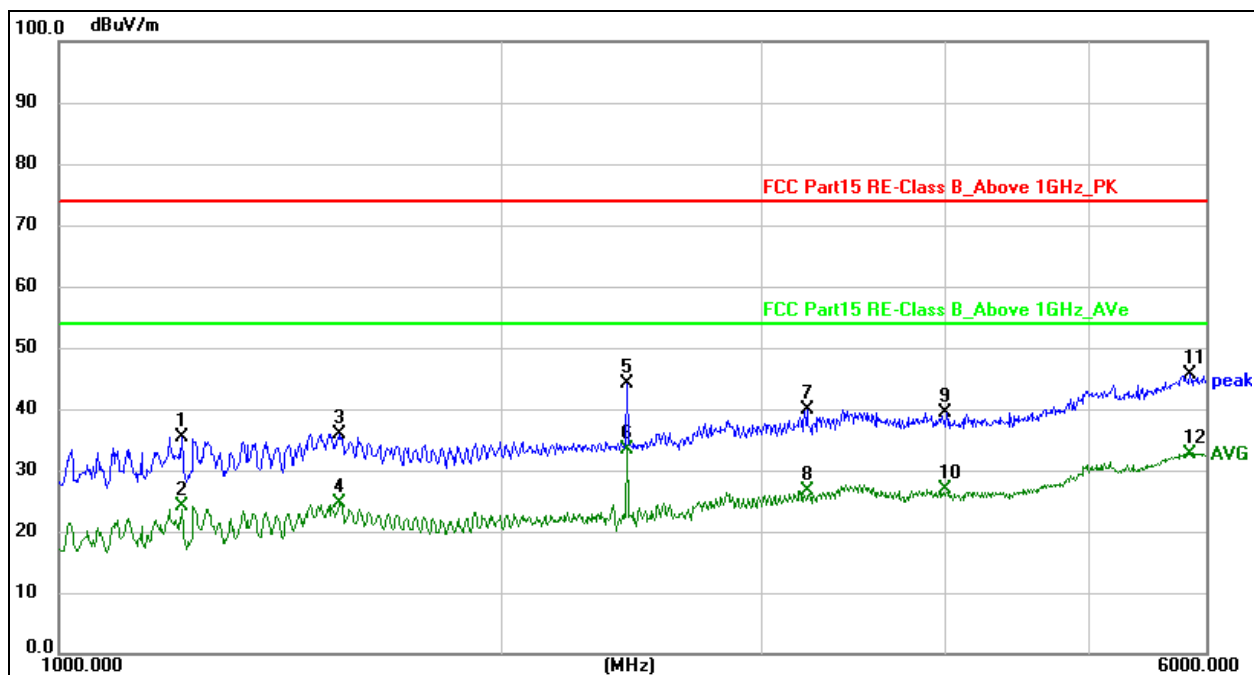


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1211.329	55.47	-19.97	35.50	74.00	-38.50	peak
2	1211.329	44.22	-19.97	24.25	54.00	-29.75	AVG
3	1551.126	55.73	-19.78	35.95	74.00	-38.05	peak
4	1551.126	44.37	-19.78	24.59	54.00	-29.41	AVG
5	2427.643	60.87	-16.76	44.11	74.00	-29.89	peak
6 *	2427.643	50.26	-16.76	33.50	54.00	-20.50	AVG
7	3216.286	53.24	-13.31	39.93	74.00	-34.07	peak
8	3216.286	39.94	-13.31	26.63	54.00	-27.37	AVG
9	4002.110	50.24	-10.90	39.34	74.00	-34.66	peak
10	4002.110	37.76	-10.90	26.86	54.00	-27.14	AVG
11	5851.364	52.79	-7.16	45.63	74.00	-28.37	peak
12	5851.364	39.86	-7.16	32.70	54.00	-21.30	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Voltage :	DC 3.7V Form battery	Test Mode:	Mode 2

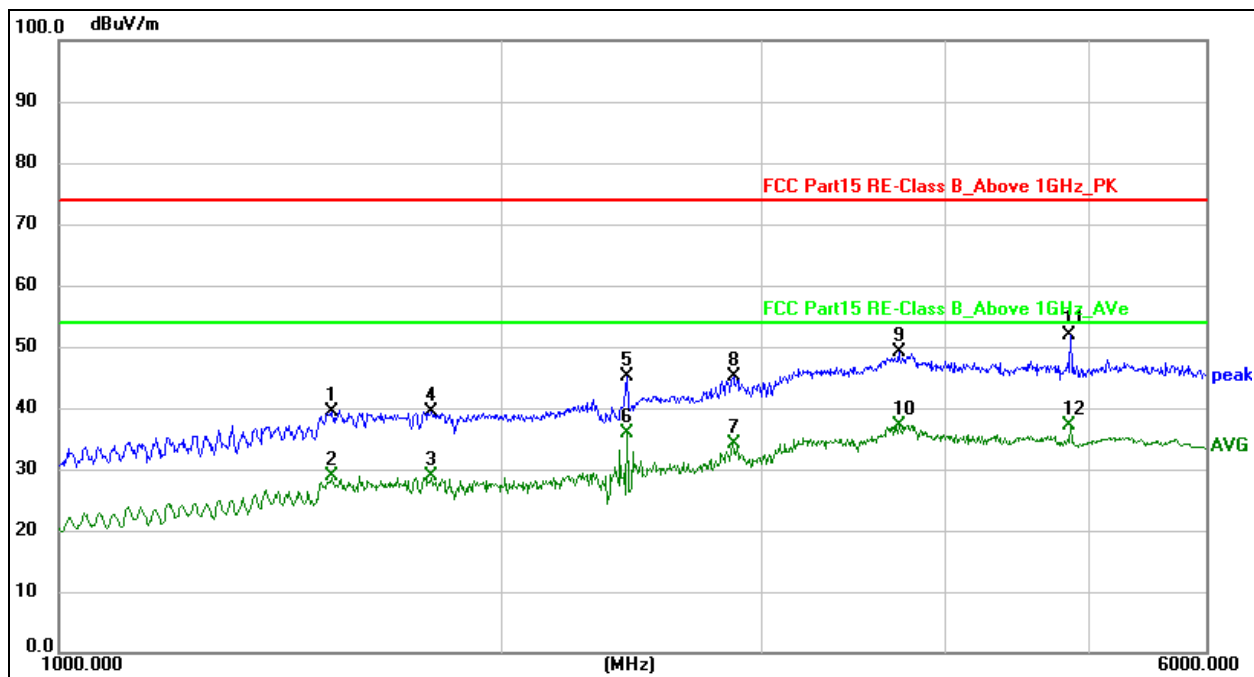

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1531.793	59.25	-19.83	39.42	74.00	-34.58	peak
2	1531.793	48.74	-19.83	28.91	54.00	-25.09	AVG
3	1790.190	48.10	-19.21	28.89	54.00	-25.11	AVG
4	1790.190	58.61	-19.21	39.40	74.00	-34.60	peak
5	2427.643	61.95	-16.76	45.19	74.00	-28.81	peak
6	2427.643	52.56	-16.76	35.80	54.00	-18.20	AVG
7	2867.827	48.79	-14.66	34.13	54.00	-19.87	AVG
8	2867.827	59.69	-14.66	45.03	74.00	-28.97	peak
9	3711.989	61.21	-12.00	49.21	74.00	-24.79	peak
10 *	3711.989	49.18	-12.00	37.18	54.00	-16.82	AVG
11	4856.567	60.95	-9.03	51.92	74.00	-22.08	peak
12	4856.567	46.21	-9.03	37.18	54.00	-16.82	AVG

8. EUT Photographs

EUT Photo 1




EUT Photo 2




EUT Photo 3




EUT Photo 4

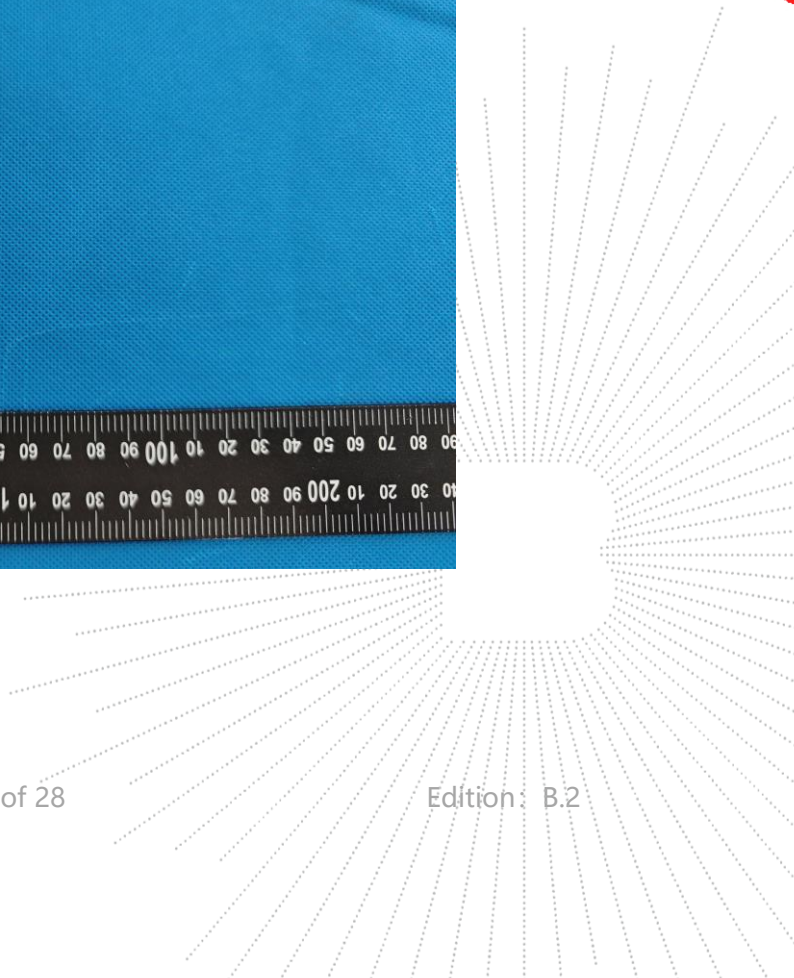


EUT Photo 5

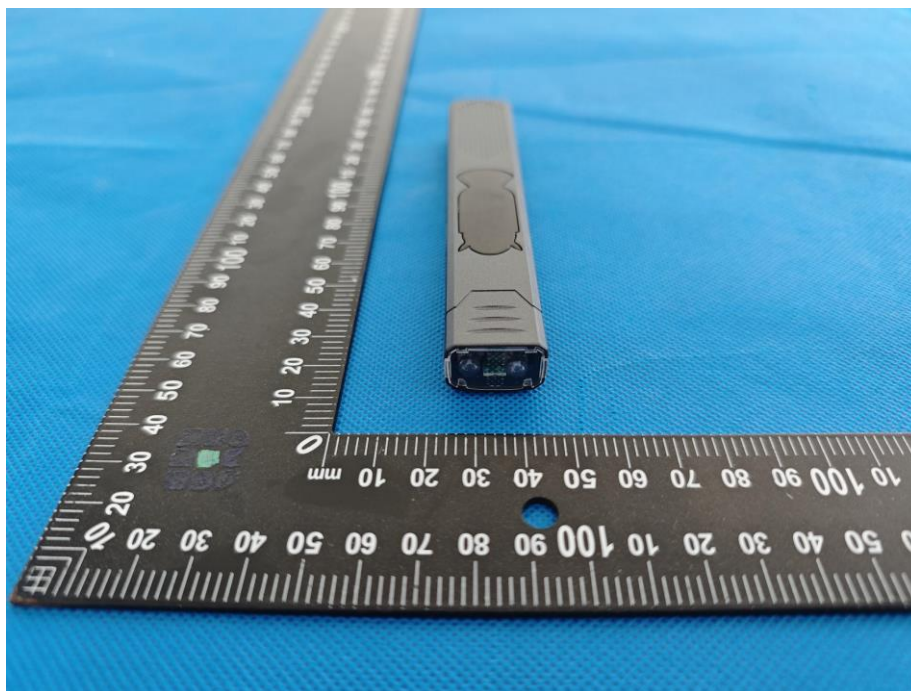


EUT Photo 6

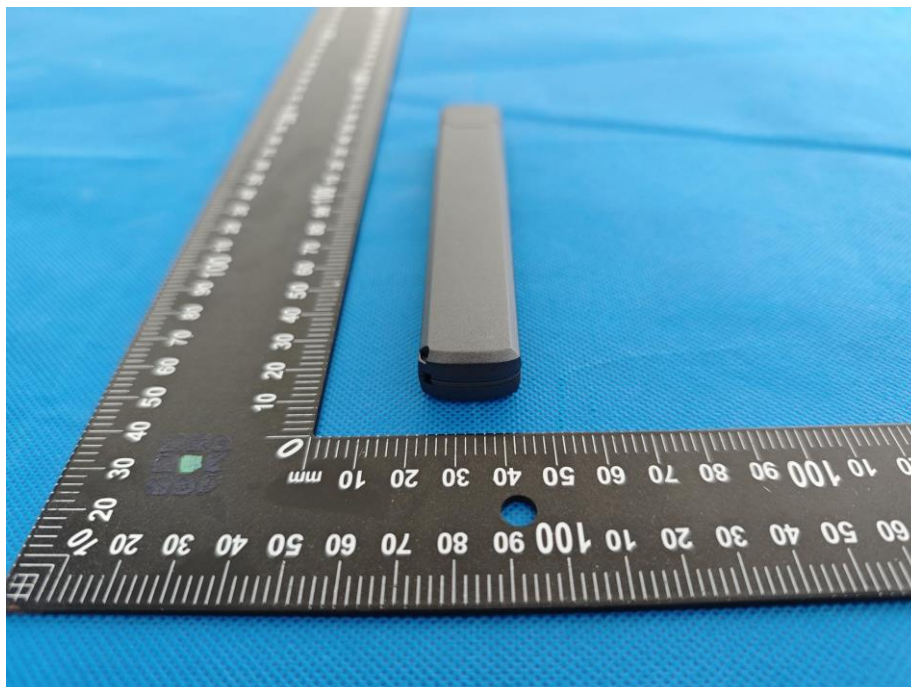


EUT Photo 7

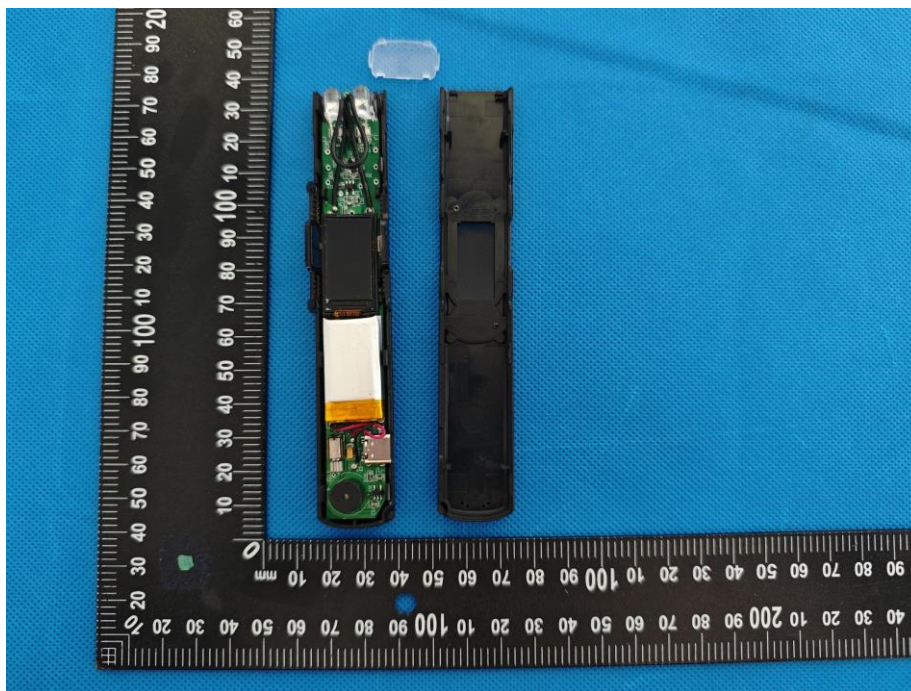


EUT Photo 8

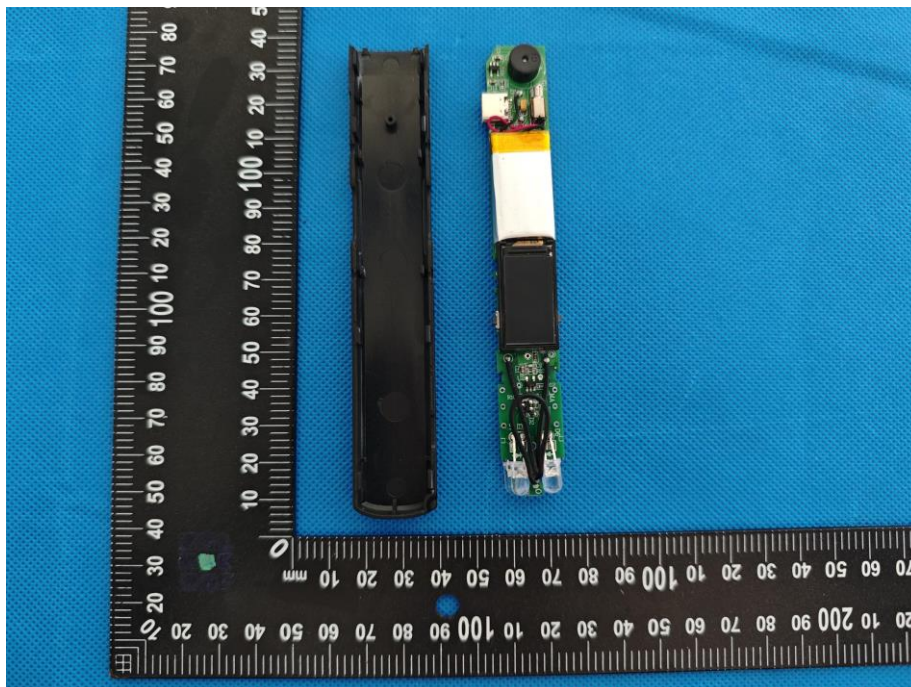


EUT Photo 9

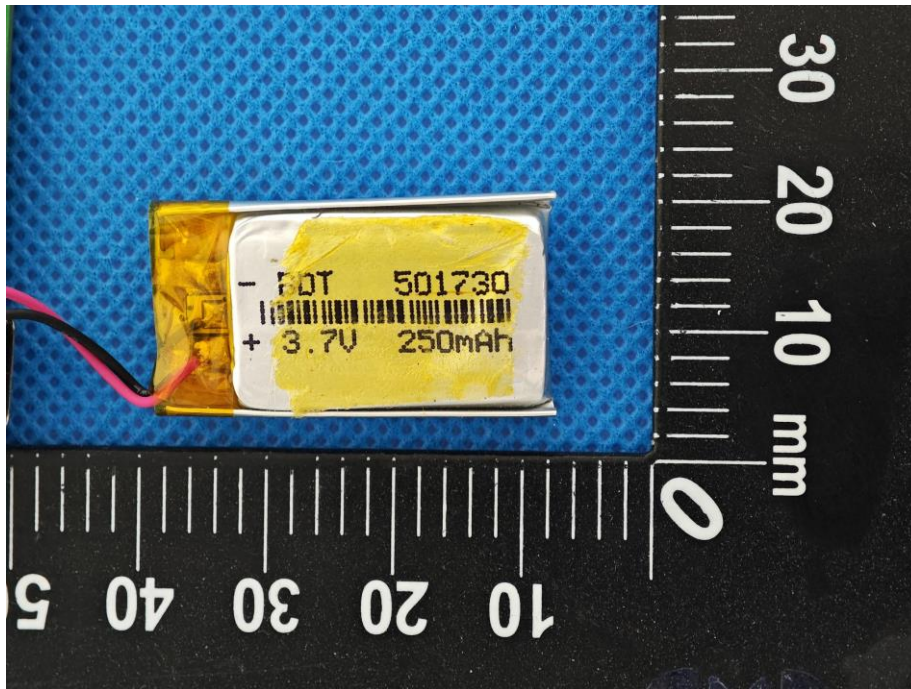


EUT Photo 10

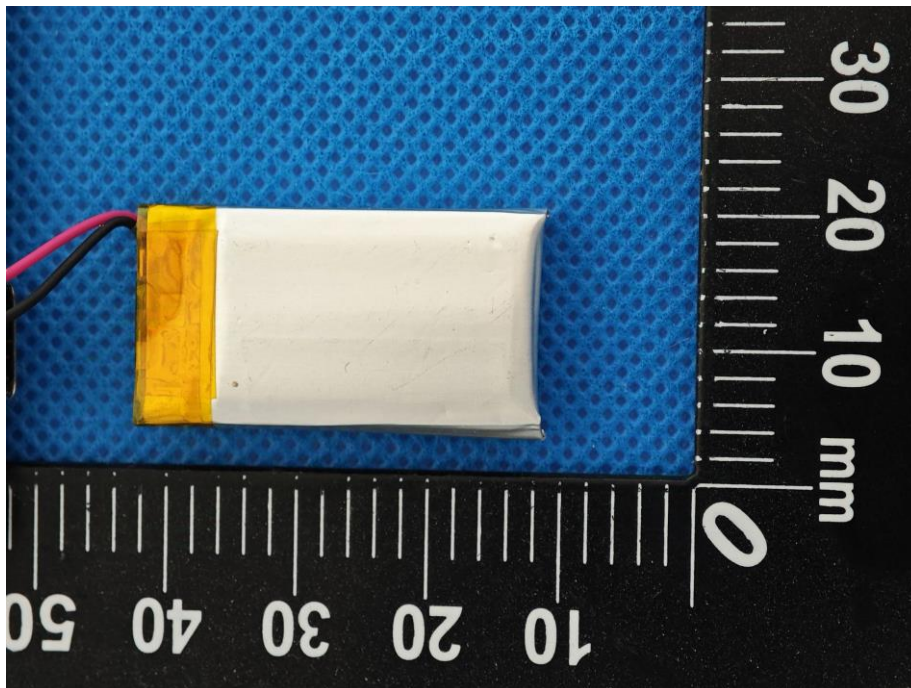


EUT Photo 11

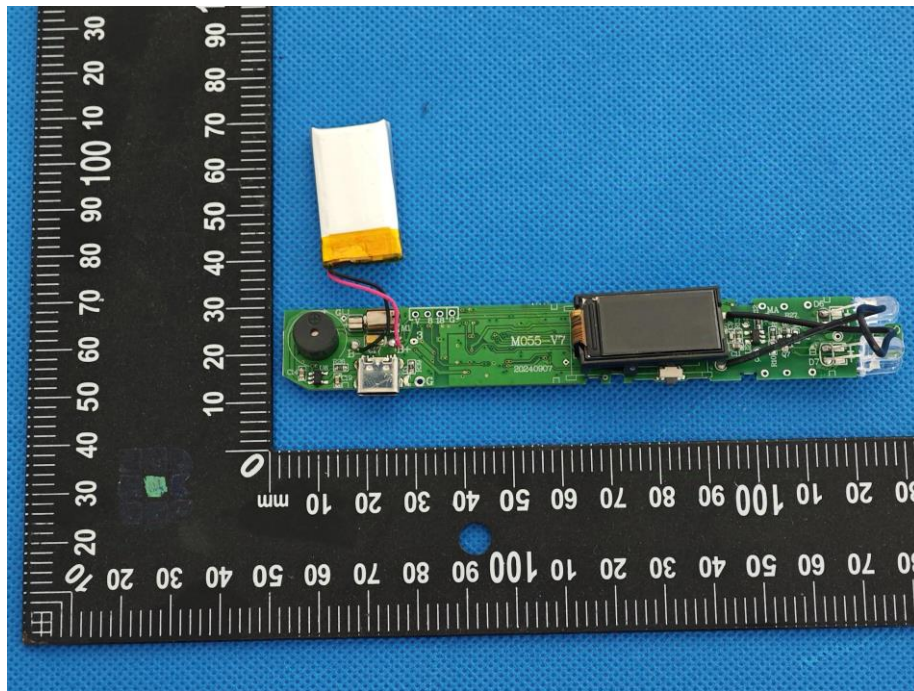

EUT Photo 12

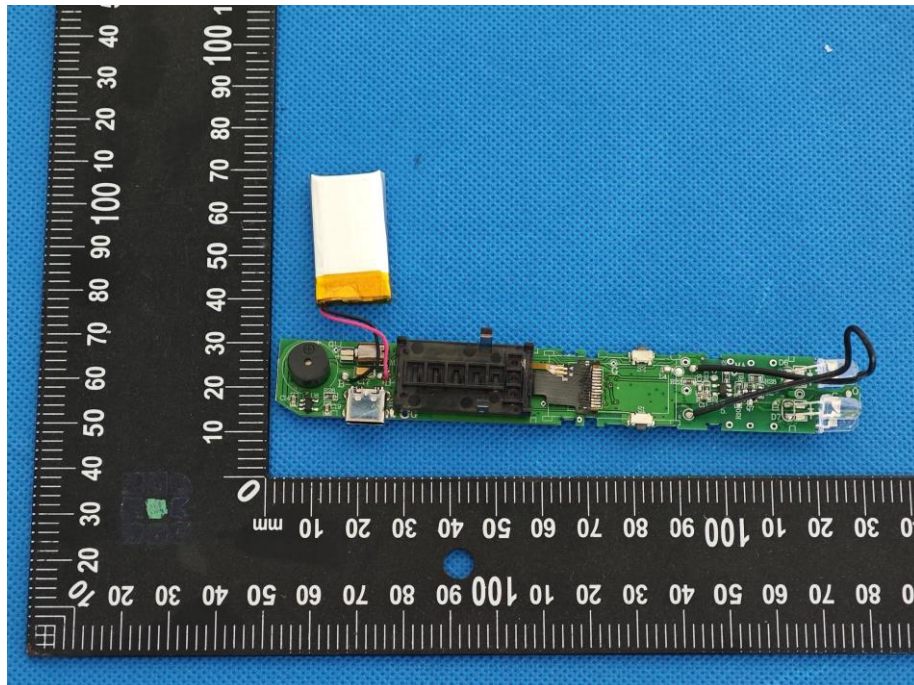

EUT Photo 13

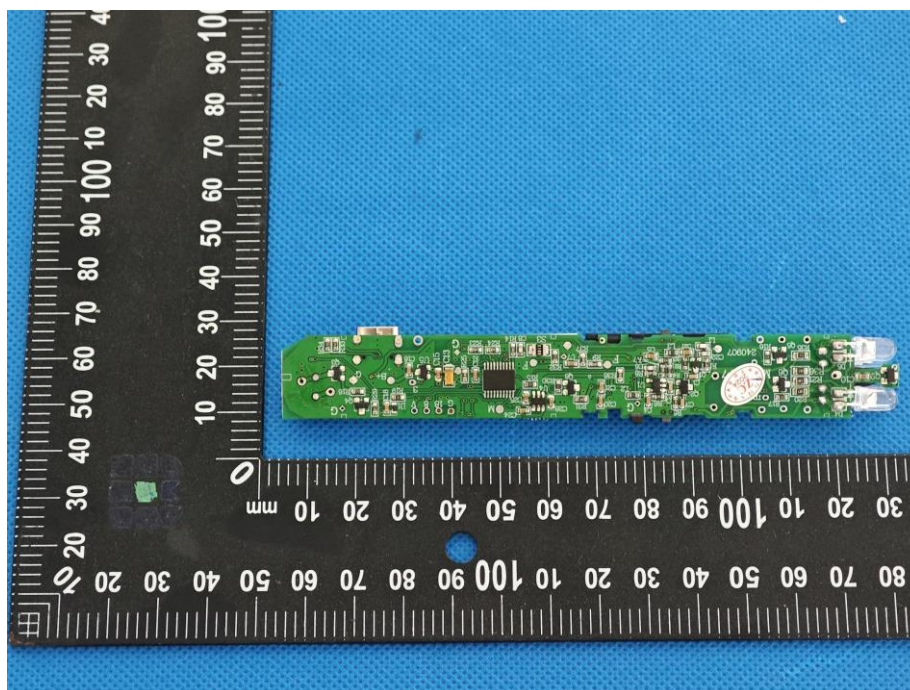


SHENZHEN


9. EUT Test Setup Photographs

Conducted Emission



Radiated Emissions

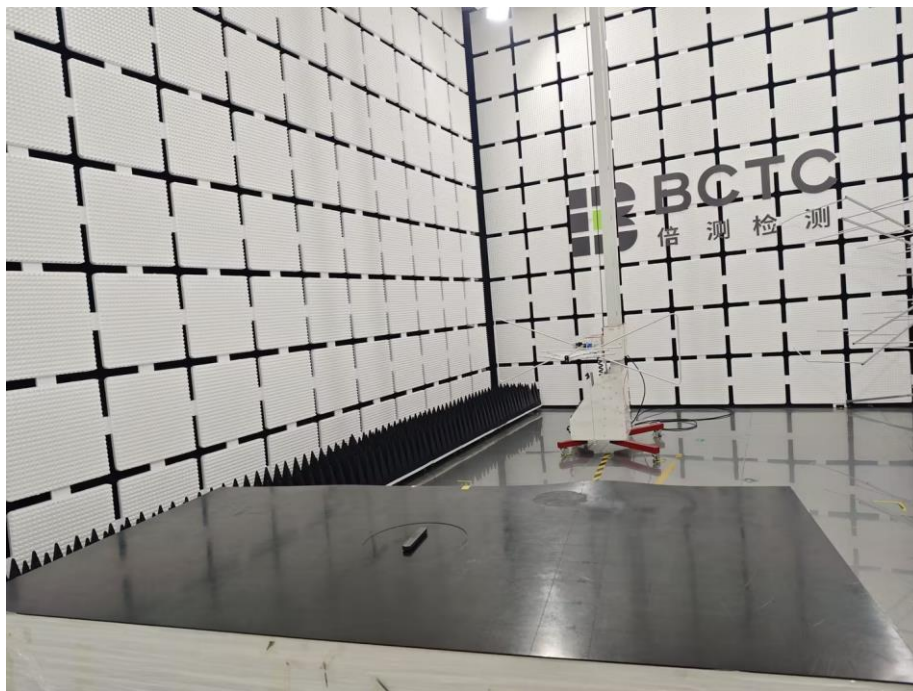

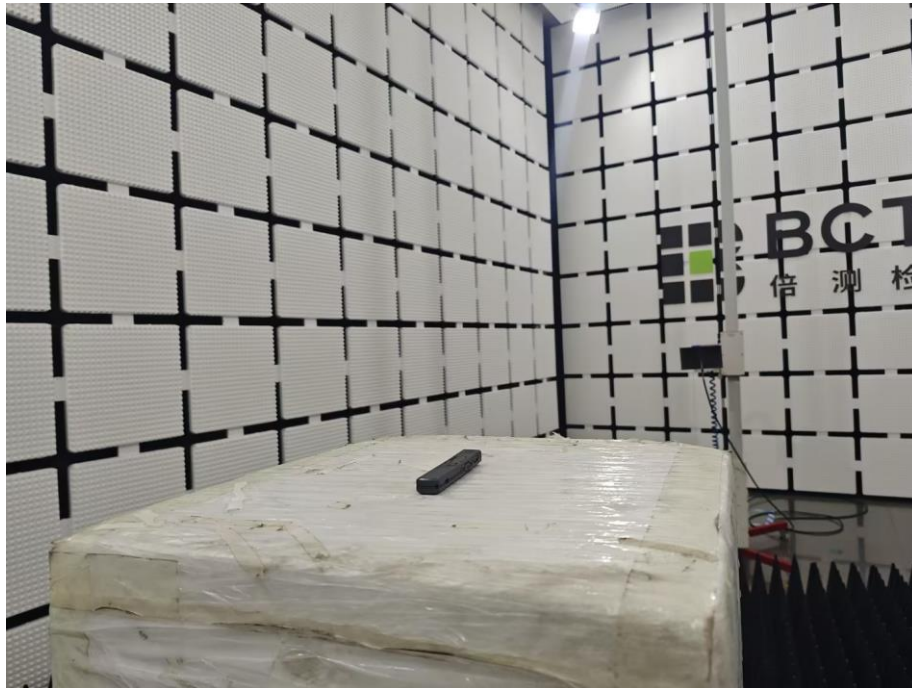

STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518116

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: bctc@bctc-lab.com.cn

Complaint/Advice E-mail: advice@bctc-lab.com.cn

***** END *****

