

TEST REPORT

Applicant Name : Shenzhen Navynav Technology Co., Ltd.
Address : Room 502, Han's Laser Technology Centre Shennan Ave No.9988,
Nanshan District, Shenzhen, Guangdong Province, China
Report Number : 2504A05479E-RF-00A
FCC ID: 2BM2K-M7

Test Standard (s)

FCC PART 90

Sample Description

Product Type: Wireless data transceiver
Model No.: M7
Trade Mark: N/A
Date Received: 2025-12-08
Report Date: 2026-03-27

Test Result:	The EUT complied with the standards above.
--------------	--

Prepared and Checked By:

Matt_Liang

Matt Liang
EMC Engineer

Approved By:

Bob.Liao

Bob.Liao
EMC Engineer

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included but no need marked.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +86 755-26503290

Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY..... 3

GENERAL INFORMATION..... 4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 4

 OBJECTIVE 4

 TEST METHODOLOGY 4

 TEST FACILITY 5

 MEASUREMENT UNCERTAINTY 5

SYSTEM TEST CONFIGURATION 6

 DESCRIPTION OF TEST CONFIGURATION..... 6

 EQUIPMENT MODIFICATIONS 6

 SUPPORT EQUIPMENT LIST AND DETAILS 6

 EXTERNAL I/O CABLE..... 6

 BLOCK DIAGRAM OF TEST SETUP 6

SUMMARY OF TEST RESULTS 8

TEST EQUIPMENT LIST 9

RF OUTPUT POWER..... 10

 APPLICABLE STANDARD..... 10

 TEST PROCEDURE 10

 TEST DATA 10

OCCUPIED BANDWIDTH & EMISSION MASK..... 11

 APPLICABLE STANDARD..... 11

 TEST PROCEDURE 11

 TEST DATA 12

SPURIOUS EMISSIONS AT ANTENNA TERMINALS 13

 APPLICABLE STANDARD..... 13

 TEST PROCEDURE 14

 TEST DATA 14

RADIATED SPURIOUS EMISSIONS 15

 APPLICABLE STANDARD..... 15

 TEST PROCEDURE 15

 TEST DATA 17

FREQUENCY STABILITY..... 18

 APPLICABLE STANDARD..... 18

 TEST PROCEDURE 18

 TEST DATA 18

TRANSIENT FREQUENCY BEHAVIOR 19

 APPLICABLE STANDARD..... 19

 TEST PROCEDURE 19

 TEST DATA 19

APPENDIX 20

 RF OUTPUT POWER..... 21

 FREQUENCY STABILITY..... 24

 OCCUPIED BANDWIDTH & EMISSION MASK 25

 SPURIOUS EMISSION AT ANTENNA TERMINAL 30

 TRANSIENT FREQUENCY BEHAVIOR..... 33

EXHIBIT A-EUT PHOTOGRAPHS 34

EXHIBIT B-TEST SETUP PHOTOGRAPHS 35

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
Rev.00	2504A05479E-RF-00A	Original Report	2026-03-27

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Name	Wireless data transceiver
Tested Model	M7
Voltage Range [#]	DC 7.5V

Frequency Range	UHF: 410-470MHz
Rated Output Power [#]	High Power: 5Watts Low Power: 2Watts
Modulation Technique	4FSK
Channel Separation	Digital: 12.5kHz
Antenna Specification [#]	External Antenna, Gain: 2dBi (It is provided by the manufacturer.)
Sample Serial Number	For RSE Test: 3E0T-2 For RF Conducted Test: 3E0T-1 (Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2, and Part 90 of the Federal Communication Commissions rules.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 90 – Private Land Mobile Radio Service

Applicable Standards:

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Accredited by American Association for Laboratory Accreditation (A2LA).The Certificate Number is 4297.01.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.064×10^{-7}
RF output power, conducted		0.3 dB
Unwanted Emission, conducted		1.2 dB
Emissions, Radiated	30MHz - 1GHz	4.3 dB
	1GHz - 18GHz	4.9 dB
	18GHz - 26.5GHz	5.2 dB
	26.5GHz - 40GHz	4.6 dB
Temperature		1°C
Humidity		7%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured to testing mode which is provided by the manufacturer.
Test Frequency#: 410.0125MHz, 440MHz, 469.9875MHz

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Unknown	50Ω Load	Unknown	Unknown
Unknown	Test Fixture#	Unknown	Unknown

External I/O Cable


Cable Description	Shielding Type	Length (m)	From Port	To
Cable	NO	0.1	EUT	Load
DC Cable	NO	1.0	Test Fixture#	DC Power Source

Block Diagram of Test Setup

Below 1GHz:

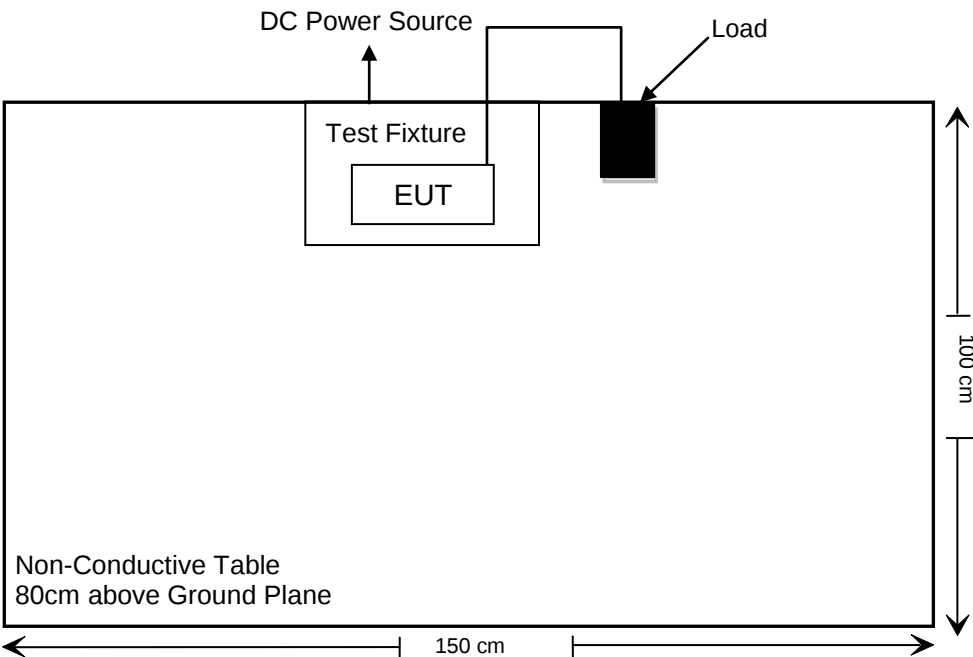

Above 1GHz:

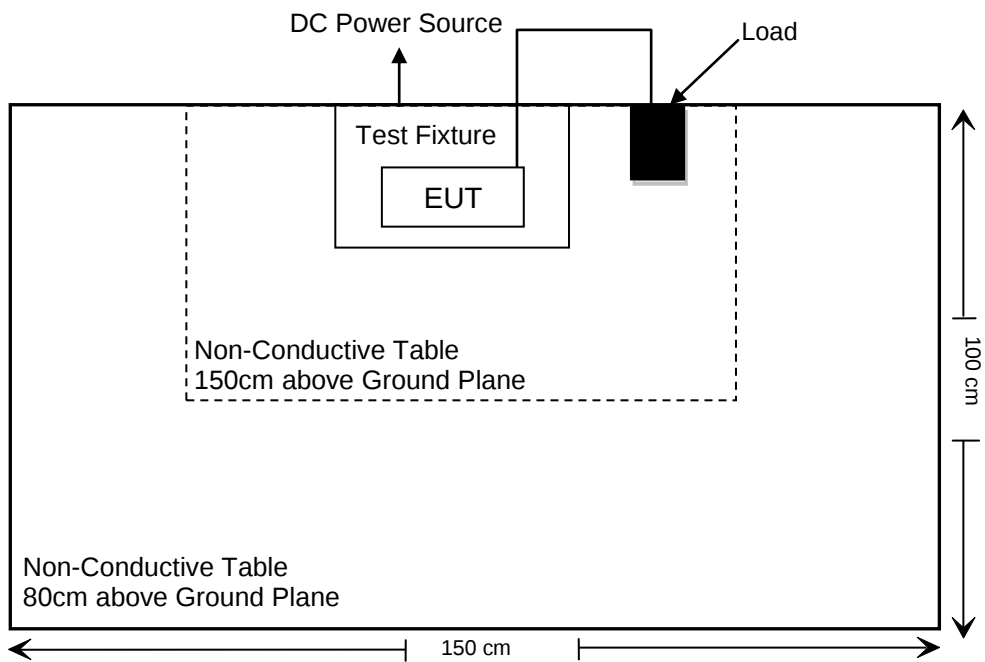

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§2.1046; §90.205	RF Output Power	Compliance
§2.1047; §90.207	Modulation Characteristic	Not Applicable
§2.1049; §90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance
§2.1051;§90.210	Spurious Emission at Antenna Terminal	Compliance
§2.1053;§90.210	Spurious Radiated Emissions	Compliance
§2.1055;§90.213	Frequency Stability	Compliance
§90.214	Transient Frequency Behavior	Compliance

Note: The device only support digital transmission.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Spurious Emission Test (Below 1GHz)					
Rohde & Schwarz	Test Receiver	ESR	102725	2025/09/18	2026/09/17
SONOMA INSTRUMENT	Amplifier	310N	186131	2025/03/26	2026/03/25
Mini-Circuits	High Pass Filter	NHP-600+	15542	2025/09/18	2026/09/17
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2024/08/08	2027/08/07
Unknown	RF Coaxial Cable	No.12	N040	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.13	N300	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.14	N800	2025/05/30	2026/05/29
Schwarzbeck	Bilog Antenna	VULB9163	9163-194	2023/02/14	2026/02/13
Unknown	RF Coaxial Cable	No.40	/	2025/05/30	2026/05/29
Agilent	Signal Generator	N5183A	MY47420360	2025/08/29	2026/08/28
Test Software: e3 191218 (V9)					
Radiated Spurious Emission Test (Above 1GHz)					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2025/09/17	2026/09/16
Decentest	Filter Switch Unit	DT7220FSU	DQ77927	2025/09/18	2026/09/17
Decentest	Multiplex Switch Test Control Set	DT7220CSU	DQ77924	2025/09/18	2026/09/17
A.H. Systems, inc.	Preamplifier	PAM-0118	226	2025/03/20	2026/03/19
Schwarzbeck	Horn Antenna	BBHA9120D	837	2023/02/22	2026/02/21
Unknown	RF Coaxial Cable	No.10	N050	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.11	N1000	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.19	N500	2025/05/30	2026/05/29
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-655	2023/11/27	2026/11/26
Unknown	RF Coaxial Cable	No.40	/	2025/05/30	2026/05/29
Agilent	Signal Generator	N5183A	MY47420360	2025/08/29	2026/08/28
Test Software: e3 191218 (V9)					
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2025/09/22	2026/09/21
Rohde&Schwarz	Spectrum Analyzer	FSV-40	101590	2025/09/17	2026/09/16
Aeroflex/Weinschel	30dB Attenuator (Input 250W/ Output 50W)	58-30-33	PS467	2025/03/26	2026/03/25
Mini-Circuits	High Pass Filter	NHP-600+	15542	2025/09/18	2026/09/17
BACL	Temp. & Humid. Chamber	BTH-150-40	30192	2025/09/18	2026/09/17
UNI-T	DC Power Supply	UTP1306S	2109D0903324	2025/03/26	2026/03/25

* Statement of Traceability: Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

RF OUTPUT POWER

Applicable Standard


FCC §2.1046 and §90.205

Test Procedure

Test Method: ANSI C63.26-2015, Clause 5.2.3.3

This procedure can be used to measure the peak power in either a CW-like or noise-like narrowband RF signal. The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

- Set the RBW $\geq$ OBW.
- Set VBW $\geq 3 \times$ RBW.
- Set span $\geq 2 \times$ OBW.
- Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the peak amplitude level



Note: offset=Cable Loss(0.5dB[#])+Attenuator(30dB)

Test Data

Test Result: Please refer to the Appendix.

OCCUPIED BANDWIDTH & EMISSION MASK

Applicable Standard

FCC §2.1049, §90.209 and §90.210

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

Emission Mask D - 12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 , 0dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least $7.27 (f_d - 2.88 \text{ kHz})$ dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz at least: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.
- 4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.


The resolution bandwidth of the spectrum analyzer was set at 100 Hz and the spectrum was recorded in the frequency band ± 50 kHz from the carrier frequency.

According to ANSI C63.26-2015 Section 5.4.4:

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.
- d) Set the detection mode to peak, and the trace mode to max-hold.
- e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).



Note: offset=Cable Loss(0.5dB[#])+Attenuator(30dB)

Test Data

Test Result: Please refer to the Appendix.

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard

FCC §2.1051 and §90.210

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:


- 1) For any frequency removed from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 , 0 dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least 7.27 ($f_d - 2.88$ kHz) dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.
- 4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Method: ANSI C63.26-2015 Section 5.7.4:

- a) Set the spectrum analyzer start frequency to the lowest frequency generated by the EUT, without going below 9 kHz, and the stop frequency to the lower frequency covered by the measurements previously performed in 5.7.3. As an alternative, the stop frequency can be set to the value specified in 5.1.1, depending on the EUT operating range, if the resulting plot can clearly demonstrate compliance for all frequencies not addressed by the out-of-band emissions measurements performed as per 5.7.3.
- b) When using an average power (rms) detector, ensure that the number of points in the sweep $\geq 2 \times (\text{span} / \text{RBW})$. This may require that the measurement range defined by the start and stop frequencies be subdivided, depending on the spectrum analyzer capabilities. This requirement does not apply to peak-detected power measurements. When average power is specified by the applicable regulation, a peak-detector can be utilized for preliminary measurements to accommodate wider frequency spans. Any emissions found in the preliminary measurement to exceed the applicable limit(s) shall be further examined using a power averaging (rms) detector with the minimum number of measurement points as defined above.
- c) The sweep time should be set to auto-couple for performing peak-detector measurements. For measurements that use a power averaging (rms) detector, the sweep time shall be set as described for out-of-band emissions measurements in item d) of 5.7.3.
- d) Identify and measure the highest spurious emission levels in each frequency range. It is not necessary to re-measure the out-of-band emissions as a part of this test. Record the frequencies and amplitudes corresponding to the measured emissions and capture the data plots.
- e) Repeat step b) through step d) for the upper spurious emission frequency range if not already captured by a wide span measurement performed as per the alternative provided in step a). The upper frequency for this measurement is defined in 5.1.1 as a function of the EUT operating range.
- f) Compare the results with the corresponding limit in the applicable regulation.
- g) The test report shall include the data plots of the measuring instrument display and the measured data.



Note: offset=Cable Loss(0.5dB[#])+Attenuator(30dB)

Test Data

Test Result: Please refer to the Appendix.

RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053 and §90.210

Test Procedure

According to ANSI C63.26-2015 Section 5.5.3:

•Test setup:

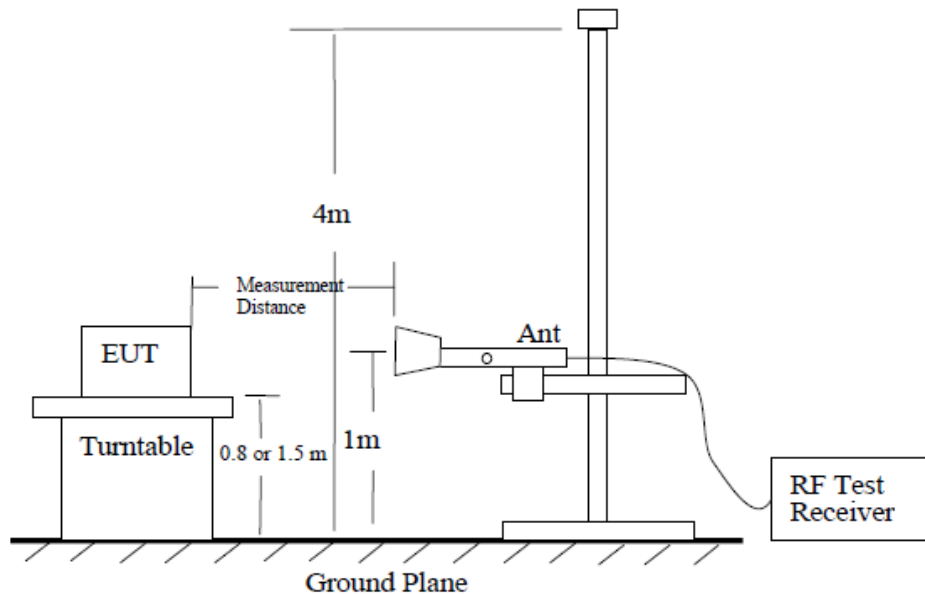


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

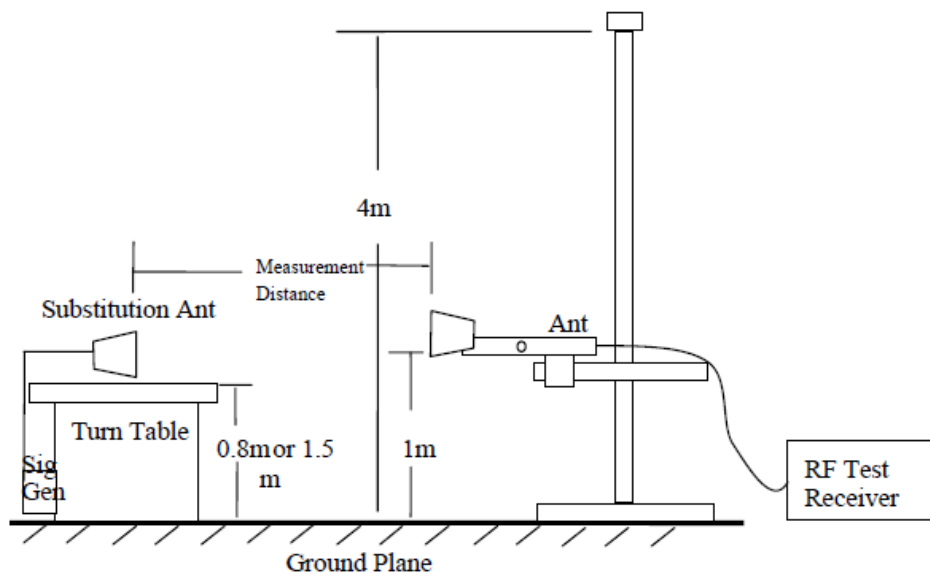


Figure 7—Substitution method set-up for radiated emission

• Final radiated emissions testing

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where
 P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm
 NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the receiving antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Test Data

Environmental Conditions

Test Item:	RSE Below 1GHz	RSE Above1GHz
Temperature:	20.9 °C	22.3 °C
Relative Humidity:	50 %	52 %
ATM Pressure:	100.9 kPa	101.8 kPa
Test Engineer:	Colin Lin	Colin Lin
Test Date:	2025-12-16	2026-01-19
EUT Operation Mode:	Transmitting(High Power)	Transmitting(High Power)

Test Result: Compliance, please refer to the below data.

Note: After pre-scan in the X, Y and Z axes of orientation, the worst case as setup photos was recorded.

For Digital:

OF Digital

Frequency (MHz)	Receiver	Rx Antenna	Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
	Reading (dBm)	Polar (H/V)				
410.0125 MHz						
820.025	-56.10	H	11.35	-44.75	-20	-24.75
820.025	-62.30	V	8.30	-54.00	-20	-34.00
1230.0375	-36.64	H	-0.89	-37.53	-20	-17.53
1230.0375	-36.64	V	-0.65	-37.29	-20	-17.29
440 MHz						
880	-57.71	H	8.11	-45.60	-20	-25.60
880	-62.15	V	10.92	-51.23	-20	-31.23
1320	-42.73	H	-1.41	-44.14	-20	-24.14
1320	-42.99	V	-1.39	-44.38	-20	-24.38
469.9875 MHz						
939.975	-55.29	H	9.48	-45.81	-20	-25.81
939.975	-61.20	V	9.81	-51.39	-20	-31.39
1409.9625	-41.25	H	-1.32	-42.57	-20	-22.57
1409.9625	-42.7	V	-1.46	-44.16	-20	-24.16

Note 1: Absolute Level = Substituted Factor + Reading

Note 2: Substituted Factor Contains: SG Level - Cable Loss+ Antenna Gain

Note 3: Margin = Absolute Level – Limit

Note 4: The data which below the 20 dB limit was not recorded.

FREQUENCY STABILITY

Applicable Standard

FCC §2.1055 and §90.213

Test Procedure

According to ANSI C63.26-2015 Section 5.6:


Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.

The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between -30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and $\pm 15\%$ supply voltage variations. If a product is specified to operate over a range of input voltage then the -15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

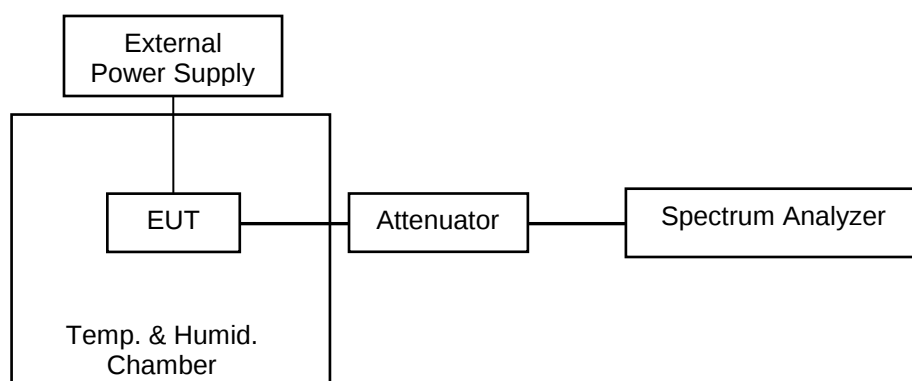

Note: offset=Cable Loss(0.5dB[#])+Attenuator(30dB)

Test Data

Test Result: Please refer to the Appendix.

TRANSIENT FREQUENCY BEHAVIOR


Applicable Standard

Regulations: FCC §90.214

Test method: ANSI C63.26-2015

Test Procedure

- a) Connect the equipment as illustrated.
- b) Modulate the transmitter with the standard transmitter symbol rate pattern.
- c) Connect the output of the standard transmitter load to the RF power meter. Supply sufficient attenuation via the RF attenuator to provide a level that is approximately 40 dB below the maximum allowable input to the modulation domain analyzer.
- d) Turn the transmitter off.
- e) Disconnect the RF power meter and connect the modulation domain analyzer in its place. Set the envelope trigger of the modulation domain analyzer to the minimum level that will trigger when the transmitter is keyed.
- f) Reduce the attenuation of the RF attenuator so that the input to the modulation domain analyzer is increased by 30 dB when the transmitter is turned on.
- g) Set the modulation domain analyzer to trigger on the rising edge of the waveform in order to capture a single-shot turn-on of the transmitter signal.
- h) Adjust the display of the modulation domain analyzer for proper viewing of the transmitter transient behavior. Set the timebase reference to the left for observing the transmitter turn-on transient.
- i) Turn the transmitter on.
- j) Observe the stored display of the modulation domain analyzer. The average of the positive and negative peak of the signal trace shall be maintained within the allowable limits during the periods t_1 and t_2 , and shall also remain within limits following t_2 .
- k) Adjust the modulation domain analyzer to trigger on the falling edge of the transmitter waveform in order to capture a single-shot turn-off transient of the transmitter signal.
- l) Adjust the display of the modulation domain analyzer for proper viewing of the transmitter transient behavior. Set the timebase reference to the right for observing the transmitter turn-off transient.
- m) Turn off the transmitter.
- n) Observe the stored display of the modulation domain analyzer. The average of the positive and negative peak of the signal trace shall be maintained within the allowable limits during the period t_3 .



Note: offset=Cable Loss(0.5dB[#])+Attenuator (30dB)

Test Data

Test Result: Please refer to the Appendix.

APPENDIX

Test Information:

Sample No.:	3E0T-1	Test Date:	2026-01-08 to 2026-03-27
Test Site:	RF	Test Mode:	Transmitting
Tester:	Benny Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.8-25.1	Relative Humidity: (%)	44-52	ATM Pressure: (kPa)	100.4-101.8
----------------------	-----------	------------------------------	-------	------------------------	-------------

RF Output Power

Test Data:


Mode	Frequency Spacing (kHz)	Frequency (MHz)	Power level	Output Power (dBm)	Output Power (W)
Digital	12.5	410.0125	High	36.37	4.34
			Low	32.39	1.73
		440	High	36.50	4.47
			Low	33.70	2.34
		469.9875	High	35.11	3.24
			Low	33.79	2.39

Note[#]: The high rated power level is 5W(37dBm), and low rated power level is 2W(33dBm).


For Digital, High Power:

410.0125MHz

440MHz

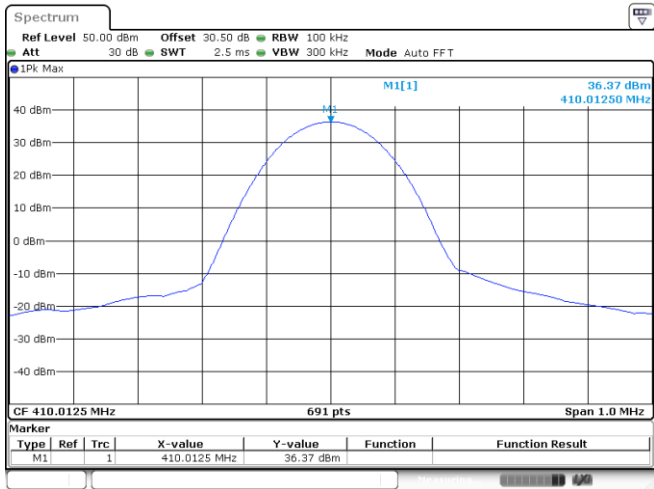


ProjectNo.:2504A05479E-RF Tester:Benny Li
Date: 8.JAN.2026 10:11:12

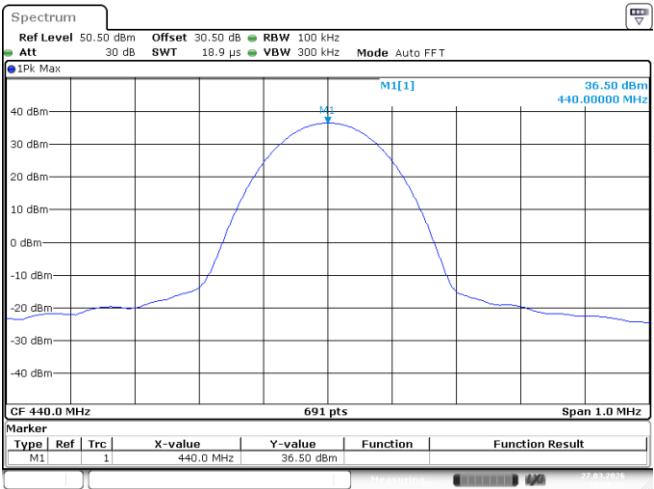

ProjectNo.:2504A05479E-RF Tester:Benny Li
Date: 27.MAR.2026 10:20:37


469.9875MHz

/

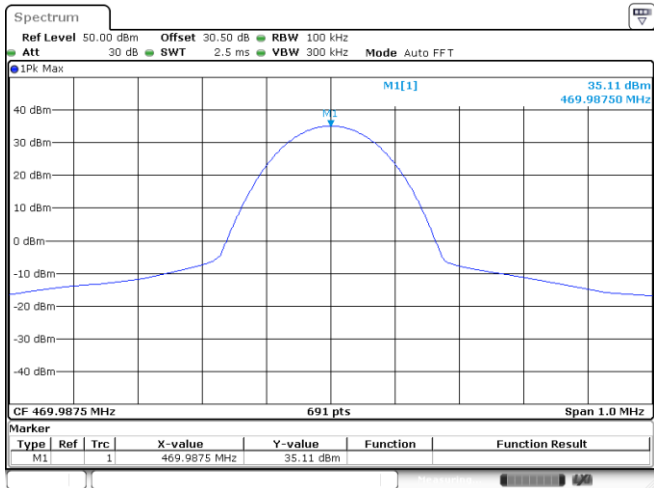

ProjectNo.:2504A05479E-RF Tester:Benny Li
Date: 8.JAN.2026 10:28:46

For Digital, Low Power:

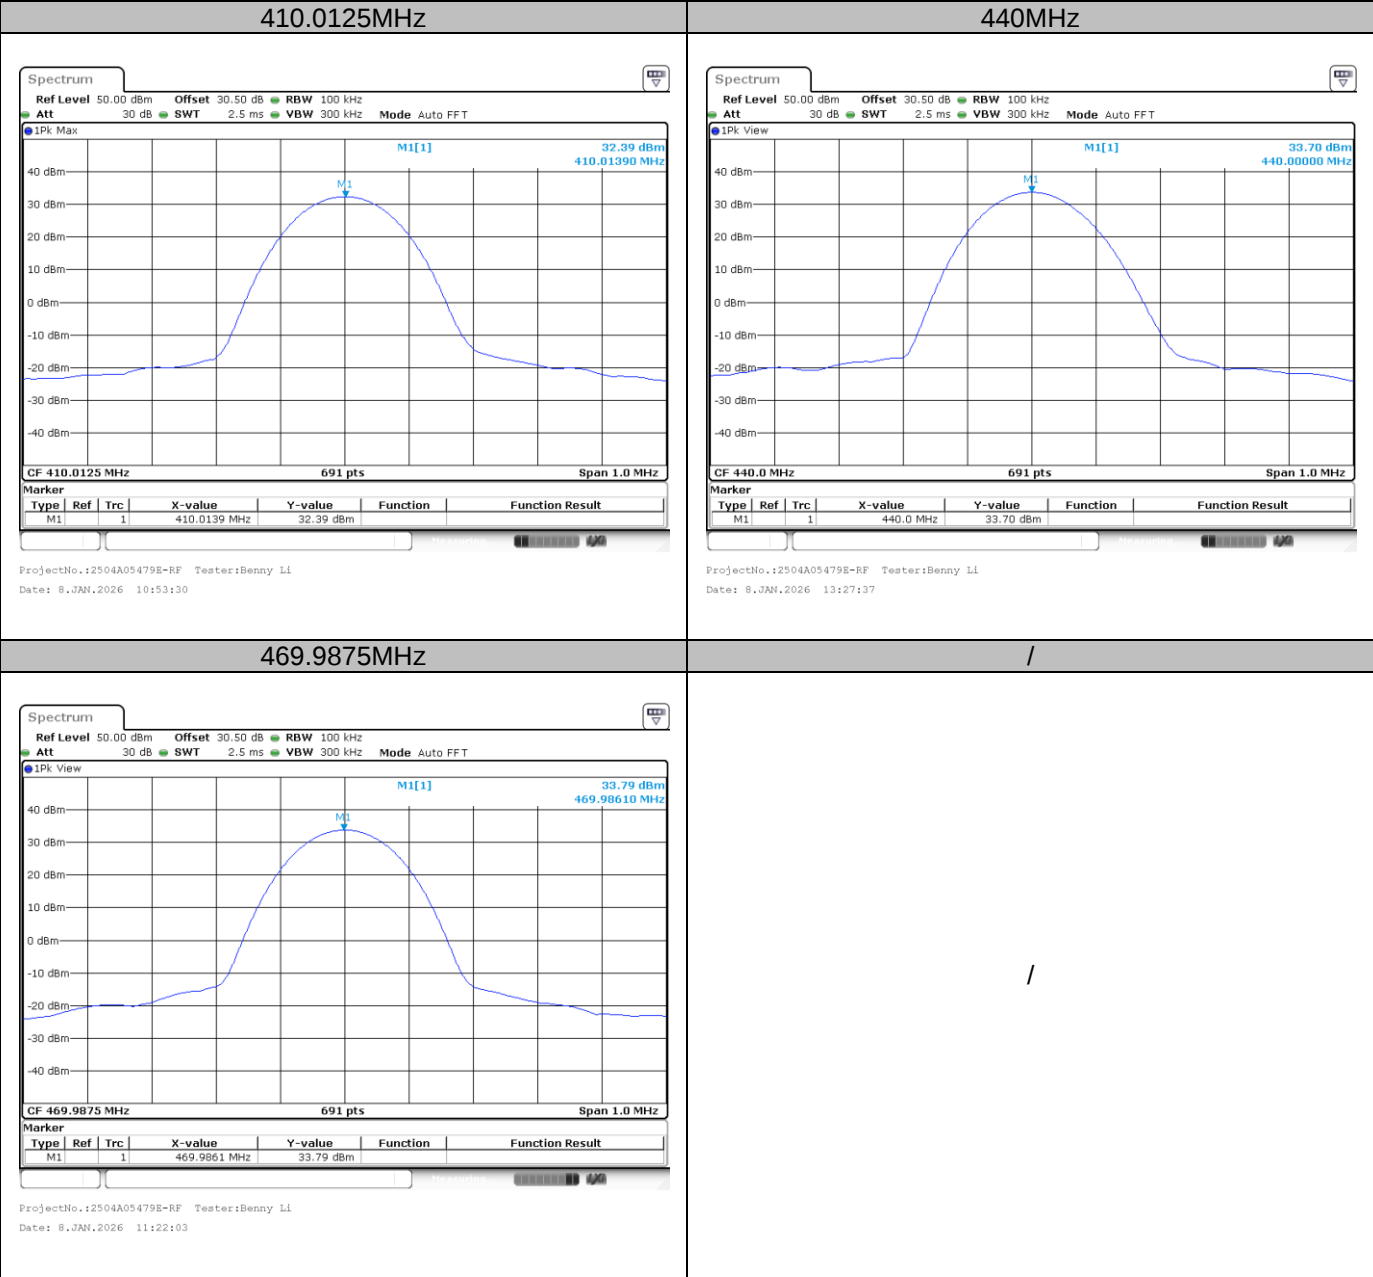

Frequency Stability

Test Data:

Reference Frequency: 440MHz, Limit: ±2.5 ppm			
Test Environment		Frequency Measure with Time Elapsed	
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
Frequency Stability versus Input Temperature			
50	7.5	439.999018	-2.23
40	7.5	439.999016	-2.24
30	7.5	439.999000	-2.27
20	7.5	439.999040	-2.18
10	7.5	439.998956	-2.37
0	7.5	439.998986	-2.30
-10	7.5	439.998952	-2.38
-20	7.5	439.998956	-2.37
-30	7.5	439.998940	-2.41
Frequency Stability versus Input Voltage			
20	6.4	439.998964	-2.36
20	8.6	439.998965	-2.35


Note: The operation voltage range was provided by manufacturer.


Occupied Bandwidth & Emission Mask

Test Data:

Modulation	Channel Separation (kHz)	Frequency (MHz)	Power Level	99% Occupied Bandwidth (kHz)	26 dB Emissions Bandwidth (kHz)
Digital	12.5	410.0125	High	4.8950	6.50783
			Low	4.8975	6.50533
		440	High	4.8975	6.50283
			Low	4.8975	6.50283
		469.9875	High	4.9025	6.51033
			Low	4.9000	6.50283


For Digital High Power:

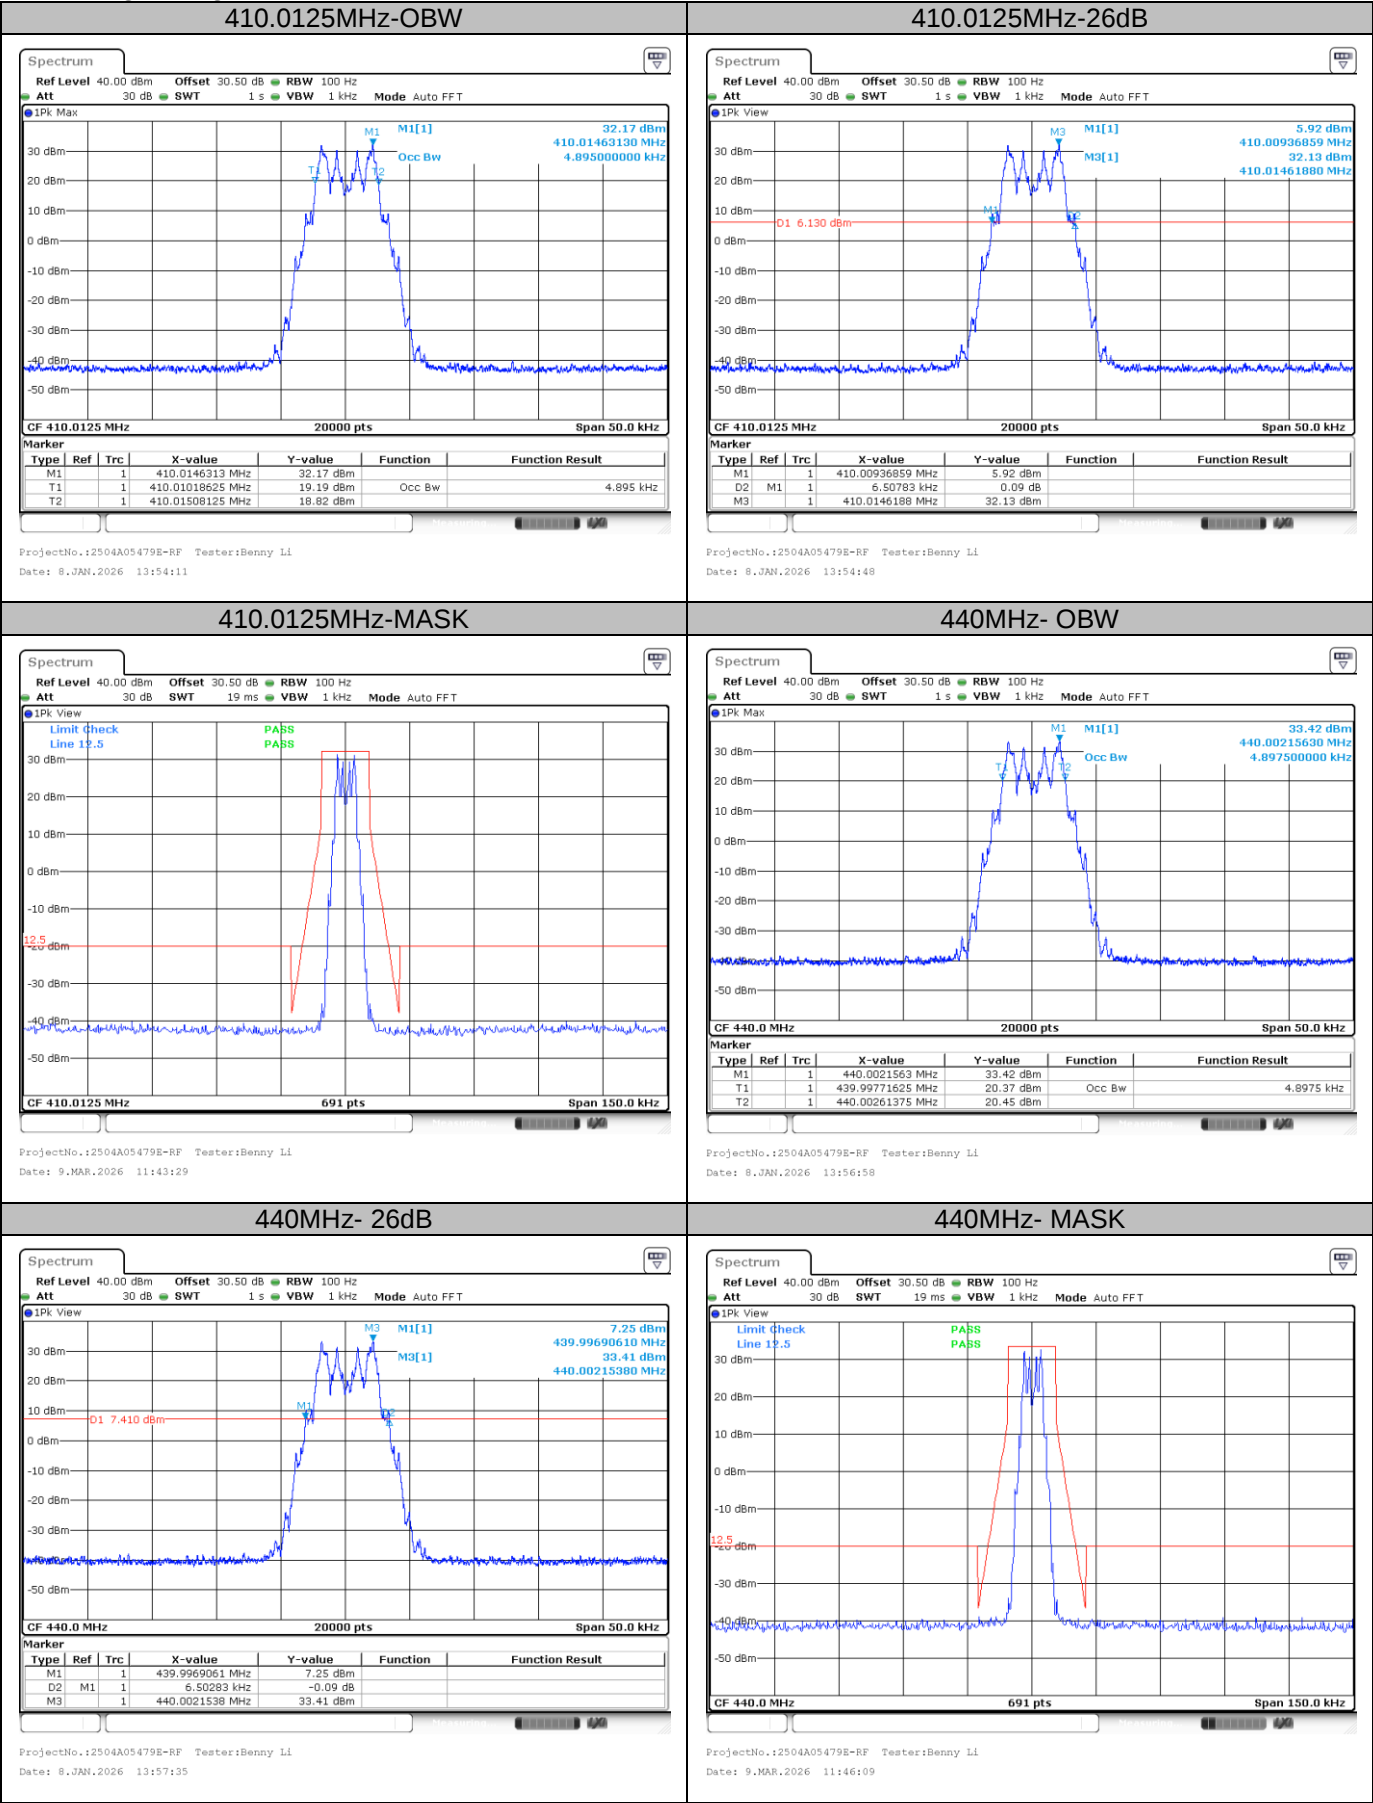

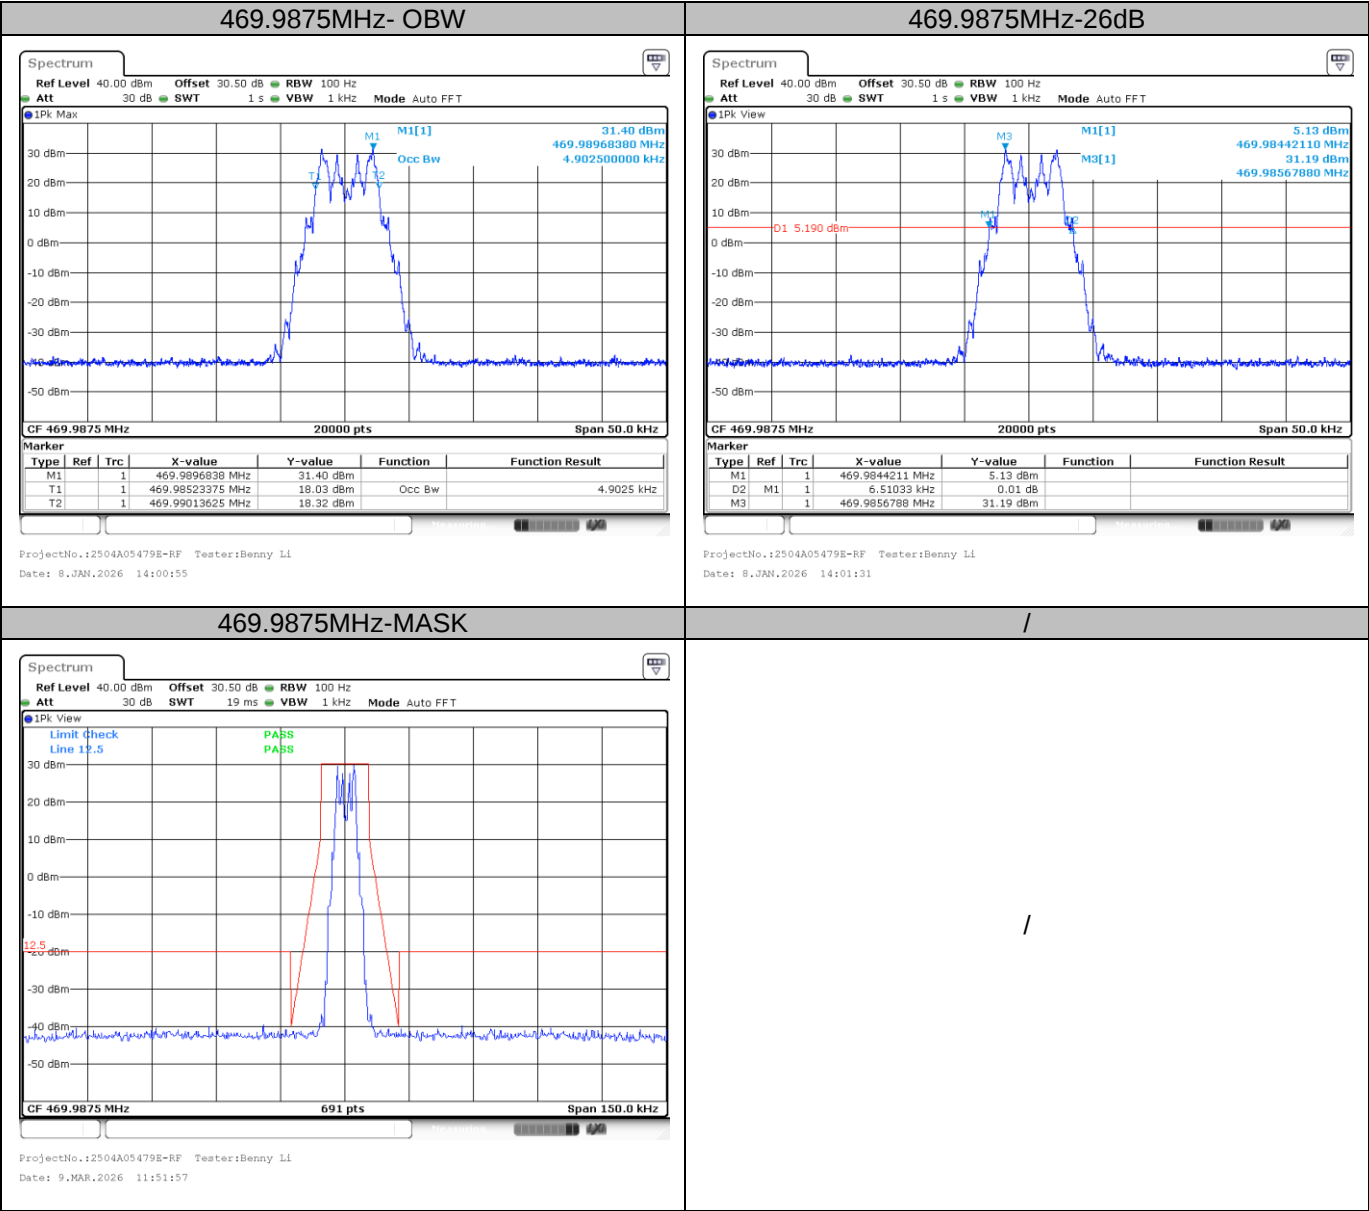


For Digital Low Power:

410.0125MHz-OBW

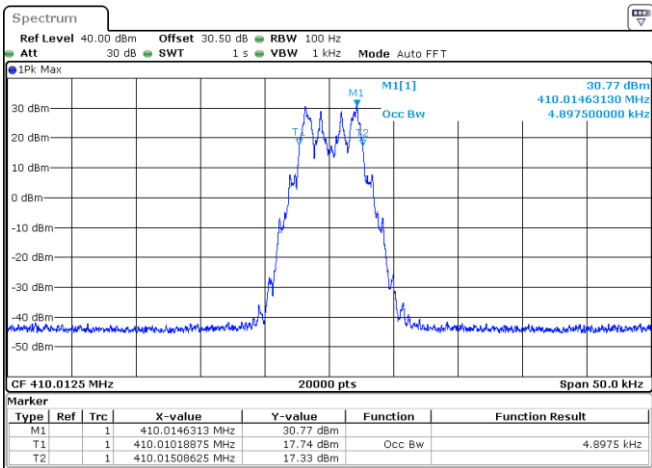


ProjectNo.:2504A05479E-RF Tester:Benny Li
Date: 8.JAN.2026 17:50:20

410.0125MHz-26dB

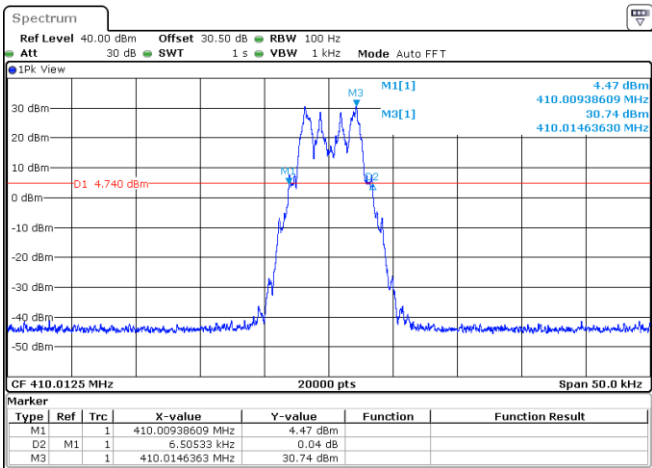


ProjectNo.:2504A05479E-RF Tester:Benny Li
Date: 8.JAN.2026 17:50:57

410.0125MHz-MASK

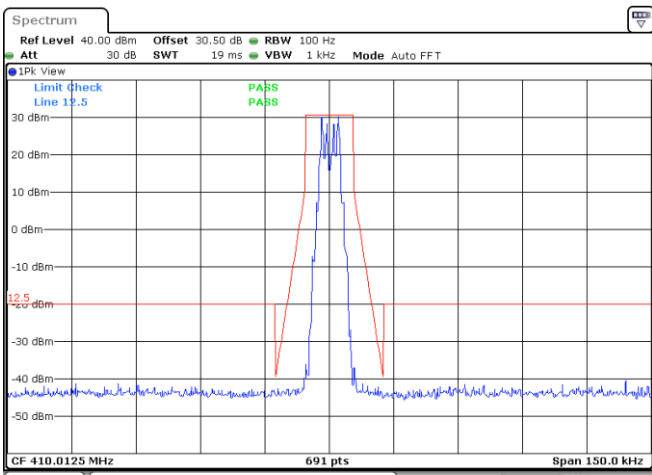


ProjectNo.:2504A05479E-RF Tester:Benny Li
Date: 9.MAR.2026 11:42:06

440MHz- OBW

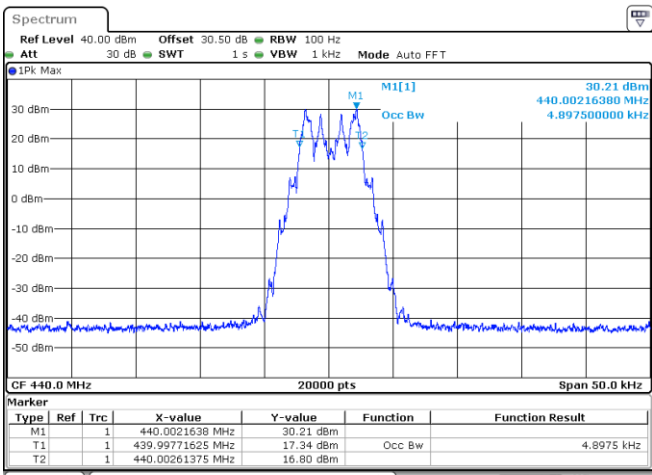


ProjectNo.:2504A05479E-RF Tester:Benny Li
Date: 8.JAN.2026 17:52:19

440MHz -26dB

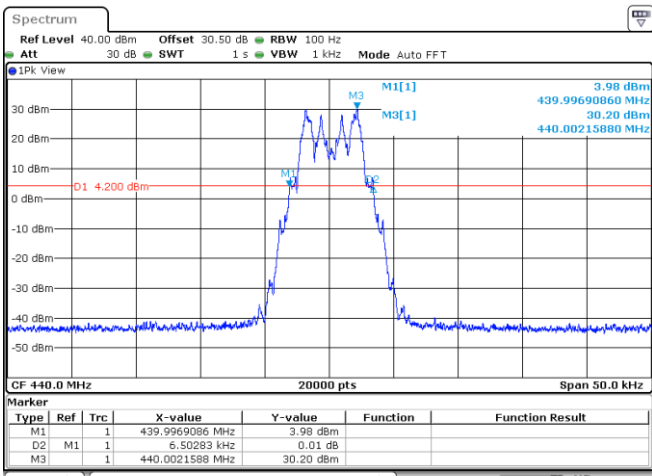


ProjectNo.:2504A05479E-RF Tester:Benny Li
Date: 8.JAN.2026 17:52:56

440MHz-MASK

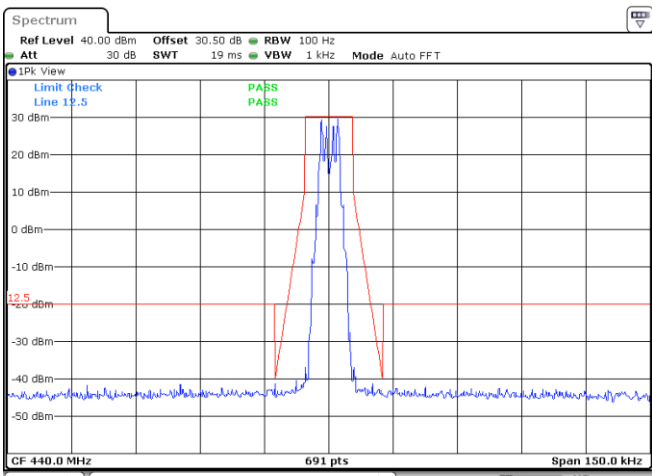


ProjectNo.:2504A05479E-RF Tester:Benny Li
Date: 9.MAR.2026 11:46:55

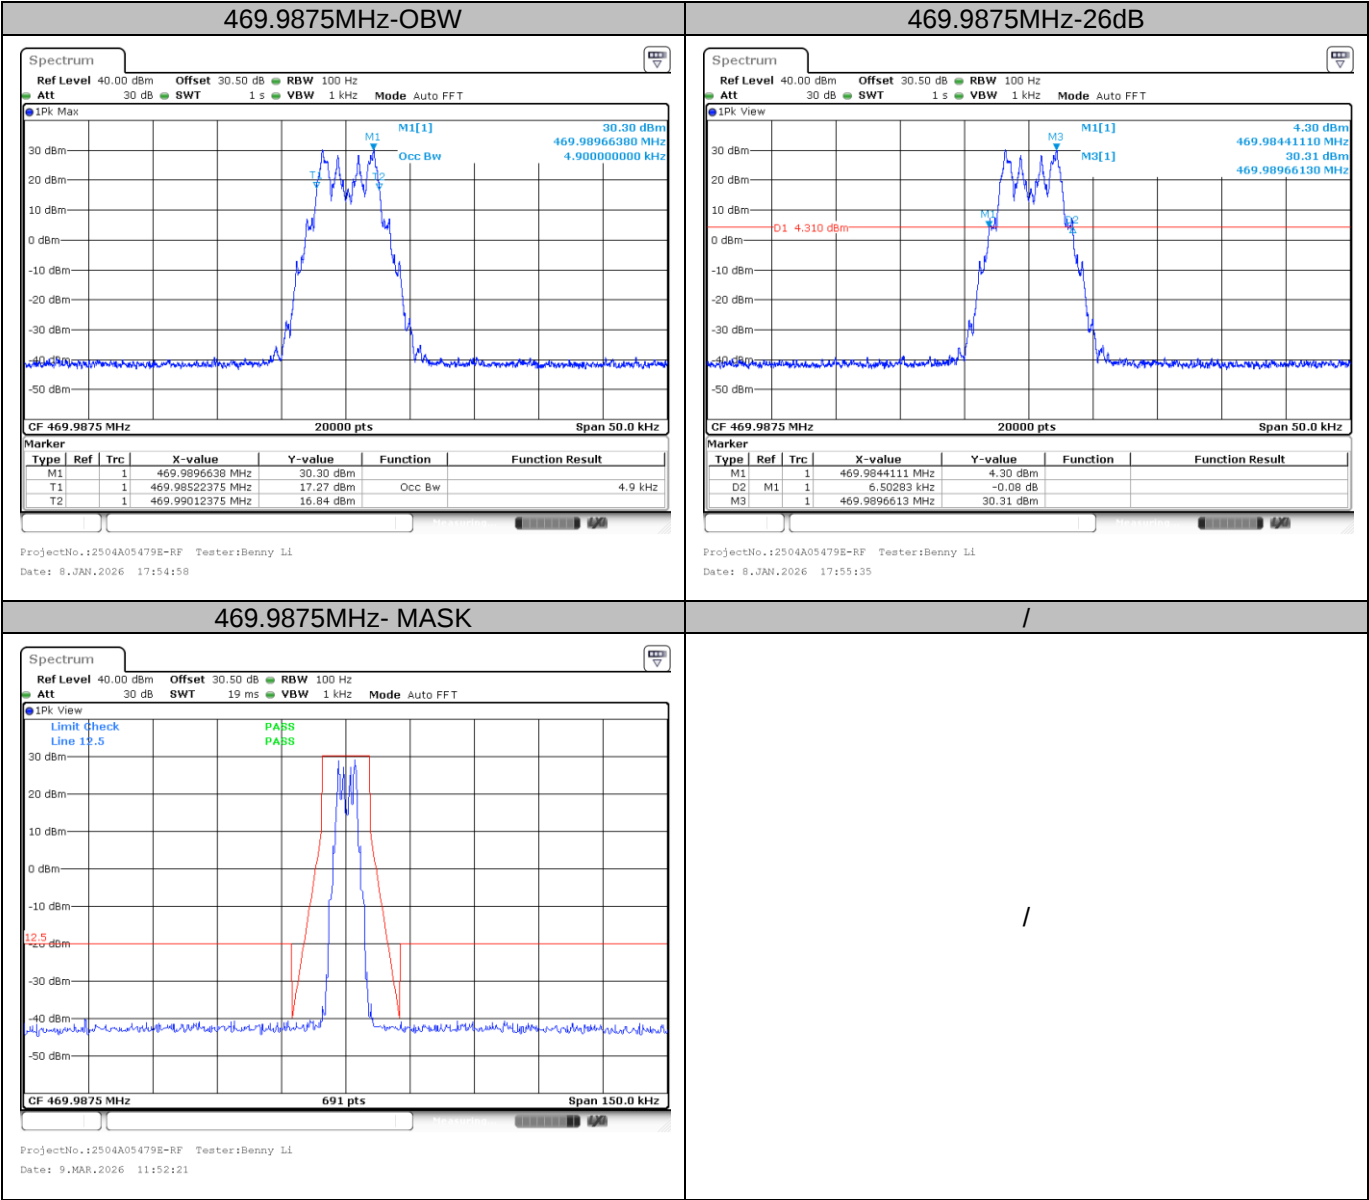



Spurious Emission at Antenna Terminal

For Digital, High Power:

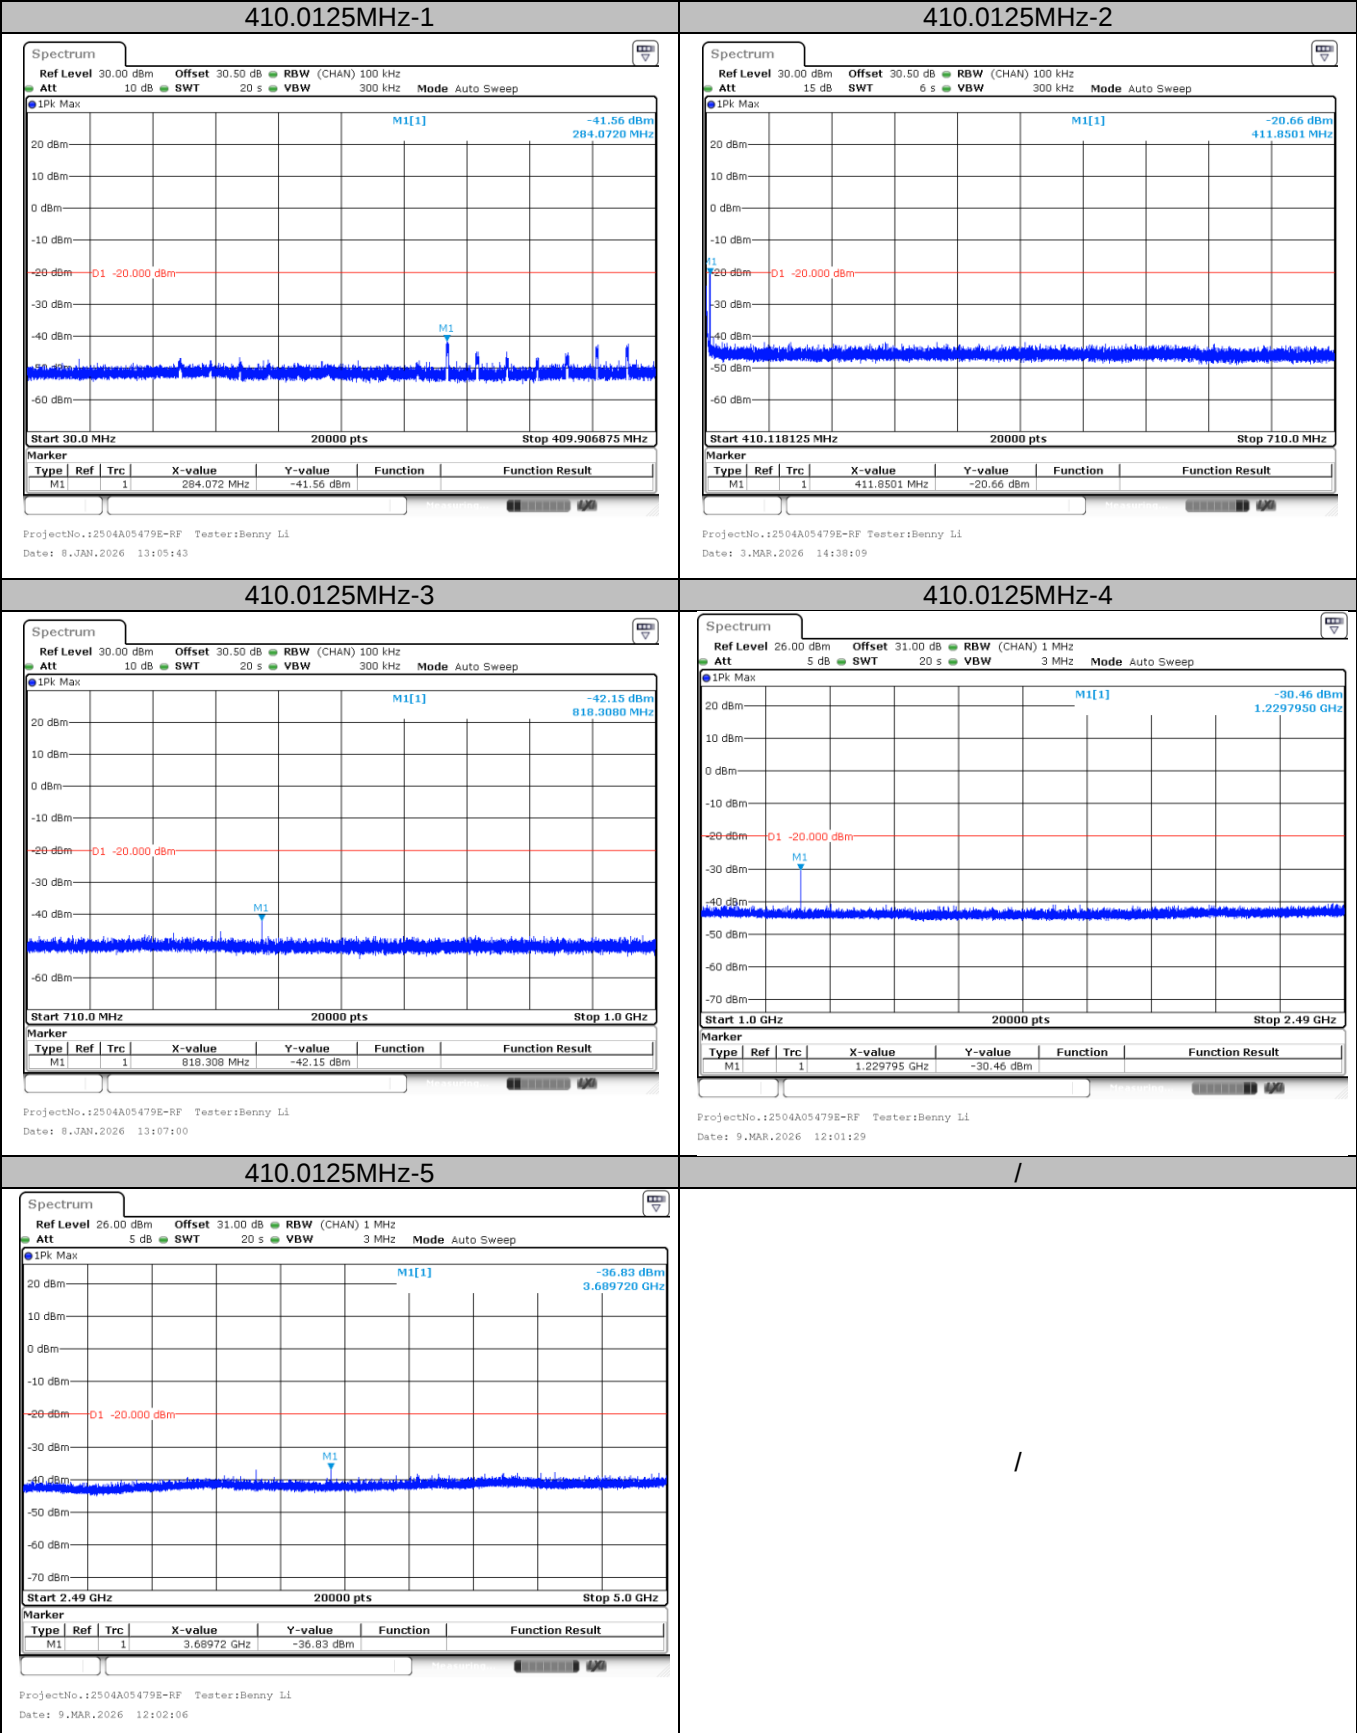



440MHz-1

440MHz-2

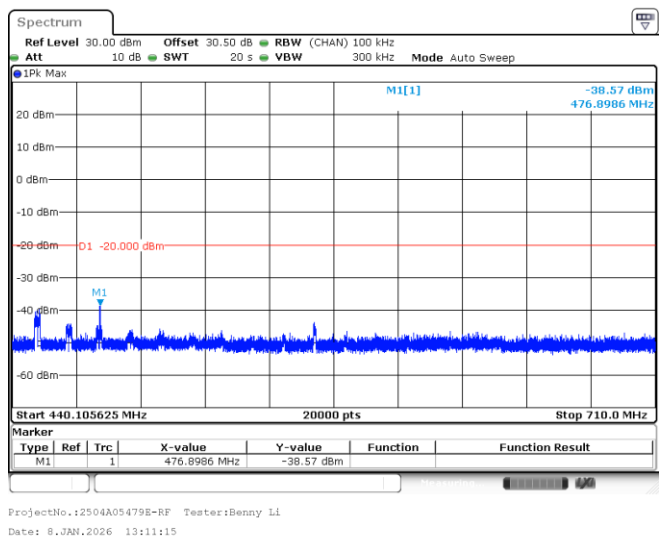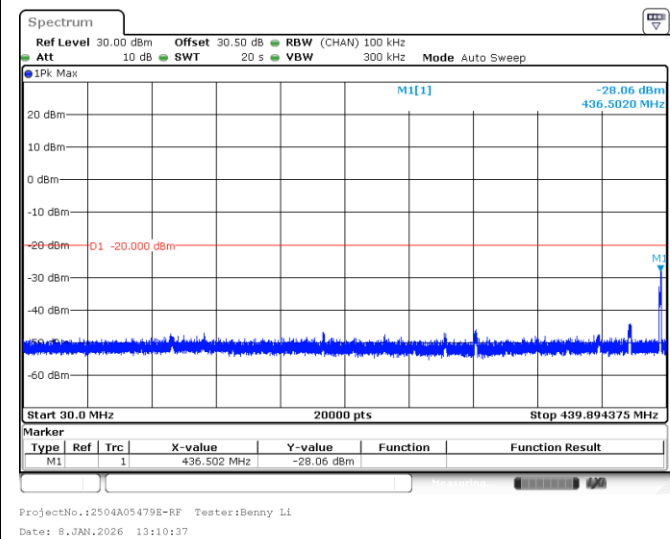


440MHz-3

440MHz-4

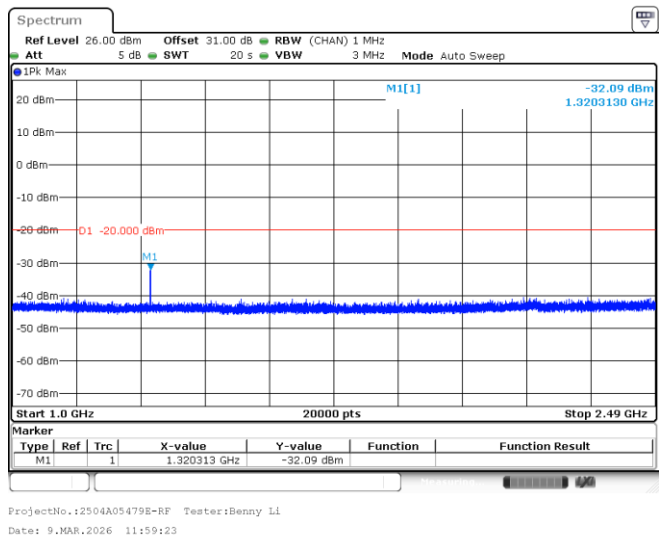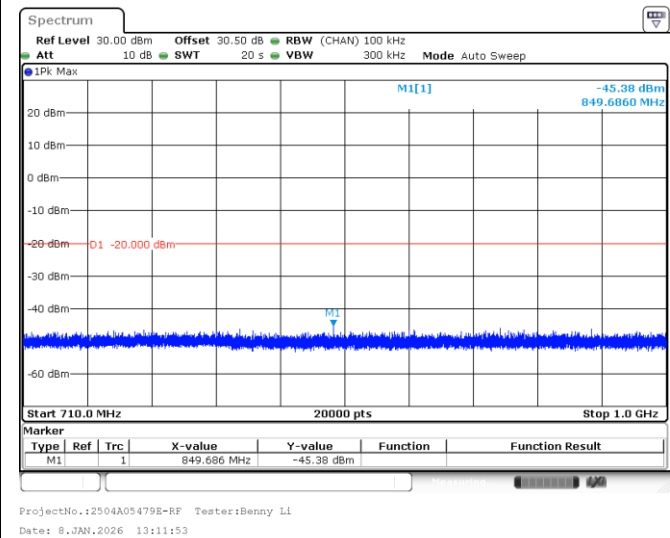


440MHz-5

/

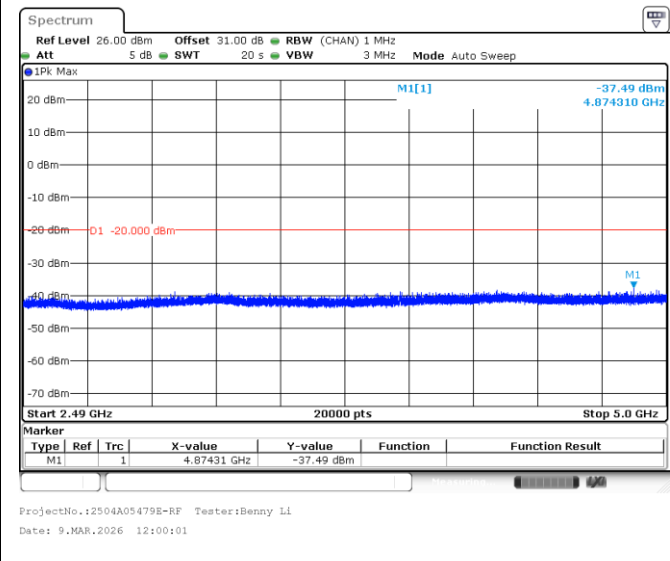


/

469.9875MHz-1

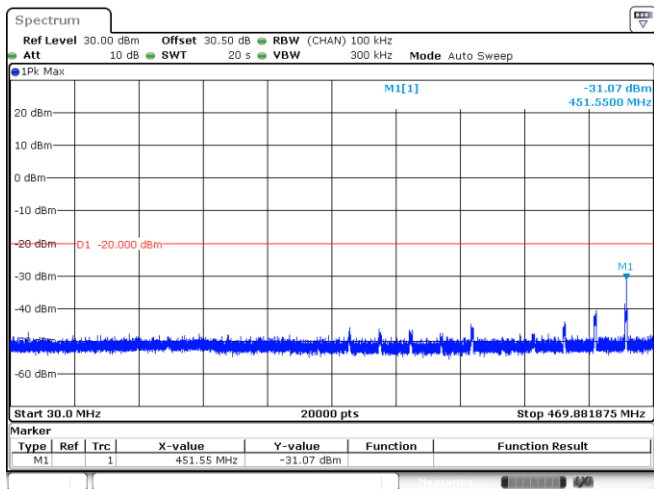


ProjectNo.:2504A05479E-RF Tester:Benny Li
Date: 8.JAN.2026 13:15:28

469.9875MHz-2

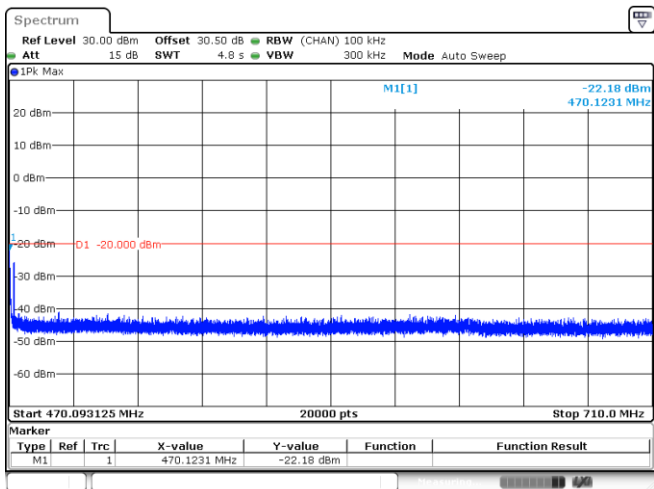


ProjectNo.:2504A05479E-RF Tester:Benny Li
Date: 3.MAR.2026 14:42:05

469.9875MHz-3

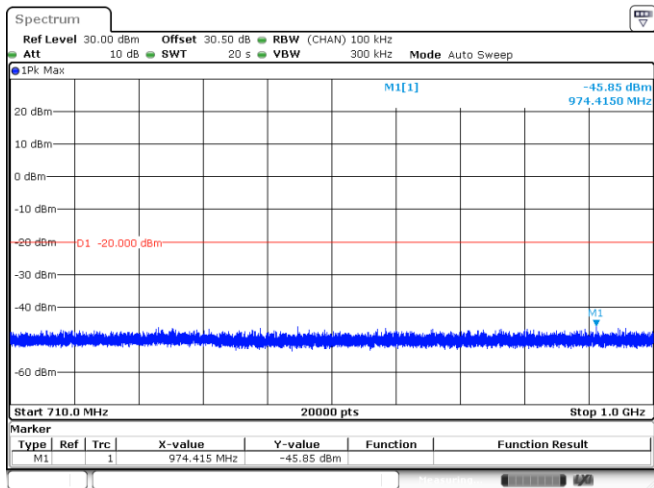


ProjectNo.:2504A05479E-RF Tester:Benny Li
Date: 8.JAN.2026 13:16:44

469.9875MHz-4

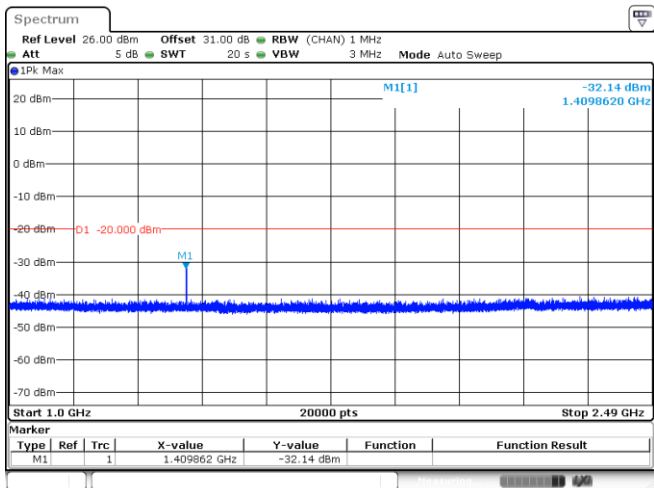

ProjectNo.:2504A05479E-RF Tester:Benny Li
Date: 9.MAR.2026 11:56:03

469.9875MHz-5

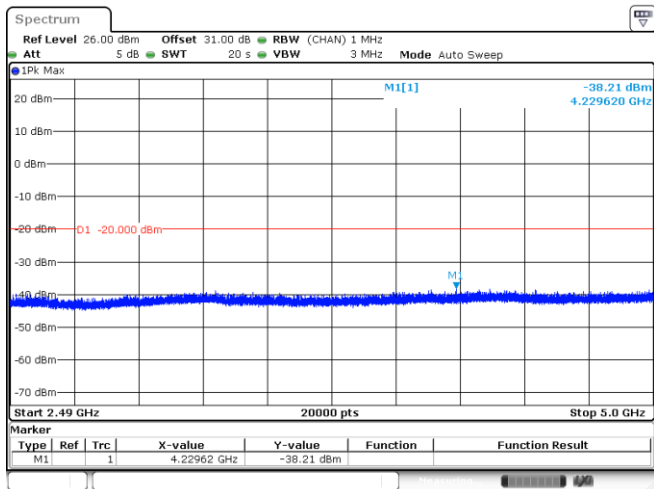

ProjectNo.:2504A05479E-RF Tester:Benny Li
Date: 9.MAR.2026 11:56:41

/

/

Transient Frequency Behavior

Test Data:

Channel Separation (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	10 (t1)	<+/-12.5 kHz	Pass
	25 (t2)	<+/-6.25 kHz	
	10 (t3)	<+/-12.5 kHz	

Note: During the time from the end of t2 to the beginning of t3, the frequency difference must not exceed the limits specified in §90.213:

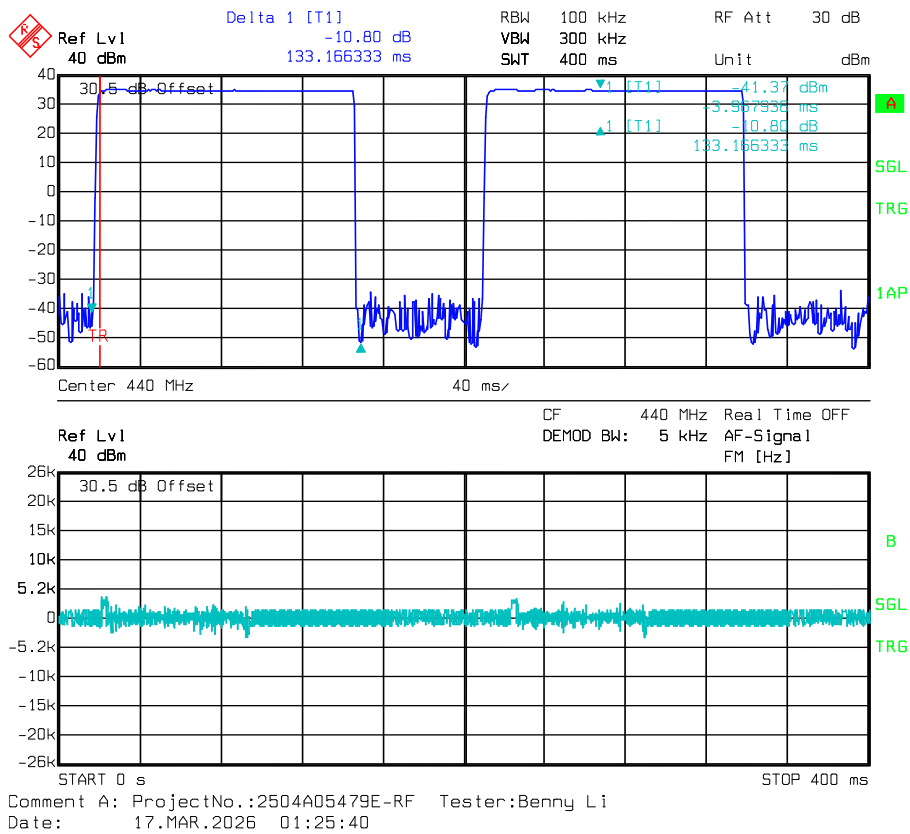


EXHIBIT A-EUT PHOTOGRAPHS

Please refer to the Attachment No.1 2504A05479E-RF EUT External Photos and Attachment No.2 2504A05479E-RF EUT Internal Photos.

EXHIBIT B-TEST SETUP PHOTOGRAPHS

Please refer to the Attachment No.3 2504A05479E-RF-00A Test Photos.

******* END OF REPORT *******