

EMC TEST REPORT



Applicant:	Astronomy Data Processing Corporation
Address:	2228 Cotner Ave Los Angeles, CA 90064

Manufacturer or Supplier:	Astronomy Data Processing Corporation
Address:	2228 Cotner Ave Los Angeles, CA 90064
Product:	Edge Controller 01
Model Name:	EC-01
FCC ID:	2BM4513EA
Date of tests:	Dec. 22, 2025 - Feb. 05, 2026

The submitted sample of the above equipment has been tested for according to the requirements of the following standards:

- ☐ FCC Part 15, Subpart B, Class A
☒ FCC Part 15, Subpart B, Class B
☒ ANSI C63.4:2014

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Carl Xie Engineer / Mobile Department	Approved by Simon Wang Manager / Mobile Department
	
Date: Feb. 05, 2026	Date: Feb. 05, 2026

BOOMWAVE TEST (SHENZHEN) CO., LTD. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report. The results documented in this report apply only the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility assure that additional production units of the model are manufactured with identical electrical and mechanical components. All sample tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. without written approval of BOOMWAVE TEST (SHENZHEN) CO., LTD., the test report shall not be reproduced except in full.



Test Report No.: EMC260413B002

TABLE OF CONTENTS

TABLE OF CONTENTS	2
RELEASE CONTROL RECORD	3
1 GENERAL INFORMATION	4
1.1 GENERAL DESCRIPTION OF EUT	4
1.2 SUMMARY OF TEST RESULTS	6
1.3 MEASUREMENT UNCERTAINTY	7
1.4 DESCRIPTION OF TEST MODES	8
1.5 DESCRIPTION OF SUPPORT UNITS	10
2 EMISSION TEST	11
2.1 CONDUCTED EMISSION MEASUREMENT	11
2.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
2.1.2 TEST INSTRUMENTS	11
2.1.3 TEST PROCEDURES	12
2.1.4 DEVIATION FROM TEST STANDARD	12
2.1.5 TEST SETUP	13
2.1.6 EUT OPERATING CONDITIONS	13
2.1.7 TEST RESULTS	14
2.2 RADIATED EMISSION MEASUREMENT	16
2.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	16
2.2.2 TEST INSTRUMENTS	17
2.2.3 TEST PROCEDURE	18
2.2.4 DEVIATION FROM TEST STANDARD	19
2.2.5 TEST SETUP	20
2.2.6 EUT OPERATING CONDITIONS	20
2.2.7 TEST RESULTS	21
3 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	25



Test Report No.: EMC260413B002

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
EMC260413B002	Original release	Feb. 05, 2026

1 GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

PRODUCT*	Edge Controller 01	
MODEL NAME*	EC-01	
NOMINAL VOLTAGE*	19Vdc	
MODULATION TYPE*	WLAN	DSSS, OFDM, OFDMA
	LTE	QPSK/16QAM/64QAM
	5G NR	DFT-s-OFDM($\pi/2$ BPSK,QPSK,16QAM,64QAM,256QAM); CP-OFDM(QPSK,16QAM,64QAM,256QAM);
OPERATING FREQUENCY*	LTE	1850.7MHz ~ 1909.3MHz (FOR LTE Band2) 1710.7MHz ~ 1754.3MHz (FOR LTE Band4) 824.7MHz ~ 848.3MHz (FOR LTE Band5) 2502.5MHz ~ 2567.5MHz (FOR LTE Band7) 699.7MHz ~ 715.3MHz (FOR LTE Band12) 779.5MHz ~ 784.5MHz (FOR LTE Band13) 790.5MHz ~ 795.5MHz (FOR LTE Band14) 706.5MHz ~ 713.5MHz (FOR LTE Band17) 1850.7MHz ~ 1914.3MHz (FOR LTE Band25) 814.7MHz ~ 848.3MHz (FOR LTE Band26) 2307.5MHz ~ 2312.5MHz (FOR LTE Band30) 2572.5MHz ~ 2617.5MHz (FOR LTE Band38) 3452.5MHz ~3597.5MHz (FOR LTE Band42) 3702.5MHz ~3797.5MHz (FOR LTE Band43) 3552.5MHz ~3697.5MHz (FOR LTE Band48) CA_ 1A-3A-7A
	5G NR	SA/NSA: n2 (1852.5MHz ~1907.5MHz) n5(826.5MHz ~ 846.5MHz) n7(2502.5MHz ~ 2567.5MHz) n12(701.5MHz ~ 713.5MHz) n25(1852.5MHz ~ 1912.5MHz) n26(814.7MHz ~ 848.3MHz) n38(2575MHz ~ 2615MHz) n41(2501.01 ~ 2685MHz) n48(3555 ~ 3694.98MHz) n77(Part27Q)(3455.01 ~ 3544.98MHz) n77(Part27O)(3705 ~ 3974.97MHz) n78(Part27Q)(3455.01 ~ 3544.98MHz) n78(Part 27O) (3705 ~ 3794.97MHz)

Test Report No.: EMC260413B002

		NSA: DC_ B7-N77 DC_ B40-N41 DC_ B2-N77 DC_ B7-N77 DC_ N2-N77 DC_ B40+N41
	WLAN	2412 ~ 2462MHz for 11b/ac(HT20/40)/ax(20/40)(RU FULL) 5180 ~ 5240MHz, 5260 ~ 5320 MHz, 5500 ~ 5720MHz, 5745 ~ 5825 MHz for 11a/ ac(VHT20)/ ac(VHT40) / ac(VHT80)/ ax(20/40/80)(RU FULL) 5955 ~ 6415MHz/6435 ~ 6525MHz/6525 ~ 6875MHz/6875 ~ 7115MHz for 802.11ax (HE20/40/80)(RU FULL)
HW VERSION*	1.0	
SW VERSION*	V1	
I/O PORTS*	Refer to user's manual	
CABLE SUPPLIED*	N/A	
ACCESSORY DEVICES*	Refer to note as below	

NOTE:

1. *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, Test Lab is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.
2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in the test report.

1.2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart B			
Standard Section	Test Item	Result	Test lab*
FCC Part 15, Subpart B, Class B ANSI C63.4:2014	Conducted Test	Compliance	A
	Radiated Emission Test (30MHz ~ 1GHz)	Compliance	A
	Radiated Emission Test (Above 1GHz)	Compliance	A

*Test Lab Information Reference

Lab A:

Boomwave Test (Shenzhen) Co., Ltd.

Lab Address:

Rm B38, Warehouse A5(Chiwan #1), #3 Chiwan 4th Rd, Chiwan Comm, Zhaoshang St, Nanshan Dis
Shenzhen, Guangdong, Shenzhen, China

Accredited Test Lab Cert 7607.01


The FCC Site Registration No. is 646781; The Designation No. is CN1429.

1.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	150kHz ~ 30MHz	$\pm 2.70\text{dB}$
Radiated emissions	30MHz~1GHz	$\pm 4.98\text{dB}$
	1GHz ~6GHz	$\pm 4.70\text{dB}$
	6GHz ~18GHz	$\pm 4.60\text{dB}$
	18GHz ~40GHz	$\pm 4.12\text{dB}$

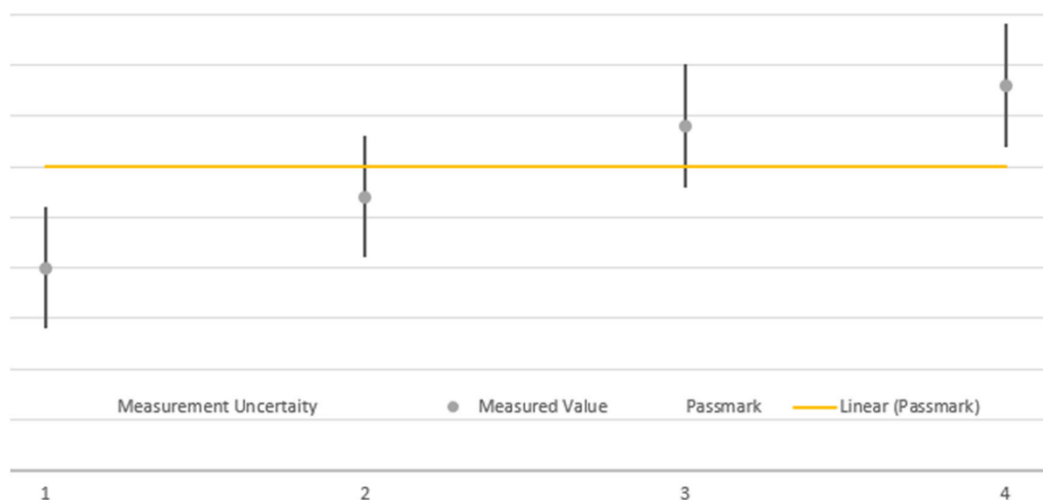

The verdicts in this test report are given according the above diagram:

Case	Measured Value	Uncertainty Range	Verdict
1	below pass mark	below pass mark	Passed
2	below pass mark	within pass mark	Passed
3	above pass mark	within pass mark	Failed
4	above pass mark	above pass mark	Failed

That means, the laboratory applies, as decision rule (see ISO/IEC 17025:2017), the so-called shared risk principle.

1.4 DESCRIPTION OF TEST MODES

Test Mode	Test Condition
Radiated emission test	
1	LTE B5 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
2	LTE B12 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
3	LTE B13 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
4	LTE B14 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
5	LTE B17 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
6	LTE B26 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
7	LTE B71 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
8	N5 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
9	N12 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
10	N13 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
11	N14 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
12	N26 Idle + USB Cable + adapter + Data Transmission + EUT to Notebook + LAN + SD Card + Earphone + PC + HDMI + U-disk + MIC + SIM
13	N71 Idle + USB Cable + adapter + Data Transmission + Notebook to EUT + LAN + SD Card + Earphone + PC + HDMI + U-disk + MIC + SIM
14	LTE B5 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable



Test Report No.: EMC260413B002

Test Mode	Test Condition
Conducted emission test	
1	LTE B5 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
2	LTE B12 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
3	LTE B13 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
4	LTE B14 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
5	LTE B17 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
6	LTE B26 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
7	LTE B71 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
8	N5 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
9	N12 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
10	N13 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
11	N14 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
12	N26 Idle + USB Cable + adapter + Data Transmission + EUT to Notebook + LAN + SD Card + Earphone + PC + HDMI + U-disk + MIC + SIM
13	N71 Idle + USB Cable + adapter + Data Transmission + Notebook to EUT + LAN + SD Card + Earphone + PC + HDMI + U-disk + MIC + SIM
14	LTE B5 Idle + Adapter + U-disk + MIC + SIM + LAN + SD Card + Earphone + PC + HDMI + USB cable
NOTE: - For radiated emission test, Pre-scan all mode, test mode 1 was the worst case and only this mode was presented in this report - For conducted emission test, Pre-scan all mode, mode 1 was the worst case and only this mode was presented in this report.	



Test Report No.: EMC260413B002

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

FOR ALL TESTS

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Laptop	Lenovo	Thinkpad E14	SL10W47313	N/A
2	Micro SD	SAMSUNG	N/A	N/A	N/A
3	Universal radio communication tester	Rohde&Schwarz	CMW500	169399	N/A
4	USB Cable	N/A	N/A	N/A	N/A
5	SIM	N/A	N/A	N/A	N/A
6	Earphone	N/A	N/A	N/A	N/A
7	Displayer	CHANGHONG	24P820F	N/A	N/A
8	Mouse	N/A	N/A	N/A	N/A
9	Keyboard	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	USB Line: Shielded, Detachable 1m;
2	Retire Line: Shielded, Detachable 2m;



Test Report No.: EMC260413B002

2 EMISSION TEST

2.1.1 CONDUCTED EMISSION MEASUREMENT

2.1.2 LIMITS OF CONDUCTED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.107 a CLASS B)

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.107 b CLASS A)

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15 ~ 0.5	79	66
0.5 ~ 30	73	60

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

2.1.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
WIDEBANDRADIO COMMUNICATION TESTER	Rohde&Schwarz	CMW500	169399	Jun.19,24	Jun.18,26
EMI Test Receiver	Rohde&Schwarz	ESR3	102749	Mar.28,24	Mar.27,26
ELEKTRA test software	Rohde&Schwarz	ELEKTRA	NA	N/A	N/A
LISN network	Rohde&Schwarz	ENV216	102640	Mar.28,24	Mar.27,26
CABLE	Rohde&Schwarz	W61.01	N/A	Apr.26,25	Apr.25,26
CABLE	Rohde&Schwarz	W601	N/A	Apr.26,25	Apr.25,26

- NOTE:** 1. The test was performed in CE shielded room.

2.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

2.1.4 DEVIATION FROM TEST STANDARD

No deviation.

2.1.5 TEST SETUP

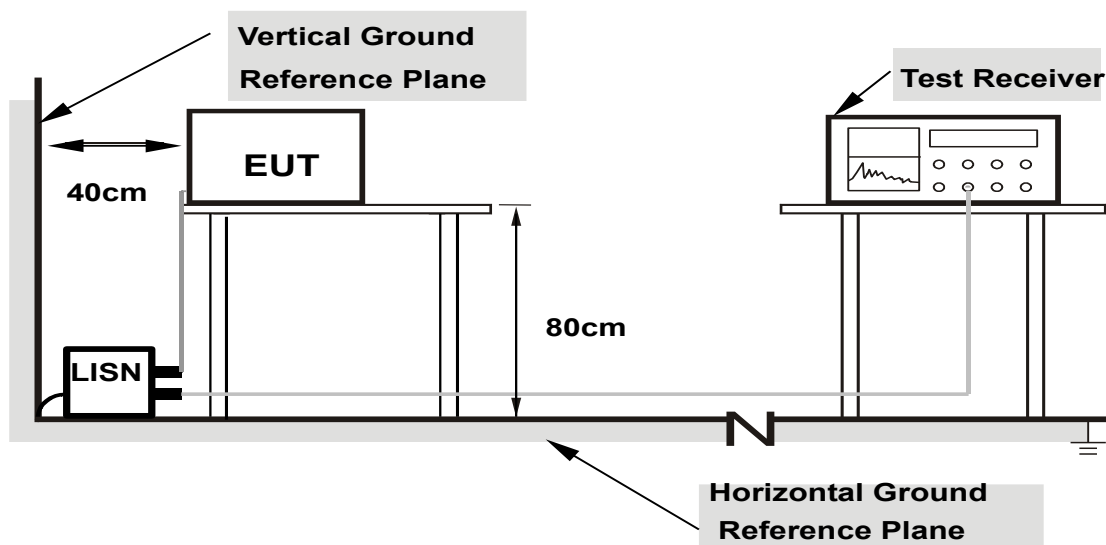

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

2.1.6 EUT OPERATING CONDITIONS


- Turned on the power and connected of all equipment.
- EUT was operated according to the use type described in the manufacturer's specifications or the user's manual.

2.1.7 TEST RESULTS

TEST VOLTAGE		Input 120 Vac, 60 Hz			Detector Function & Resolution Bandwidth			Quasi-Peak (QP) / Average (AV), 9 kHz		
ENVIRONMENTAL CONDITIONS		26deg. C, 51%RH			TESTED BY			Carl Xie		
Rg	Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	CAV Level [dBμV]	CAV: AVG Limit [dBμV]	CAV Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]
1	0.164	37.86	65.28	27.42	25.20	55.28	30.08	9.79	L1	9.000
1	0.488	26.14	56.21	30.07	22.46	46.21	23.75	9.75	L1	9.000
1	1.343	14.34	56.00	41.66	9.91	46.00	36.09	9.79	L1	9.000
1	2.657	7.26	56.00	48.74	1.47	46.00	44.53	9.91	L1	9.000
1	6.302	20.45	60.00	39.55	13.50	50.00	36.50	10.33	L1	9.000
1	21.318	37.42	60.00	22.58	30.96	50.00	19.04	13.59	L1	9.000

REMARKS:


1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Limit value- Emission level
4. Correction factor = Insertion loss + Cable loss + Attenuate
5. Emission Level = Correction Factor + Reading Value.

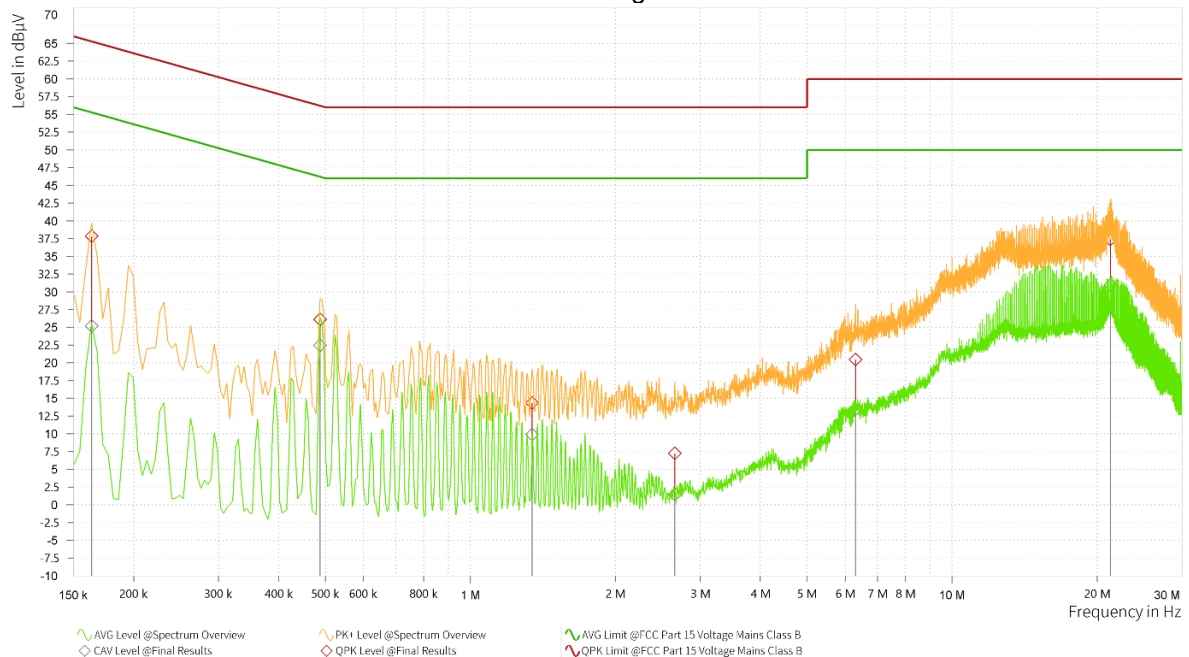

TEST VOLTAGE		Input 120 Vac, 60 Hz			DETECTOR FUNCTION & RESOLUTION BANDWIDTH			Quasi-Peak (QP) / Average (AV), 9 kHz		
ENVIRONMENTAL CONDITIONS		26deg. C, 51%RH			TESTED BY			Carl Xie		
Rg	Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	CAV Level [dBμV]	CAV: AVG Limit [dBμV]	CAV Margin [dB]	Correction [dB]	Line	Meas. BW [kHz]
1	0.164	37.46	65.28	27.82	25.21	55.28	30.07	9.79	N	9.000
1	0.492	27.41	56.13	28.72	26.50	46.13	19.63	9.75	N	9.000
1	1.473	15.69	56.00	40.31	11.04	46.00	34.96	9.79	N	9.000
1	4.092	12.89	56.00	43.11	6.21	46.00	39.79	10.05	N	9.000
1	11.810	29.44	60.00	30.56	22.33	50.00	27.67	11.45	N	9.000
1	21.197	36.60	60.00	23.40	29.91	50.00	20.09	13.59	N	9.000

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Limit value- Emission level
4. Correction factor = Insertion loss + Cable loss + Attenuate
5. Emission Level = Correction Factor + Reading Value.

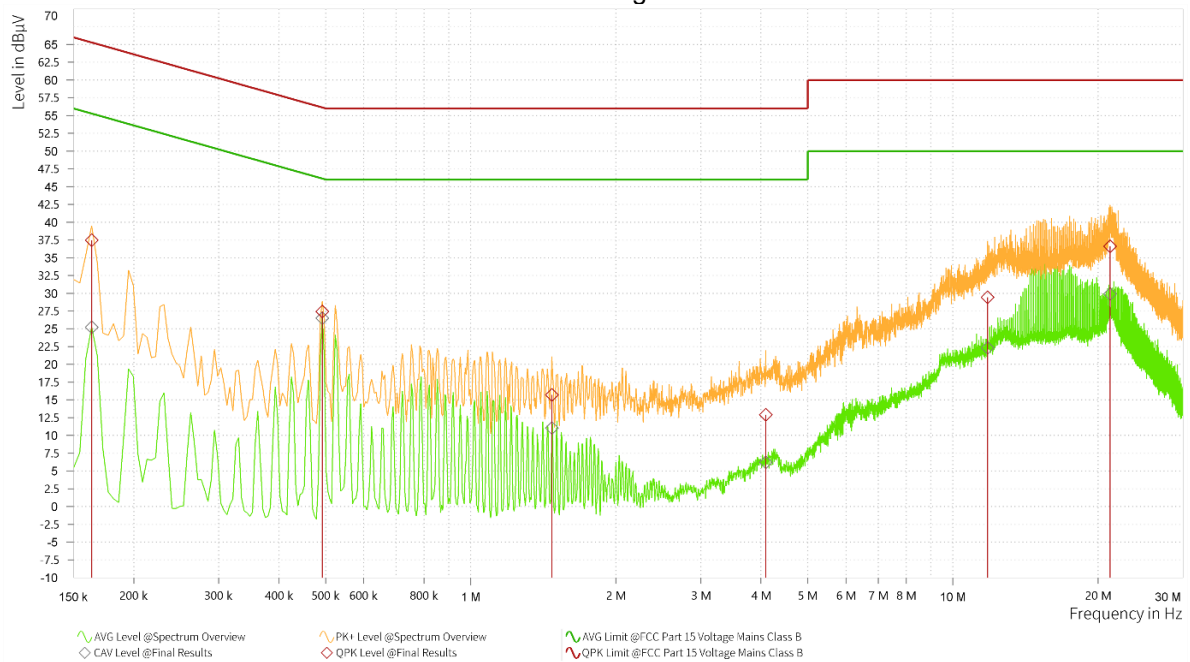

2.2 RADIATED EMISSION MEASUREMENT

2.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.109)

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 3 meters (dB μ V/m)		
Frequencies (MHz)	FCC 15B Class A	FCC 15B Class B
30-88	49.54	40
88-216	53.98	43.5
216-960	56.9	46
960-1000	60	54
Above 1000	Avg: 60 Peak: 80	Avg: 54 Peak: 74

Frequency Range (For unintentional radiators)

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5 th harmonic of the highest frequency or 40GHz, whichever is lower

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. Emission level (dB μ V/m) = 20 log Emission level (uV/m).
 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 4. QP detector shall be applied if not specified.



Test Report No.: EMC260413B002

2.2.2 TEST INSTRUMENTS

Frequency range below 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
WIDEBANDRADIO COMMUNICATION TESTER	Rohde&Schwarz	CMW500	169399	Jun.19,24	Jun.18,26
3m Semi-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-02Chamber	Aug.20,25	Aug.19,28
Bilog Antenna	SCHWARZBECK	VULB 9163	1264	Jul.04,25	Jul.03,27
EMI Test Receiver	R&S	ESW44	101973	Mar.28,24	Mar.27,26
Measurement Software	R&S	ELEKTRA	N/A	N/A	N/A
6DB attenuator	Tonscend Technology Co., Ltd	N/A	23062787	N/A	N/A
Pre-Amplifier	R&S	SCU08F1	101028	Jan.22,24	Jan.21,26
CABLE	R&S	W13.01	N/A	Apr.26,25	Apr.25,26
CABLE	R&S	W13.02	N/A	Apr.26,25	Apr.25,26
CABLE	R&S	W12.14	N/A	Apr.26,25	Apr.25,26

Frequency range above 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
WIDEBANDRADIO COMMUNICATION TESTER	Rohde&Schwarz	CMW500	169399	Jun.19,24	Jun.18,26
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.24,22	Nov.23,25
3m Fully-anechoic Chamber	TDK	9m*6m*6m	HRSW-SZ-EMC-01Chamber	Nov.23,25	Nov.22,28
Horn Antenna	ETS-LINDGREN	3117	227836	Aug.20,25	Aug.19,27
EMI Test Receiver	R&S	ESW44	101973	Mar.28,24	Mar.27,26
Pre-Amplifier	R&S	SCU08F1	101028	Jan.22,24	Jan.21,26
Measurement Software	R&S	ELEKTRA	N/A	N/A	N/A
CABLE	R&S	W13.01	N/A	Apr.26,25	Apr.25,26
CABLE	R&S	W13.02	N/A	Apr.26,25	Apr.25,26
CABLE	R&S	W12.14	N/A	Apr.26,25	Apr.25,26

NOTE: 1. The calibration interval of the above test instruments is 12/ 24/ 36 months and the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.

2. The test was performed in 3m Chamber.

Boomwave Test (Shenzhen)
Co., Ltd.

Rm B38, Warehouse A5(Chiwan #1), #3 Chiwan
4th Rd, Chiwan Comm, Zhaoshang St, Nanshan
Dist, Shenzhen, Guangdong, Shenzhen, China

Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

2.2.3 TEST PROCEDURE

<Frequency Range below 1GHz>

The basic test procedure was in accordance with ANSI C63.4:2014 (section 12).

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.

NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. $\text{Emission level(dBuV/m)} = \text{Raw Value(dBuV)} + \text{Correction Factor(dB/m)}$
3. $\text{Correction Factor(dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Factor (dB)}$ (if the raw value not contains the amplifier);
4. $\text{Correction Factor(dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Factor (dB)} - \text{Amplifier Gain(dB)}$ (if the raw value contains the amplifier).
5. $\text{Margin value} = \text{Limit value} - \text{Emission level}$.

<Frequency Range above 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. The bore sight should be used during the test above 1GHz.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz

NOTE:


1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth of test receiver/spectrum analyzer is 1Hz for Average detection (AV) at frequency above 1GHz.
3. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the receiver antenna.
4. $\text{Emission level(dBuV/m)} = \text{Raw Value(dBuV)} + \text{Correction Factor(dB/m)}$
5. $\text{Correction Factor(dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Factor (dB)}$ (if the raw value not contains the amplifier);
6. $\text{Correction Factor(dB/m)} = \text{Antenna Factor (dB/m)} + \text{Cable Factor (dB)} - \text{Amplifier Gain(dB)}$ (if the raw value contains the amplifier)
7. $\text{Margin value} = \text{Limit value} - \text{Emission level}.$

2.2.4 DEVIATION FROM TEST STANDARD


No deviation.

2.2.5 TEST SETUP

<Frequency Range below 1GHz>

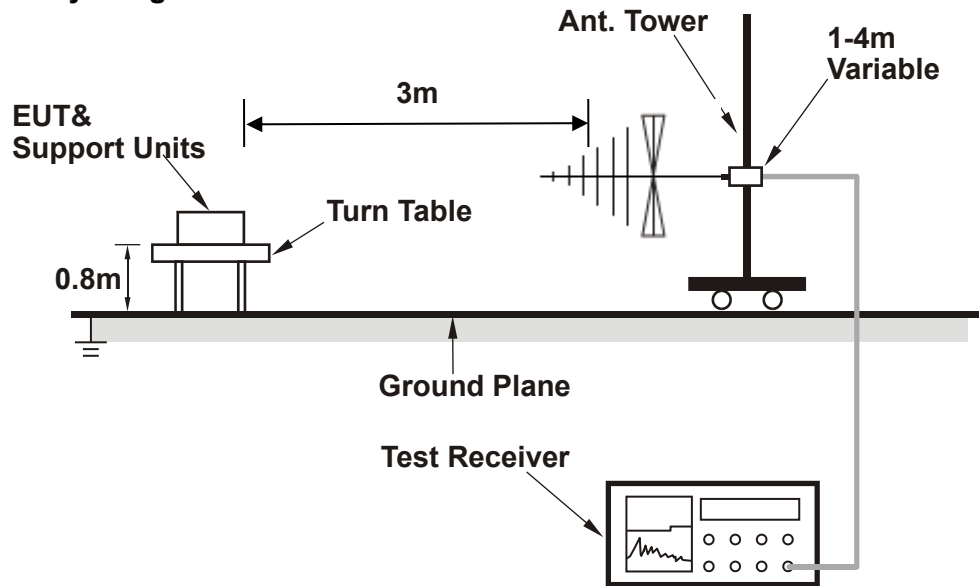

<Frequency Range above 1GHz>

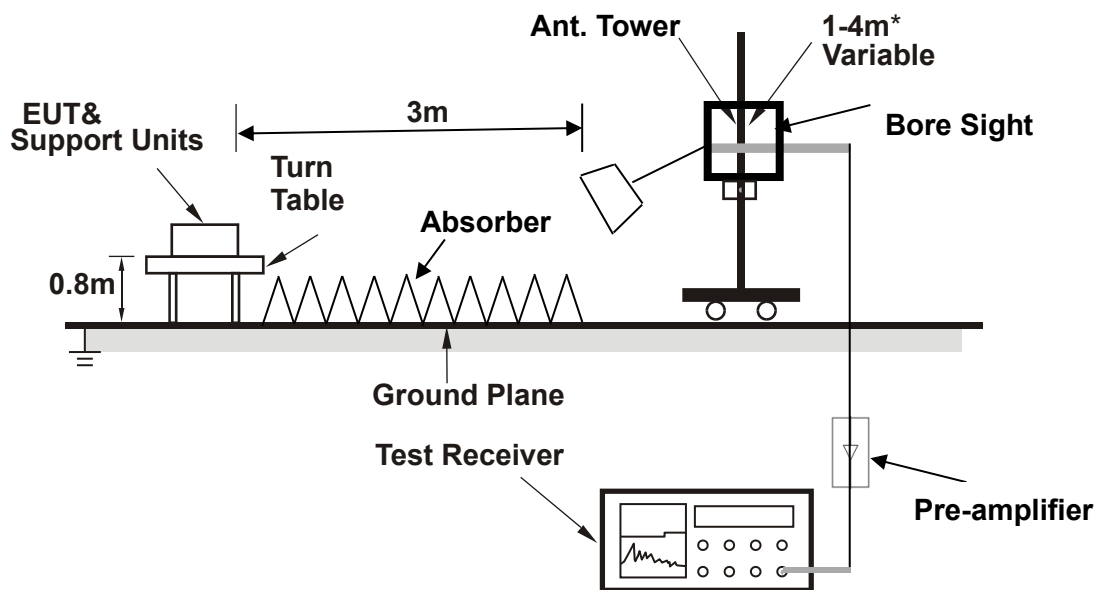

Note: Above 1G is a directional antenna depends on the EUT height and the antenna 3dB bandwidth both, refer to section 7.3 of CISPR 16-2-3.

2.2.6 EUT OPERATING CONDITIONS

Same as item 2.1.6.

2.2.7 TEST RESULTS


TEST VOLTAGE	Input 120 Vac, 60 Hz	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120 kHz
TESTED BY	Carl Xie		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	35.928	22.20	40.00	17.80	-12.39	H	1	1.00	120.000
1	138.748	33.28	43.50	10.22	-15.38	H	284.2	2.00	120.000
1	405.498	39.62	46.00	6.38	-3.94	H	1.5	2.00	120.000
1	430.125	27.51	46.00	18.49	-4.72	H	238.2	1.00	120.000
1	444.406	42.12	46.00	3.88	-3.94	H	238.2	1.00	120.000
1	499.965	38.25	46.00	7.75	-3.70	H	238.2	1.00	120.000

REMARKS:

1. Emission level(dBuV/m)=Read Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) -Amplifier Gain
3. The other emission levels were very low against the limit.
4. Margin value = Limit value -. Emission level.

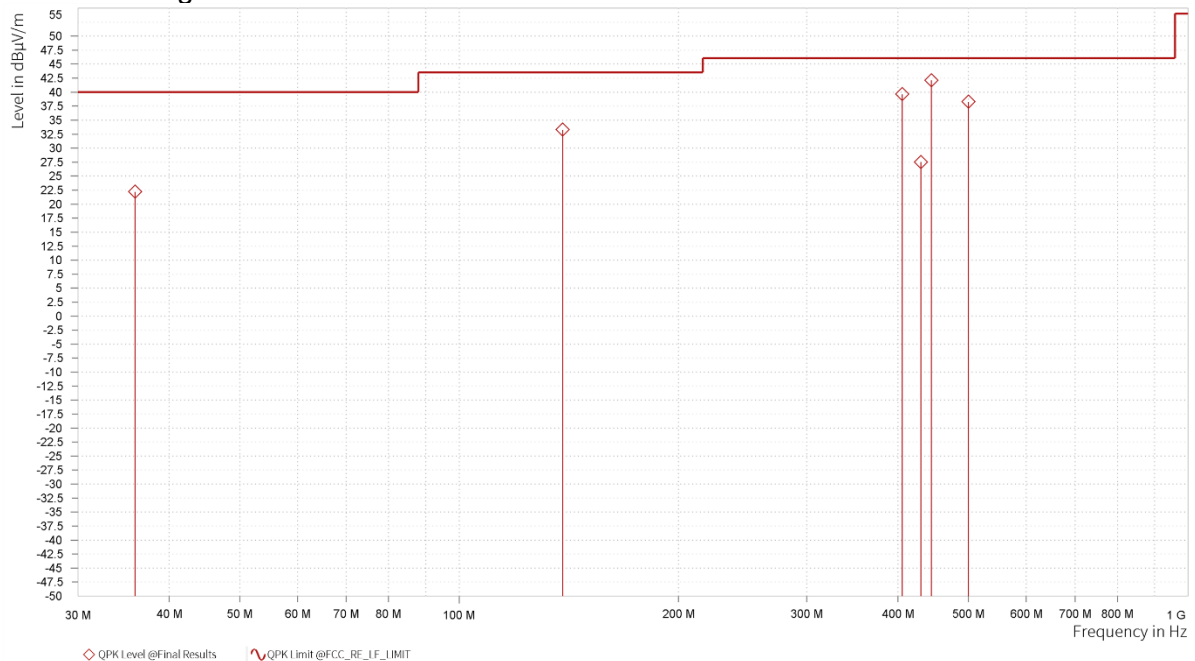


TEST VOLTAGE	Input 120 Vac, 60 Hz	FREQUENCY RANGE	30-1000 MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120 kHz
TESTED BY	Carl Xie		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	33.611	27.46	40.00	12.54	-12.97	V	1	1.00	120.000
1	148.124	34.07	43.50	9.43	-15.19	V	237	1.00	120.000
1	209.181	14.64	43.50	28.86	-11.48	V	42.8	2.00	120.000
1	444.459	39.17	46.00	6.83	-3.94	V	124.2	2.00	120.000
1	500.019	34.10	46.00	11.90	-3.70	V	158.2	1.00	120.000
1	624.987	36.81	46.00	9.19	-2.26	V	158.2	1.00	120.000

REMARKS:

1. Emission level(dBuV/m)=Read Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) -Amplifier Gain
3. The other emission levels were very low against the limit.
4. Margin value = Limit value –. Emission level.

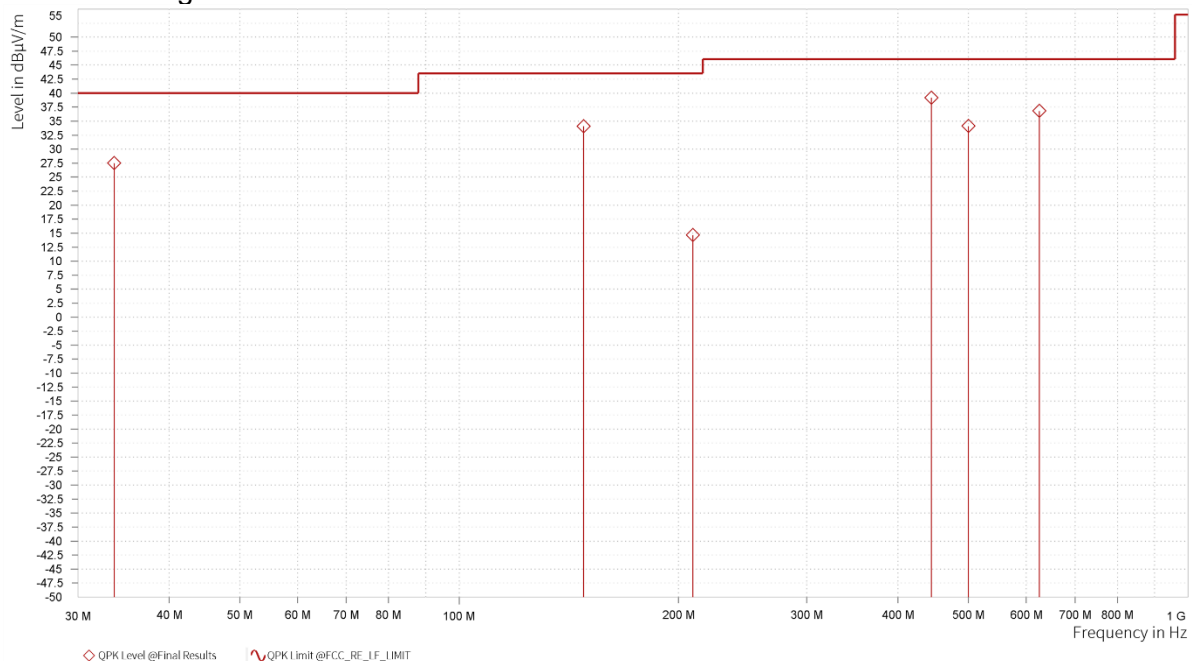


TEST VOLTAGE	Input 120 Vac, 60 Hz	FREQUENCY RANGE	1-18 GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Peak/Average, 1 MHz
TESTED BY	Carl Xie		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	1,729.000	42.66	74.00	31.34	28.98	54.00	25.02	2.06	H	37.9	2.00
1	3,363.000	44.59	74.00	29.41	32.20	54.00	21.80	8.07	H	178.6	1.00
1	7,420.000	51.51	74.00	22.49	39.26	54.00	14.74	16.21	H	1	2.00

REMARKS:

1. Peak detector quick scan is shown on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 1GHz to 5th harmonic of the highest frequency or 40GHz, whichever is lower. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.
4. Only emissions significantly above the equipment noise floor are reported.

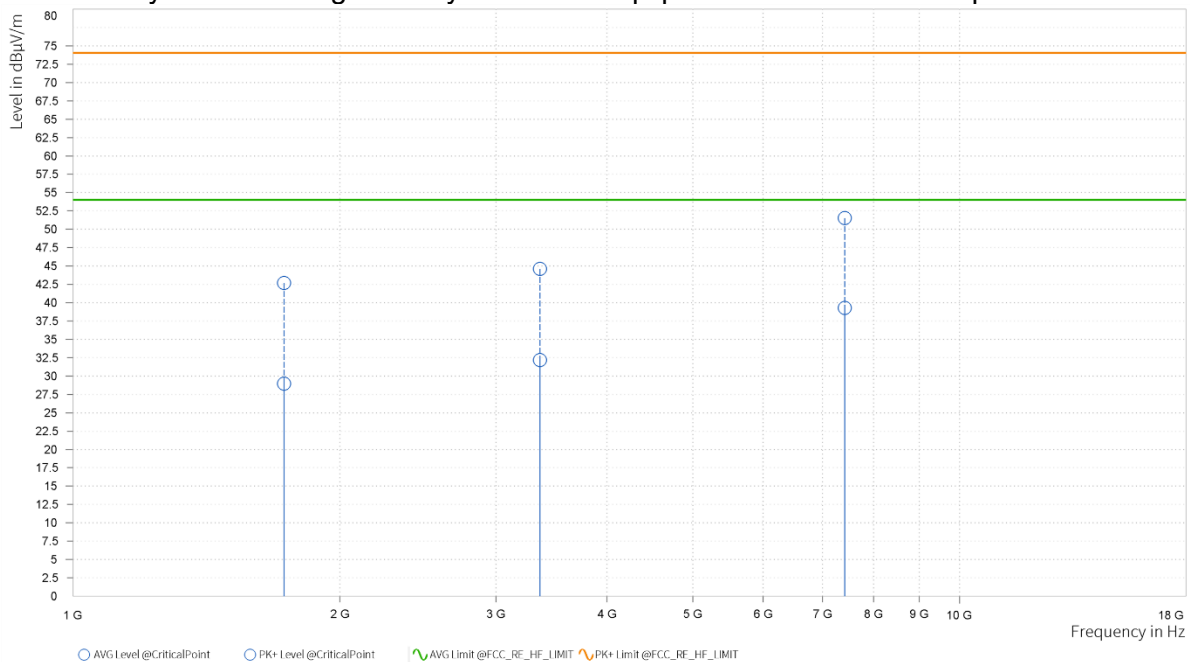


TEST VOLTAGE	Input 120 Vac, 60 Hz	FREQUENCY RANGE	1-18 GHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70 %RH	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Peak/Average, 1 MHz
TESTED BY	Carl Xie		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,033.500	44.04	74.00	29.96	31.93	54.00	22.07	5.93	V	183.8	2.00
1	3,835.500	46.21	74.00	27.79	33.38	54.00	20.62	9.07	V	345.9	1.00
1	7,449.000	51.50	74.00	22.50	39.89	54.00	14.11	16.21	V	197.7	1.00

REMARKS:

1. Peak detector quick scan is shown on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
2. Negative sign (-) in the margin column signify levels below the limit.
3. Frequency range scanned: 1GHz to 5th harmonic of the highest frequency or 40GHz, whichever is lower. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.
4. Only emissions significantly above the equipment noise floor are reported.

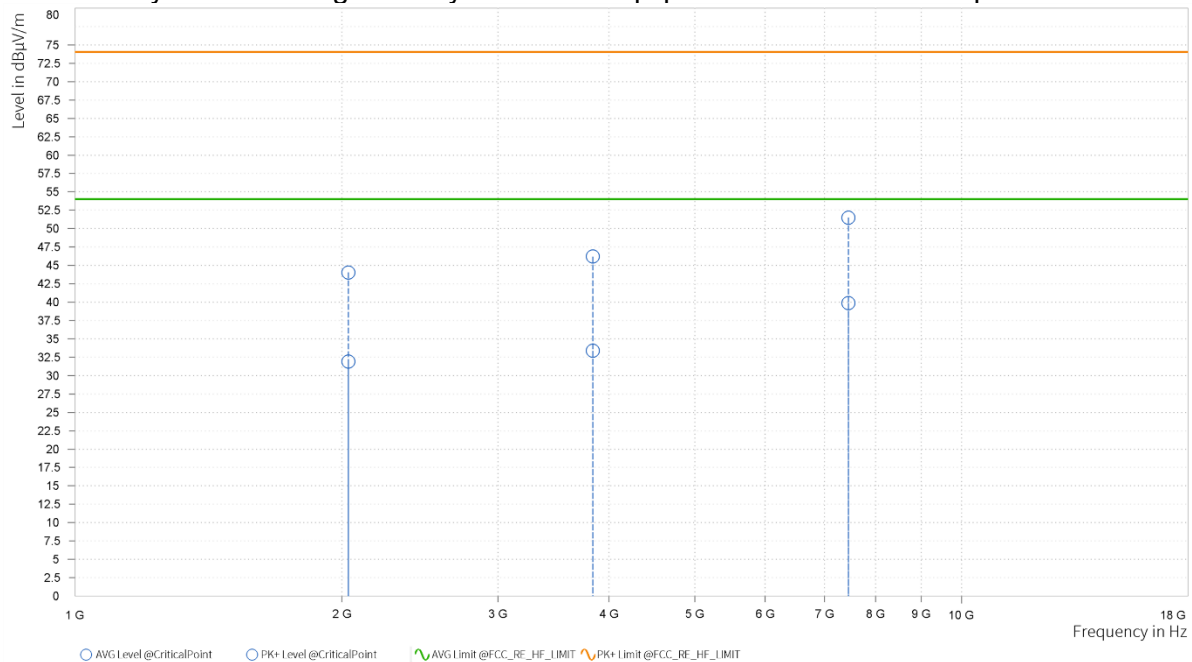



Test Report No.: EMC260413B002

3 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

---END---