

SPECIFICATION

Shenzhen Guandetong Electronic Limited


Antenna Specifications

Shenzhen Guandetong Electronic Co., Ltd.
Address: 3rd Floor, Building D, Maoyuan Industrial Park, Huanguan South Road,
Guanhu Street, Longhua District, Shenzhen, China
Phone+ +86-755-88298396
e-mail: deyi.huang@szgdtrf.com

Content

cover.....	1
catalogue.....	2
一、Product pictures.....	3
二、Product parameters.....	3
三、S11 data.....	4
四、Antenna Dimension.....	5
五、Radiation Pattern.....	6


一、Product pictures

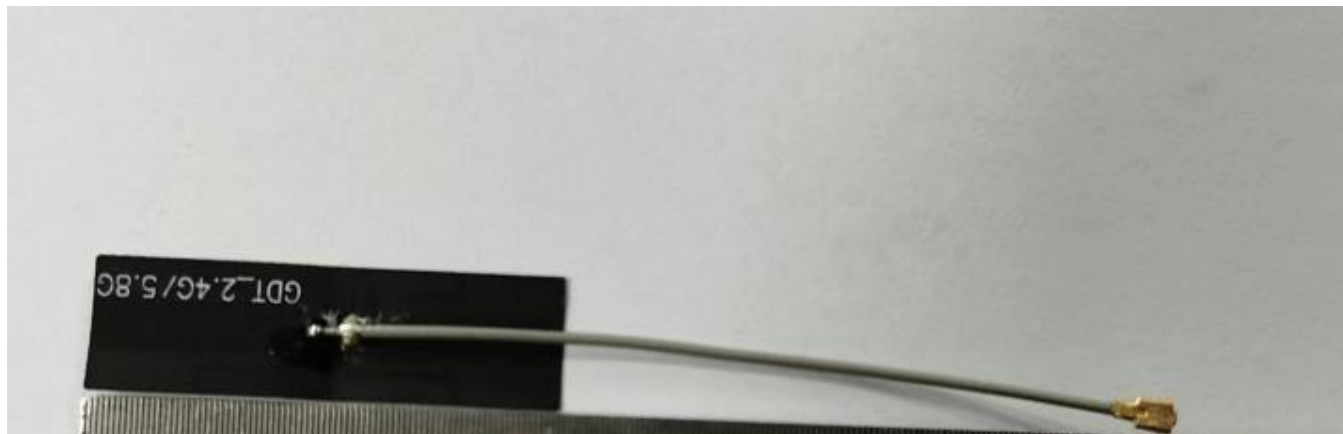


二、Product parameters

Product parameters			
Name	FPC Antenna	Model Type	GDT-2PWIFI-001
Electrical Specifications			
Frequency Range	2400-2500MHz	Polarization	perpendicular
Impedance	50 Ω	Radiation direction	omnidirectional
VSWR	≤ 2	Power	50W
Gain	3dBi	Bandwidth	100/600MHz
Mechanical Specifications			
Dimensions	41.40*12 $\pm$ 1mm	Chassis Color	black
Connector	IPEX	Cable Length	60MM
Chassis Material	FPC		
Working Temperature	-40 $^{\circ}$ C--+85 $^{\circ}$ C	Limit Temperature	-40 $^{\circ}$ C--+85 $^{\circ}$ C

三、S11 (VSWR 、 Return loss 、 Smith)

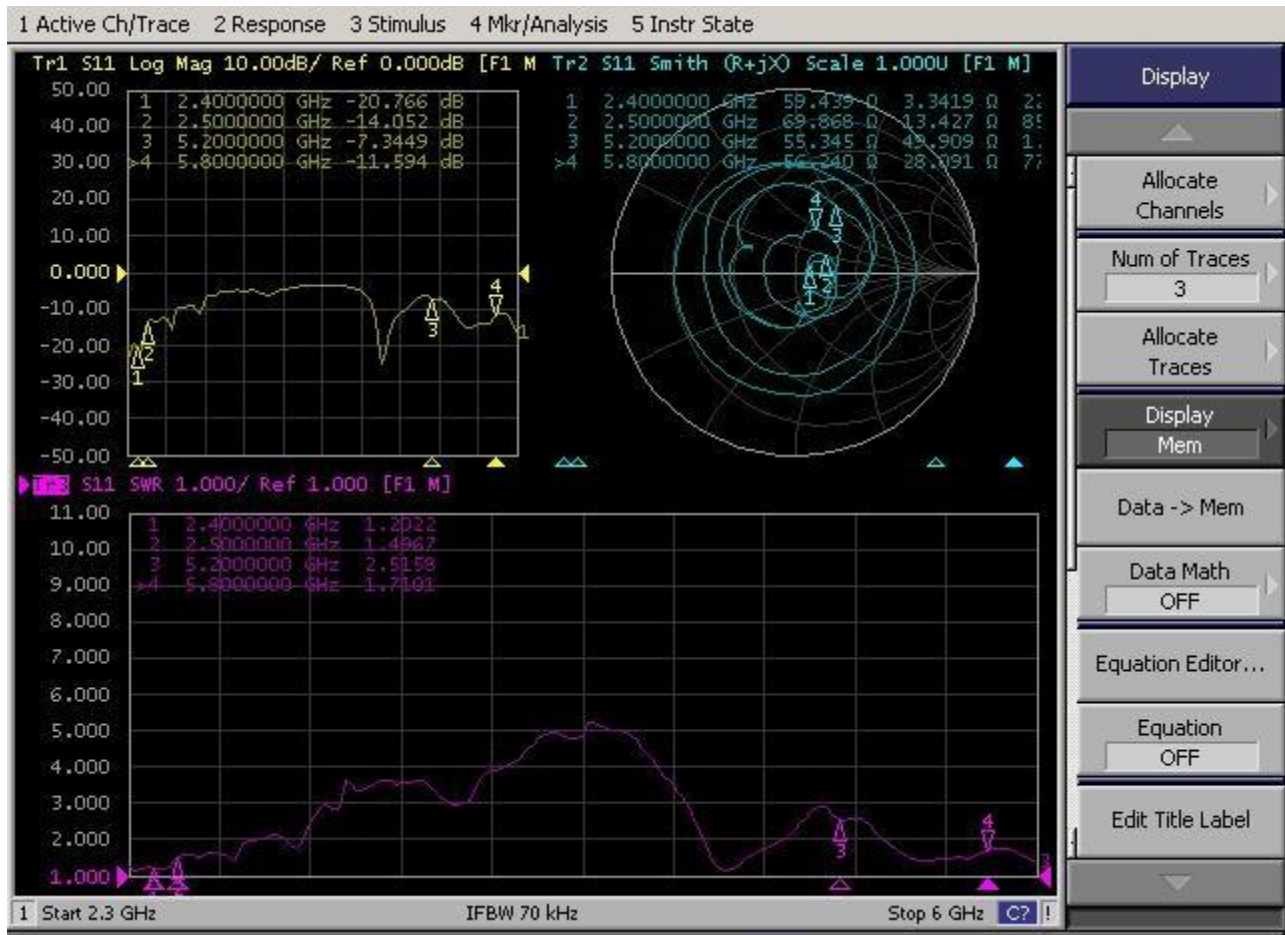

四、Antenna Dimension

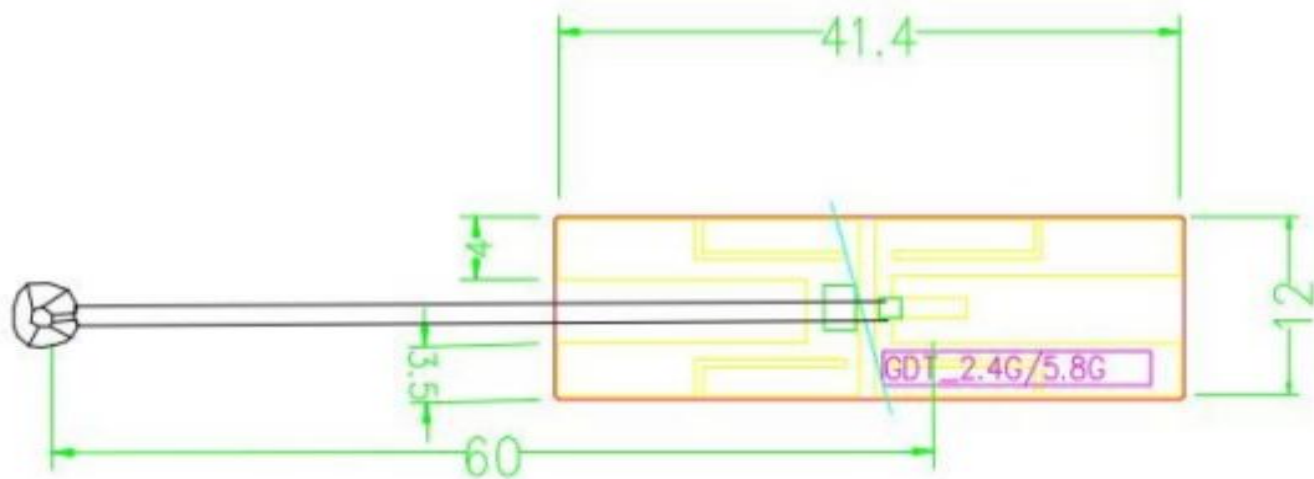

五、Radiation Pattern

Test Point ID	Freq. (MHz)	TRP (dBm)	Gain (dBi)	Directivity (dBi)	Efficiency (%)	Efficiency (dB)	Max (dBm)	Theta of Max	Phi of Max	Min (dBm)	Theta of Min	Phi of Min	AVG (dBm)	Max/Min (dB)	Max/AVG (dB)	Min/AVG (dB)
1	2400.0	2400.00	2.14	5.51	46.0%	-3.37	2.14	135	60	-95.99	0	0	-3.04	98.13	5.18	-92.95
2	2410.0	2410.00	2.25	5.82	44.0%	-3.57	2.25	135	60	-95.99	0	0	-3.02	98.24	5.27	-92.97
3	2420.0	2420.00	2.54	6.12	43.9%	-3.58	2.54	135	60	-95.99	0	0	-2.79	98.53	5.33	-93.20
4	2430.0	2430.00	3.00	6.30	47.6%	-3.22	3.08	135	60	-95.99	0	0	-2.30	99.07	5.38	-93.69
5	2440.0	2440.00	2.77	6.27	44.7%	-3.50	2.77	135	60	-95.99	0	0	-2.66	98.76	5.43	-93.33
6	2450.0	2450.00	2.69	6.34	43.1%	-3.65	2.69	135	60	-95.99	0	0	-2.83	98.68	5.52	-93.16
7	2460.0	2460.00	2.66	6.41	42.2%	-3.75	2.66	135	60	-95.99	0	0	-2.95	98.65	5.61	-93.04
8	2470.0	2470.00	2.53	6.29	42.1%	-3.76	2.53	135	60	-95.99	0	0	-3.18	98.52	5.71	-92.81
9	2480.0	2480.00	2.22	6.00	41.9%	-3.78	2.22	135	60	-95.99	0	0	-3.60	98.21	5.82	-92.39
10	2490.0	2490.00	2.04	6.05	39.7%	-4.01	2.04	135	60	-95.99	0	0	-3.92	98.03	5.96	-92.07
11	2500.0	2500.00	1.74	6.02	37.3%	-4.28	1.74	135	60	-95.99	0	0	-4.27	97.73	6.00	-91.72

