

Material requirement specification for the S-DN003D project antenna

Customer name: XieChuang

Customer product name: S-DN003D

Product name: WIFI 2 antenna

Product specification: See the BOM table for more details

Product code: 400104170

Change Content CV:

order number	edition	state	Start and end date	person liable	page number	remarks
1	V0.6	editio princeps	2024-12-11	Li Jieyi	14	

The Supplier acknowledges the signature of the following documents:

Responsible person / date		IQC/ date	Review / Date	Approval / Date
MD				
RF				

The Demander acknowledges the signature (please send it back after the confirmation):

The demander's judgment result: ☐ qualified ☐ unqualified			
Development & Design Engineer / Date	SQE Engineer / Date	Purchasing Leader / Date	Development Manager approval / date

Catalogue

1. OVERVIEW	3
1.1 SCOPE OF APPLICATION	3
1.2 PROJECT BASIC INFORMATION	3
2. TECHNICAL INDEX REQUIREMENTS	3
2.1 ACTIVE REPORTING	3
2.2 TEST INSTRUCTIONS	3
2.2.1 ANT-2 ANTENNA (FILE LOGMAG + VSWR + SMITH)	4
2.2.2 WIFI-2-ANTENNA EFFICIENCY AND GAIN	4
2.2.3 ANTENNA ACTIVE PARAMETERS	5
2.2.4 ANTENNA ISOLATION	6
2.2.5. COORDINATE SYSTEM OF THE WHOLE MACHINE	6
2.2.6 ANT2-2.4G	7
2.2.7 ANT2-2.4G	7
2.2.8 ANT2-5.8G	8
2.2.9 ANT2-5.8G	8
2.2.10 ANTENNA POSITION-ANT 2-J4	9
3. ENGINEERING DRAWINGS	10
3.1 WIFI2	10
4. BILL OF MATERIAL	11
5. PACKAGE SCHEMATIC DIAGRAM	12

1. Overview

1.1 Scope of application

This requirement specifies the antenna technical requirements and material requirements specifications for S-DN003D products.

This requirement is applicable to the antenna selection, testing and acceptance of S-DN003D products.

1.2 Project basic information

Antenna name:	S-DN003D
Antenna band:	WIFI : 2. 4G-2. 5G 5. 1G-5. 8G
Antenna material:	FPC antenna + coaxis

2. Technical index requirements

2.1 Active Reporting

2.2 Test instructions


Test tools: Agilent8960 instrument, R & S CMW500, full wave far field ETS dark room, high precision positioning system and its controller and computer with automatic test program

Test environment: temperature $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$, humidity $50\% \pm 15\%$

Test method: DUT is fixed in the center of the turntable with H plane, on the same horizontal line as the center of the horn antenna.

The positioning system enables the DUT to rotate in the whole sphere to satisfy the high-precision 3 D positioning. Each RF instrument and turntable controller communicate with the PC with automatic test software through the GPIB interface.

2.2.1 ANT-2 antenna (file LOGMAG + VSWR + SMITH)

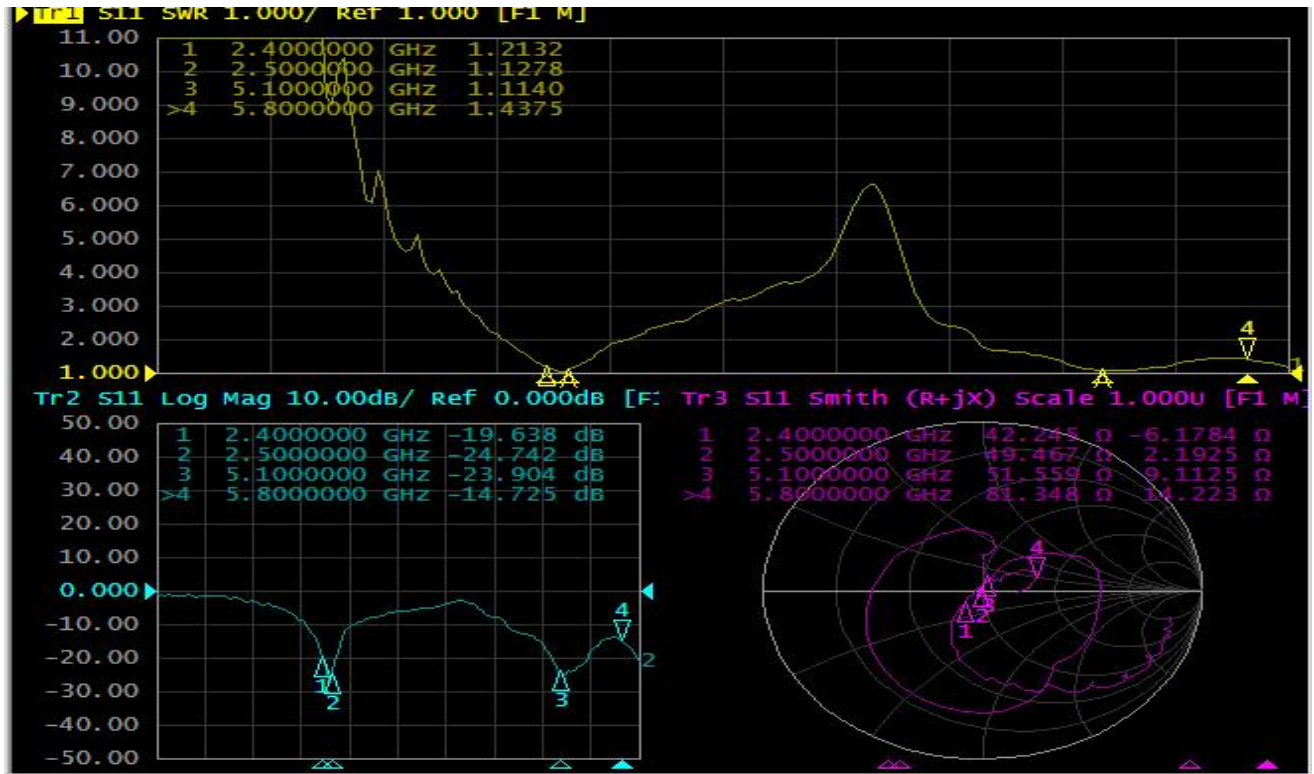

2.2.2 WIFI-2-Antenna efficiency and gain


Passive Test For 2400MHz~2500MHz					Passive Test For 5100MHz~5800MHz				
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)		Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	
2400	60.3%	-2.20	2.21		5170.0	60.8%	-2.16	2.39	
2410	60.6%	-2.18	2.34		5210.0	61.2%	-2.13	2.44	
2420	60.9%	-2.15	2.53		5250.0	61.7%	-2.10	2.57	
2430	61.2%	-2.13	2.66		5290.0	62.8%	-2.02	2.63	
2440	61.7%	-2.10	2.82		5330.0	63.9%	-1.94	2.72	
2450	61.9%	-2.08	2.95		5370.0	64.6%	-1.90	2.54	
2460	62.1%	-2.07	3.05		5410.0	65.9%	-1.81	2.59	
2470	61.5%	-2.11	2.99		5450.0	67.2%	-1.73	2.74	
2480	60.8%	-2.16	2.97		5490.0	66.4%	-1.78	2.69	
2490	60.4%	-2.19	2.87		5530.0	65.6%	-1.83	2.65	
2500	60.7%	-2.17	2.93		5570.0	64.8%	-1.88	2.58	
					5610.0	64.1%	-1.93	2.42	
					5650.0	63.4%	-1.98	2.34	
					5690.0	63.2%	-1.99	2.46	
					5730.0	62.5%	-2.04	2.48	
					5770.0	61.5%	-2.11	2.44	
					5810.0	60.9%	-2.15	2.38	
					5850.0	60.5%	-2.19	2.31	

2.2.3 Antenna active parameters


	802. 11	channel number	Single-root antenna- -J3		Single-root antenna-J4	
			TRP (db)	TIS (dbm)	TRP (db)	TIS (dbm)
WIFI	11B (11M)	CH1	18.23	-85.14	17.76	-83.32
		CH6	18.14	-85.09	17.89	-83.05
		CH11	18.17	-84.92	17.44	-82.59
	11A (54M)	CH36	15.63	-72.89	15.22	-72.23
		CH149	16.04	-72.45	15.57	-72.13
		CH165	16.17	-72.18	15.04	-72.35

	802. 11	channel number	J3+J4	
			TRP (db)	TIS (dbm)
WIFI	11B (11M)	CH1	20.76	-85.98
		CH6	20.5	-86.1
		CH11	20.68	-86.37
	11A (54M)	CH36	17.57	-75.67
		CH149	18.23	-75.08
		CH165	18.19	-74.99


2.2.4 Antenna isolation

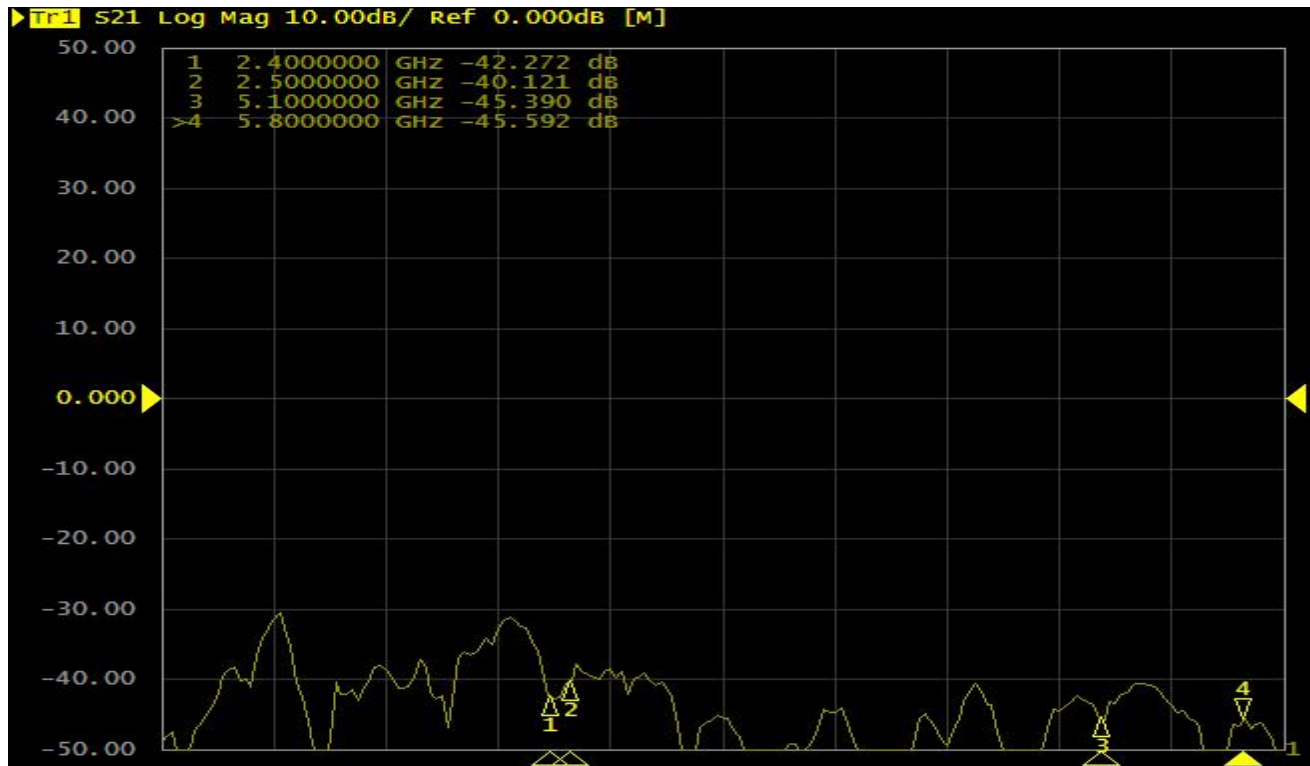


2.2.5. Coordinate system of the whole machine

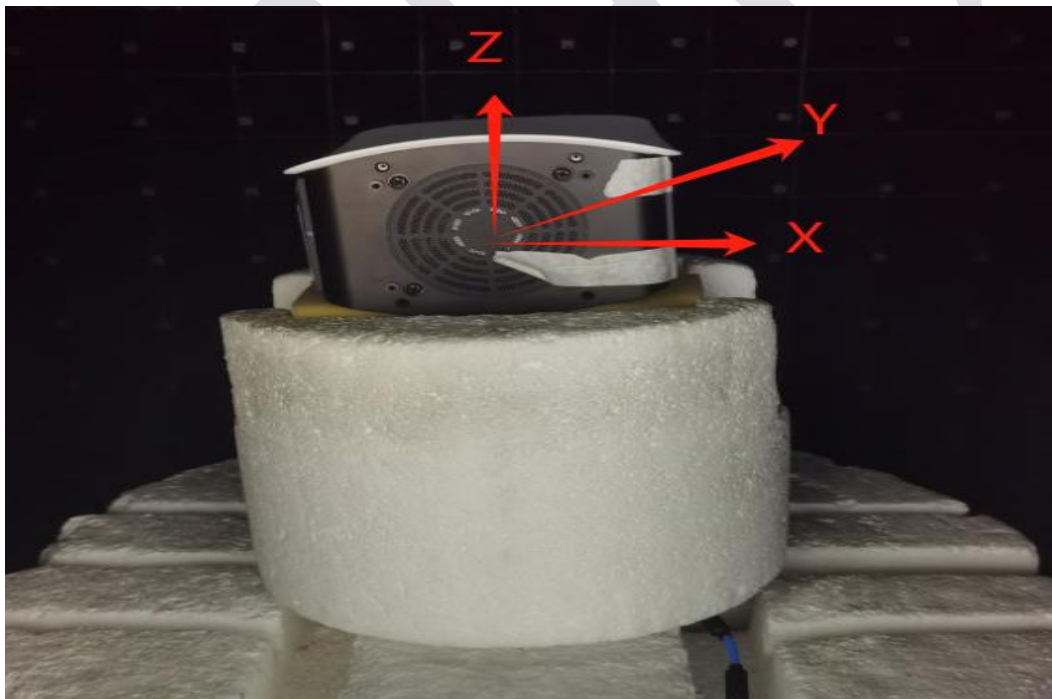


2.2.6 ANT2-2.4G

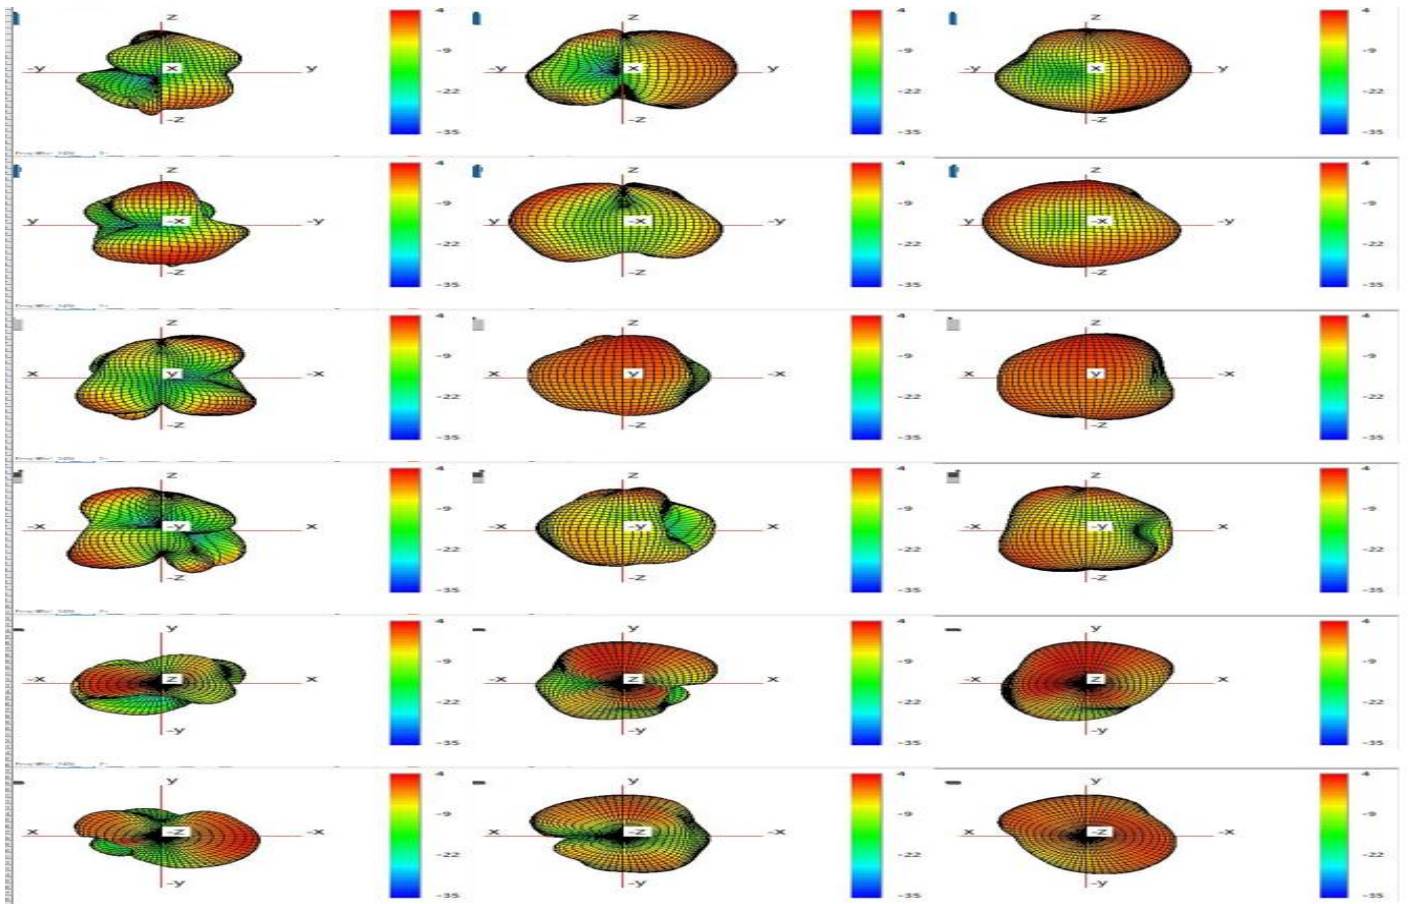


2.2.7 ANT2-2.4G

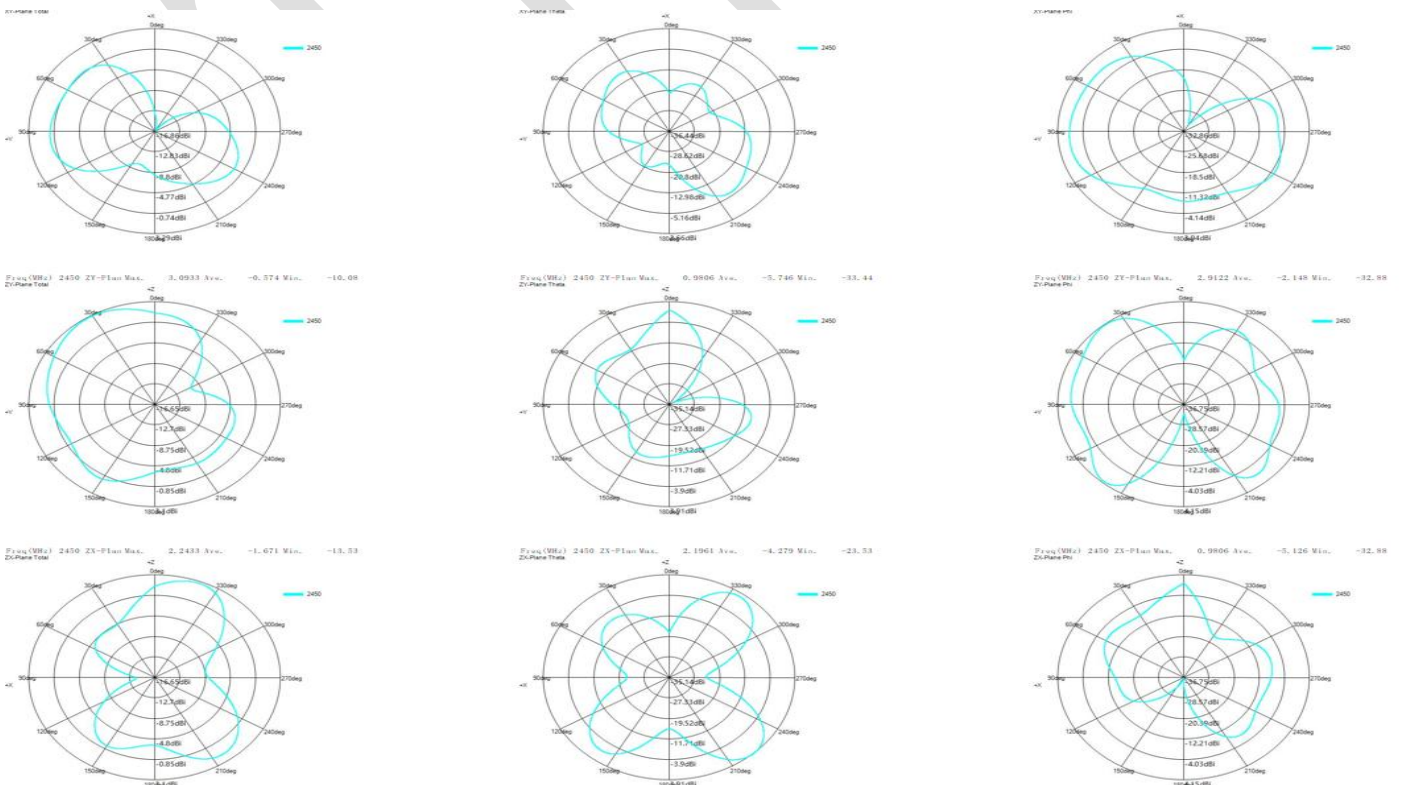

2.2.8 ANT2-5.8G

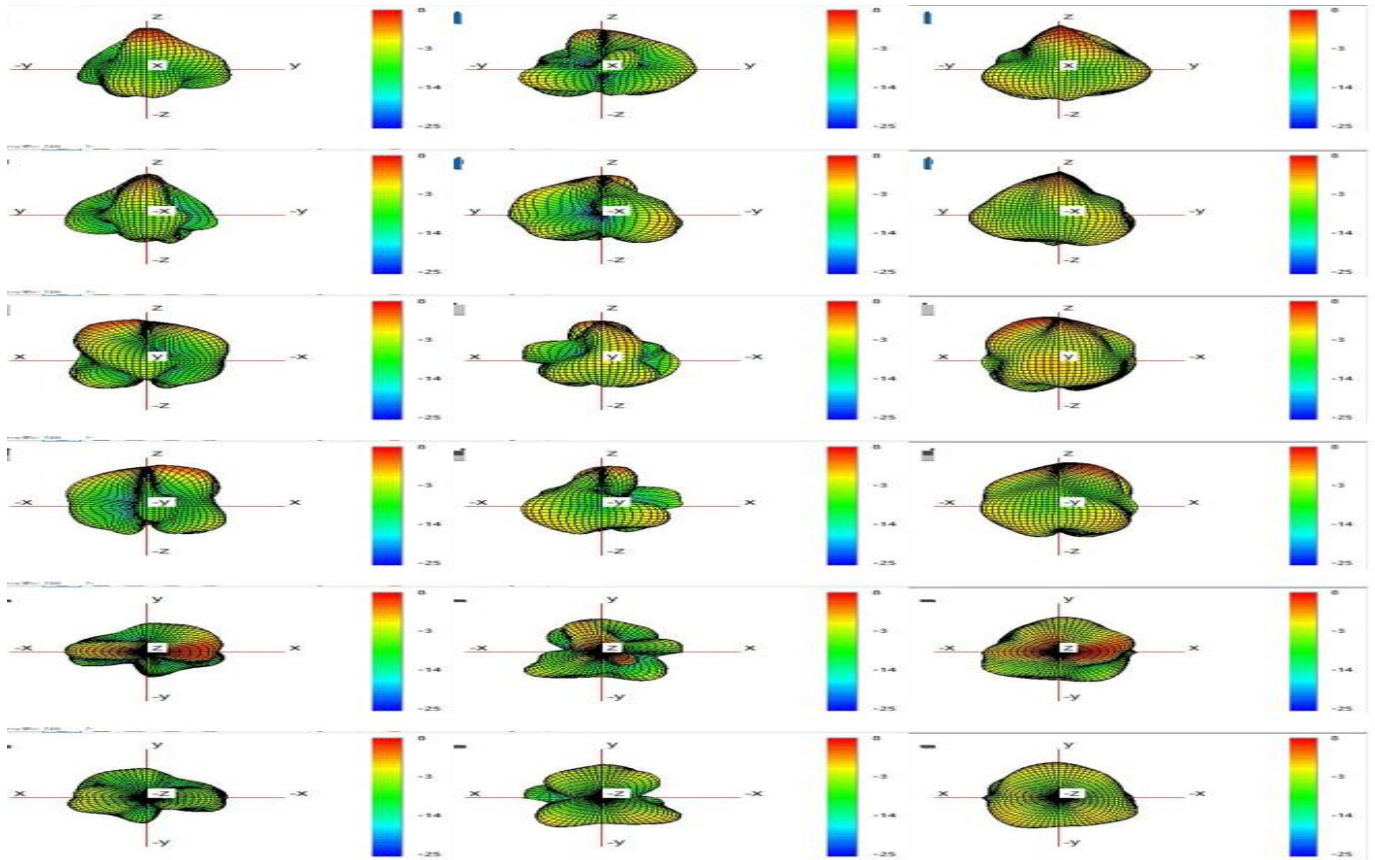

2.2.9 ANT2-5.8G


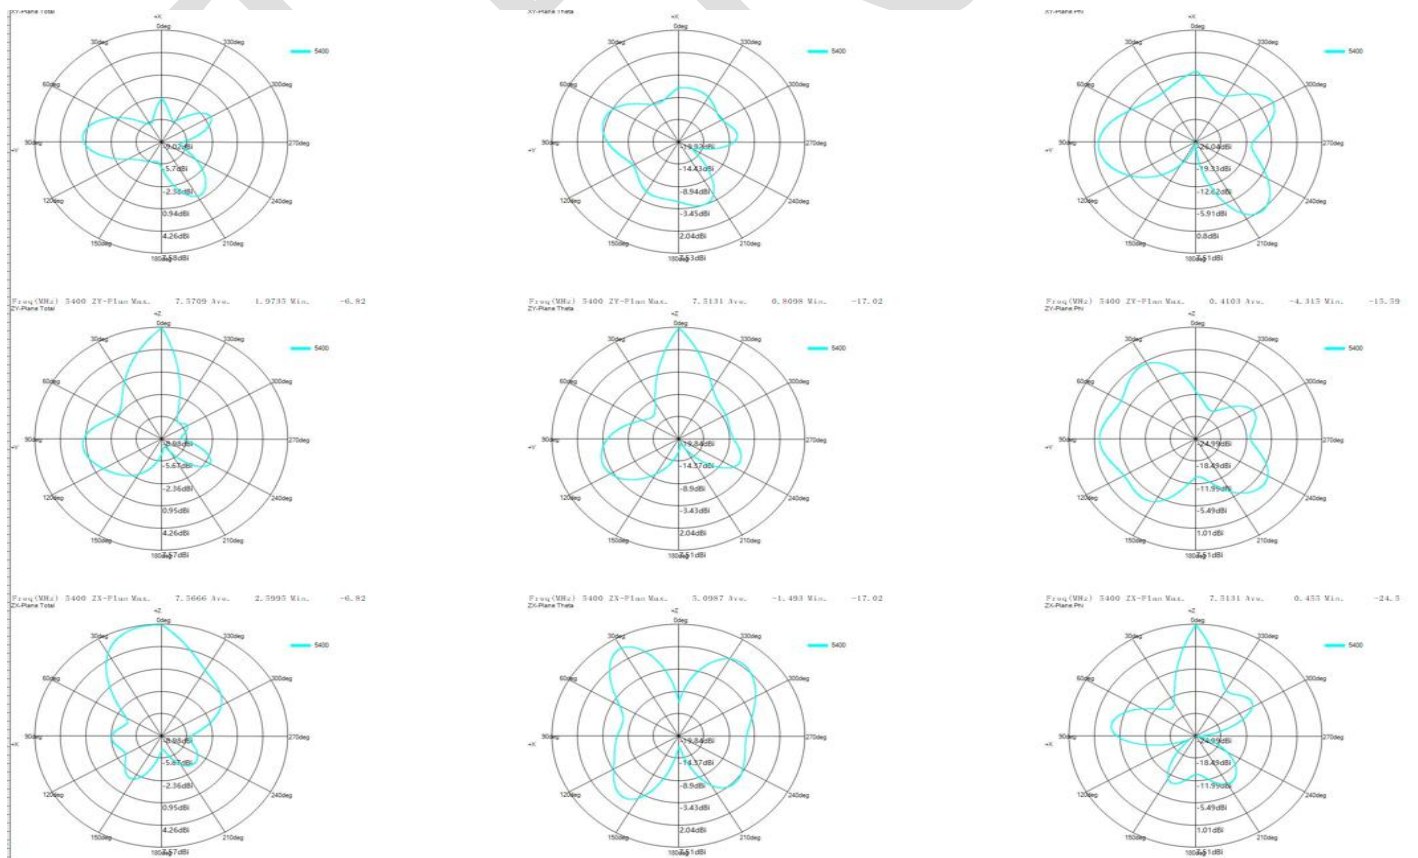


2.2.10 Antenna position-ANT 2-J4



3. Engineering drawings

3.1 WIFI2

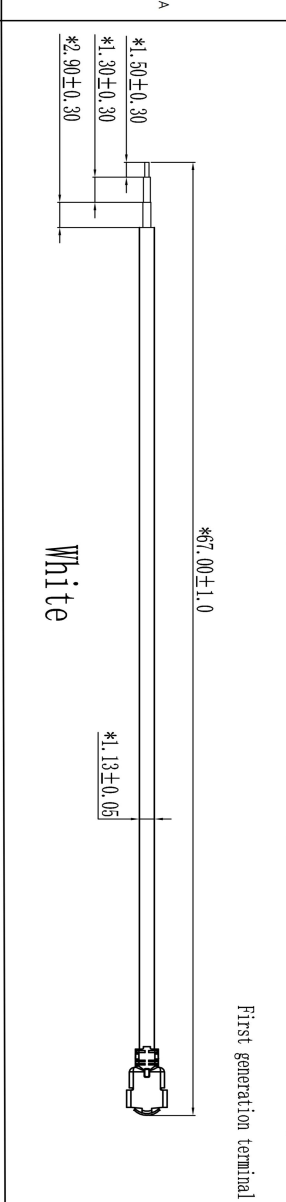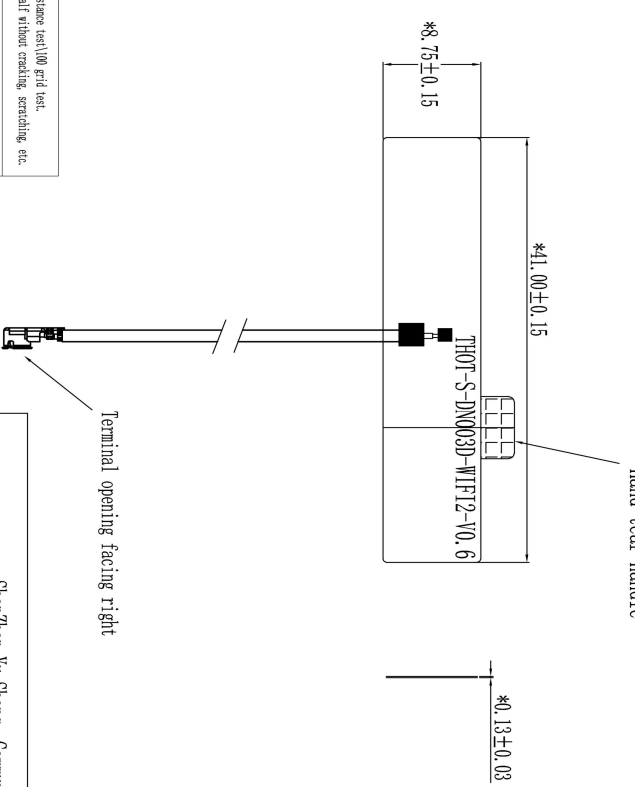1	2	3	4	5	6																																																							
				<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>DATE</th> <th>Modify the content</th> <th>Version</th> <th>Revise</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>		DATE	Modify the content	Version	Revise																																																			
DATE	Modify the content	Version	Revise																																																									
																																																												
skills requirements: <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>1. PCB substrate specifications:</td> <td>PI substrate:</td> <td>1.0mm</td> </tr> <tr> <td></td> <td>Electrolytic copper:</td> <td>0.5oz(OD)</td> </tr> <tr> <td></td> <td>Double-sided tape:</td> <td>9M-9711SG</td> </tr> <tr> <td>2. Electroplating specifications:</td> <td>QEP antioxidant treatment:</td> <td></td> </tr> <tr> <td>3. Surface ink requirements:</td> <td>Surface ink color:</td> <td>Mat black</td> </tr> <tr> <td></td> <td>Printing font color:</td> <td>White</td> </tr> <tr> <td></td> <td>Printing font height:</td> <td>According to drawings</td> </tr> </table> 4. Reliability requirements: 1. Reliability test: salt spray test(water friction test)(alcohol resistance test)(100 grid test). 2. The front ink, the surface of the ink is required to be folded in half without cracking, scratching, etc. 5. Tolerance requirements: 1. Shape tolerance ±0.15; 2. Copper foil circuit tolerance ±0.05; 3. The position of the copper foil to the shape is ±0.15; 4. Hole-to-hole position tolerance ±0.10; hole-to-shape position tolerance ±0.15; 5. The size tolerance of gold finger is ±0.20; 6. For other unmarked dimensions, refer to 2D drawings. 6. Key control size: The dimension marked with numbers are regarded as important dimensions and the others refer to 2D drawings 7. Environmental requirements: Parts meet MHS2.0/IEP/Reach/CF environmental protection requirements 8. Packaging requirements: Single PCS shipment						1. PCB substrate specifications:	PI substrate:	1.0mm		Electrolytic copper:	0.5oz(OD)		Double-sided tape:	9M-9711SG	2. Electroplating specifications:	QEP antioxidant treatment:		3. Surface ink requirements:	Surface ink color:	Mat black		Printing font color:	White		Printing font height:	According to drawings																																		
1. PCB substrate specifications:	PI substrate:	1.0mm																																																										
	Electrolytic copper:	0.5oz(OD)																																																										
	Double-sided tape:	9M-9711SG																																																										
2. Electroplating specifications:	QEP antioxidant treatment:																																																											
3. Surface ink requirements:	Surface ink color:	Mat black																																																										
	Printing font color:	White																																																										
	Printing font height:	According to drawings																																																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="4">Shenzhen Yu Sheng Communication Equipment Co., Ltd.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">  </td> <td style="text-align: center;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>0~3</td> <td>±0.08</td> <td>Φ</td> <td>0.03</td> </tr> <tr> <td>3~30</td> <td>±0.10</td> <td>○</td> <td>0.03</td> </tr> <tr> <td>30~50</td> <td>±0.12</td> <td>◎</td> <td>0.02</td> </tr> <tr> <td>50~80</td> <td>±0.15</td> <td>⊥</td> <td>0.02</td> </tr> <tr> <td>角度</td> <td>±1°</td> <td></td> <td>0.05</td> </tr> </table> </td> <td style="text-align: center;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Model</td> <td>S-DN003D</td> </tr> <tr> <td>Name</td> <td>WIFI2 Antenna</td> </tr> <tr> <td>Part NO</td> <td>661001-1A-TC</td> </tr> <tr> <td>Material quality</td> <td>Electrolytic copper</td> </tr> </table> </td> <td style="text-align: center;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>DATE</td> <td>20240731</td> </tr> <tr> <td>Design</td> <td>BYZ</td> </tr> <tr> <td>Review</td> <td>FJW</td> </tr> <tr> <td>confirm</td> <td>RF</td> </tr> <tr> <td>RF</td> <td>tdl</td> </tr> </table> </td> <td style="text-align: center;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>UNIT</td> <td>mm</td> </tr> <tr> <td>proportion</td> <td>1:1</td> </tr> <tr> <td>PTT</td> <td>RF</td> </tr> <tr> <td>Revis</td> <td>R-A</td> </tr> </table> </td> </tr> </tbody> </table>						Shenzhen Yu Sheng Communication Equipment Co., Ltd.					<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>0~3</td> <td>±0.08</td> <td>Φ</td> <td>0.03</td> </tr> <tr> <td>3~30</td> <td>±0.10</td> <td>○</td> <td>0.03</td> </tr> <tr> <td>30~50</td> <td>±0.12</td> <td>◎</td> <td>0.02</td> </tr> <tr> <td>50~80</td> <td>±0.15</td> <td>⊥</td> <td>0.02</td> </tr> <tr> <td>角度</td> <td>±1°</td> <td></td> <td>0.05</td> </tr> </table>	0~3	±0.08	Φ	0.03	3~30	±0.10	○	0.03	30~50	±0.12	◎	0.02	50~80	±0.15	⊥	0.02	角度	±1°		0.05	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Model</td> <td>S-DN003D</td> </tr> <tr> <td>Name</td> <td>WIFI2 Antenna</td> </tr> <tr> <td>Part NO</td> <td>661001-1A-TC</td> </tr> <tr> <td>Material quality</td> <td>Electrolytic copper</td> </tr> </table>	Model	S-DN003D	Name	WIFI2 Antenna	Part NO	661001-1A-TC	Material quality	Electrolytic copper	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>DATE</td> <td>20240731</td> </tr> <tr> <td>Design</td> <td>BYZ</td> </tr> <tr> <td>Review</td> <td>FJW</td> </tr> <tr> <td>confirm</td> <td>RF</td> </tr> <tr> <td>RF</td> <td>tdl</td> </tr> </table>	DATE	20240731	Design	BYZ	Review	FJW	confirm	RF	RF	tdl	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>UNIT</td> <td>mm</td> </tr> <tr> <td>proportion</td> <td>1:1</td> </tr> <tr> <td>PTT</td> <td>RF</td> </tr> <tr> <td>Revis</td> <td>R-A</td> </tr> </table>	UNIT	mm	proportion	1:1	PTT	RF	Revis	R-A
Shenzhen Yu Sheng Communication Equipment Co., Ltd.																																																												
	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>0~3</td> <td>±0.08</td> <td>Φ</td> <td>0.03</td> </tr> <tr> <td>3~30</td> <td>±0.10</td> <td>○</td> <td>0.03</td> </tr> <tr> <td>30~50</td> <td>±0.12</td> <td>◎</td> <td>0.02</td> </tr> <tr> <td>50~80</td> <td>±0.15</td> <td>⊥</td> <td>0.02</td> </tr> <tr> <td>角度</td> <td>±1°</td> <td></td> <td>0.05</td> </tr> </table>	0~3	±0.08	Φ	0.03	3~30	±0.10	○	0.03	30~50	±0.12	◎	0.02	50~80	±0.15	⊥	0.02	角度	±1°		0.05	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Model</td> <td>S-DN003D</td> </tr> <tr> <td>Name</td> <td>WIFI2 Antenna</td> </tr> <tr> <td>Part NO</td> <td>661001-1A-TC</td> </tr> <tr> <td>Material quality</td> <td>Electrolytic copper</td> </tr> </table>	Model	S-DN003D	Name	WIFI2 Antenna	Part NO	661001-1A-TC	Material quality	Electrolytic copper	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>DATE</td> <td>20240731</td> </tr> <tr> <td>Design</td> <td>BYZ</td> </tr> <tr> <td>Review</td> <td>FJW</td> </tr> <tr> <td>confirm</td> <td>RF</td> </tr> <tr> <td>RF</td> <td>tdl</td> </tr> </table>	DATE	20240731	Design	BYZ	Review	FJW	confirm	RF	RF	tdl	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>UNIT</td> <td>mm</td> </tr> <tr> <td>proportion</td> <td>1:1</td> </tr> <tr> <td>PTT</td> <td>RF</td> </tr> <tr> <td>Revis</td> <td>R-A</td> </tr> </table>	UNIT	mm	proportion	1:1	PTT	RF	Revis	R-A										
0~3	±0.08	Φ	0.03																																																									
3~30	±0.10	○	0.03																																																									
30~50	±0.12	◎	0.02																																																									
50~80	±0.15	⊥	0.02																																																									
角度	±1°		0.05																																																									
Model	S-DN003D																																																											
Name	WIFI2 Antenna																																																											
Part NO	661001-1A-TC																																																											
Material quality	Electrolytic copper																																																											
DATE	20240731																																																											
Design	BYZ																																																											
Review	FJW																																																											
confirm	RF																																																											
RF	tdl																																																											
UNIT	mm																																																											
proportion	1:1																																																											
PTT	RF																																																											
Revis	R-A																																																											

4. Bill Of Material

661006 (S-DN003D) -BOM

edition : T:A


client : 661

Type of aircTCft : 661006

Set a date : 2024/8/12

Item number	*Material code	*Material name	name	*Machine type	Specification and model	colour	*UNIT	dosage	remark
2	661006-IB-TC	WIFI2 antenna		S-DN003D	WIFI1-FPC+CABLE+weld	black	PCS	1	
2.1	661006-IB-01-TC	FPC		S-DN003D	WIFI2-FPC Electrolytic copper 8.75*41*0.12 mm	black	PCS	1	
2.2	661006-IB-02-TC	CABLE		S-DN003D	First generation terminal ϕ 1.13*87.00 mm	white	PCS	1	
2.3	661006-IB-03-TC	weld		S-DN003D	weld	black	PCS	1	
verify :			examine :			manufacture : BYZ			

5. Package schematic diagram

Packaging method diagram		
product name	Antenna components	
P / N	661006	
Project model	S-DN003D	
File details	Carton Size 1: 270*260*200MM Carton Size 2: 260*200*200MM Carton Size 3: Depending on the order quantity / volume	
	Boating method	Packaging by order quantity
	Total number of binning	Packaging by order quantity
labeling requirement	Tag Size 1: Universal use 100 * 100mm Tag Size 2: According to customer requirements	
matters need attention		
1. Due to the limitation of order quantity, the packing method of each material is the size of the box according to the total quantity of the order or the physical volume		
2. Storage temperature: room temperature		
3. Preservation conditions: store them in a cool and dry place		