



Duty Cycle

Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Max Variation (%)
NVNT	a	5180	0.232	0.289	80.28	0.95	4.31	0.22
NVNT	a	5200	0.232	0.289	80.28	0.95	4.31	0.22
NVNT	a	5240	0.232	0.289	80.28	0.95	4.31	0.22
NVNT	n20	5180	0.253	0.308	82.14	0.85	3.95	0.22
NVNT	n20	5200	0.252	0.309	81.55	0.89	3.97	0.21
NVNT	n20	5240	0.352	0.4	88	0.56	2.84	0.23
NVNT	n40	5190	0.236	0.292	80.82	0.92	4.24	0.21
NVNT	n40	5230	0.236	0.293	80.55	0.94	4.24	0.20


Duty Cycle NVNT a 5240MHz

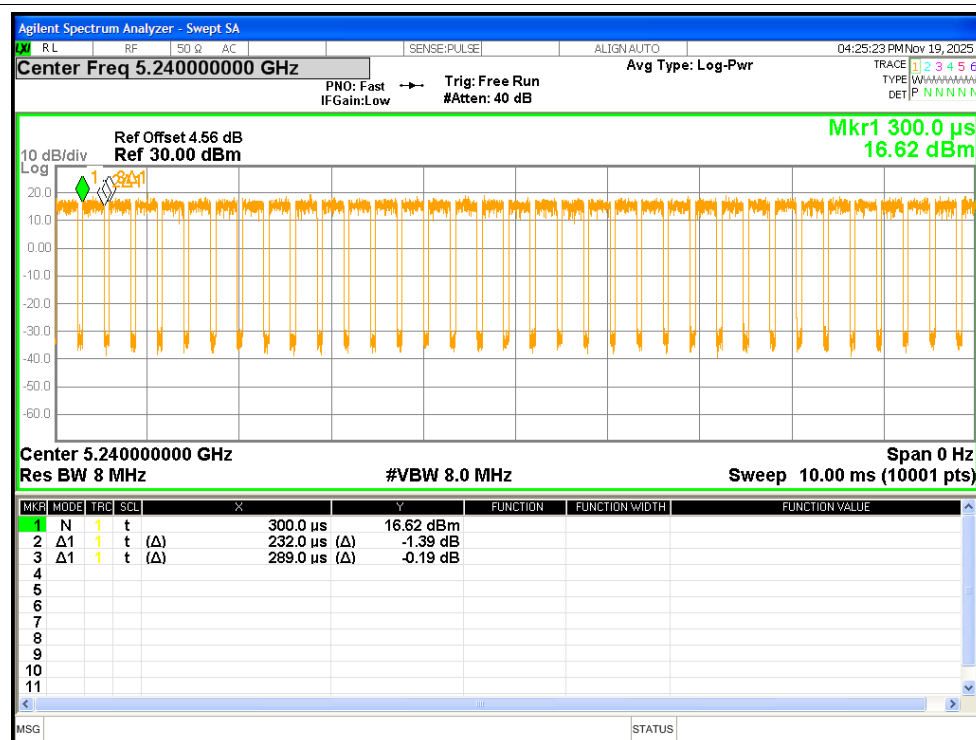


Duty Cycle NVNT n20 5180MHz

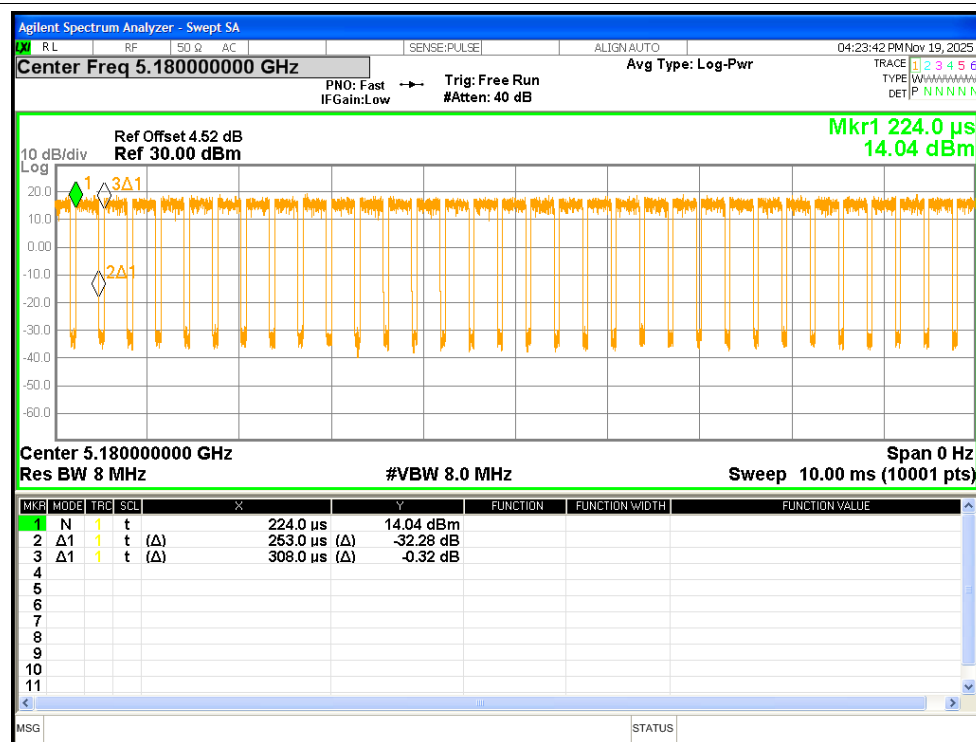

Duty Cycle NVNT n40 5190MHz


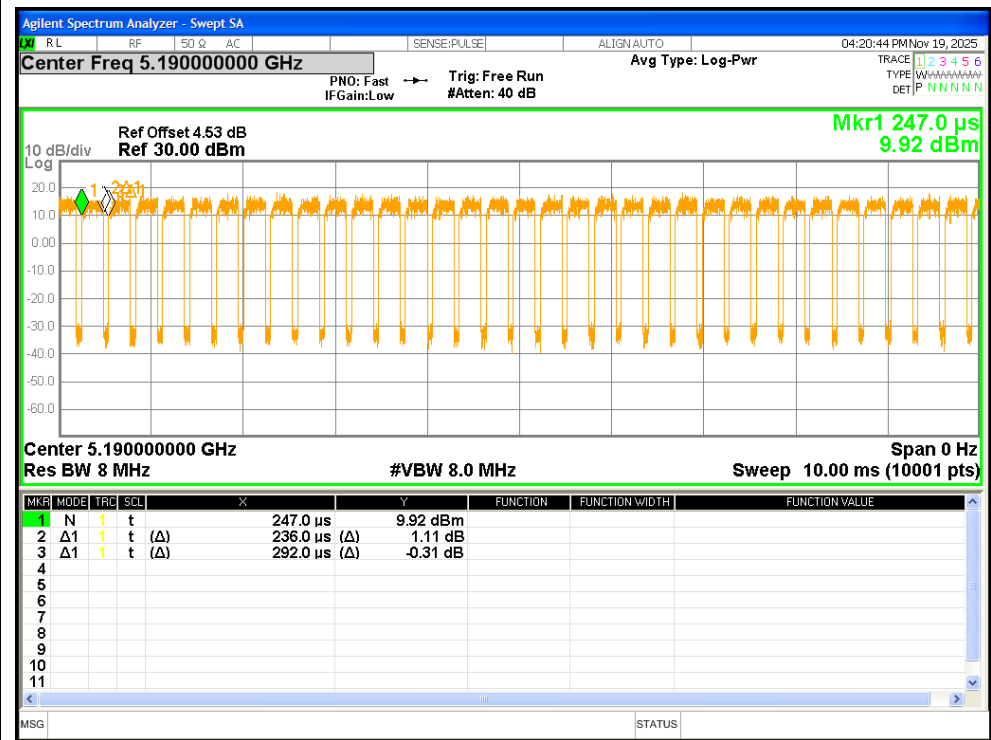




Duty Cycle NVNT n40 5230MHz


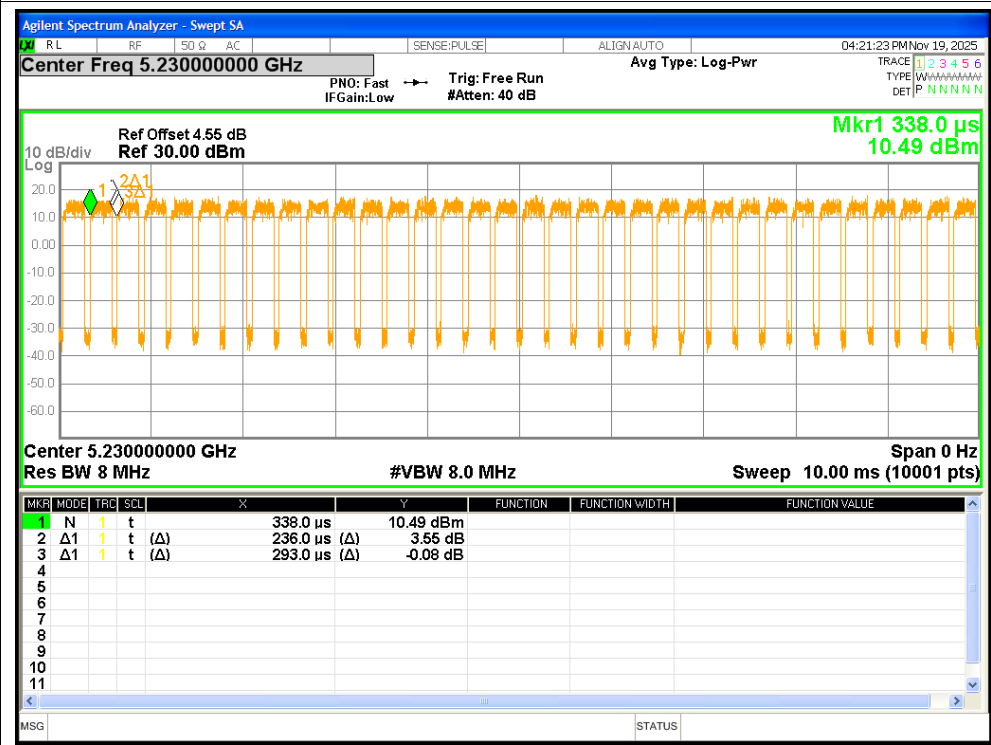




Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	13.3	0.95	14.25	<=24	Pass
NVNT	a	5200	13.38	0.95	14.33	<=24	Pass
NVNT	a	5240	13.18	0.95	14.13	<=24	Pass
NVNT	n20	5180	13.3	0.85	14.15	<=24	Pass
NVNT	n20	5200	13.44	0.89	14.33	<=24	Pass
NVNT	n20	5240	13.48	0.56	14.04	<=24	Pass
NVNT	n40	5190	14.86	0.92	15.78	<=24	Pass
NVNT	n40	5230	15.02	0.94	15.96	<=24	Pass

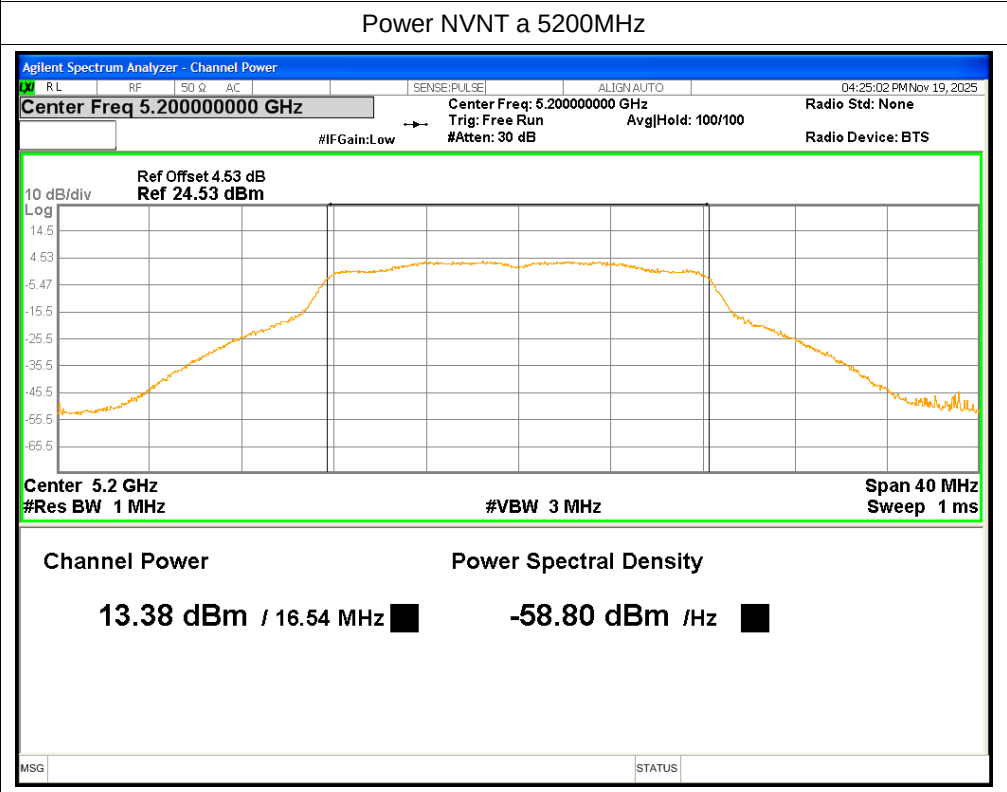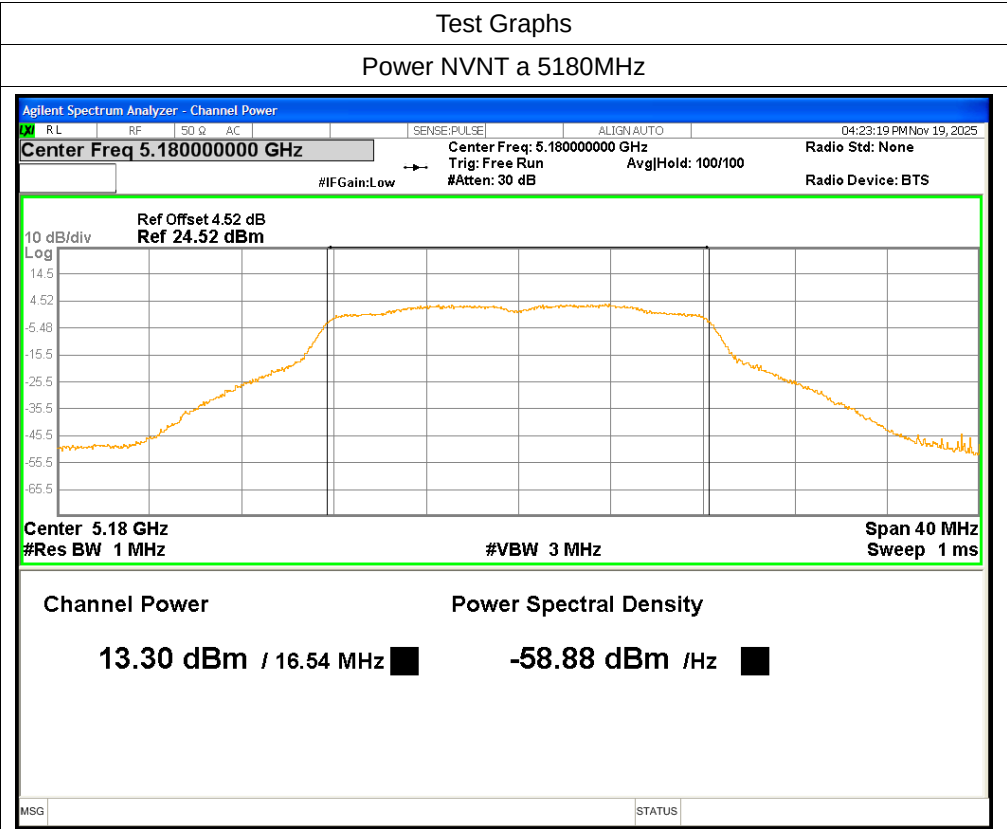

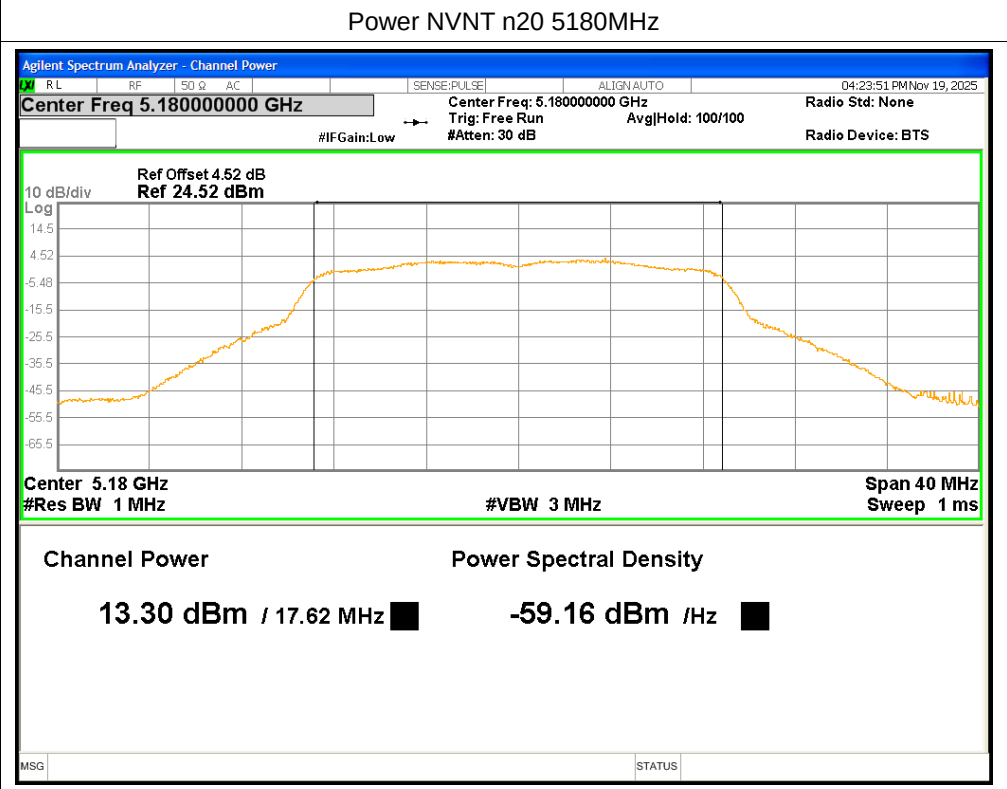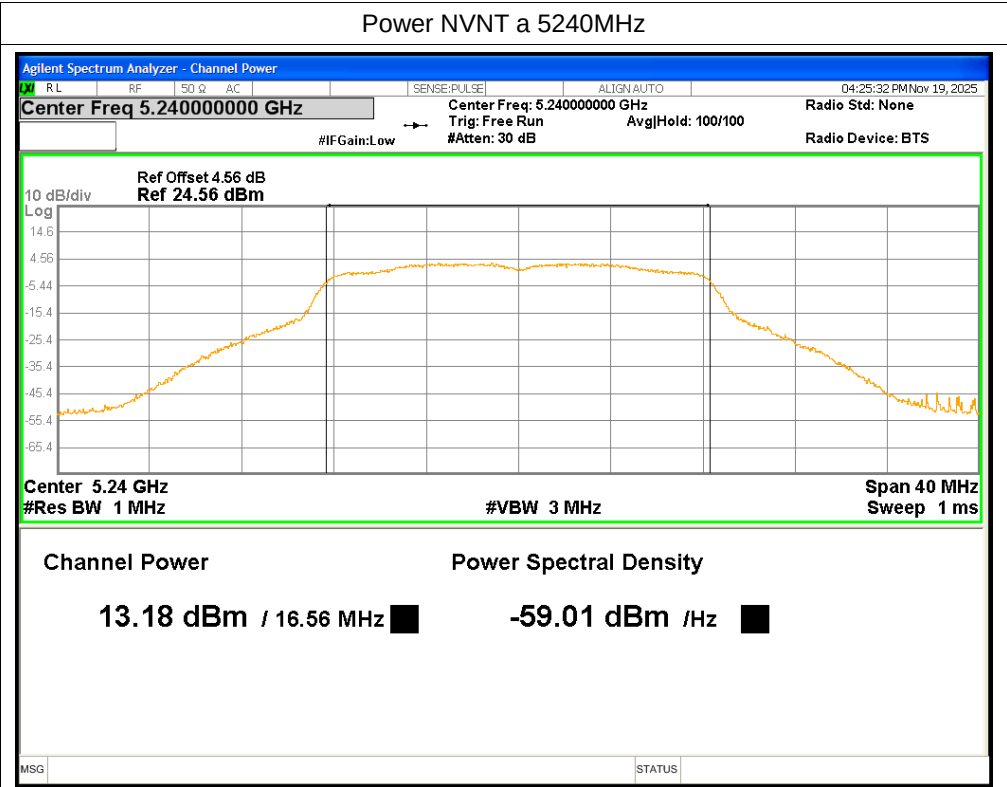

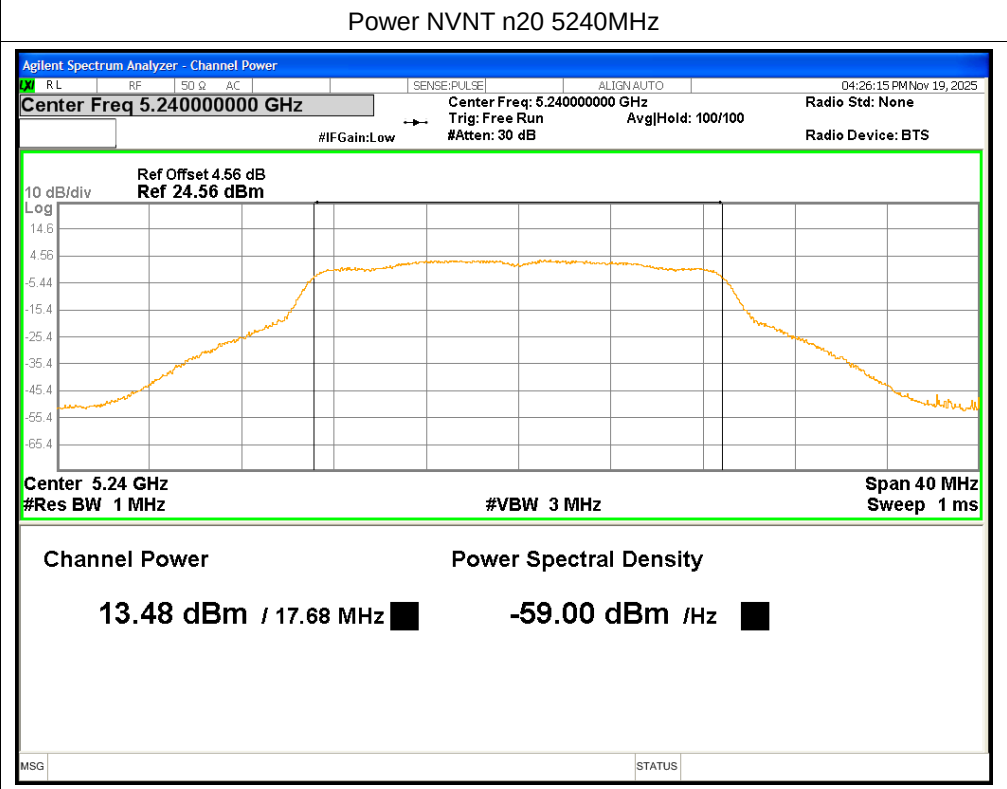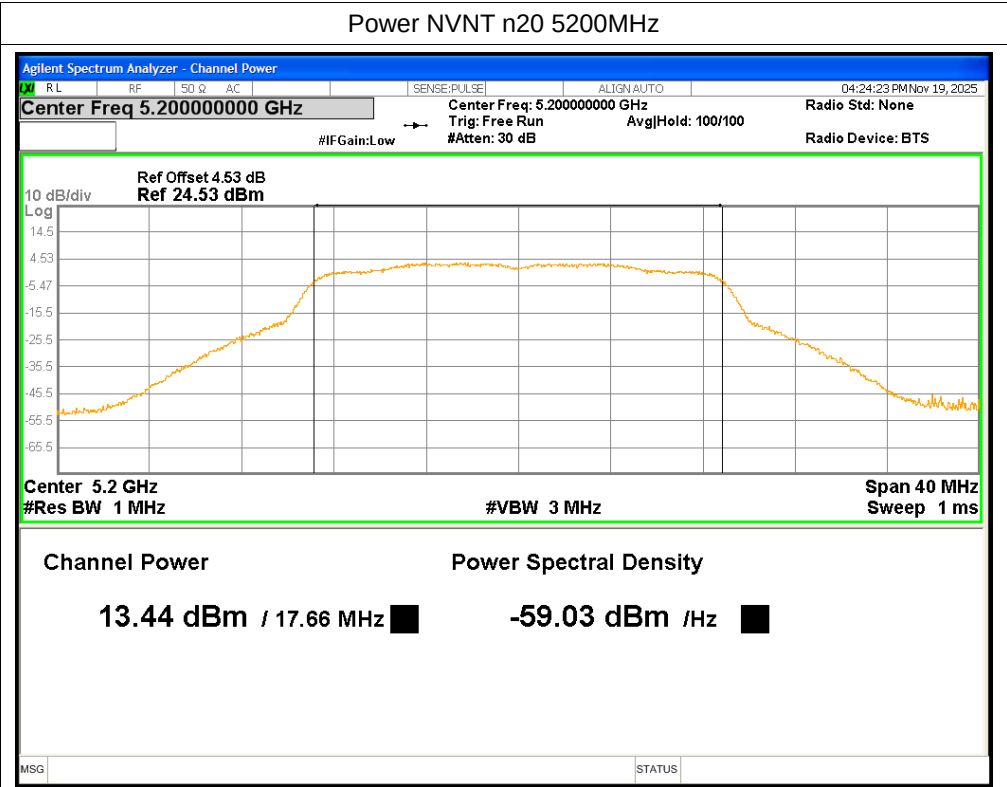

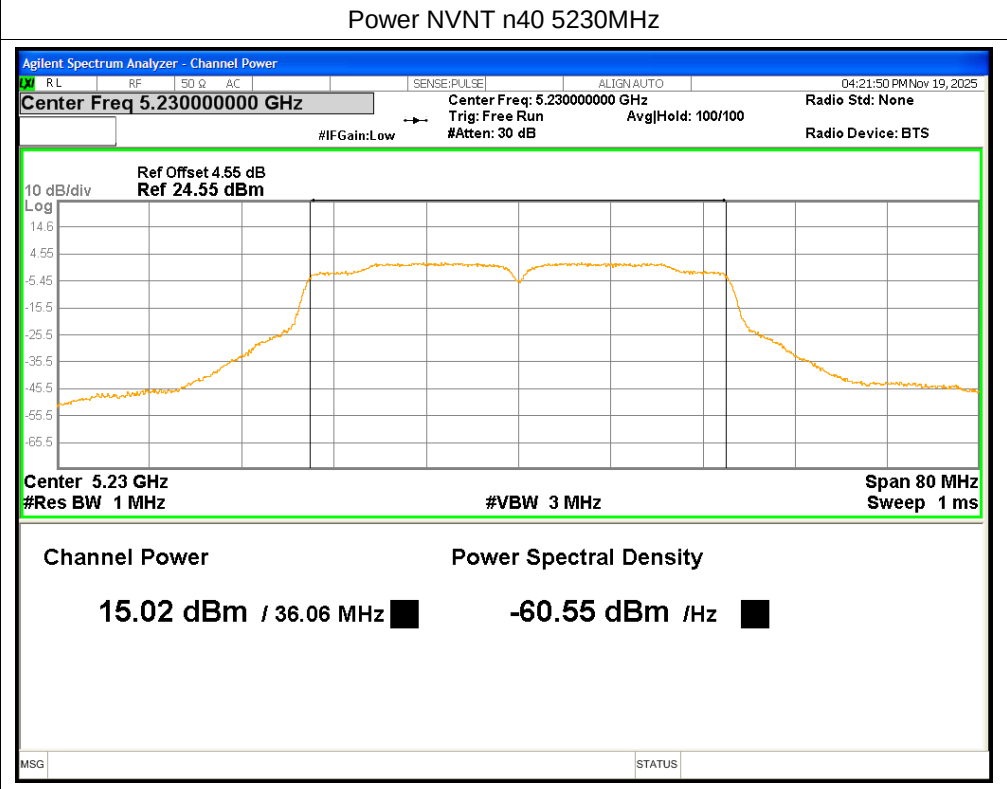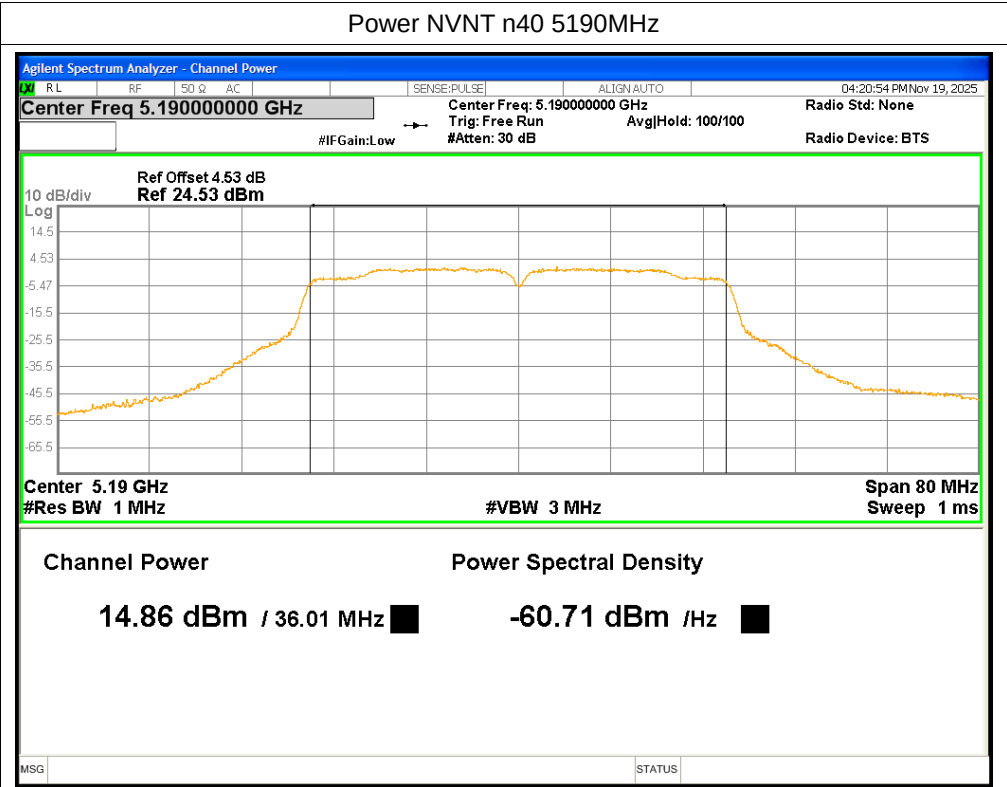


-26dB Bandwidth


Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	23.32	Pass
NVNT	a	5200	23.6	Pass
NVNT	a	5240	23.6	Pass
NVNT	n20	5180	24.09	Pass
NVNT	n20	5200	23.38	Pass
NVNT	n20	5240	23.79	Pass
NVNT	n40	5190	42.6	Pass
NVNT	n40	5230	43.3	Pass

Test Graphs


-26dB Bandwidth NVNT a 5180MHz

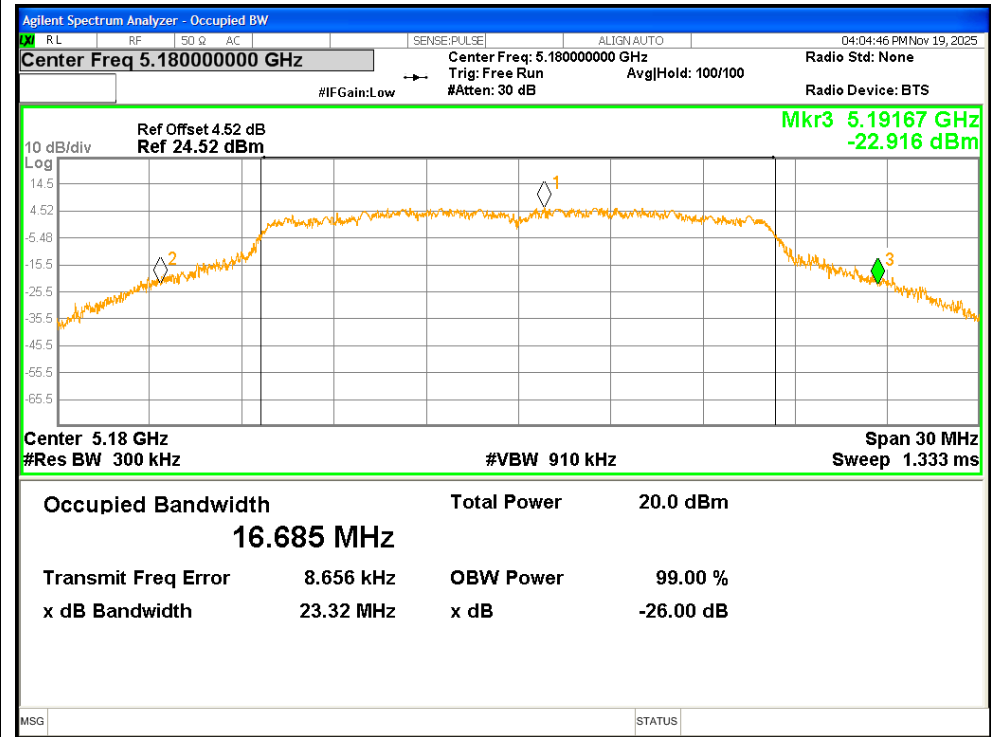


-26dB Bandwidth NVNT a 5200MHz

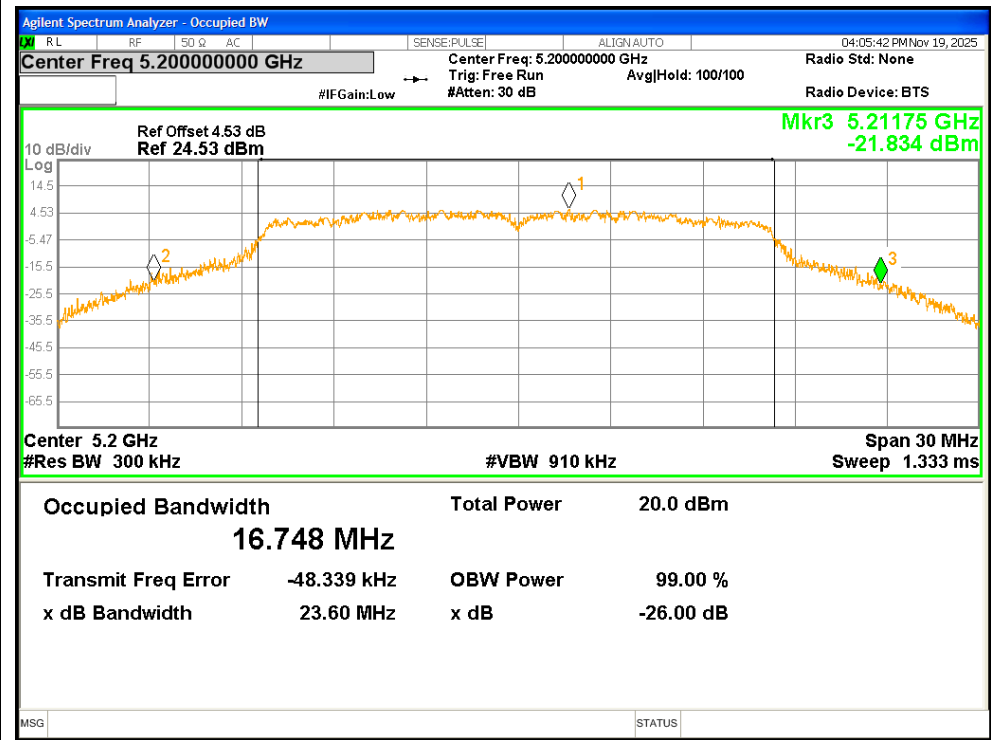


-26dB Bandwidth NVNT a 5240MHz

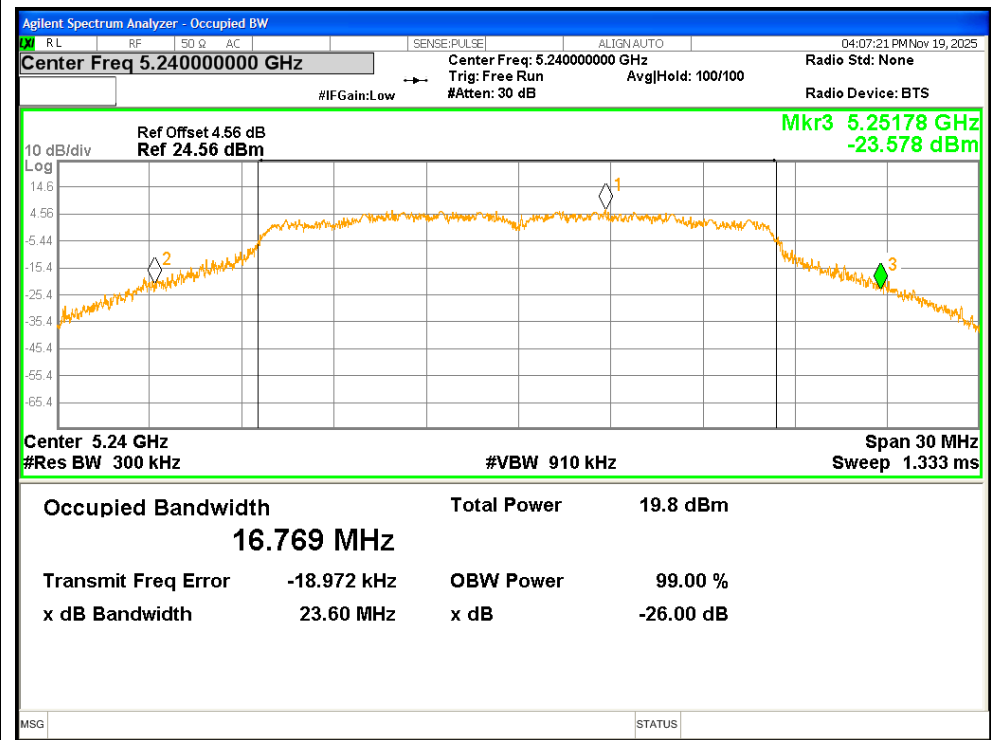


-26dB Bandwidth NVNT n20 5180MHz


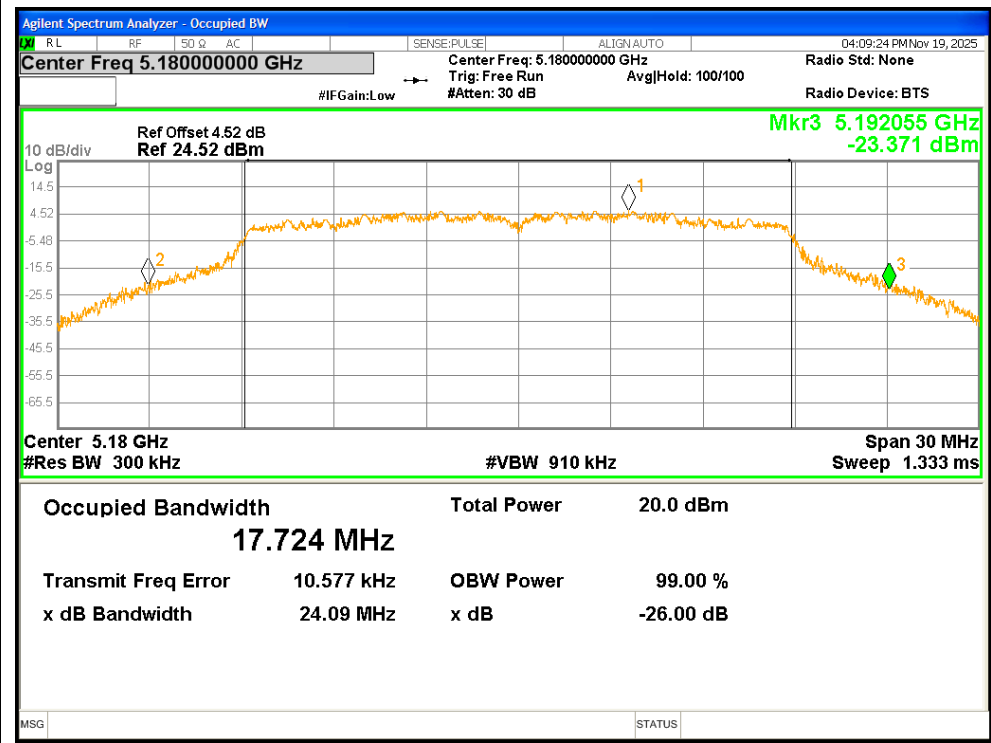


-26dB Bandwidth NVNT n20 5200MHz

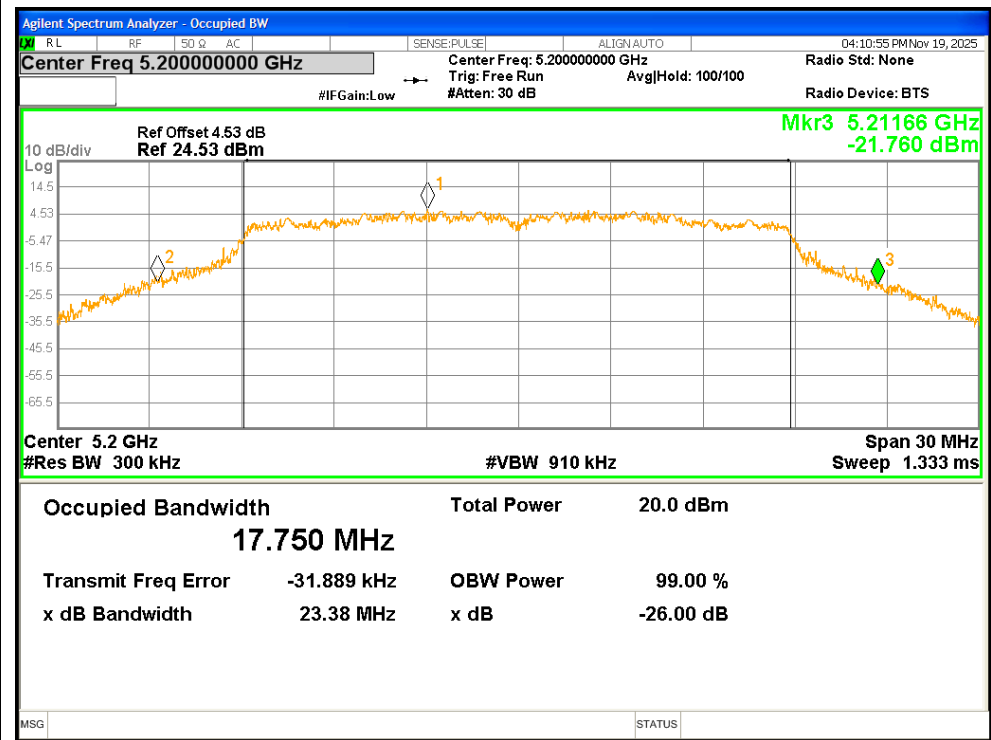



-26dB Bandwidth NVNT n20 5240MHz


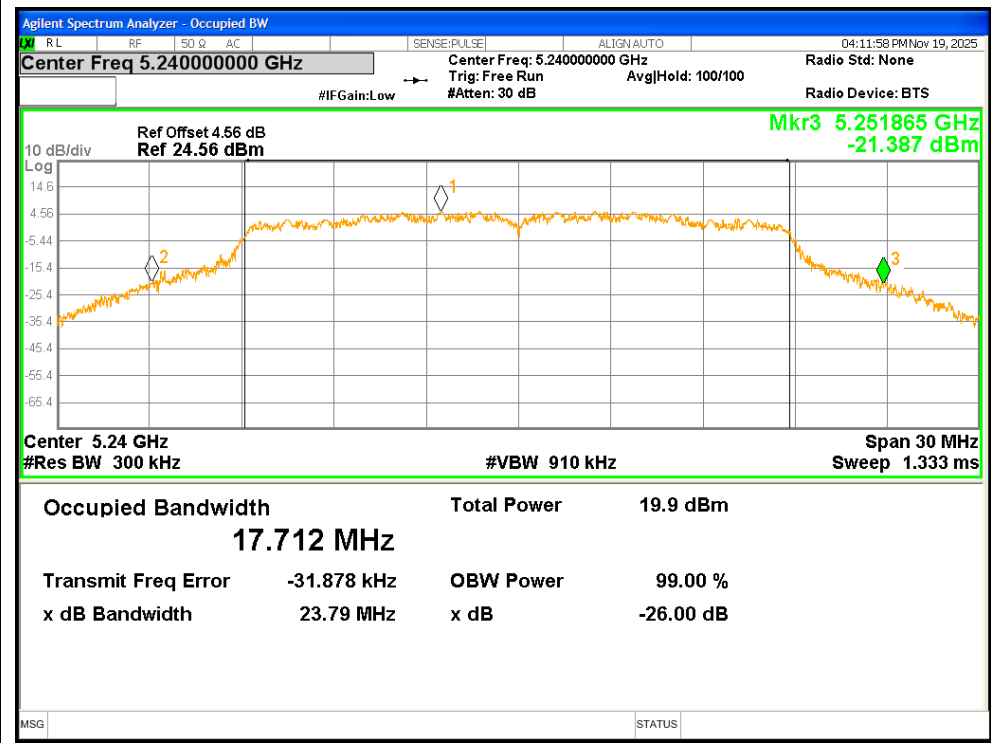


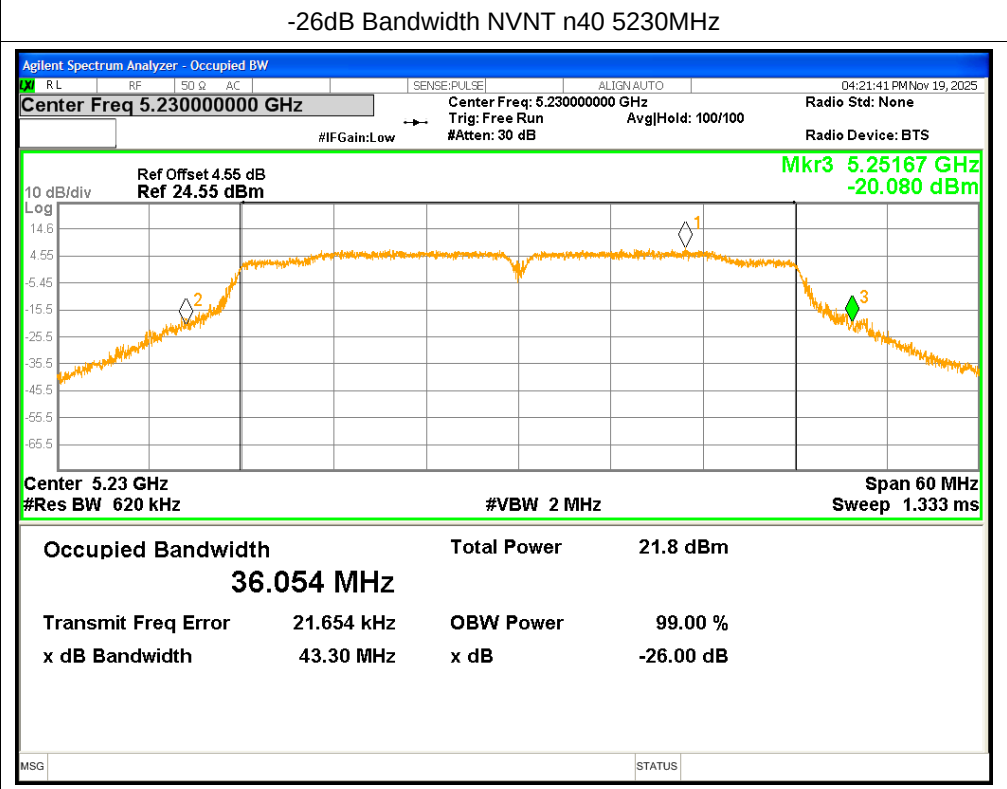
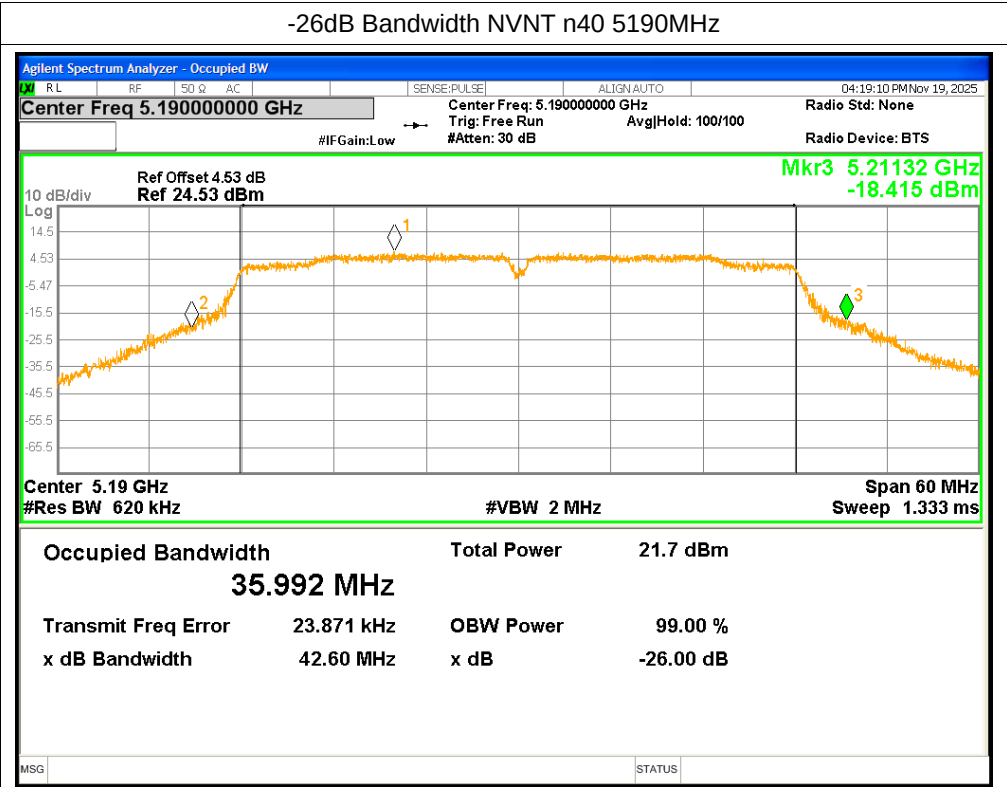




Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5180	16.539
NVNT	a	5200	16.544
NVNT	a	5240	16.564
NVNT	n20	5180	17.62
NVNT	n20	5200	17.659
NVNT	n20	5240	17.684
NVNT	n40	5190	36.009
NVNT	n40	5230	36.055

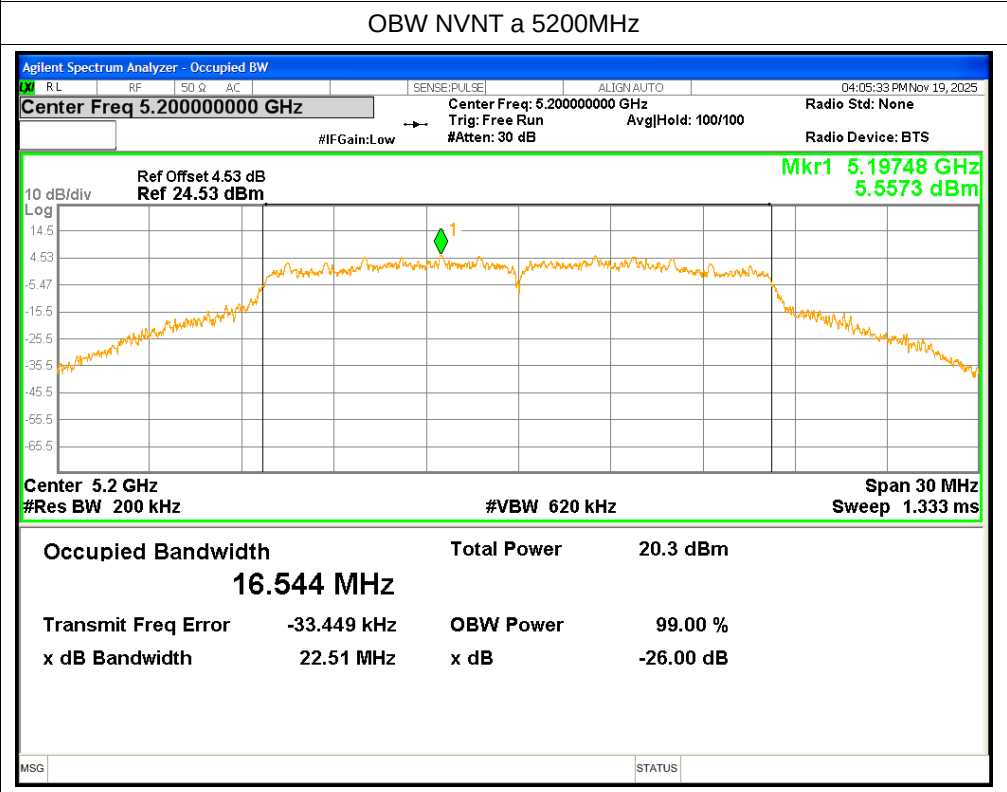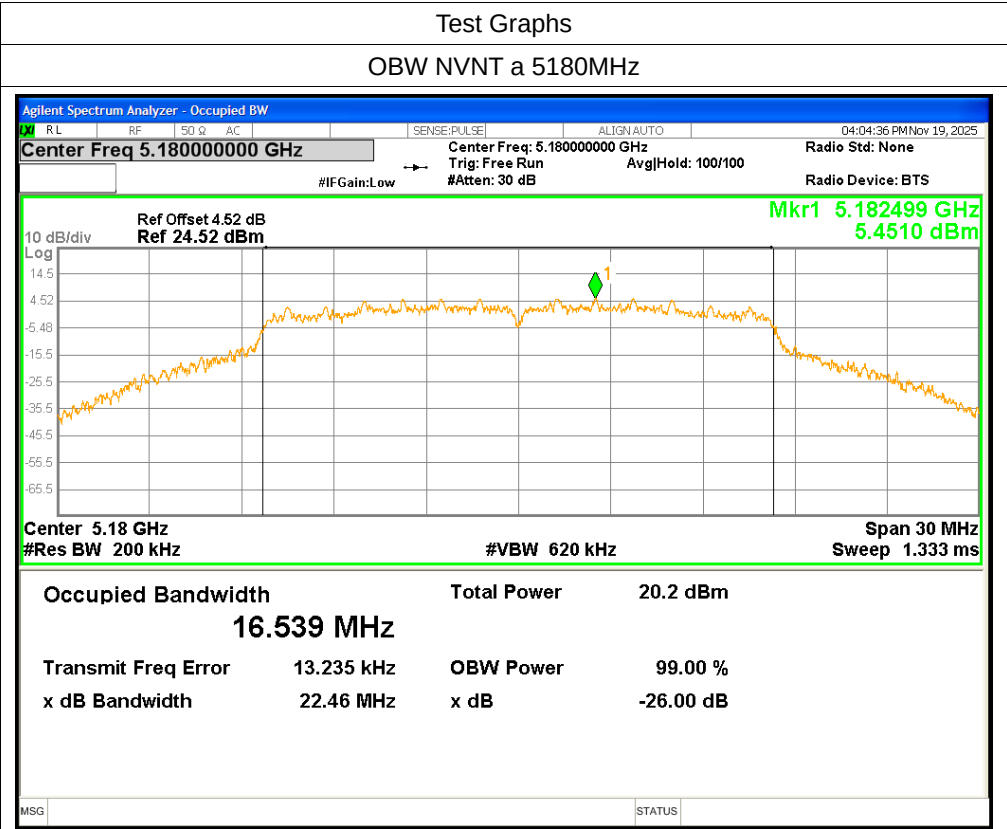

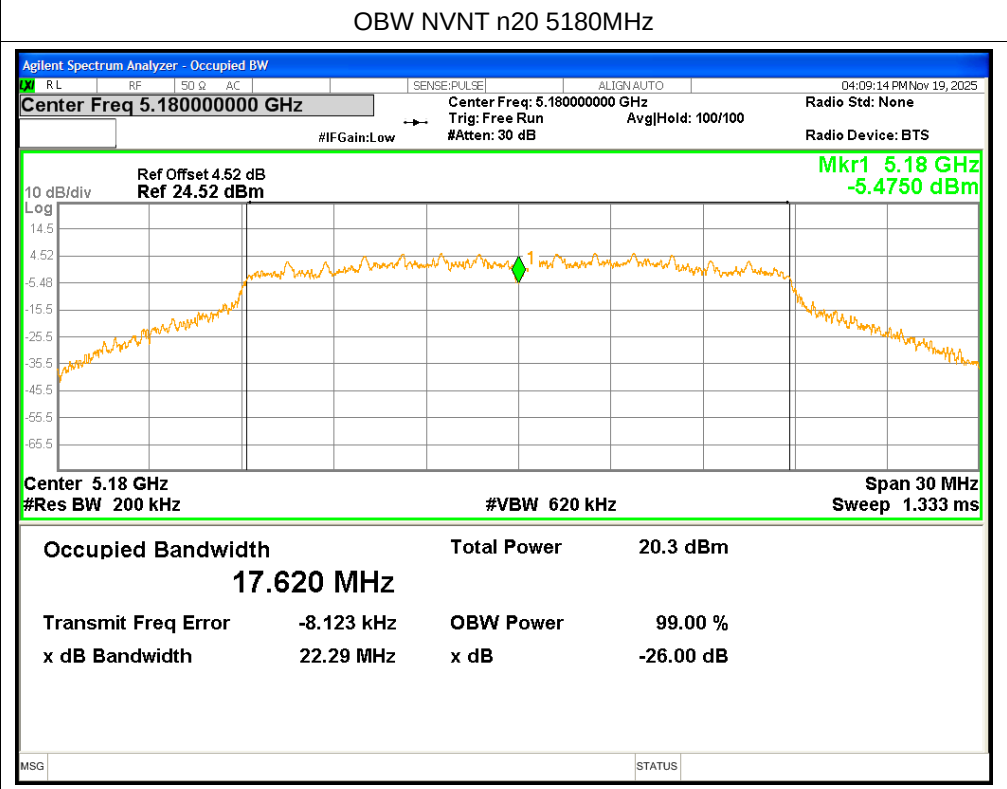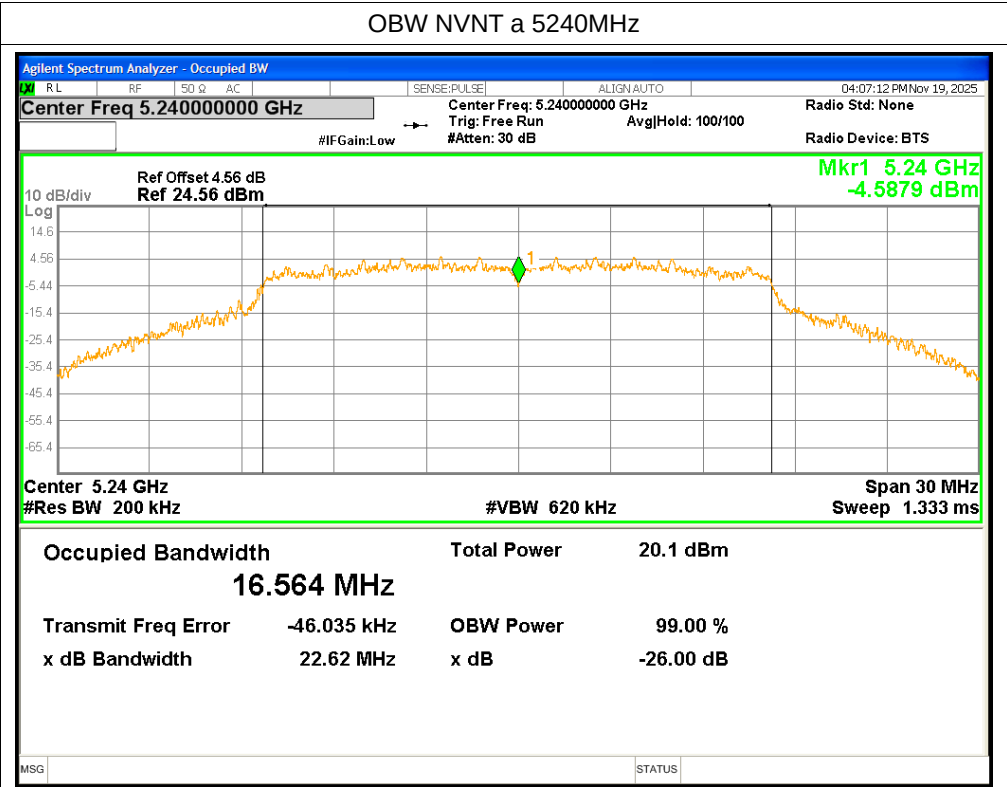

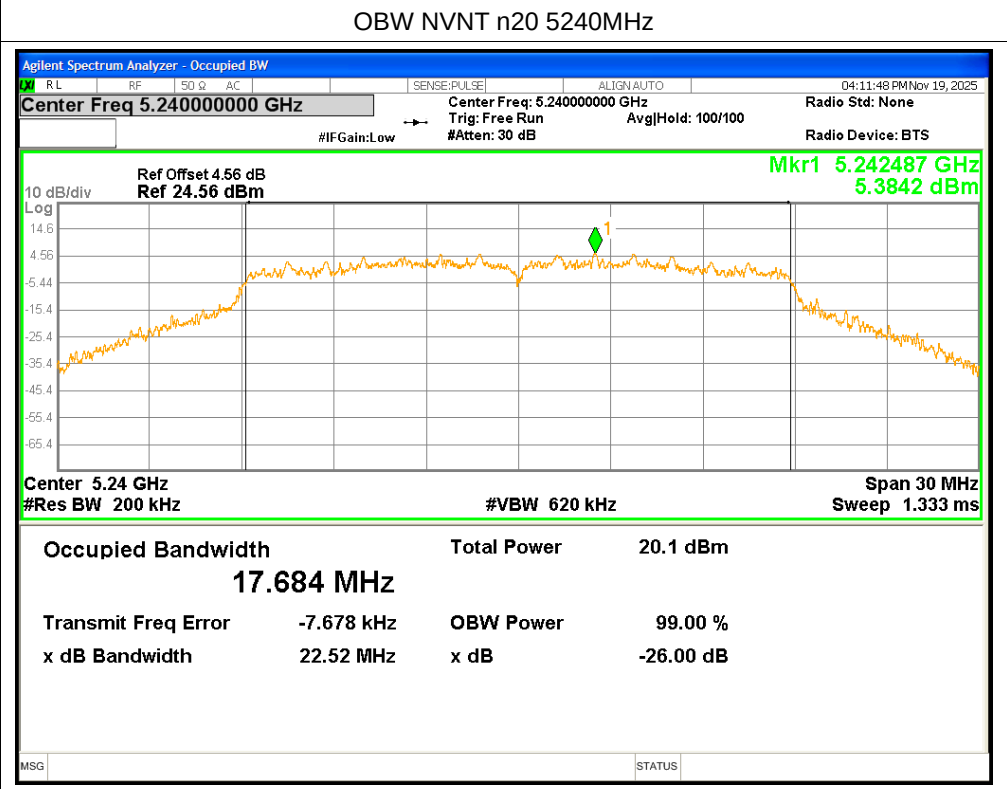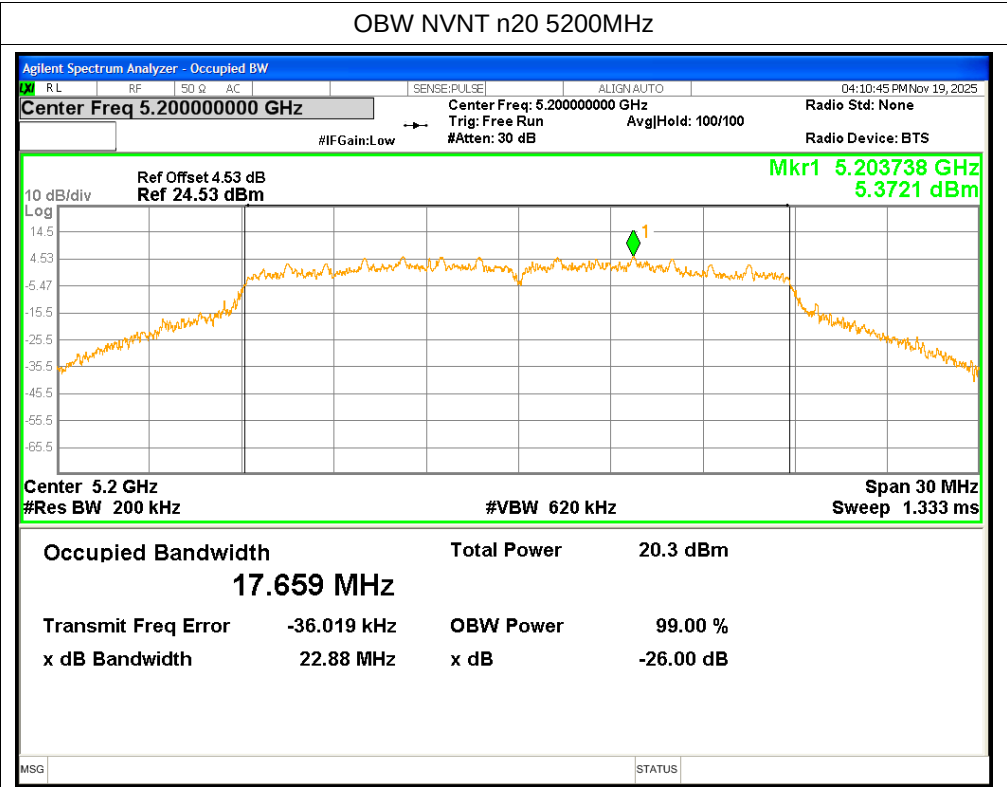

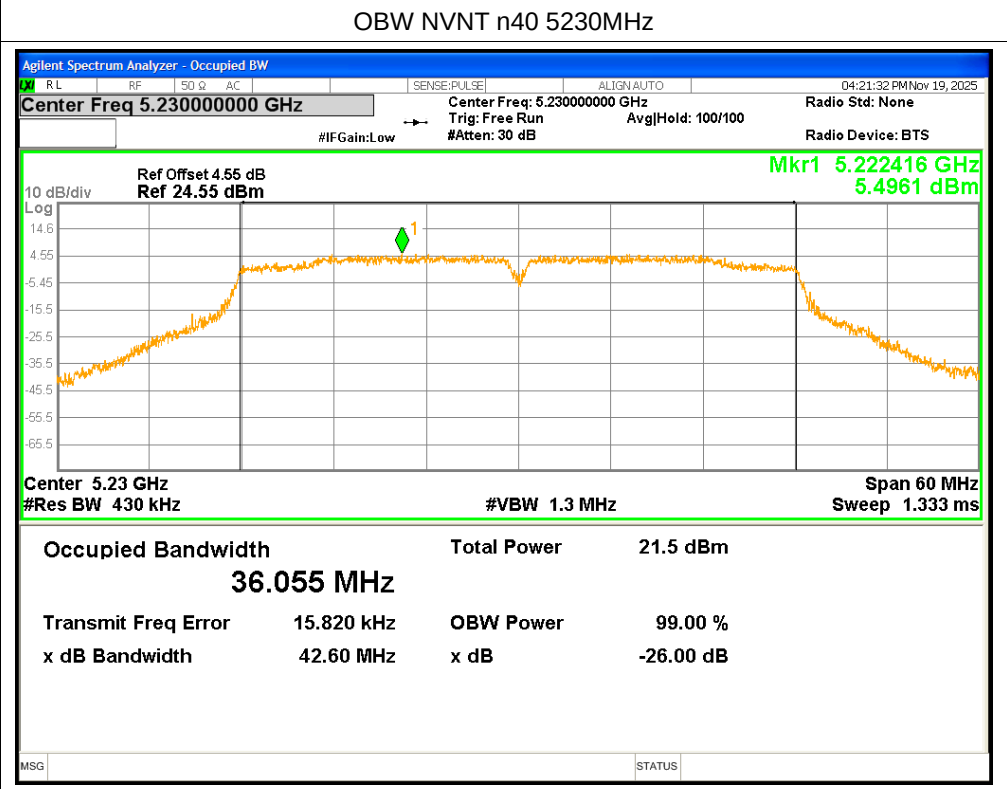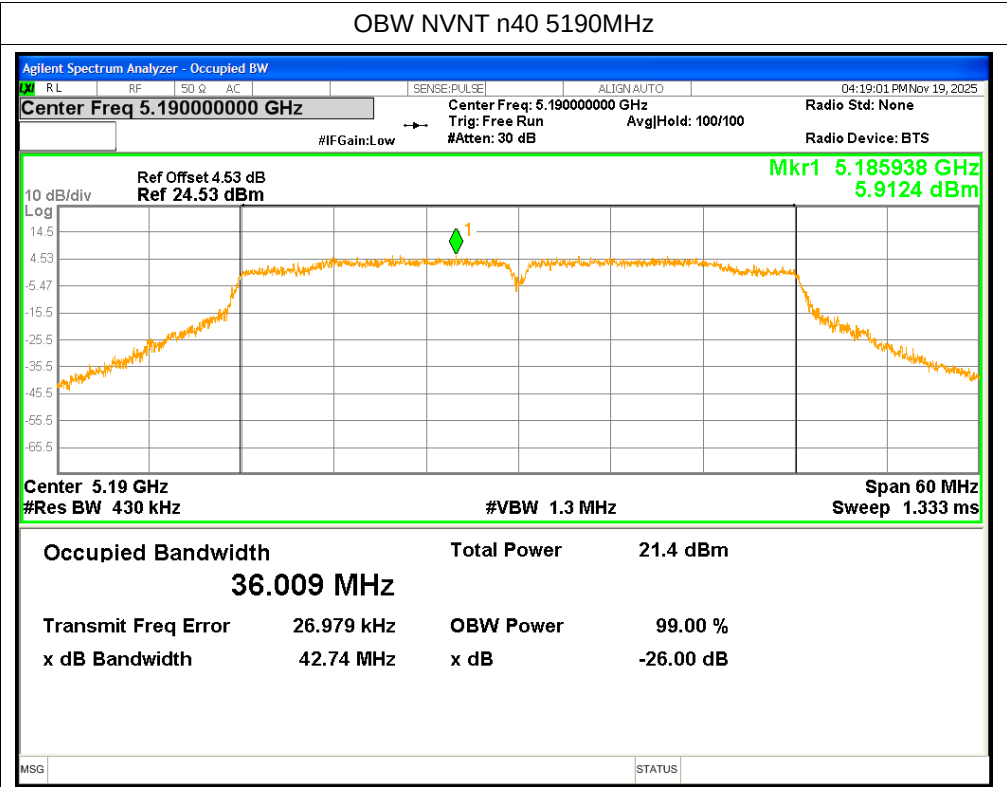

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	3.596	0.95	4.546	<=11	Pass
NVNT	a	5200	3.758	0.95	4.708	<=11	Pass
NVNT	a	5240	3.702	0.95	4.652	<=11	Pass
NVNT	n20	5180	3.532	0.84	4.372	<=11	Pass
NVNT	n20	5200	3.777	0.85	4.627	<=11	Pass
NVNT	n20	5240	3.547	0.84	4.387	<=11	Pass
NVNT	n40	5190	1.84	0.9	2.74	<=11	Pass
NVNT	n40	5230	2.165	0.94	3.105	<=11	Pass

