

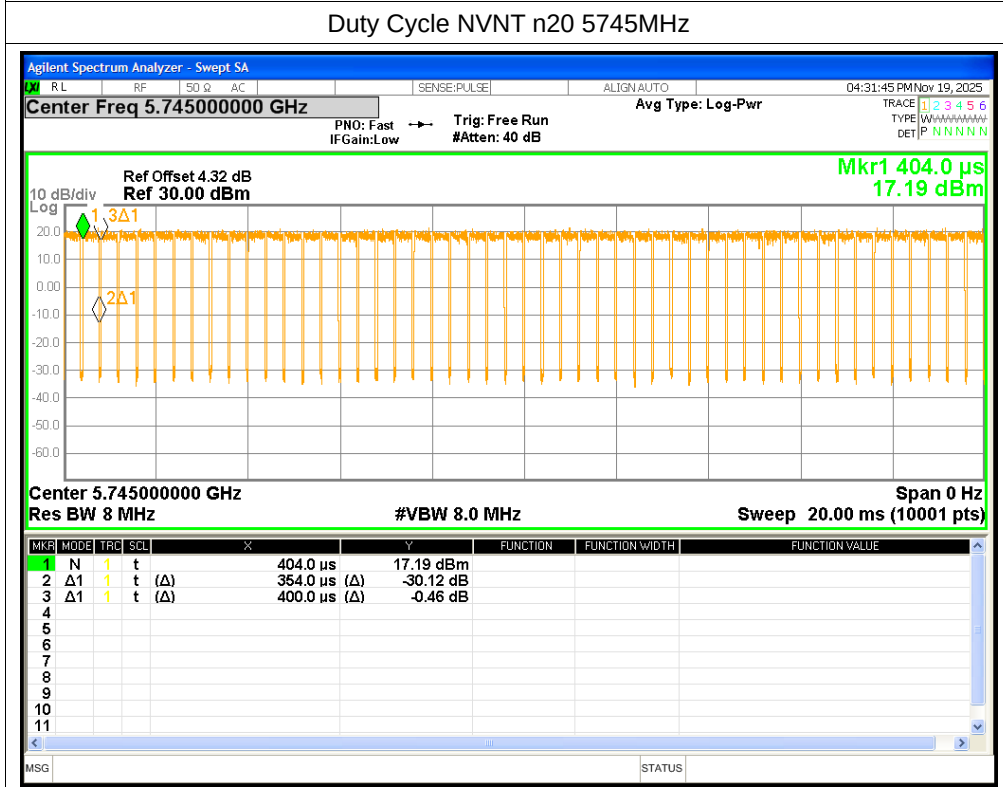
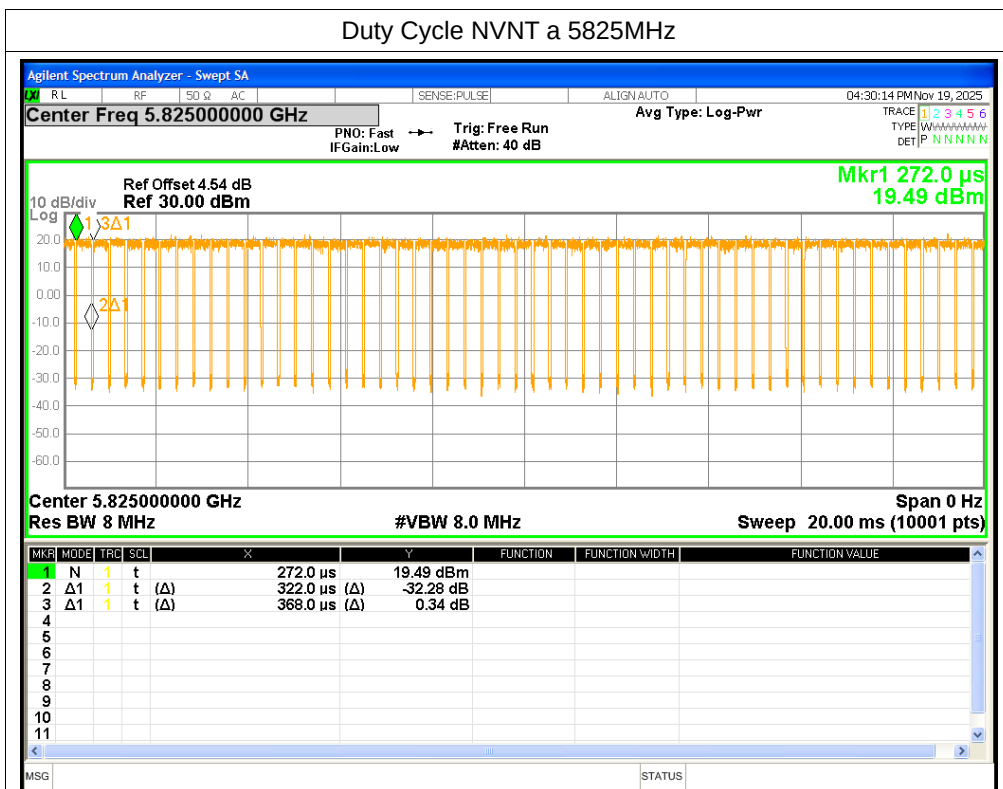


Duty Cycle


Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)	Max Variation (%)
NVNT	a	5745	0.32	0.368	86.96	0.61	3.13	0.25
NVNT	a	5785	0.32	0.368	86.96	0.61	3.13	0.28
NVNT	a	5825	0.322	0.368	87.5	0.58	3.11	0.25
NVNT	n20	5745	0.354	0.4	88.5	0.53	2.82	0.22
NVNT	n20	5785	0.352	0.4	88	0.56	2.84	0.25
NVNT	n20	5825	0.354	0.4	88.5	0.53	2.82	0.21
NVNT	n40	5755	0.334	0.38	87.89	0.56	2.99	0.22
NVNT	n40	5795	0.332	0.38	87.37	0.59	3.01	0.24


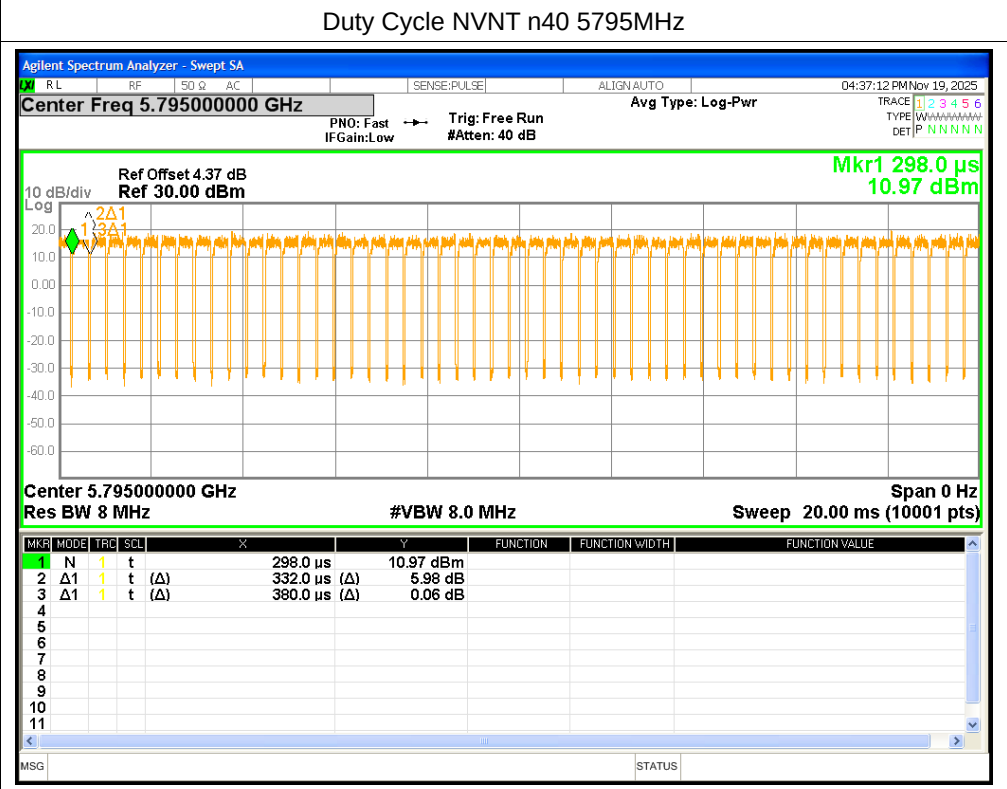



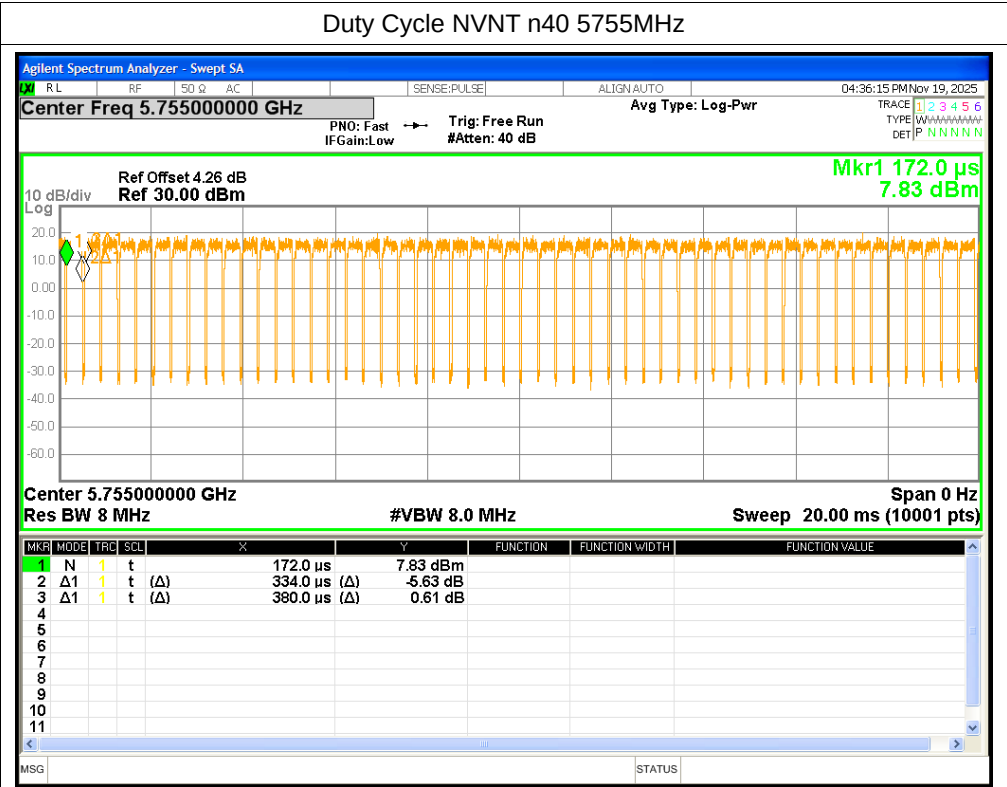




Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	16	0.61	16.61	<=30	Pass
NVNT	a	5785	15.68	0.61	16.29	<=30	Pass
NVNT	a	5825	15.88	0.58	16.46	<=30	Pass
NVNT	n20	5745	15.96	0.53	16.49	<=30	Pass
NVNT	n20	5785	15.69	0.56	16.25	<=30	Pass
NVNT	n20	5825	15.89	0.53	16.42	<=30	Pass
NVNT	n40	5755	16.24	0.56	16.8	<=30	Pass
NVNT	n40	5795	16.01	0.59	16.6	<=30	Pass

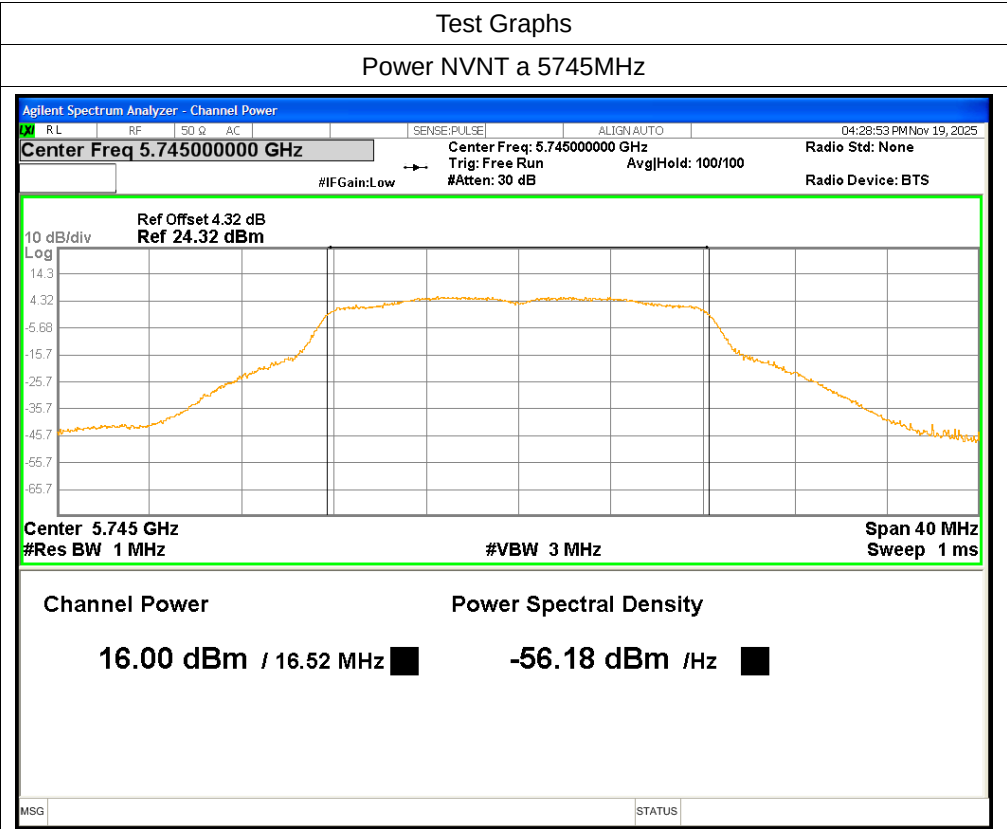

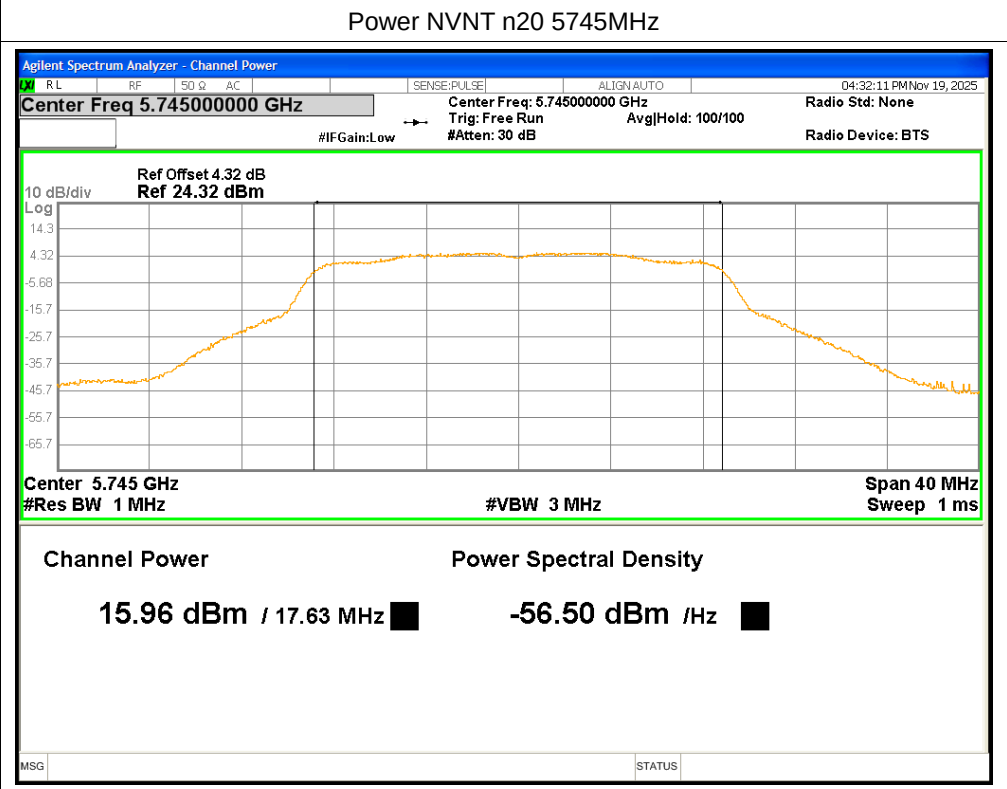
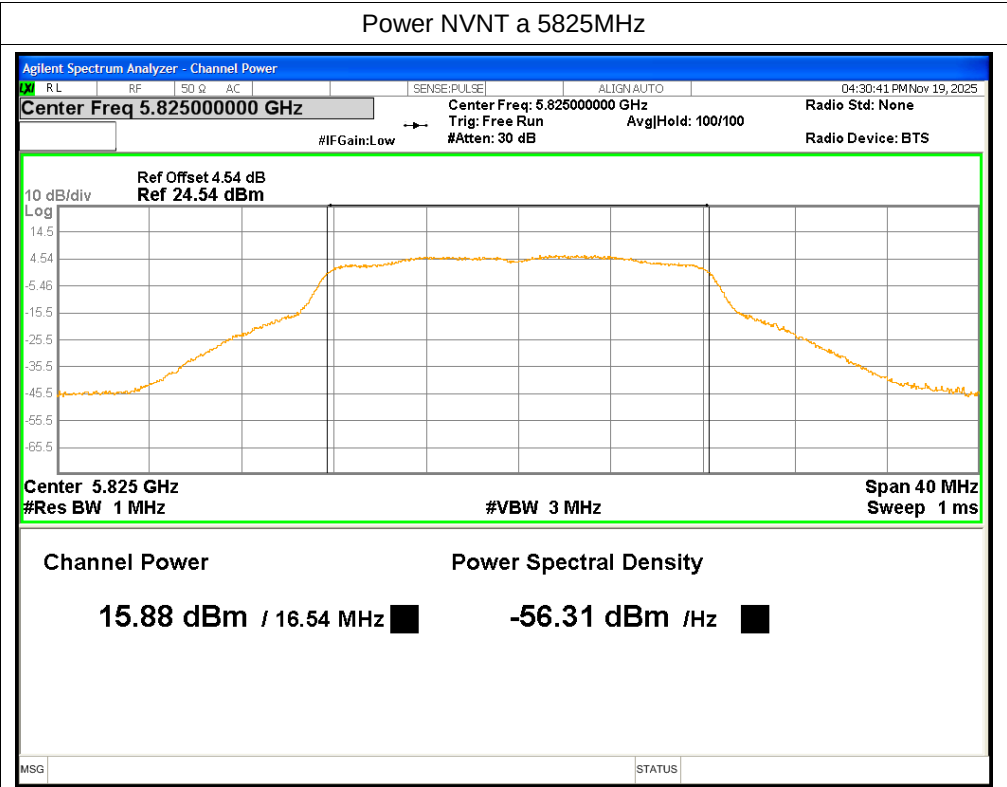


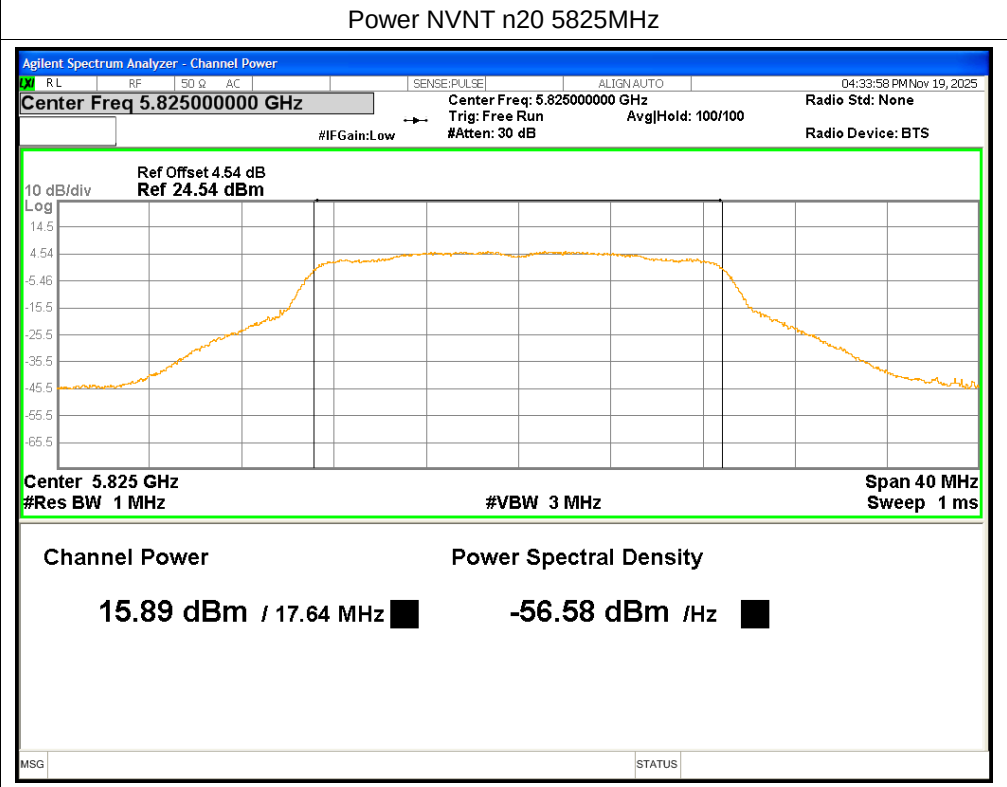
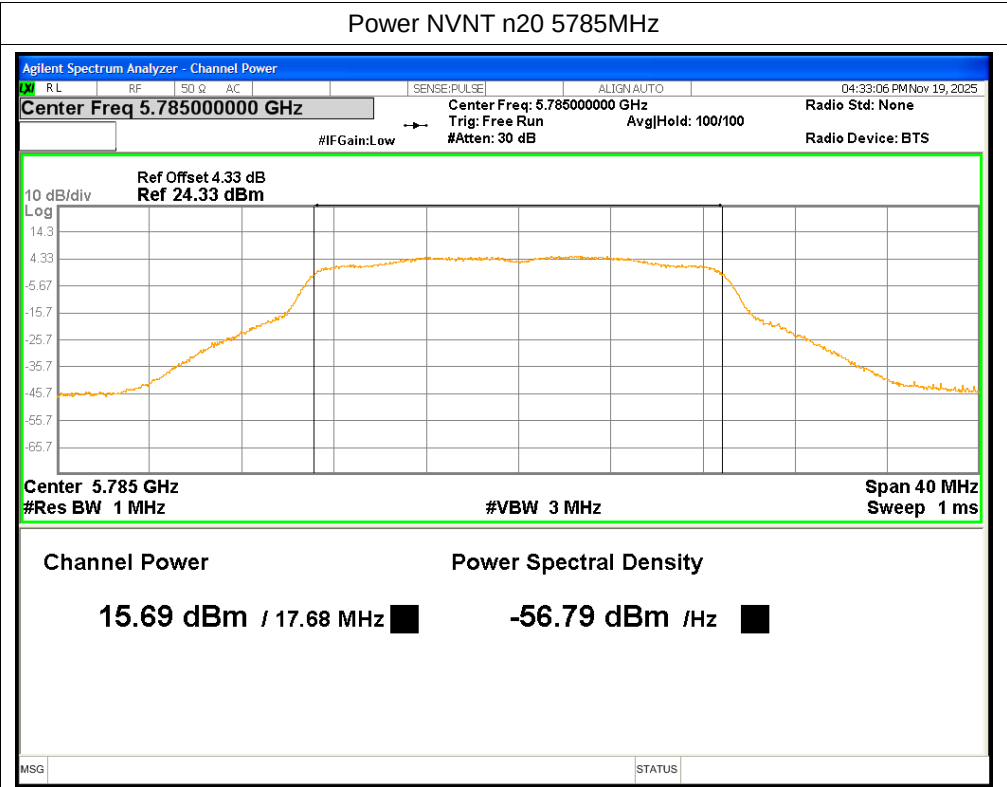


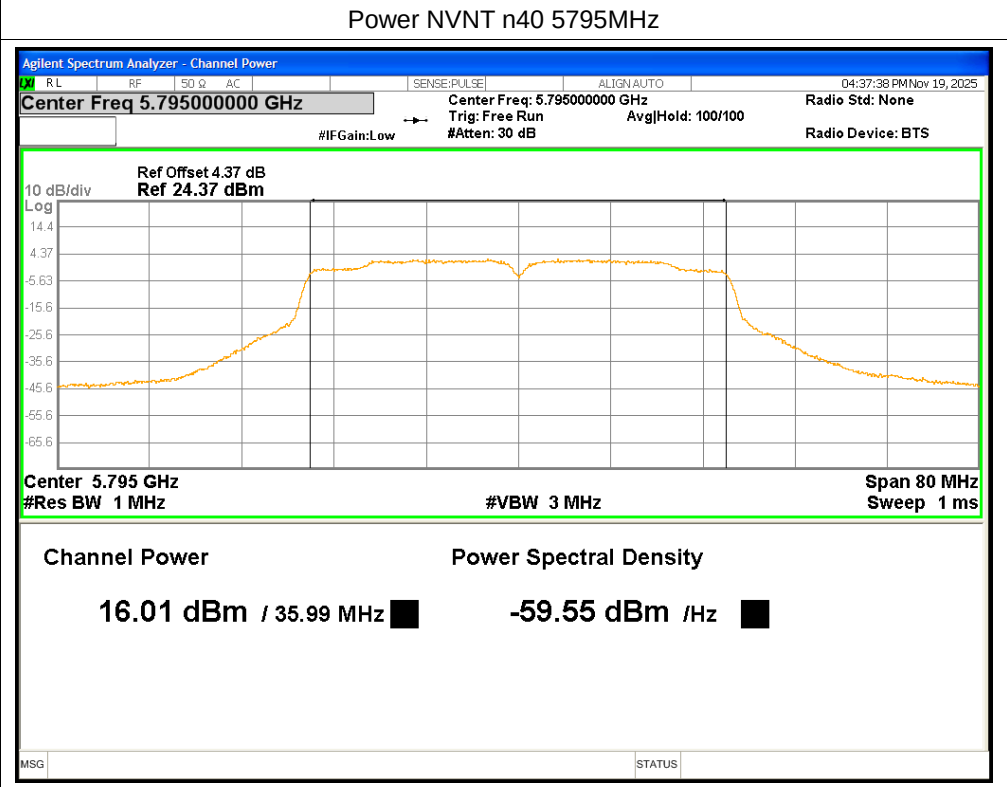
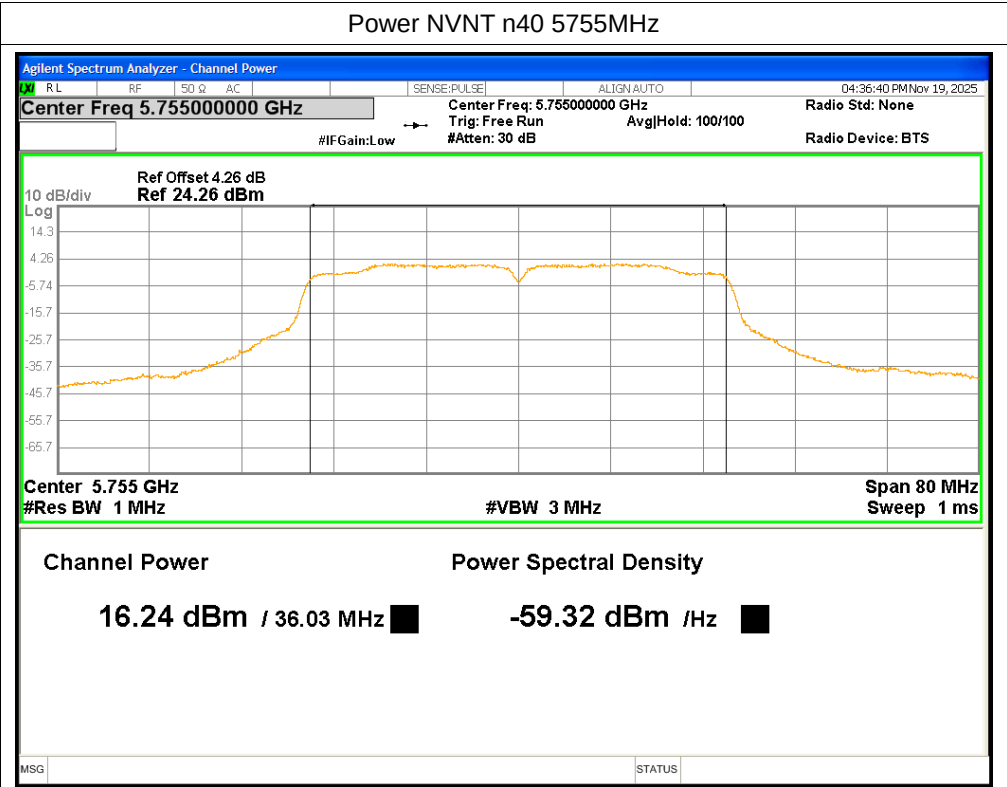




-6dB Bandwidth

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	15.1	≥ 0.5	Pass
NVNT	a	5785	15.1	≥ 0.5	Pass
NVNT	a	5825	15.07	≥ 0.5	Pass
NVNT	n20	5745	15.12	≥ 0.5	Pass
NVNT	n20	5785	15.1	≥ 0.5	Pass
NVNT	n20	5825	15.13	≥ 0.5	Pass
NVNT	n40	5755	35.1	≥ 0.5	Pass
NVNT	n40	5795	35.08	≥ 0.5	Pass

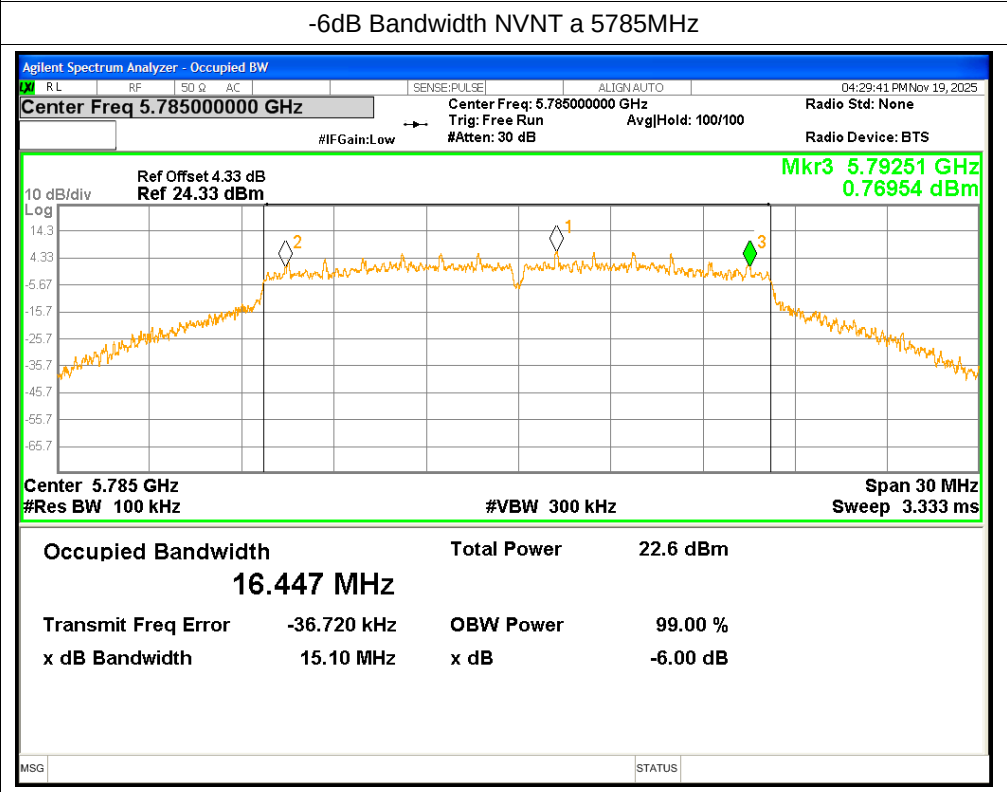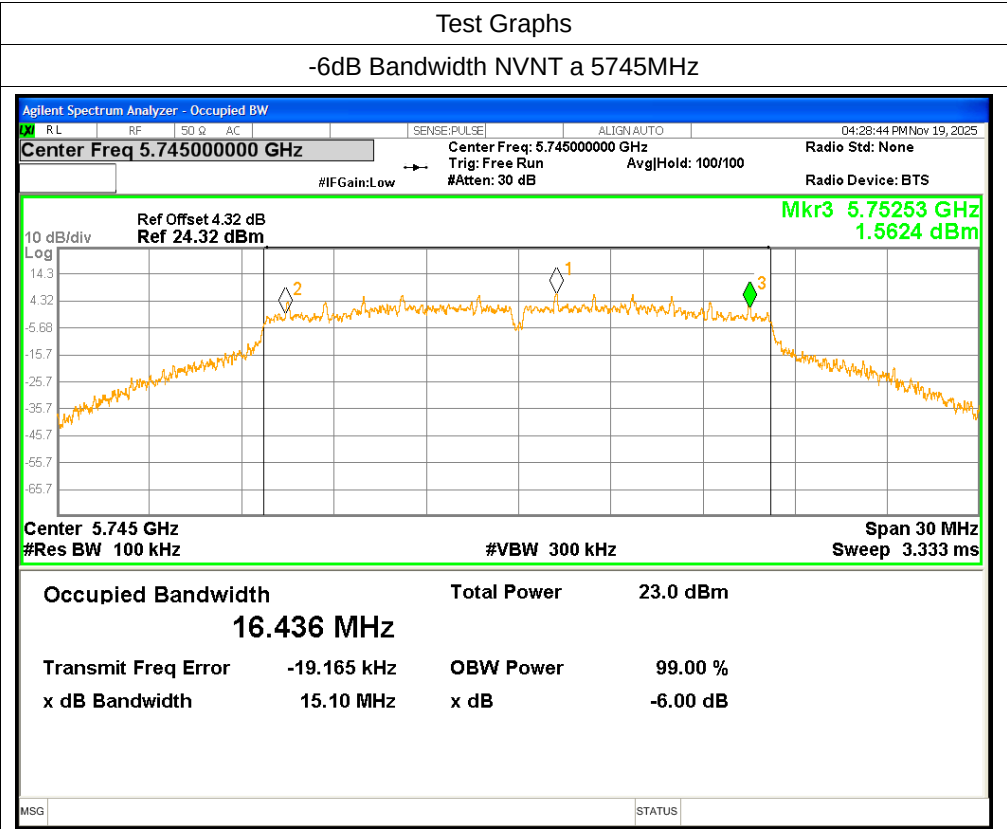

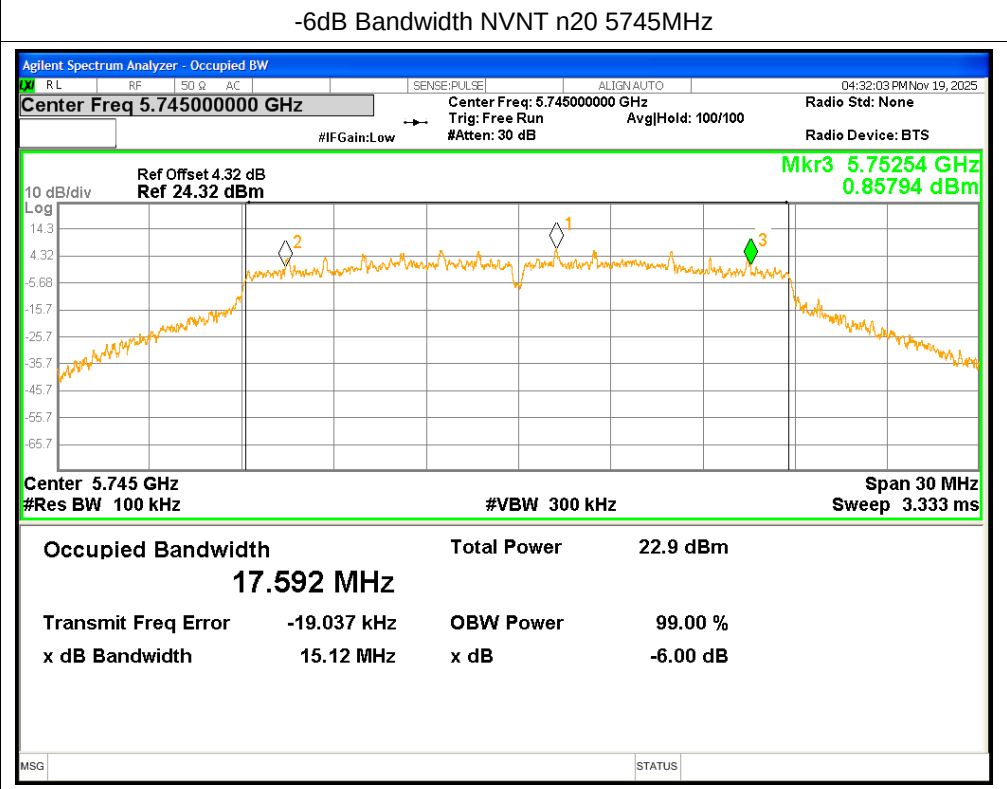
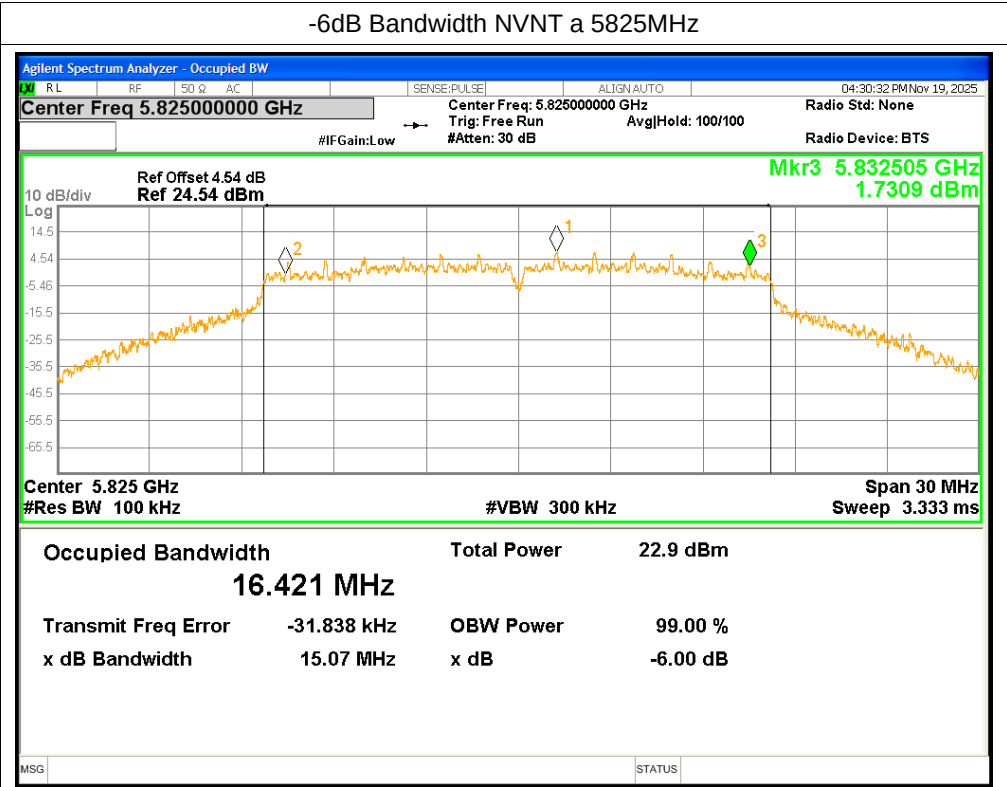


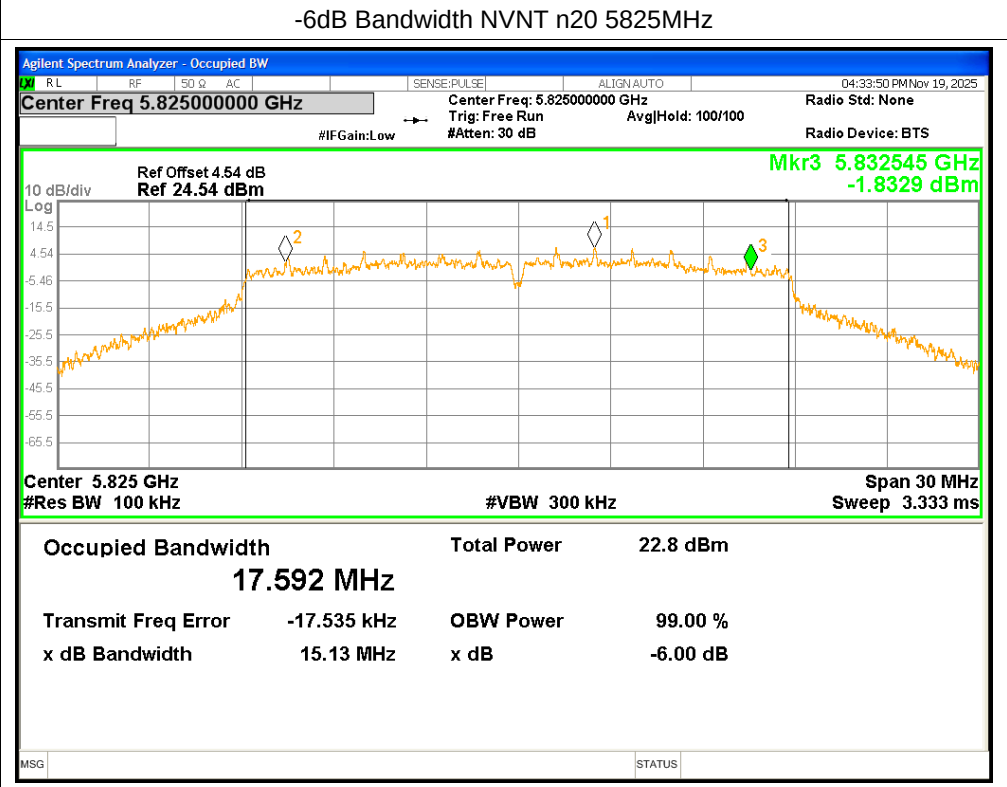
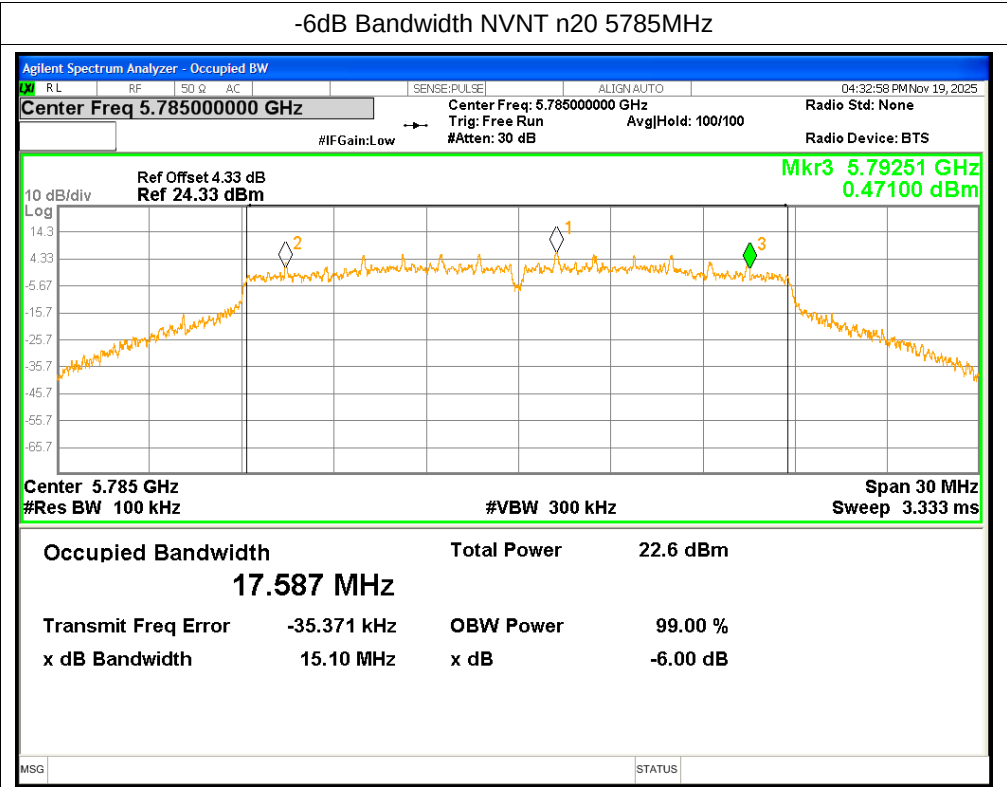


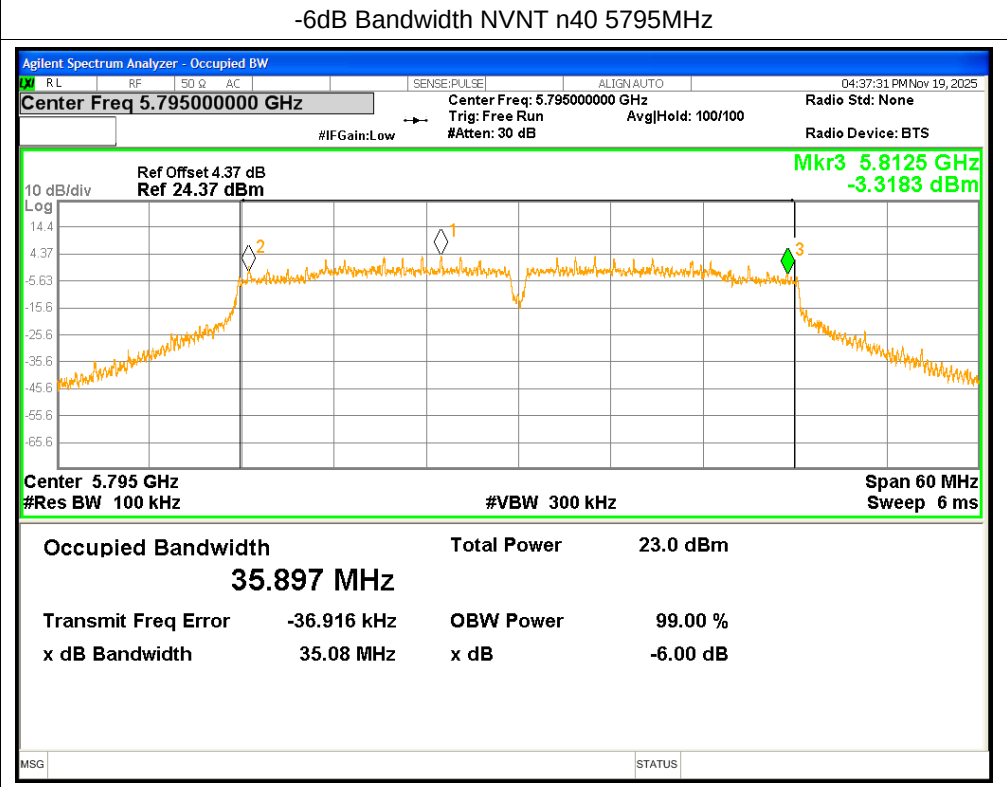
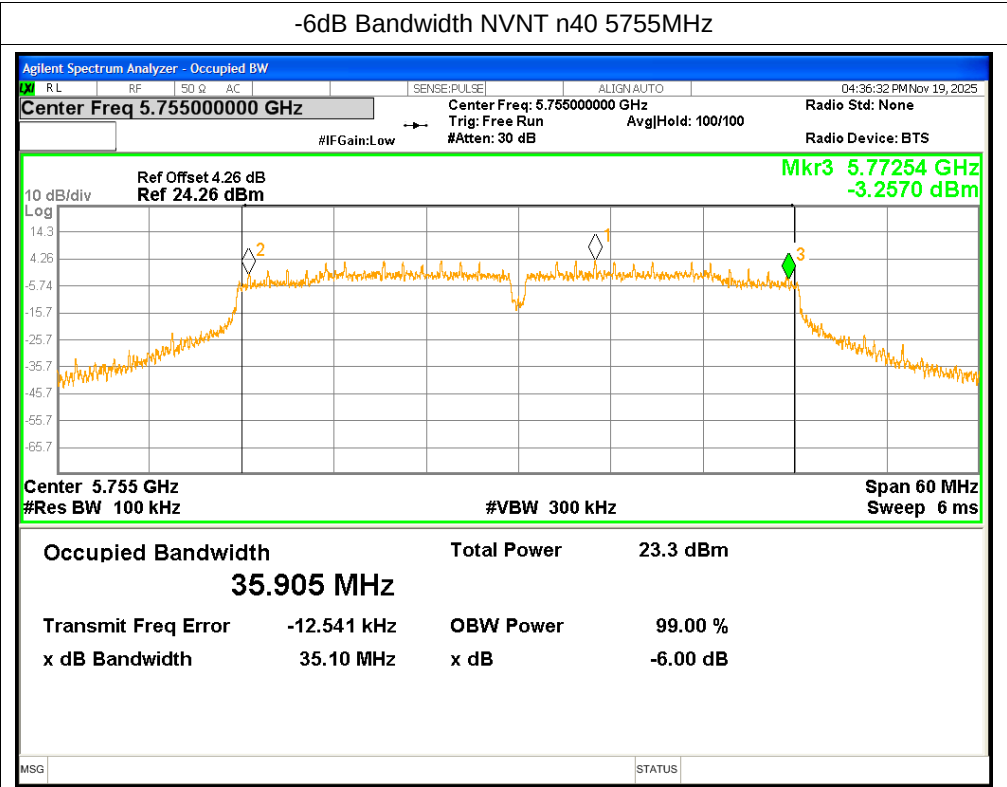




Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5745	16.516
NVNT	a	5785	16.561
NVNT	a	5825	16.538
NVNT	n20	5745	17.634
NVNT	n20	5785	17.677
NVNT	n20	5825	17.642
NVNT	n40	5755	36.031
NVNT	n40	5795	35.988

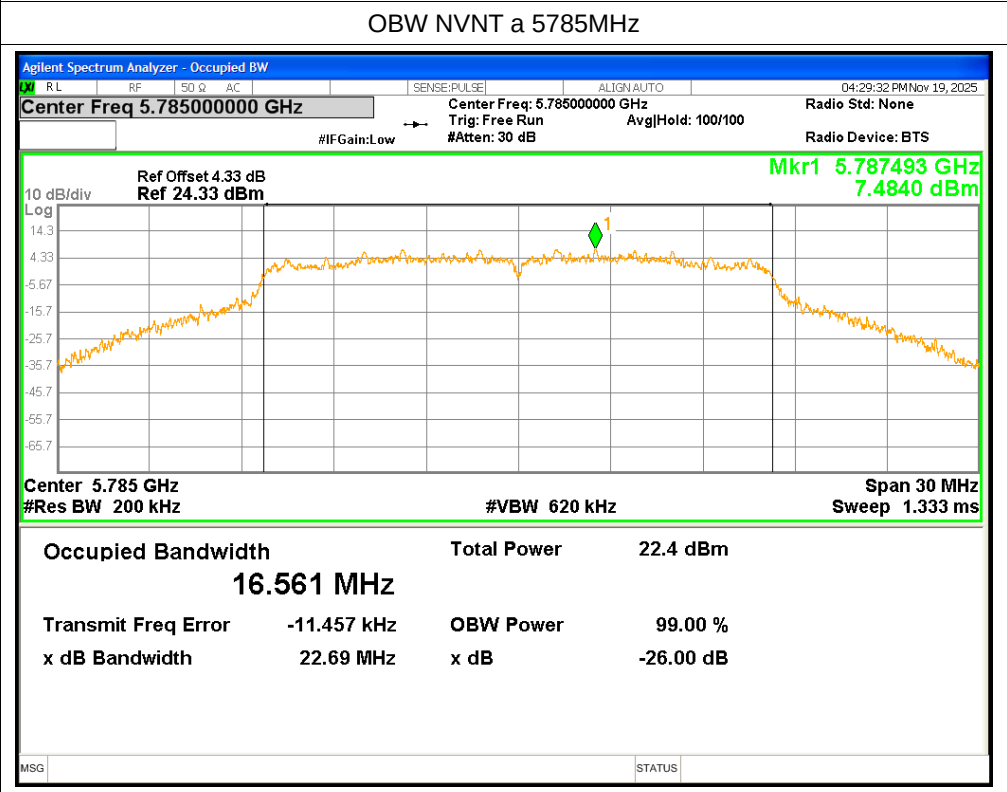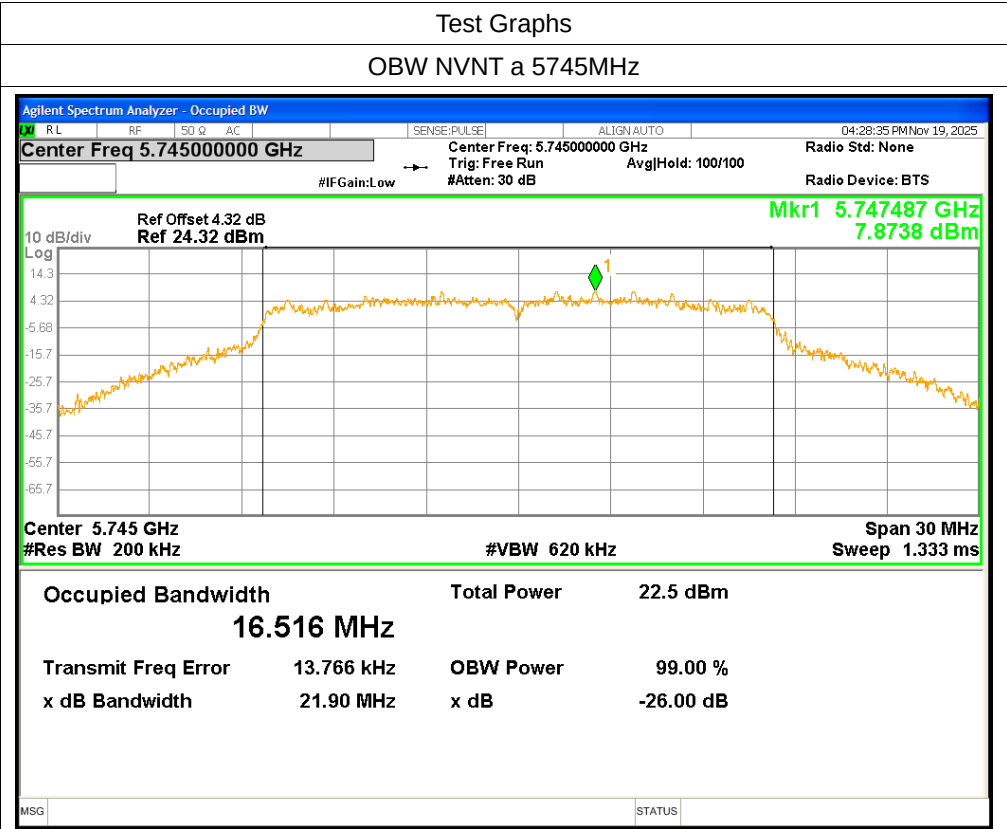

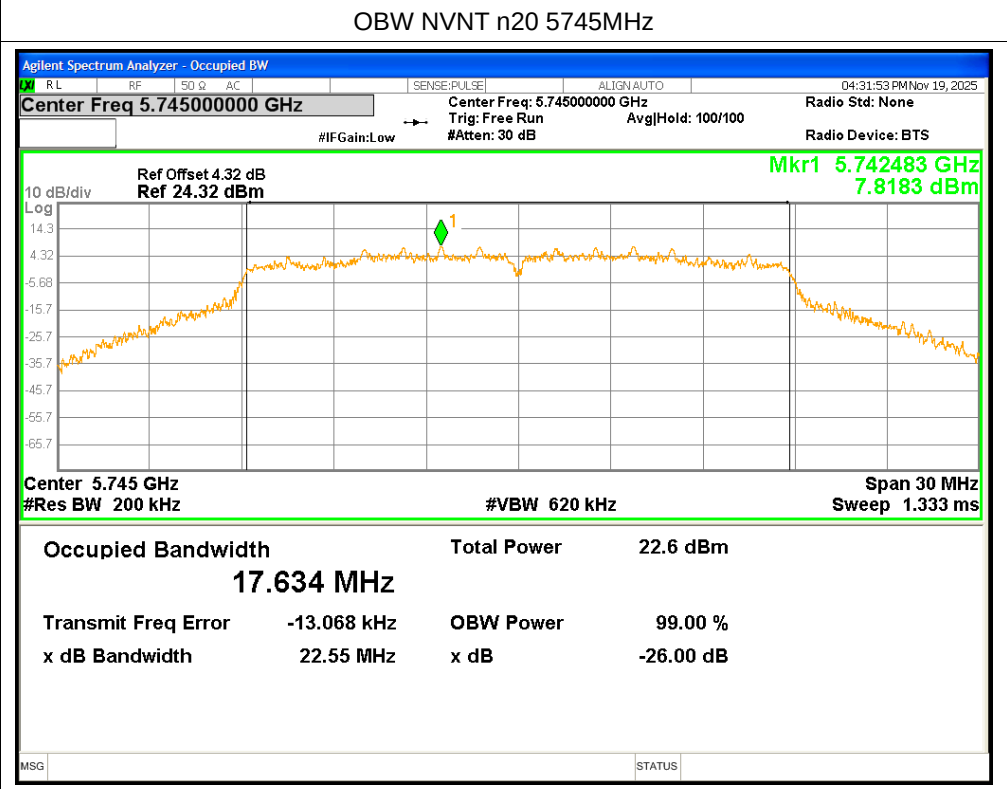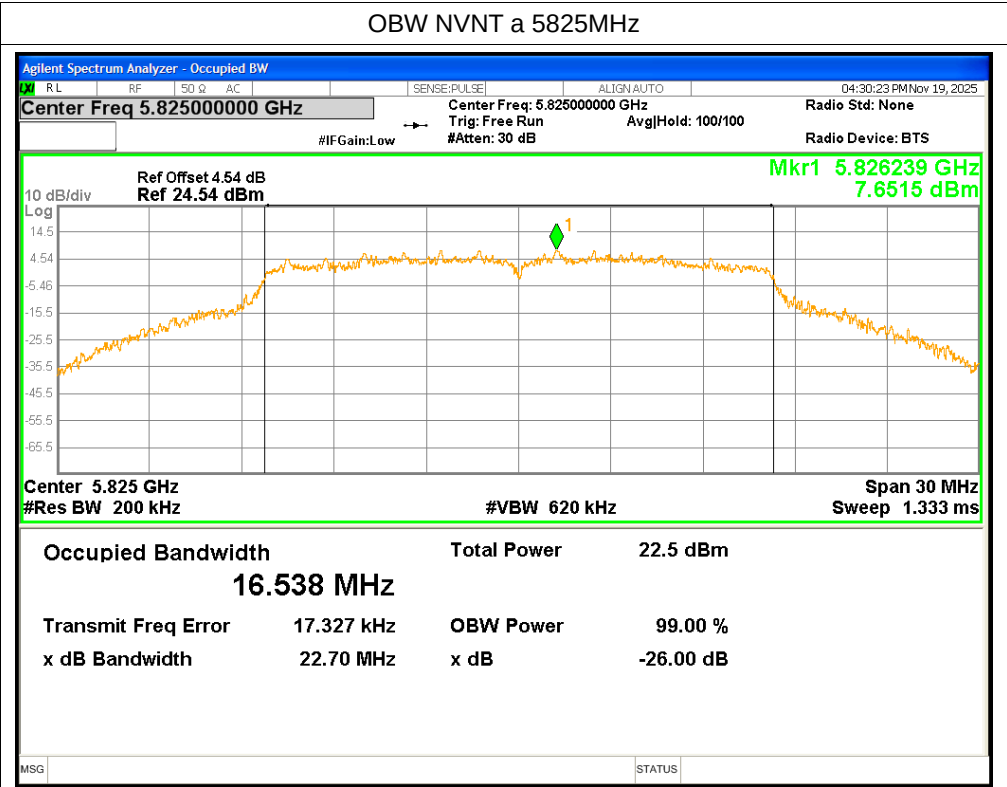

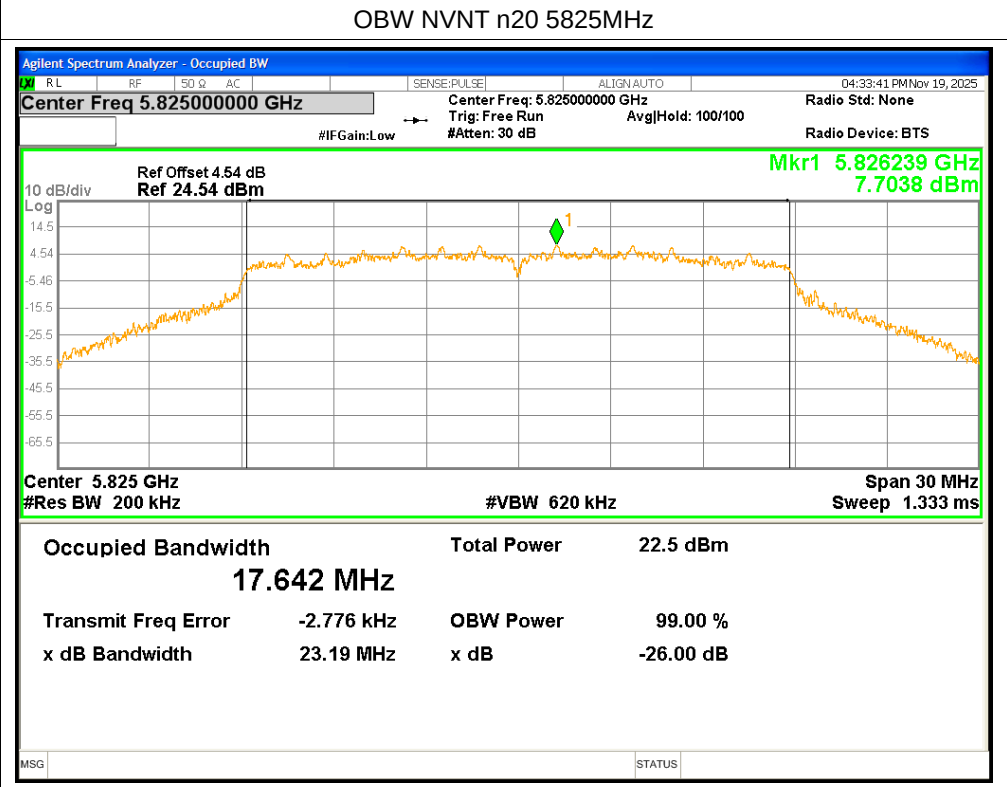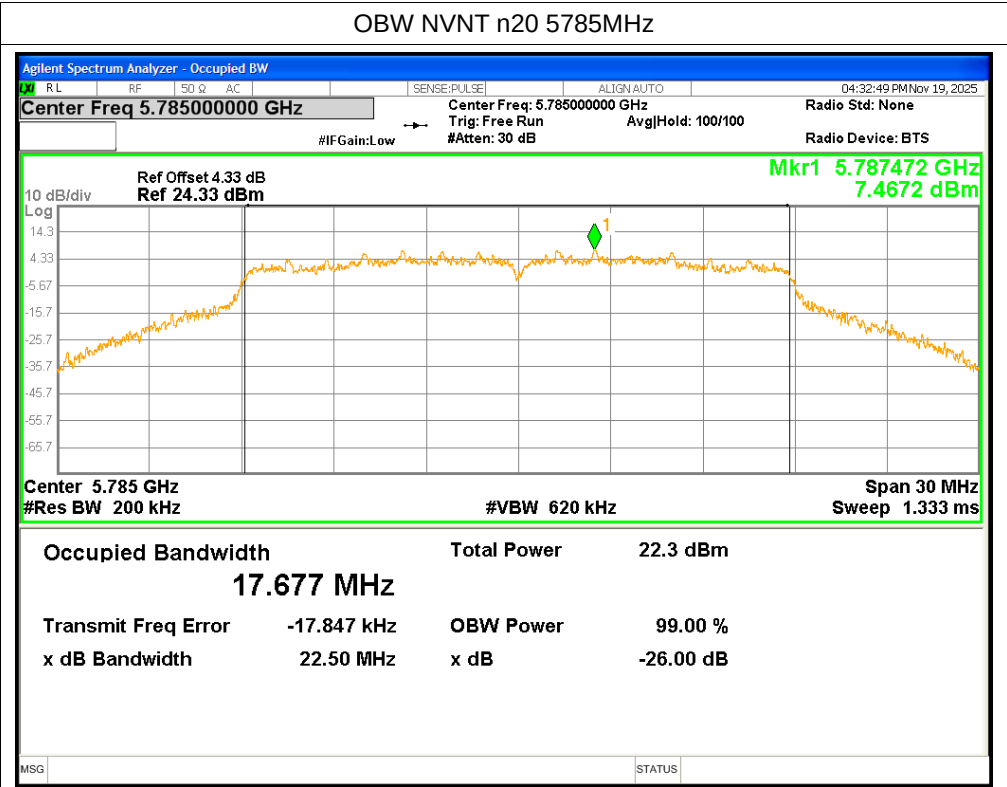

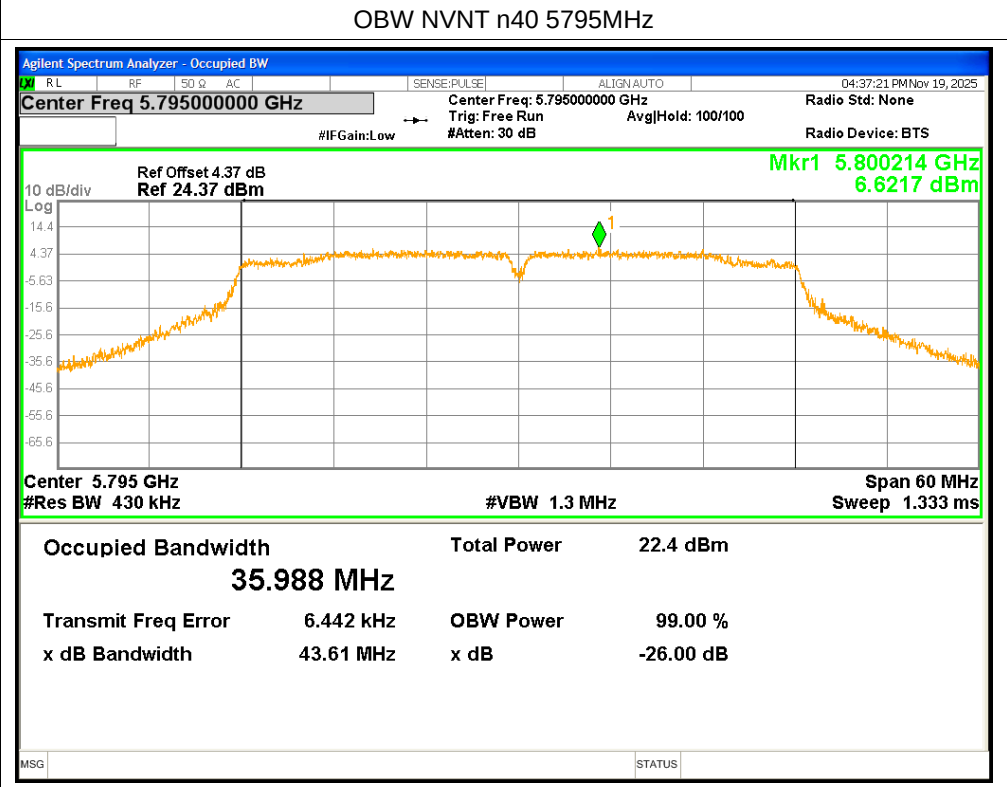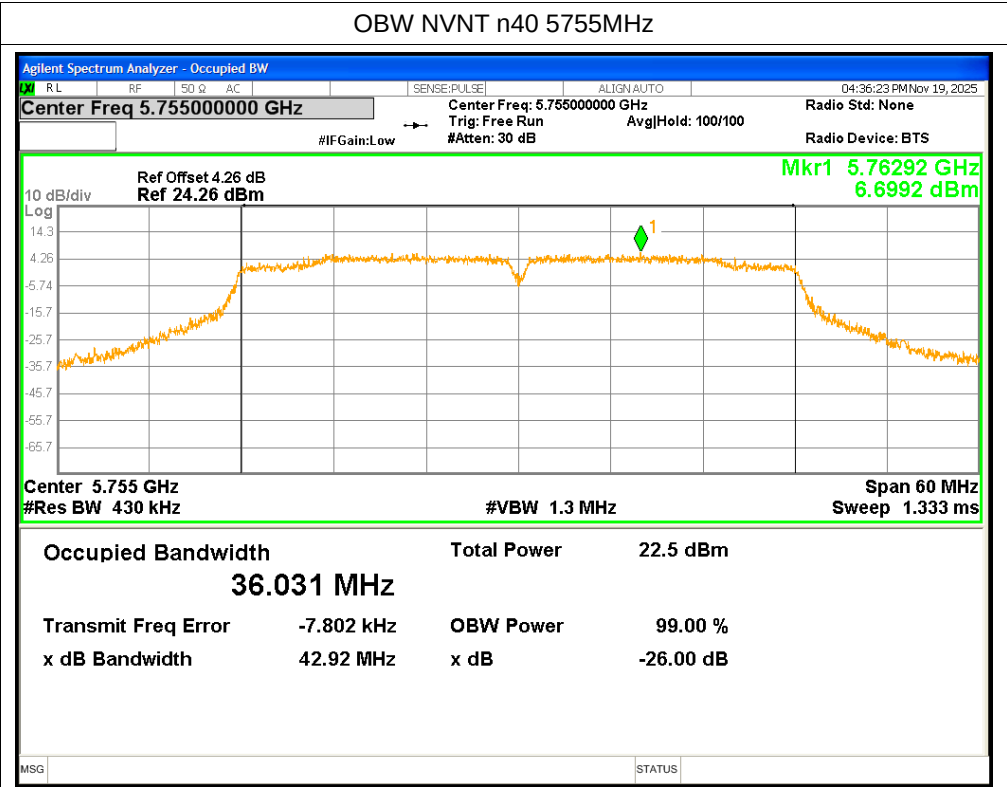

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/510kHz)	Duty Factor (dB)	Total PSD (dBm/510kHz)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
NVNT	a	5745	3.806	0.61	4.416	4.33	<=30	Pass
NVNT	a	5785	3.354	0.61	3.964	3.88	<=30	Pass
NVNT	a	5825	3.494	0.58	4.074	3.99	<=30	Pass
NVNT	n20	5745	3.102	0.53	3.632	3.55	<=30	Pass
NVNT	n20	5785	3.151	0.56	3.711	3.62	<=30	Pass
NVNT	n20	5825	2.97	0.53	3.5	3.41	<=30	Pass
NVNT	n40	5755	0.237	0.56	0.797	0.71	<=30	Pass
NVNT	n40	5795	-0.009	0.59	0.581	0.49	<=30	Pass

