


2.4G-2.48G frequency band onboard PCB antenna test report

SPECIFICATIONS	
Frequency (MHz)	2400-2480
Peak Gain (dBi)	2.499
Average Gain (dBi)	> -4
VSWR	< 3.2
Impedance (Ω)	50 Ω
Antenna Type	PCB antenna
Polarization	Linear

Company:Shenzhen Vnvtent Technology Co.,Ltd.
Address: F15 Bldg A, Zhonghao Yuandong Industrial Park, Xiangjiaotang Community, Bantian St,
Longgang Dist, Shenzhen.

Antenna size

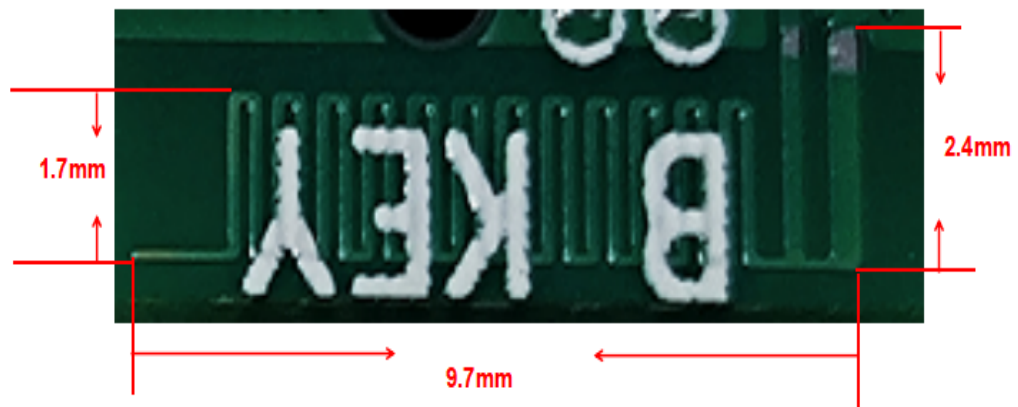

Antenna efficiency and gain

Frequency (MHz)	Gain (dBi)
2400	1.433
2410	0.927
2420	0.829
2430	0.881
2440	1.192
2450	1.688
2460	2.194
2470	2.118
2480	2.499

3D Radiation Pattern

