


DD3770 Series

Wall-mounted Emitter

Instruction

Version: A/01

Instruction of Buttons

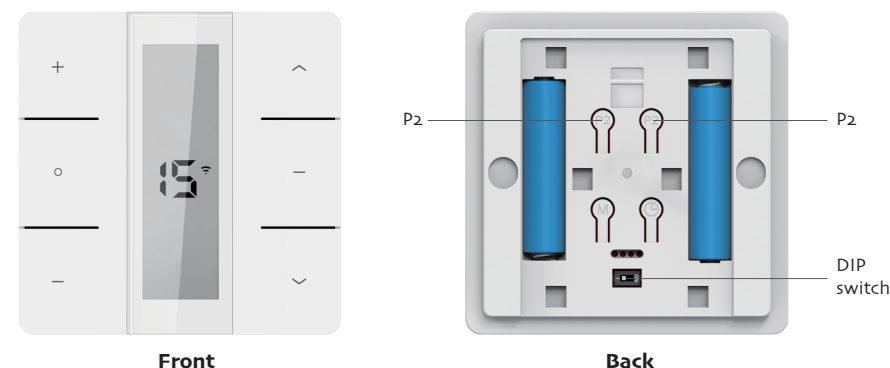

RF exposure statement:

This equipment complies with the FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.


FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

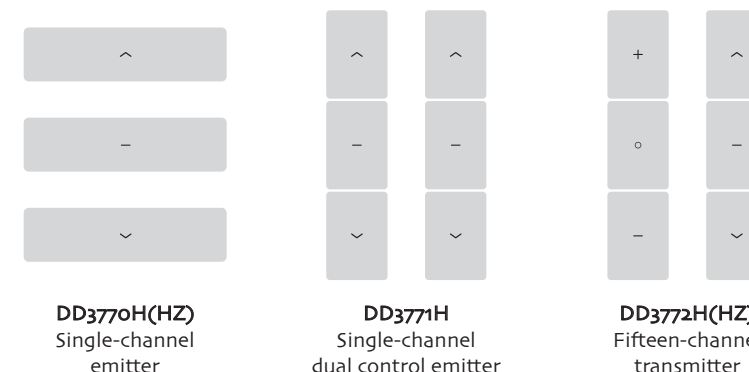

Key symbol



Technical specification


Battery: 3VDC (AAA battery×2)	Battery life: >2 years
Working temperature: -10℃~+50℃	Radio frequency: 433.92MHz
Radio range: Outdoor>150 meters, indoor>40 meters	

Warning

- 1, Emitter couldn't expose to moisture or be striked heavily, or else the emitter life will be affected.
- 2, If the emitter is not so sensitive or the radio range becomes shorter or the low battery icon on the LCD lights up, pls check whether to change the battery.
- 3, If the voltage of the 15-channel emitter is less than 2.65V, there will be a low voltage indication.
- 4, Under uni-directional mode, if you press any button more than 20s, while under bi-directional mode, you press any button 5s, the emitter will stop sending radio signals.
- 5, It's forbidden to use different type battery to avoid any dangerous risk.
- 6, Dispose of used batteries properly.


1. Dip Switch (For all series emitters)

Note: Factory default in "1"—bi-directional mode.

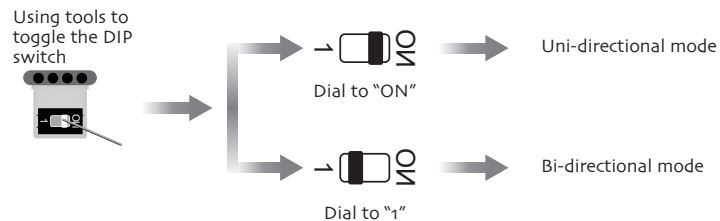


2. Lock/Unlock Combo-Key (For emitters with LED)

- Note: 1, Either P2 button on back of emitter can be used.
- 2, Combo-Key is in unlocking status by factory default. Repeat same operations to switch unlock/lock status.
- 3, Combo-key cannot be used in locked status. In this status, press combo-key, the emitter won't send any signal and LED won't flash.

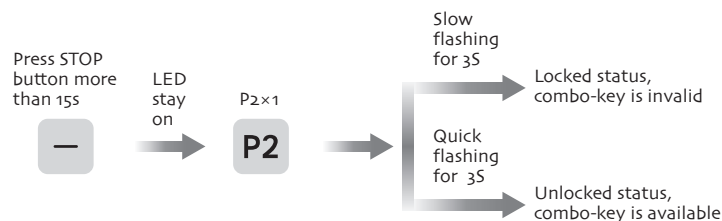

3. Selecting Emitter's Channels (For emitters with LCD)

Note: Press UP or DOWN button, to exit setting mode quickly. Reset it, when you want to select channels again.

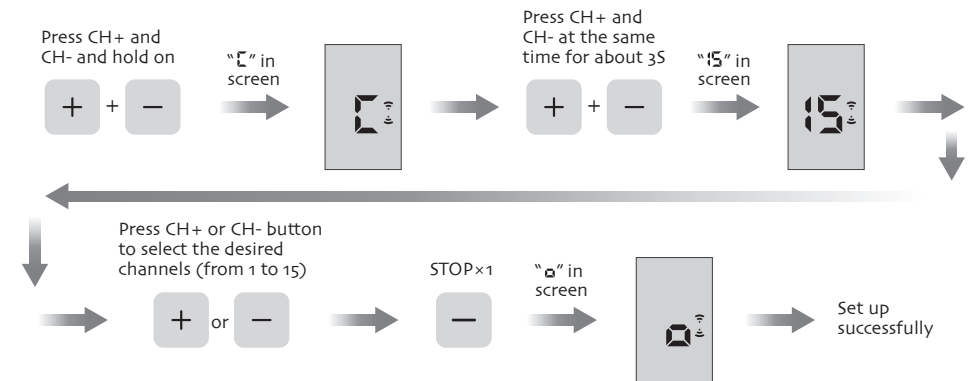

4. Lock/Unlock Combo-Key (For emitters with LCD)

- Note: 1, Either P2 button on back of emitter can be used.
- 2, During operation, no action in 10s, the emitter will be out of setting mode automatically.
- 3, Combo-Key is in unlocking status by factory default. Repeat same operations to switch unlock/lock status.
- 4, In locked status, the combo-keys don't work; In unlocked status, the combo-key will work normally.
- 5, If combo-key is locked, the only influence is that the emitter cannot send signals.

