802.11n(HT20)/LCH			
802.11n(HT20)/MCH			
802.11n(HT20)/HCH		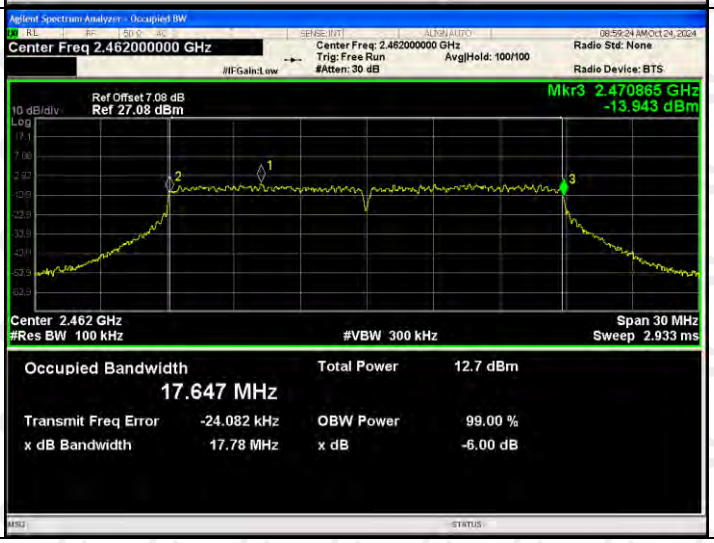	

802.11n(HT40)/LCH			
802.11n(HT40)/MCH			
802.11n(HT40)/HCH		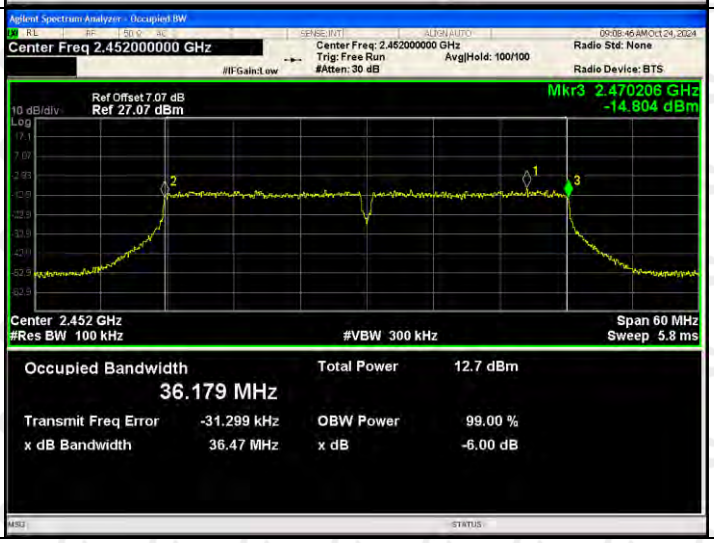	

ANT2:
Test Graph:

Graphs			
802.11b /LCH			
802.11b /MCH			
802.11b/HCH			

802.11g/LCH		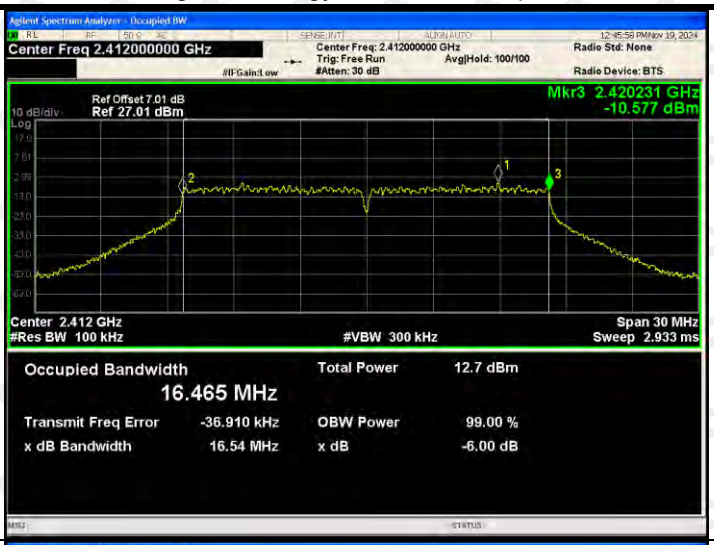	
802.11g/MCH			
802.11g/HCH		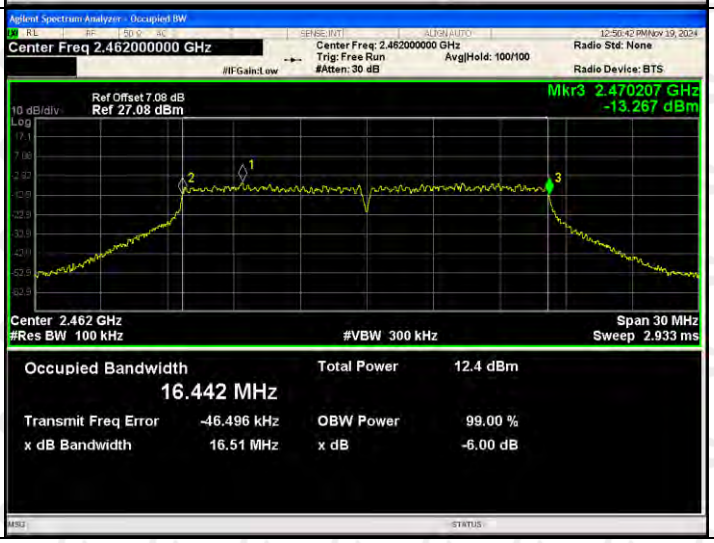	

802.11n(HT20)/LCH			
802.11n(HT20)/MCH			
802.11n(HT20)/HCH		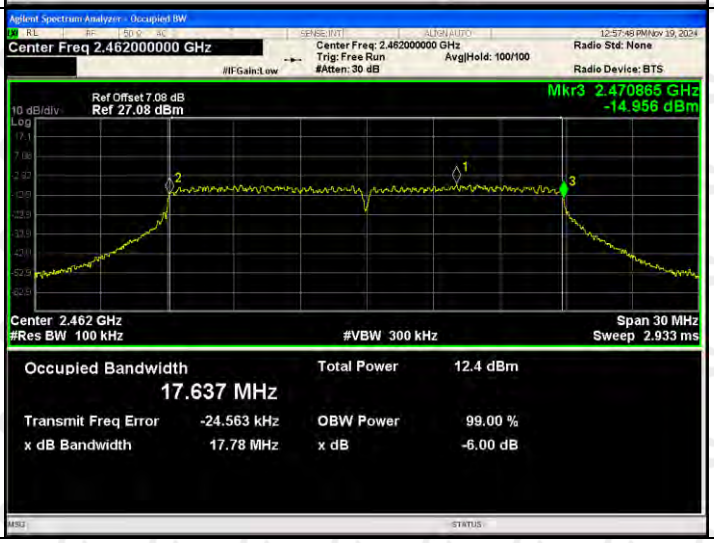	

802.11n(HT40)/LCH			
802.11n(HT40)/MCH			
802.11n(HT40)/HCH		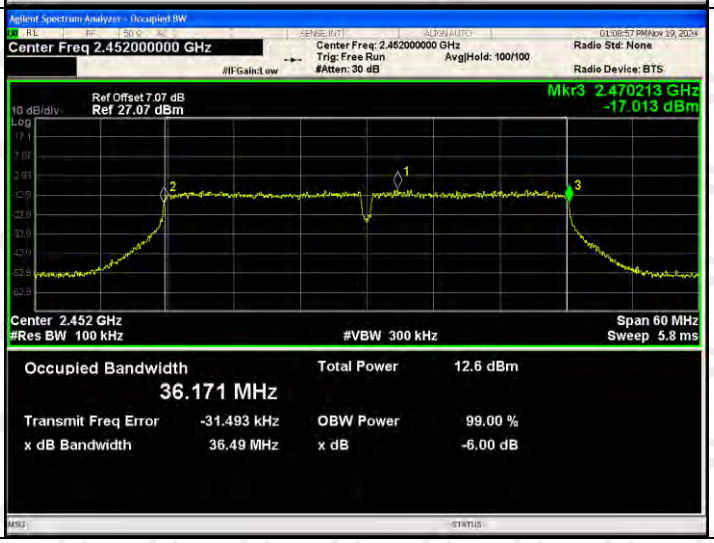	

ANT3:
Test Graph:

Graphs			
802.11b /LCH			
802.11b /MCH			
802.11b/HCH			

802.11g/LCH			
802.11g/MCH			
802.11g/HCH		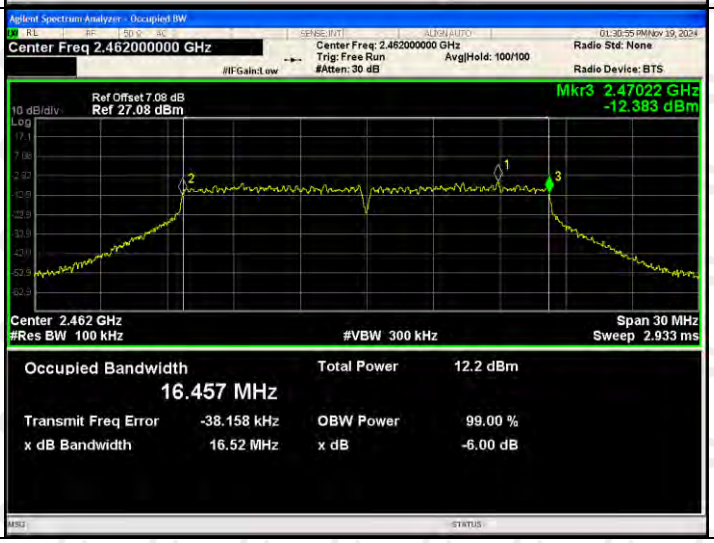	

802.11n(HT20)/LCH			
802.11n(HT20)/MCH			
802.11n(HT20)/HCH		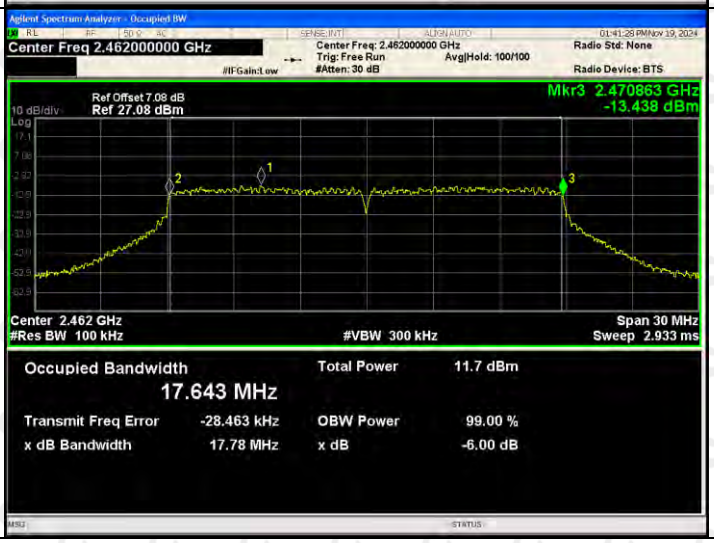	

802.11n(HT40)/LCH		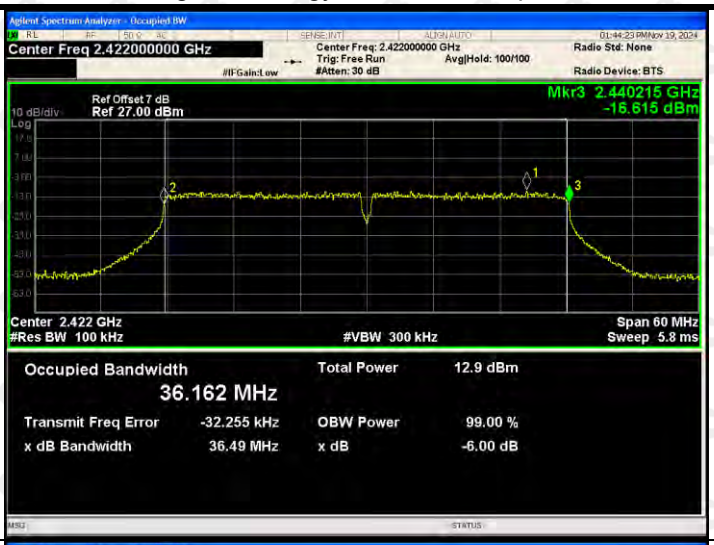	
802.11n(HT40)/MCH		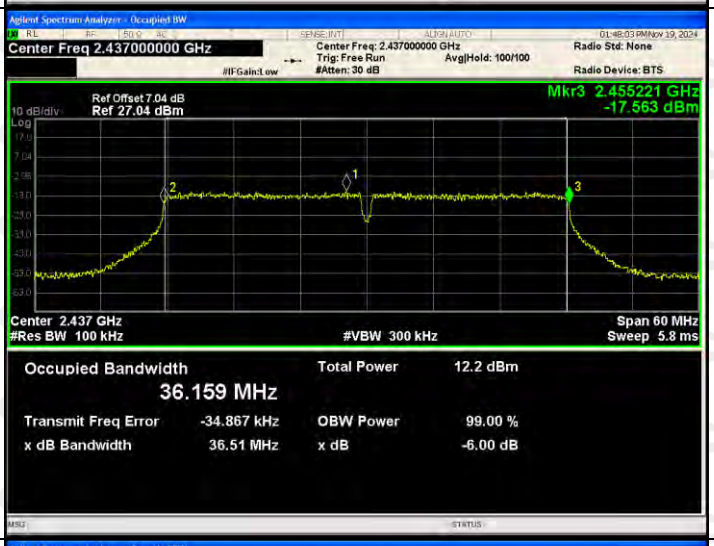	
802.11n(HT40)/HCH		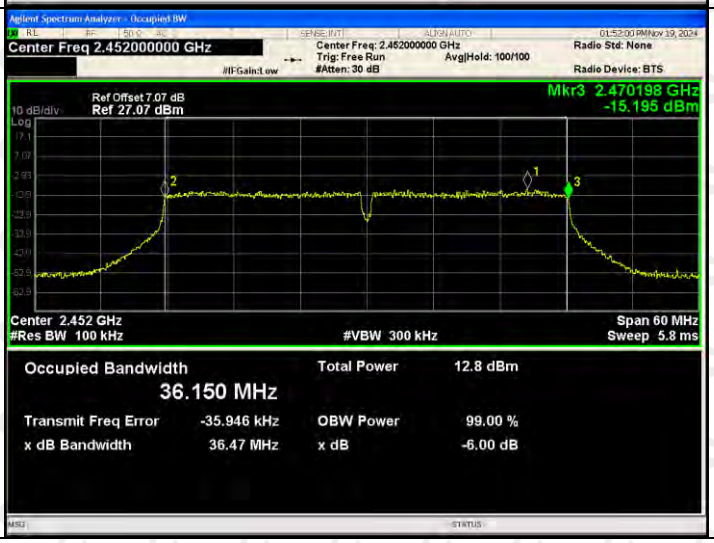	

ANT4:
Test Graph:

Graphs			
802.11b /LCH			
802.11b /MCH			
802.11b/HCH			

802.11g/LCH		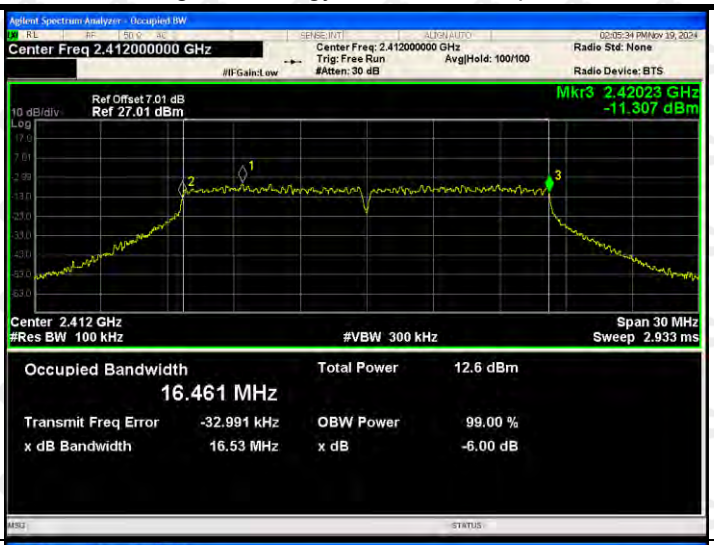	
802.11g/MCH			
802.11g/HCH		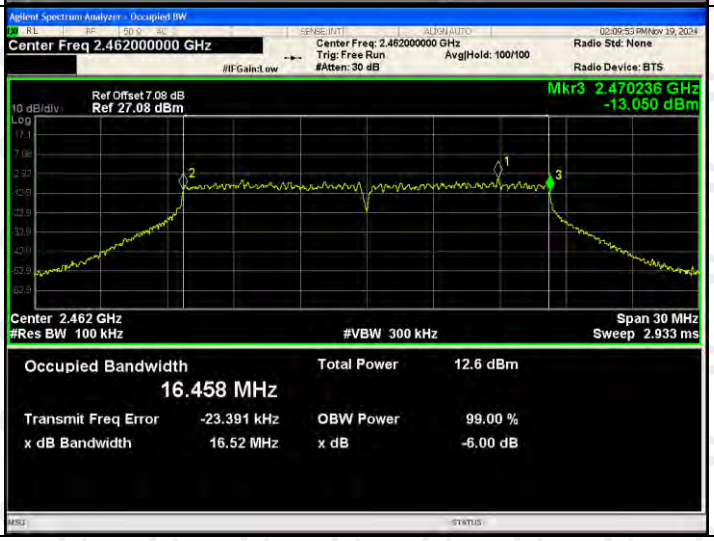	

802.11n(HT20)/LCH		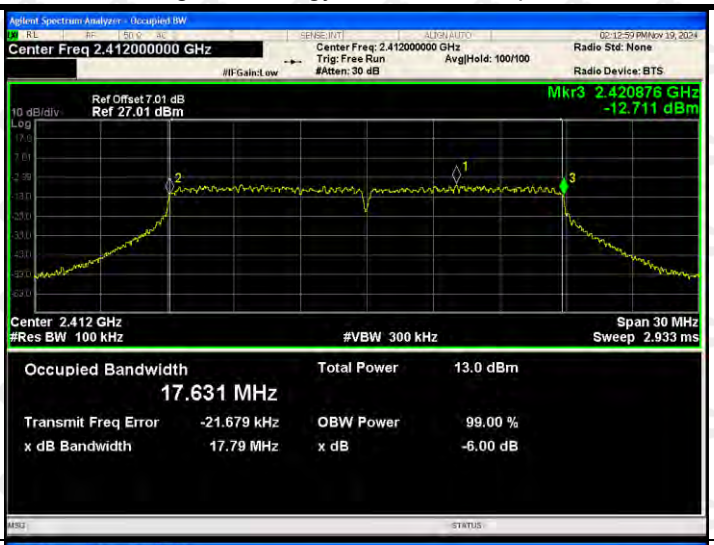	
802.11n(HT20)/MCH			
802.11n(HT20)/HCH		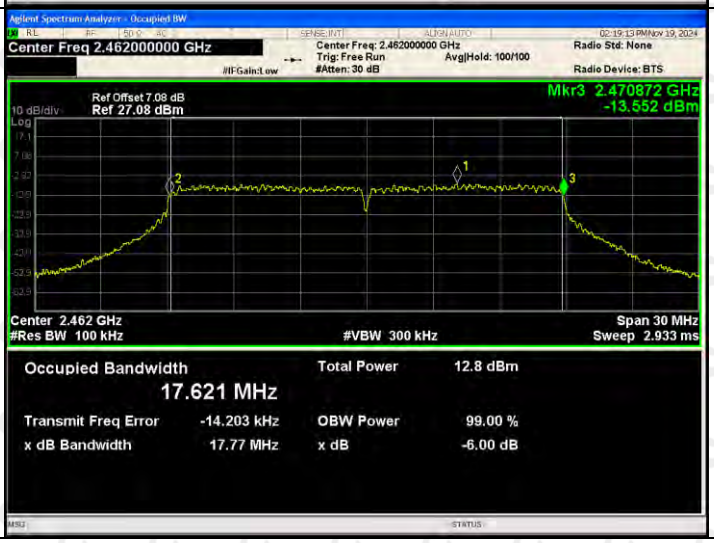	

802.11n(HT40)/LCH		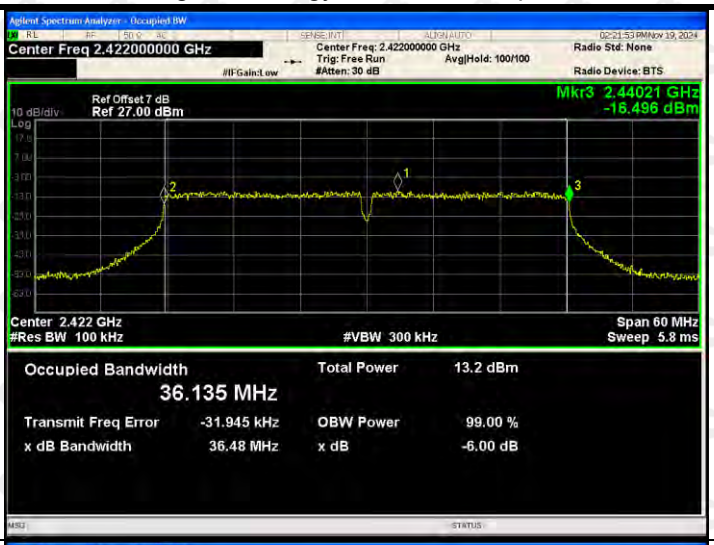	
802.11n(HT40)/MCH			
802.11n(HT40)/HCH		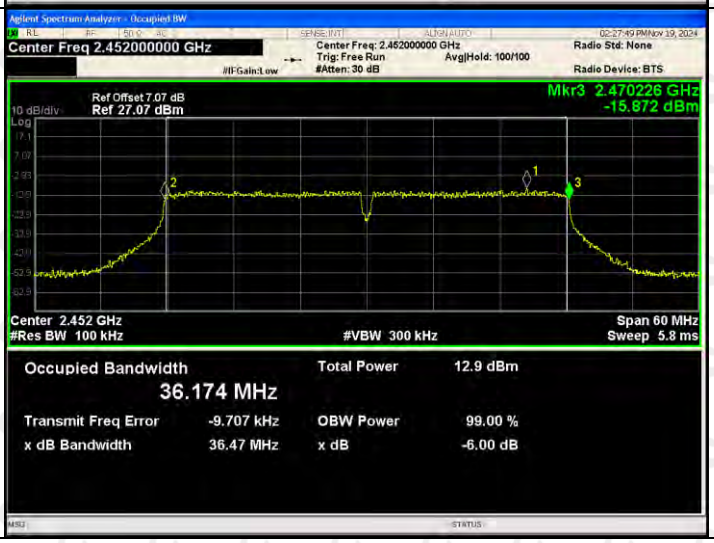	

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

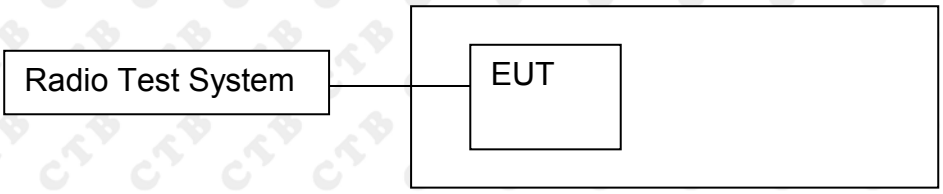

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.
4. Set the VBW ≥ 3 x RBW.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ANT1	Maximum Peak Power [dBm] ANT2	Maximum Peak Power [dBm] ANT3	Maximum Peak Power [dBm] ANT4	Limit [dBm]
802.11b	LCH	-19.577	-22.594	-20.380	-20.725	30
	MCH	-20.023	-23.093	-20.884	-21.141	30
	HCH	-20.404	-20.059	-20.869	-20.261	30
802.11g	LCH	-19.999	-20.506	-20.404	-20.207	30
	MCH	-19.701	-20.501	-20.972	-20.167	30
	HCH	-19.923	-20.656	-20.702	-20.352	30
802.11n(HT20)	LCH	-20.916	-20.774	-20.834	-20.607	30
	MCH	-21.429	-21.299	-21.604	-20.610	30
	HCH	-20.845	-20.791	-21.425	-20.399	30
802.11n(HT40)	LCH	-22.035	-22.518	-22.316	-22.306	30
	MCH	-22.899	-22.996	-23.022	-22.458	30
	HCH	-23.028	-22.952	-22.906	-22.482	30

ANT1:
Test Graph

Graphs			
802.11b /LCH			
802.11b /MCH			
802.11b/HCH			

802.11g/LCH		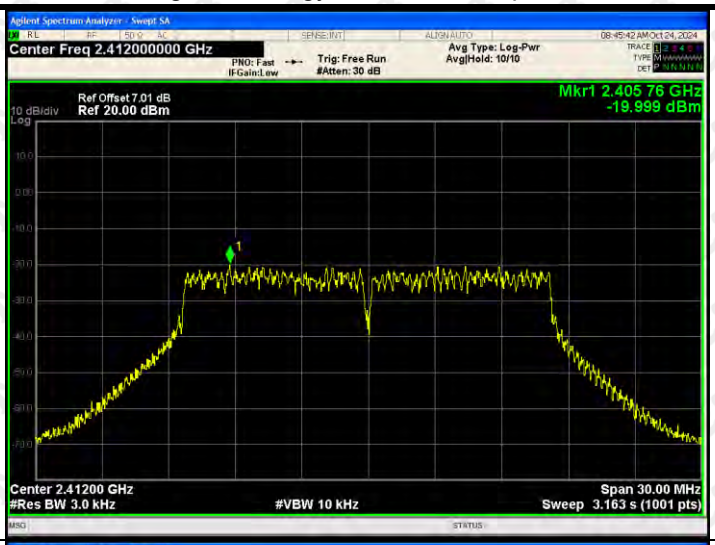	
802.11g/MCH			
802.11g/HCH			

802.11n(HT20)/LCH			
802.11n(HT20)/MCH			
802.11n(HT20)/HCH			

802.11n(HT40)/LCH		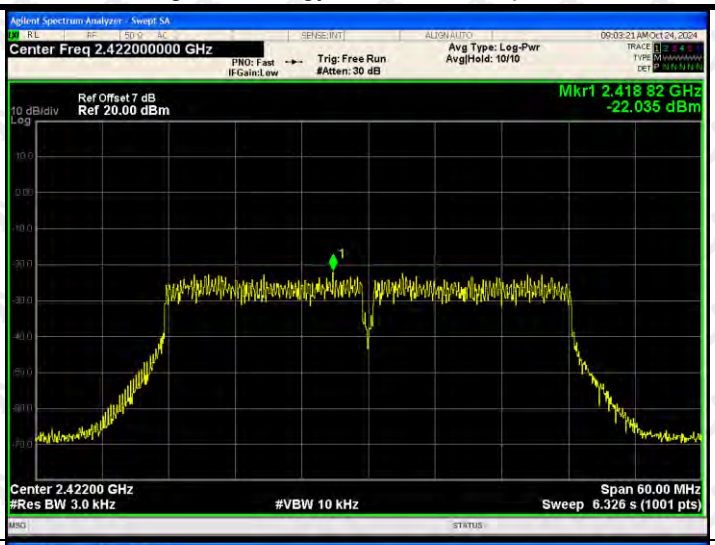	
802.11n(HT40)/MCH			
802.11n(HT40)/HCH		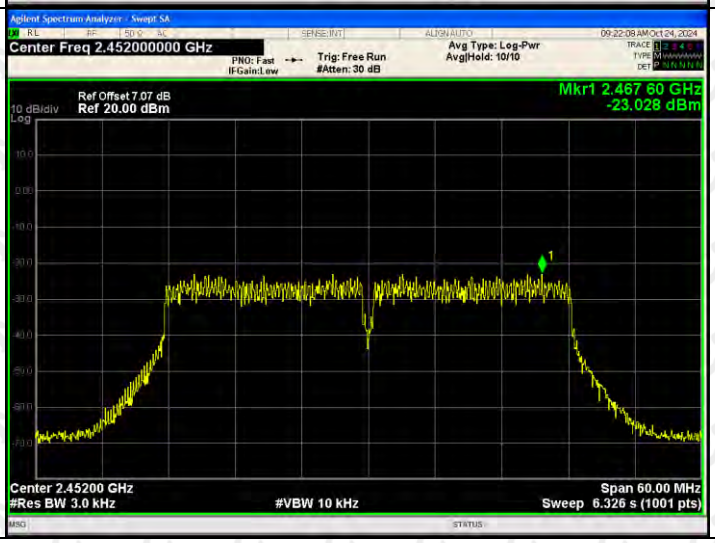	

ANT2:
Test Graph

Graphs			
802.11b /LCH			
802.11b /MCH			
802.11b/HCH			

802.11g/LCH		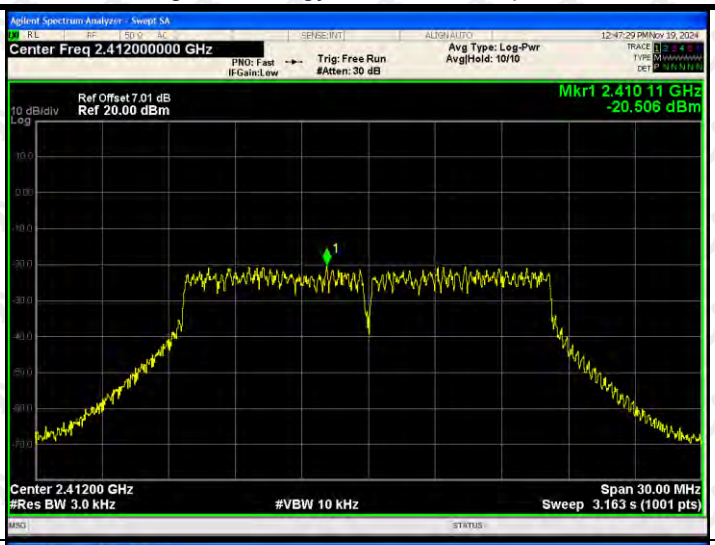	
802.11g/MCH			
802.11g/HCH			

802.11n(HT20)/LCH		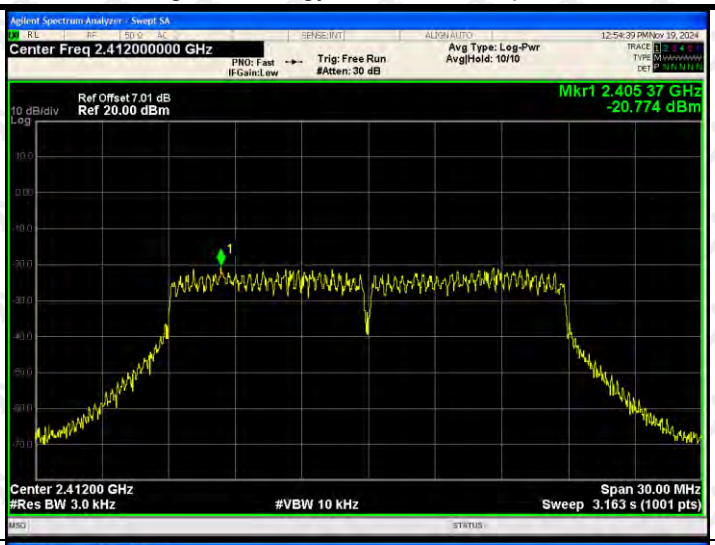	
802.11n(HT20)/MCH			
802.11n(HT20)/HCH			

802.11n(HT40)/LCH		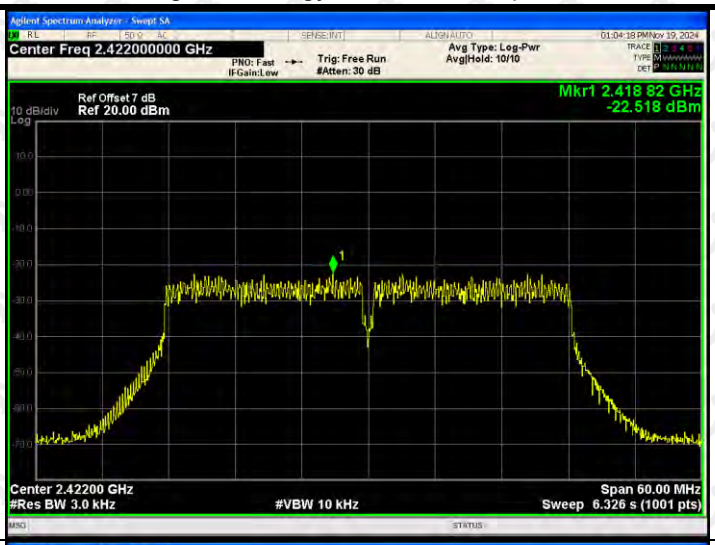	
802.11n(HT40)/MCH			
802.11n(HT40)/HCH			

ANT3:
Test Graph

Graphs			
802.11b /LCH			
802.11b /MCH			
802.11b/HCH			

802.11g/LCH			
802.11g/MCH			
802.11g/HCH			

802.11n(HT20)/LCH			
802.11n(HT20)/MCH			
802.11n(HT20)/HCH			

802.11n(HT40)/LCH		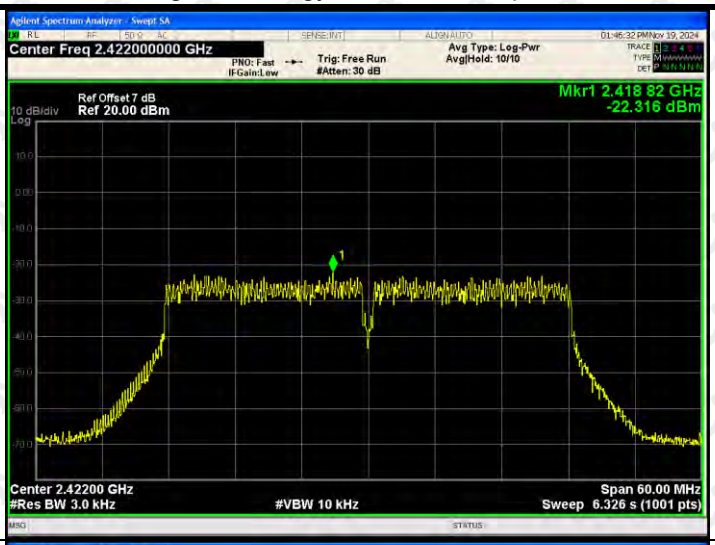	
802.11n(HT40)/MCH			
802.11n(HT40)/HCH		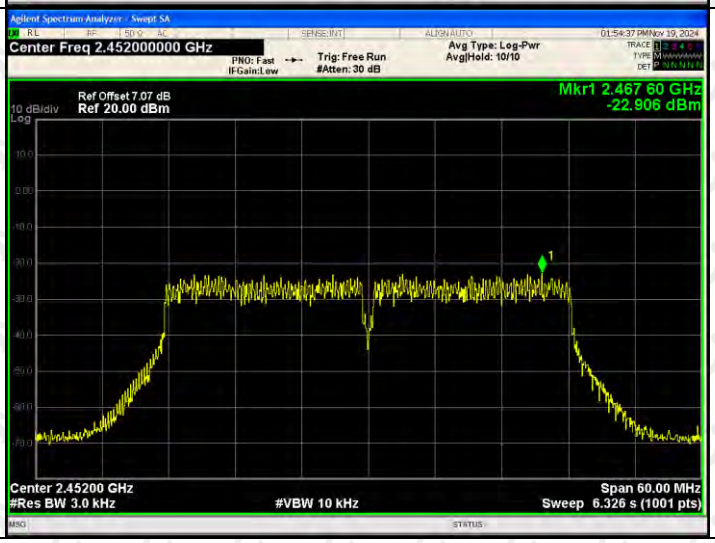	

ANT4:
Test Graph

Graphs			
802.11b /LCH			
802.11b /MCH			
802.11b/HCH			

802.11g/LCH		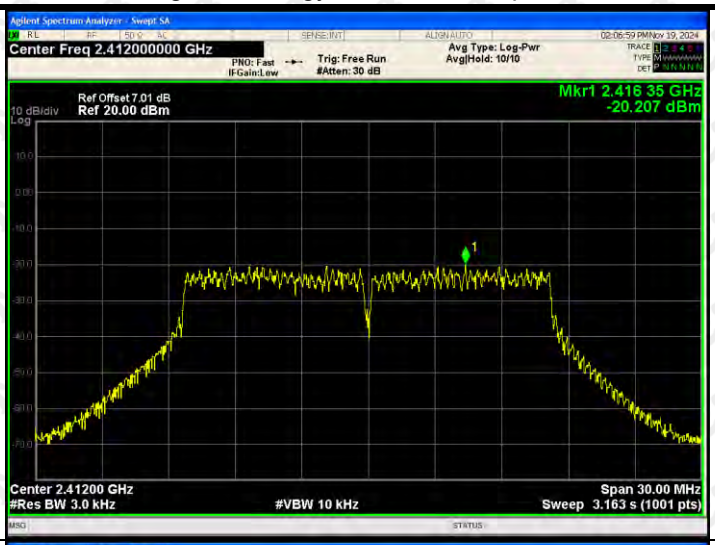	
802.11g/MCH			
802.11g/HCH			

802.11n(HT20)/LCH			
802.11n(HT20)/MCH			
802.11n(HT20)/HCH		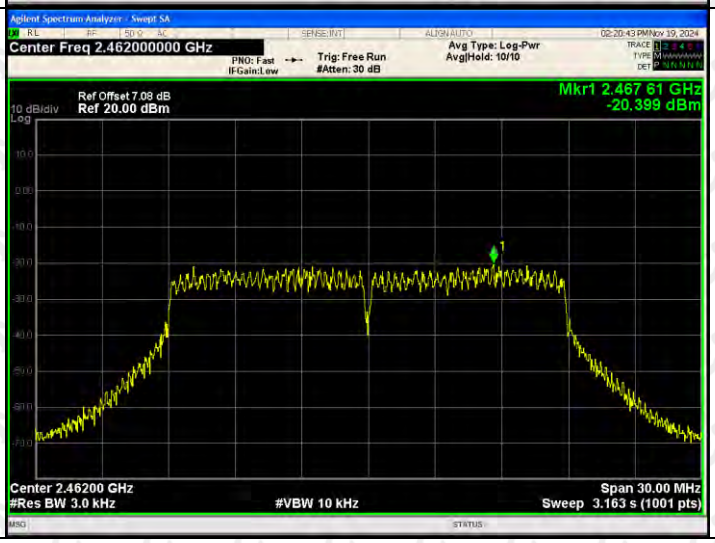	

802.11n(HT40)/LCH		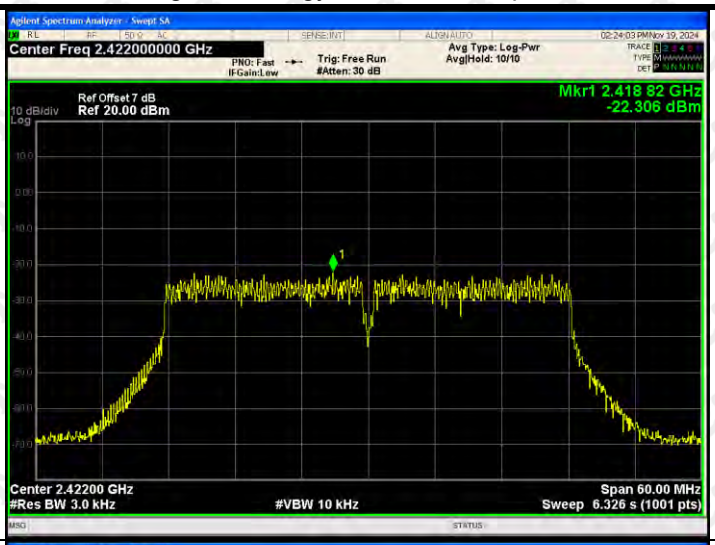	
802.11n(HT40)/MCH			
802.11n(HT40)/HCH			

12. ANTENNA REQUIREMENT

15.203 requirement:
An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
15.247(b) (4) requirement:
The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is External antenna and no consideration of replacement. The best case gain of the antenna is -3.71dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

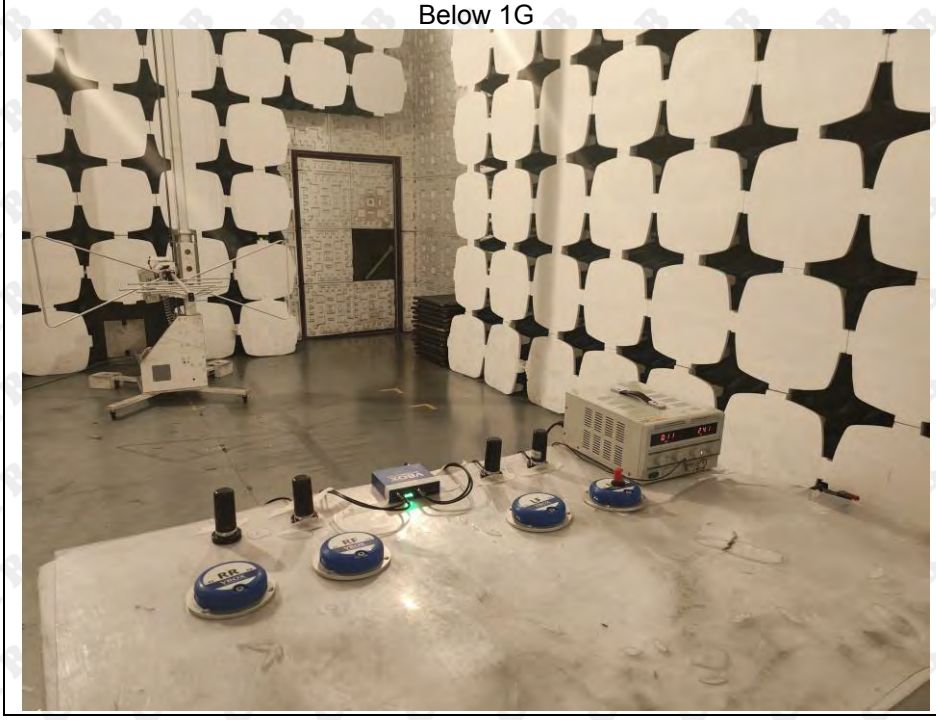

Above 1G

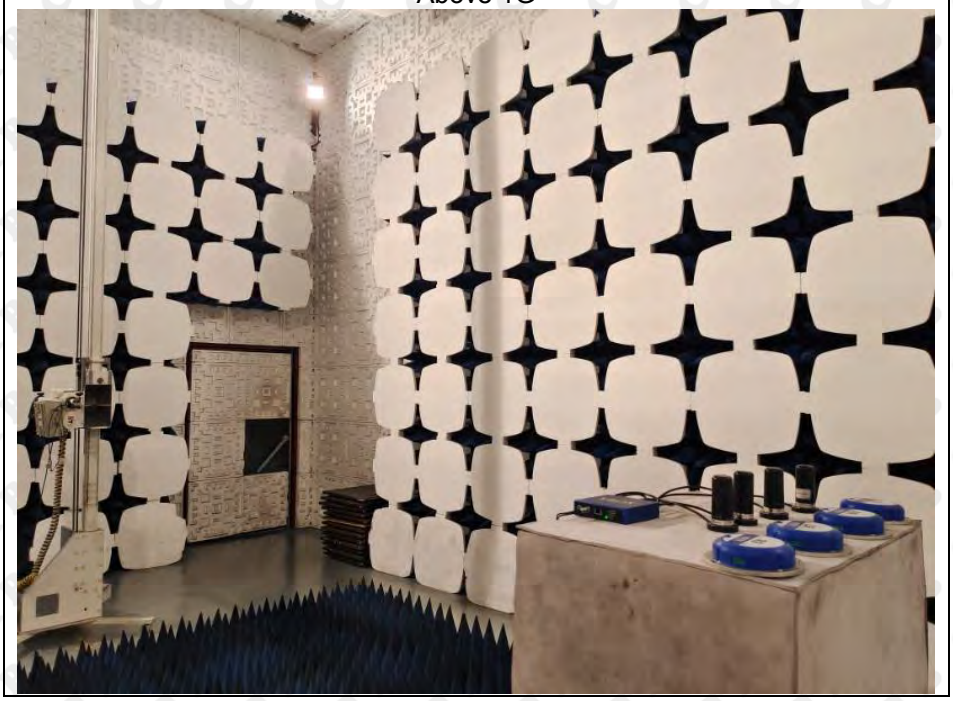

※※※※※ **END OF REPORT** ※※※※※