

Quick Installation Guide

Product Name : WiFi Extender
Product Name : M-A25

LED Explanation

Icon	Indication	Status
	POWER LED	NO: The device is power on OFF: The Device is not resolving electrical power
	WLAN LED	Wireless signal
	WPS LED	Flashing: WPS connection is established or WPS signal of another device is expected NO: The LAN port is connected OFF: The LAN port is disconnected Flashing: Transferring data to/from a network device
	LAN LED	

Button Explanation

WPS Button: If your host router supports WPS function,you can press the WPS button and then press the WPS button of the WPS button of the WiFi Repeater to establish a secure connection between the host router and the WiFi Repeater.
Reset Button: This button is used to restore The Repeater' s factory default settings.
With the repeater powered on, use a pin to press and hold the Reset button for about 8 seconds.
LAN Port: One 10/100Mbps RJ45 Ethernet port is used to connect an Ethernet-enabled device to a Wi-Fi network,such as Internet TV,DVR,Gaming console and so on. Please note that this port cannot be connected to a router.

REV.2.0

Quick Installation

Working mode Diagram

Note: If you need to connect the network cable, please connect the network cable after the configuration is completed.

Repeater Mode: As a wireless signal extender

A. Extend your Wi-Fi signal without using any cables to reduce wiring troubles.



B. Extend your Wi-Fi signal with a cable, connect your device and extender stably.



AP Mode: As a wired signal extender (access point)


Get better WiFi speed by connecting the router and the extender with network cable in the poor WiFi signal area.



Quick Installation Guide


When the machine work normally,use the mobile phone to search and connect to Repeater-XXXXXX.
(XXXX is the last 6 numbers of the repeater MAC address)

Note: If the mobile phone does not automatically jump to setting page after connecting,please click "forget" the wifi name that has been connected on the mobile in wifi manage,turn off the wifi and then reopen the wifi to search it,or input "192.168.11.1".

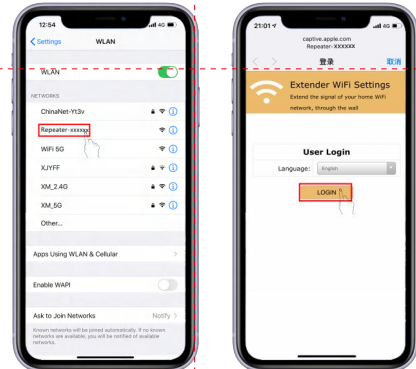

Wi-Fi Repeater mode setup

Step1: Click repeater mode to enter the network search page.

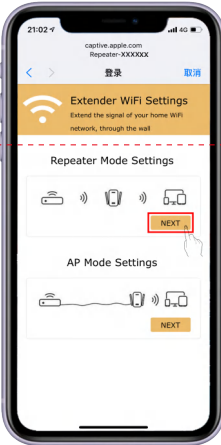

Step2: Select the wireless signal you want to extend.If it is a hidden network, you need to add it manually.

Step3: Enter your router connection password and click "Next".If you don't want the same name as your router,please choose and input the new name.

Step4: Click the "Finish" button to complete the relay mode configuration.(The extended WiFi's password is the same as the routers' by default)

Step5: Complete Repeater Mode setting.

Step6: Set the wireless name and password with more than 8 digits(the wireless name and password can be set according to personal preference).

Step7: Click to Select "AP" mode to enter the setting page.

Step8: Set the wireless name and password with more than 8 digits(the wireless name and password can be set according to personal preference).

Step9: Click the "Finish" button to complete the AP mode configuration.

Step10: Complete AP mode setting.

Step11: Click the "Finish" button to complete the AP mode configuration.

Step12: Complete AP mode setting.

Step13: Click the "Finish" button to complete the AP mode configuration.

Step14: Complete AP mode setting.

Step15: Click the "Finish" button to complete the AP mode configuration.

Step16: Complete AP mode setting.

Step17: Click the "Finish" button to complete the AP mode configuration.

Step18: Complete AP mode setting.

Step19: Click the "Finish" button to complete the AP mode configuration.

Step20: Complete AP mode setting.

Step21: Click the "Finish" button to complete the AP mode configuration.

Step22: Complete AP mode setting.

Step23: Click the "Finish" button to complete the AP mode configuration.

Step24: Complete AP mode setting.

Step25: Click the "Finish" button to complete the AP mode configuration.

Step26: Complete AP mode setting.

Step27: Click the "Finish" button to complete the AP mode configuration.

Step28: Complete AP mode setting.

Step29: Click the "Finish" button to complete the AP mode configuration.

Step30: Complete AP mode setting.

Step31: Click the "Finish" button to complete the AP mode configuration.

Step32: Complete AP mode setting.

Step33: Click the "Finish" button to complete the AP mode configuration.

Step34: Complete AP mode setting.

Step35: Click the "Finish" button to complete the AP mode configuration.

Step36: Complete AP mode setting.

Step37: Click the "Finish" button to complete the AP mode configuration.

Step38: Complete AP mode setting.

Step39: Click the "Finish" button to complete the AP mode configuration.

Step40: Complete AP mode setting.

Step41: Click the "Finish" button to complete the AP mode configuration.

Step42: Complete AP mode setting.

Step43: Click the "Finish" button to complete the AP mode configuration.

Step44: Complete AP mode setting.

Step45: Click the "Finish" button to complete the AP mode configuration.

Step46: Complete AP mode setting.

Step47: Click the "Finish" button to complete the AP mode configuration.

Step48: Complete AP mode setting.

Step49: Click the "Finish" button to complete the AP mode configuration.

Step50: Complete AP mode setting.

Step51: Click the "Finish" button to complete the AP mode configuration.

Step52: Complete AP mode setting.

Step53: Click the "Finish" button to complete the AP mode configuration.

Step54: Complete AP mode setting.

FAQ (Frequently Asked Questions)

Q1: What should I do if I cannot access the Repeater' s web management page?

- A1: Make sure your computer is connected to the extended network.
- A2: Make sure your computer is set to obtain an IP address automatically.
- A3: If the Repeater has connected to the router,you should go to your router' s DHCP client list to obtain the Repeater' s current IP address.
- A4: Reset the Repeater.

Q2: Why does the wireless transmission rate speed down,when the wireless signal is stronger after repeated by the Repeater?

A1: In compliance with the wireless transmission protocol,all the Repeater devices are set to work in half-duplex instead of full-duplex mode.In other words,the Repeater has to process one-way communication between your root Wireless router(or AP) and the terminal clients; so the transmission time will be double-increased,while the speed will be decreased.Recommends that you connect to the extender when your home network connection is poor,or when you want a larger wireless coverage to eliminate "dead zones".

Q3: Why the devices connected to the Repeater cannot get an IP address from the Repeater and cannot access the Internet?

- A1: Maybe you enabled a wireless MAC filter,wireless access control,or access control list(ACL) on your router. To solve this problem,please log into your router and disable the MAC filter,wireless access control or ACL.
- A2: Maybe the Repeater has not been successfully connected to your router, please reset the Repeater and Reconfiguration.
- A3:Maybe the IP address of the router is occupied or the wireless device connected by the router has reached the limit. please reboot your router, then reset the Repeater and Reconfiguration.

快速安装指南

指示灯说明

图标	作用	状态
	电源指示灯	接通电源指示灯常亮
	WiFi指示灯	工作正常时灯常亮
	WPS指示灯	快闪连接中，慢闪连接成功
	网口指示灯	常亮：局域网端口连接正常 闪烁：数据传输

按钮说明

WPS按钮: 如果您的主机路由支持WPS功能,您可以按WPS按钮,然后按WiFi中继器的WPS按钮,在主机路由器和WiFi中继器之间建立安全连接。

重置按钮: 此按钮用于恢复中继器的工厂默认设置。随着中继器的启动,使用一个复位针/针按下并保持8秒。

局域网口: 一个10/100Mbps RJ45以太网端口用于将启用以太网的设备连接到Wi-Fi网络,如互联网电视、DVR、游戏控制台等等。请注意,此端口不能连接到路由器。

REV.2.0


快速安装手册

工作模式示意图


注意事项: 如果需要接网线,请在中继器设置好之后再接插网线,避免设置之前接插网线导致设置异常。

中继模式: 作为一个无线信号扩展器

A. 在不使用任何网线的情况下扩展你的Wi-Fi信号,减少布线的麻烦,但不能优化Wi-Fi速度



B. 在不使用网线的情况下扩展你的Wi-Fi信号,通过网线让PC与扩展器建立稳定连接,但不能优化Wi-Fi速度



AP模式: 作为一个有线信号扩展器(接入点)

在Wi-Fi信号较差的位置,为获得更好的Wi-Fi速度,可用以太网线将路由器与扩展器连接起来



快速操作说明

当机器进入开机状态时,使用手机或电脑WiFi搜索连接Repeater-XXXXXX,点击连接后会自动跳转进入设置页面。
(XXXXXX 是中继器MAC地址的最后6个数字)

注意: 如果手机点击连接后,不会自动跳转页面,请点击 "忽略此网络" 然后点击 "关闭" 关闭Wi-Fi,然后点击 "重新进行Wi-Fi连接",若此操作仍然无效,可在设置菜单中手动输入网址 "192.168.11.1".

进入管理员登录界面后,可选择语言: 中文 (简体)

第一步: 选择 "中继模式配置" 并点击 "下一步" 进入网络信号搜索页面

第二步: 选择要扩展的无线信号,点击连接;如果是隐藏网络,需要手动添加

第三步: 输入你的路由器密码,点击 "下一步"

第四步: 点击 "完成配置" 按钮,完成中继模式配置(扩展器的WiFi密码与路由器的默认密码一致)

第五步: 完成中继器模式设置,等待30秒,WiFi扩展器会自动重启。

第六步: 选择 "AP模式配置" 第二步: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第七步: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第八步: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第九步: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第十步: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第十一步: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第十二步: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第十三步: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第十四步: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第十五步: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第十六步: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第十七步: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第十八步: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第十九步: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第二十步: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第二十一: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第二十二: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第二十三: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第二十四: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第二十五: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第二十六: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第二十七: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第二十八: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第二十九: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第三十: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第三十一: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第三十二: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第三十三: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第三十四: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第三十五: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第三十六: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第三十七: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第三十八: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第三十九: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第四十: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第四十一: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第四十二: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第四十三: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第四十四: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第四十五: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第四十六: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第四十七: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第四十八: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第四十九: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第五十: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第五十一: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第五十二: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第五十三: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第五十四: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第五十五: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第五十六: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第五十七: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第五十八: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第五十九: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第六十: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第六十一: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第六十二: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第六十三: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第六十四: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第六十五: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第六十六: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第六十七: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第六十八: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第六十九: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第七十: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第七十一: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第七十二: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第七十三: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第七十四: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第七十五: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第七十六: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第七十七: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第七十八: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第七十九: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第八十: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第八十一: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第八十二: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第八十三: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第八十四: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第八十五: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第八十六: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第八十七: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第八十八: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第八十九: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第九十: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第九十一: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第九十二: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第九十三: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第九十四: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第九十五: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第九十六: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第九十七: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第九十八: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第九十九: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

第一百: 设置无线名称和8位数密码,点击 "下一步" 进入设置页面

正面 英文

背面 中文

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC 's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.