

IZL574-12-000-R

✚ SAA Part No. IZL574-12-000-R

✚ Frequency range (MHz): 617-960/1710-2690 & 978 & 1090

✚ Connector options: SMA Male



Electrical				
Frequency Range (MHz)	617-960	1710-2690	978	1090
VSWR	≤ 3.0	≤ 2.5	≤ 3.5	≤ 5.5
Peak Gain (dBi) typ.	4.5	6	2	-0.5
Polarization	Linear			
Impedance (Ω)	50			


* The data is measured on the Zip mock-up.

Mechanical	
Cable	$\Phi 1.13\text{mm}$, 50 Ω
Connector	SMA Male
Dimension	50.3*159*20.5mm
Holder Material	EPS
Adhesive	3M VHB LSE-060
Sealing Glue	CEMEDINE X8008
Operating Temperature	-40 °C ~ +85 °C
Environmentally Friendly	ROHS Compliant
Waterproof	IPX4




Radiation Pattern (Cellular B2,4,5,12,13,66):

Front Cut

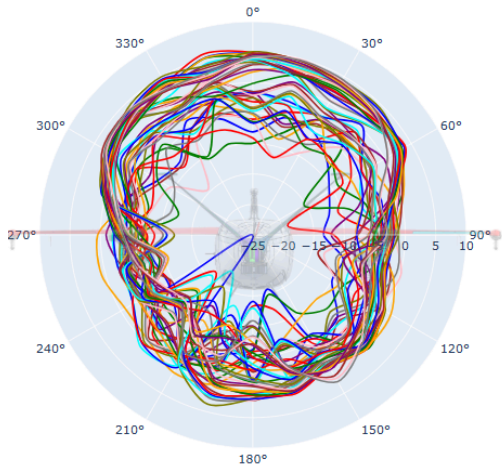

Horizon Cut

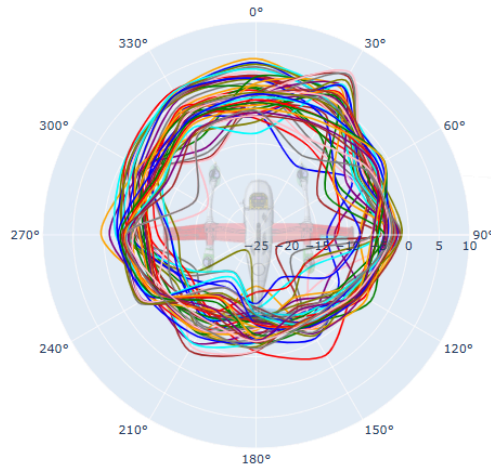

Side Cut

