

LTC-3216MLT Specification


Operating Temp. : -40℃~+85℃

**1. FEATURES:**


- Light weight, compact
- Wide bandwidth, low cost
- Built-in antenna with high gain

2. APPLICATIONS:

- Bluetooth, Wireless LAN, Mobile TV
- Home RF System, etc

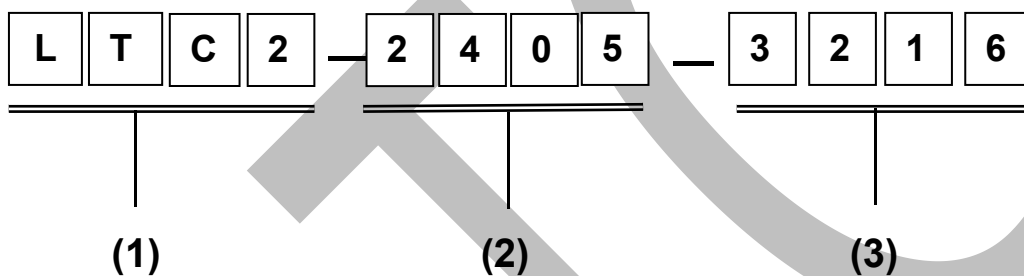3. PRODUCT IDENTIFICATION

- (1) Product type: Multilayer chip Antenna
 (2) Center Frequency: 2450MHz
 (3) External Dimensions (L×W) (mm): 3.2*1.6

4. SHAPE AND DIMENSIONS:

L	W	H	A
3.2±0.2	1.6±0.2	0.52±0.1	0.4±0.1

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=

ANGLES = ±

HOLE DIA = ±

NewTranx Information Technology
(Shenzhen) Co., Ltd.

SCALE : N/A

UNIT : mm

DRAWN BY : Sera

CHECKED BY: XD

DESIGNED BY: Sera

APPROVED BY: XD

ADD:Room 1302-1303, Block A, Nanshan Zhiqiu Industrial Park,
 No. 3185, Shahe West Road, Shuguang Community, Xili Street,
 Nanshan District, Shenzhen City

TITLE : LTC2-2405-3216 Specification

DOCUMENT
NO.


3216

SPEC REV.

P1


Reference Dimensions of Test Board:

Unit: mm

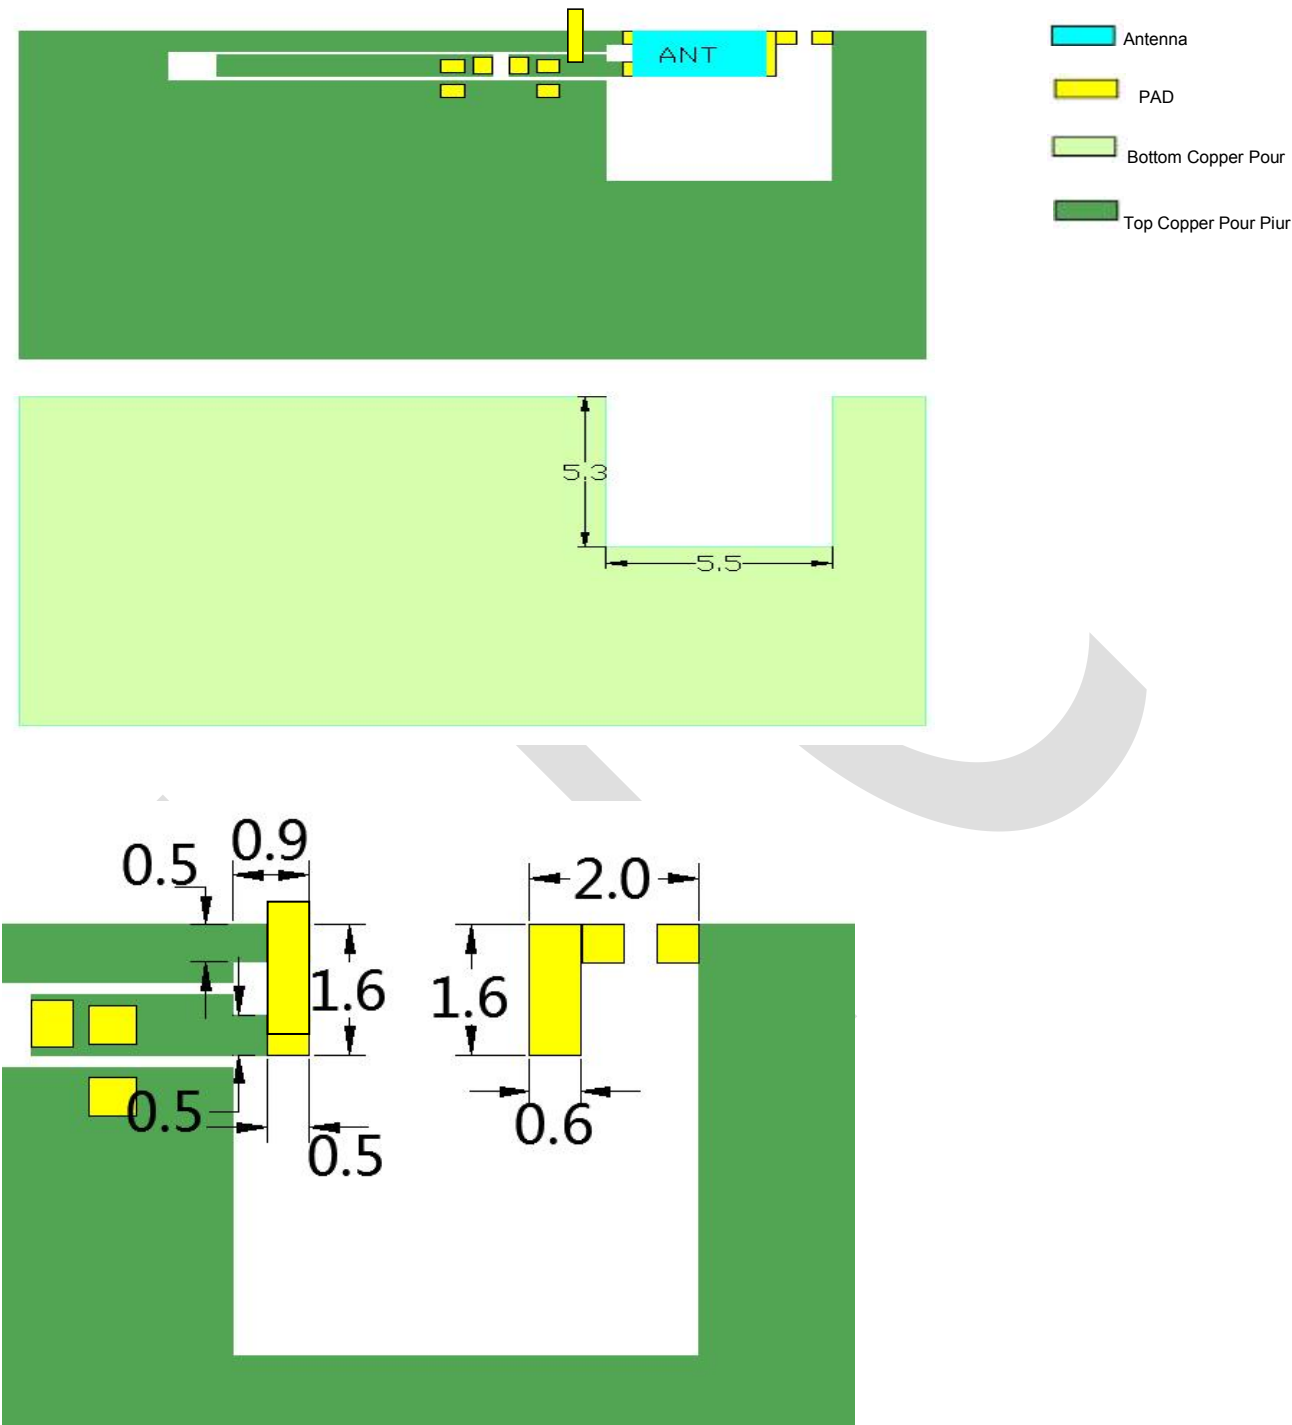


UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=± ANGLES = ± HOLES DIA = ±		NewTranx Information Technology (Shenzhen) Co., Ltd.		
SCALE : N/A	UNIT : mm	ADD:Room 1302-1303, Block A, Nanshan Zhiqiu Industrial Park, No. 3185, Shahe West Road, Shuguang Community, Xili Street Nanshan District, Shenzhen City		
DRAWN BY : Sera	CHECKED BY: XD			
DESIGNED BY: Sera	APPROVED BY: XD			
TITLE : LTC2-2405-3216 Specification		DOCUMENT NO.	3216	SPEC REV. P1

Drilling Reference Diagram

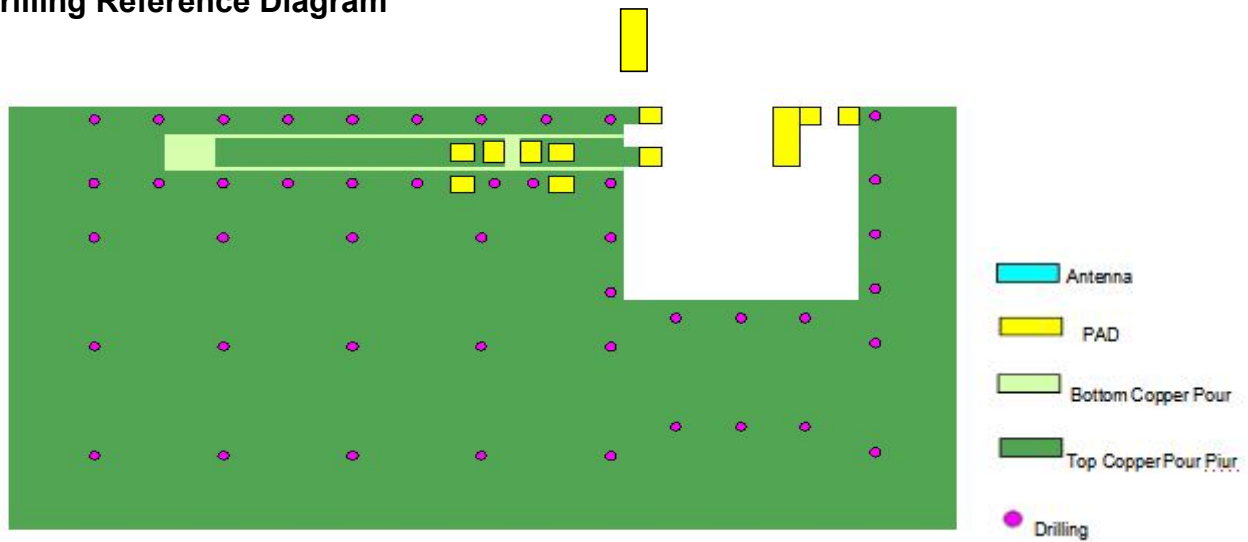

APPLICATION GUIDE

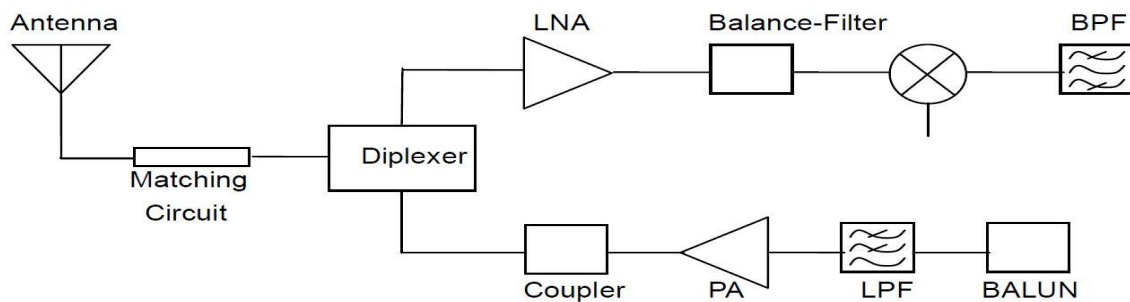

5. SPECIFICATIONS:

Test Case	Spec.
BW	2400-2483(MHz)
Polarization Method	Linear Polarization
Max Gain	2.67dBi
Effi	72.30%
Input Impedance	50 Ω

* Test condition: Test board size 90*40 mm

Matching circuit: Pi matching circuit will be required

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=±
 ANGLES = ± HOLES DIA = ±

SCALE : N/A

UNIT : mm

DRAWN BY : Sera

CHECKED BY: XD

DESIGNED BY: Sera

APPROVED BY: XD

NewTranx Information Technology
(Shenzhen) Co., Ltd.

ADD: Room 1302-1303, Block A, Nanshan Zhiqu Industrial Park,
No. 3185, Shahe West Road, Shuguang Community, Xili Street,
Nanshan District, Shenzhen City

TITLE : LTC2-2405-3216 Specification

DOCUMENT
NO.


3216

SPEC REV.


P1

6. Electrical Characteristics :

R.L

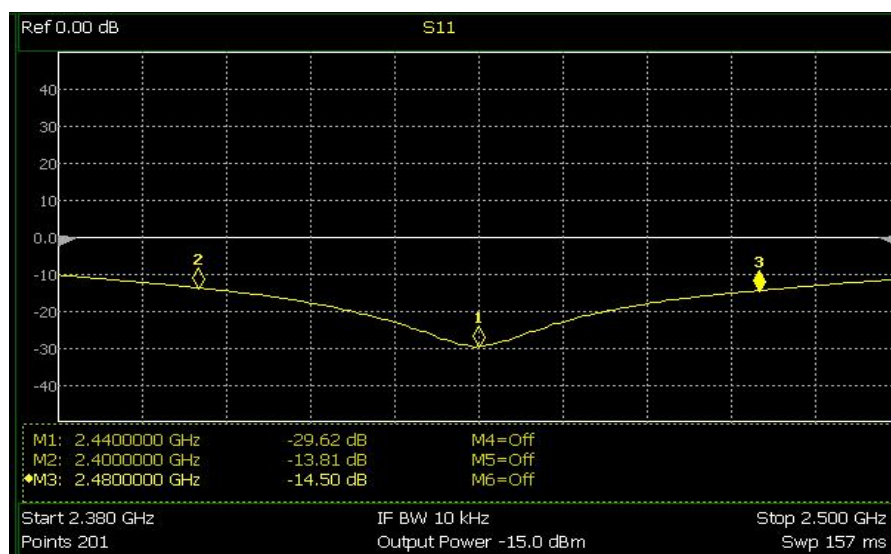

VSWR

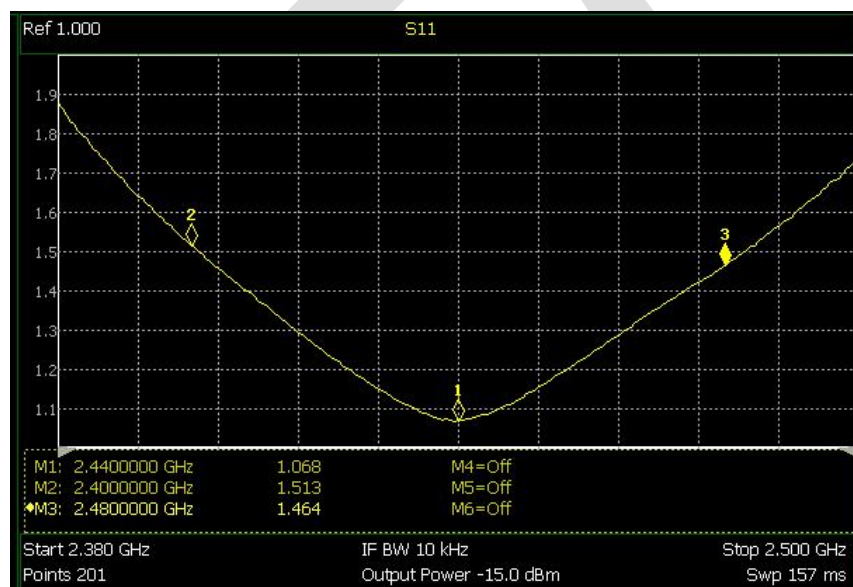

Mark	Frequency	VSWR
1	2400 MHz	1.513
2	2440 MHz	1.068
3	2480 MHz	1.464

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=

ANGLES = ± HOLEDIA = ±

SCALE : N/A

UNIT : mm

DRAWN BY : Sera

CHECKED BY: XD

DESIGNED BY: Sera

APPROVED BY: XD

TITLE : LTC2-2405-3216 Specification

**NewTranx Information Technology
(Shenzhen) Co., Ltd.**

ADD:Room 1302-1303, Block A, Nanshan Zhiqun Industrial Park
No. 3185, Shahe West Road, Shuguang Community, Xili Street
Nanshan District, Shenzhen City

**DOCUMENT
NO.**


3216

SPEC REV.


P1

Radiation Pattern


The Gain pattern is measured in FAR-field chamber. DUT is placed on the table of rotator, a standard horn antenna and Vector Network Analyzer is used to collect data.

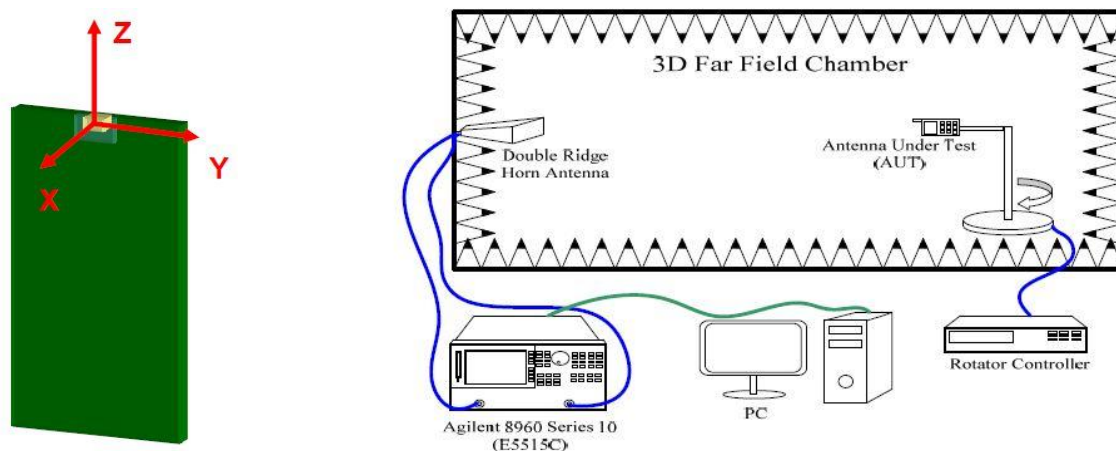

Effi

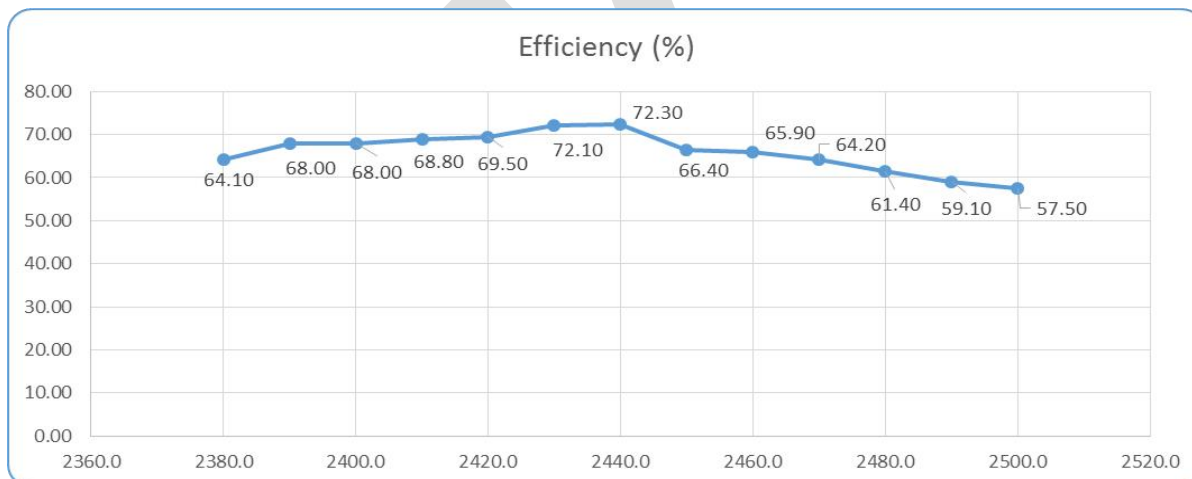

Gain

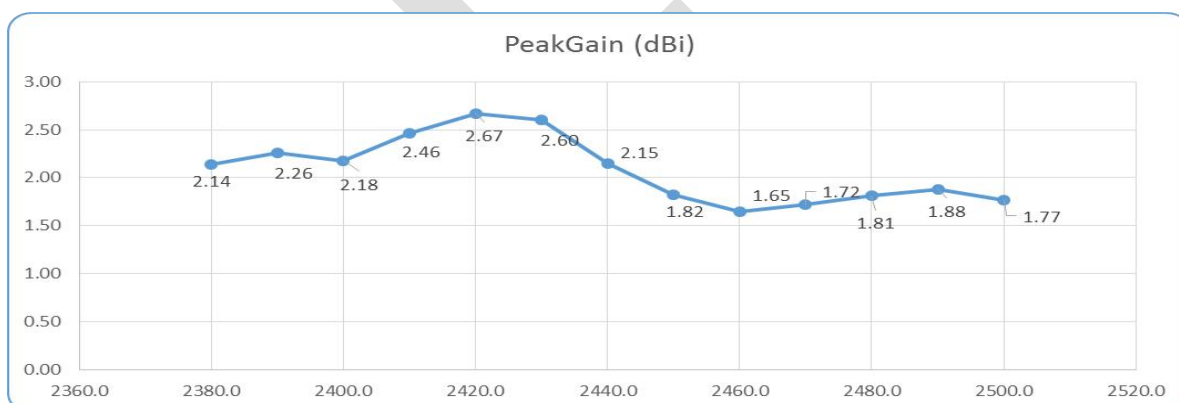

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=

ANGLES = ± HOLEDIA = ±

SCALE : N/A

UNIT : mm

DRAWN BY : Sera

CHECKED BY: XD

DESIGNED BY: Sera

APPROVED BY: XD

TITLE : LTC2-2405-3216 Specification

NewTranx Information Technology
(Shenzhen) Co., Ltd.

ADD:Room 1302-1303, Block A, Nanshan Zhiq Industrial Park,
No. 3185, Shahe West Road, Shuguang Community, Xili Street,
Nanshan District, Shenzhen City


DOCUMENT
NO.

3216


SPEC REV.

P1


◎ 3D Gain Pattern (2400 MHz)

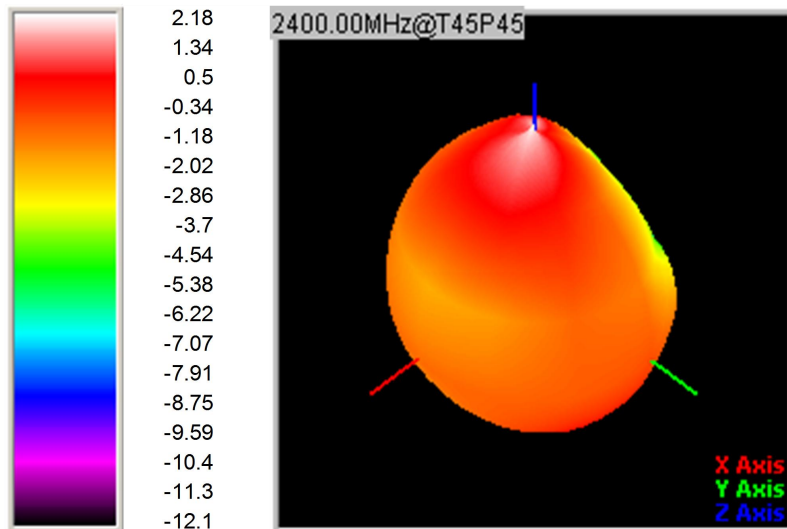

◎ 3D Gain Pattern (2440 MHz)

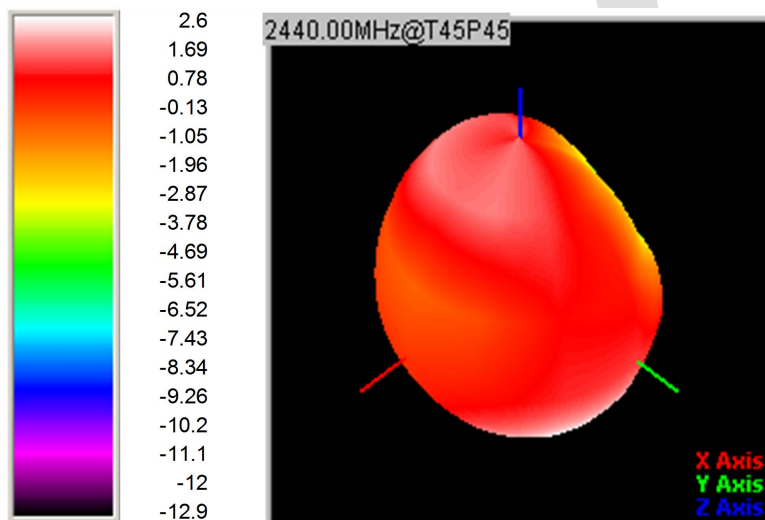

◎ 3D Gain Pattern (2480 MHz)

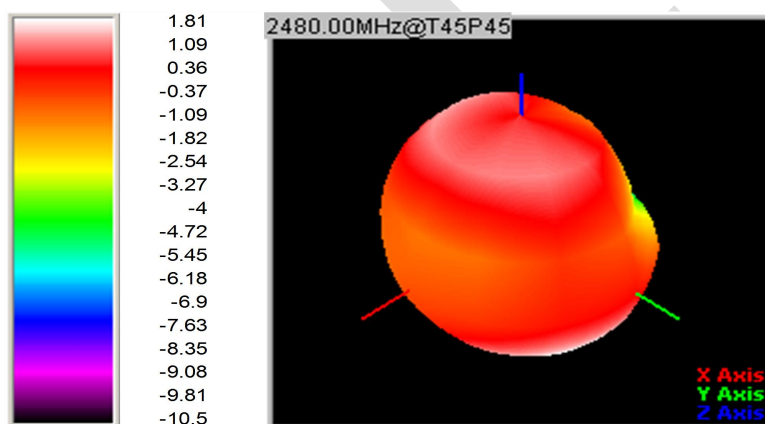

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=

ANGLES = ± HOLEDIA = ±

SCALE : N/A

UNIT : mm

DRAWN BY : Sera

CHECKED BY: XD

DESIGNED BY: Sera

APPROVED BY: XD

NewTranx Information Technology
(Shenzhen) Co., Ltd.

These drawings and specifications are the property of Litongchuang Technology Limited and shall not be reproduced or used as a basis for or equipment without

TITLE : LTC2-2405-3216 Specification

DOCUMENT
NO.

3216

SPEC REV.

P1

7. Environmental Characteristics

(1) Reliability Test

Item	Condition	Specification
Thermal shock	1. 30 ± 3 minutes at $-40^{\circ}\text{C}\pm 5^{\circ}\text{C}$, 2. Convert to $+105^{\circ}\text{C}$ (5 minutes) 3. 30 ± 3 minutes at $+105^{\circ}\text{C}\pm 5^{\circ}\text{C}$, 4. Convert to -40°C (5 minutes) 5. Total 100 continuous cycles	No apparent damage Fulfill the electrical spec. after test.
Humidity resistance	1. Humidity: 85% R.H. 2. Temperature: $85\pm 5^{\circ}\text{C}$ 3. Time: 1000 hours.	No apparent damage Fulfill the electrical spec. after test.
High temperature resistance	1. Temperature: $150^{\circ}\text{C}\pm 5^{\circ}\text{C}$ 2. Time: 1000 hours.	No apparent damage Fulfill the electrical spec. after test.
Low temperature resistance	1. Temperature: $-40^{\circ}\text{C}\pm 5^{\circ}\text{C}$ 2. Time: 1000 hours.	No apparent damage Fulfill the electrical spec. after test.
Soldering heat resistance	1. Solder bath temperature : $260\pm 5^{\circ}\text{C}$ 2. Bathing time: 10 ± 1 seconds	No apparent damage
Solderability	The dipped surface of the terminal shall be at least 95% covered with solder after dipped in solder bath of $245\pm 5^{\circ}\text{C}$ for 3 ± 1 seconds.	No apparent damage

(2) Storage Condition

(a) At warehouse:

The temperature should be within $0\sim 30^{\circ}\text{C}$ and humidity should be less than 60% RH.

The product should be used within 1 year from the time of delivery.

(b) On board:

The temperature should be within $-40\sim 85^{\circ}\text{C}$ and humidity should be less than 85% RH.

(3) Operating Temperature Range

Operating temperature range : -40°C to $+105^{\circ}\text{C}$.

UNLESS OTHER SPECIFIED TOLERANCES ON :

$X=\pm$ $X.X=\pm$ $X.XX=$
ANGLES = $\pm$ **HOLE DIA** = $\pm$

**NewTranx Information Technology
(Shenzhen) Co., Ltd.**

SCALE : N/A

UNIT : mm

DRAWN BY : Sera

CHECKED BY: XD

DESIGNED BY: Sera

APPROVED BY: XD

ADD:Room 1302-1303, Block A, Nanshan Zhiqiu Industrial Park,
No. 3185, Shahe West Road, Shuguang Community, Xili Street,
Nanshan District, Shenzhen City

TITLE : LTC2-2405-3216 Specification


**DOCUMENT
NO.**

3216

SPEC REV.

P1

8. Recommended Reflow Soldering

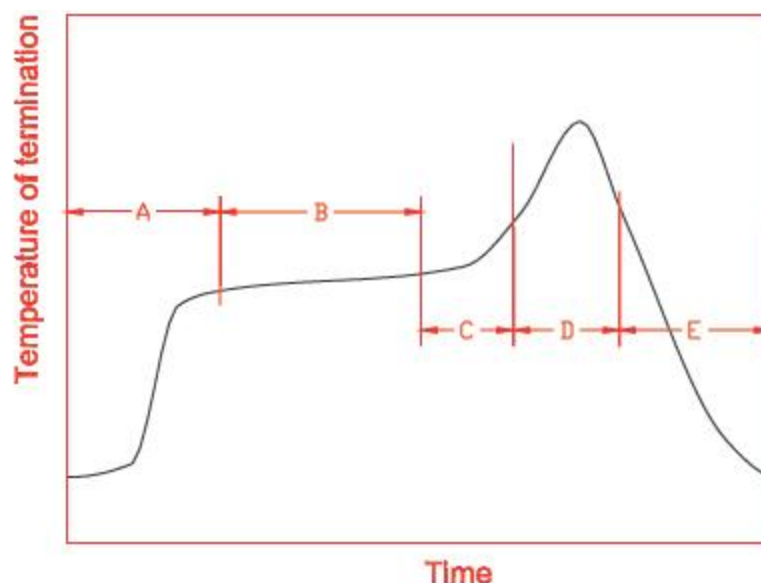

A	1 st rising temperature	The normal to Preheating temperature	30s to 60s
B	Preheating	140°C to 160°C	60s to 120s
C	2 nd rising temperature	Preheating to 200°C	20s to 40s
D	Main heating	if 220°C	50s~60s
		if 230°C	40s~50s
		if 240°C	30s~40s
		if 250°C	20s~40s
		if 260°C	20s~40s
E	Regular cooling	200°C to 100°C	1°C/s ~ 4°C/s

*reference: J-STD-020C

(1) Soldering Gun Procedure

Note the follows, in case of using solder gun for replacement.

- (a) The tip temperature must be less than 350° C for the period within 3 seconds by using soldering gun under 30 W.
- (b) The soldering gun tip shall not touch this product directly.

(2) Soldering Volume


Note that excess of soldering volume will easily get crack the body of this product.

UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=		NewTranx Information Technology (Shenzhen) Co., Ltd.		
A N G L E S = ± H O L E D I A = ±				
SCALE : N/A	UNIT : mm	ADD:Room 1302-1303, Block A, Nanshan Zhiqu Industrial Park, No. 3185, Shahe West Road, Shuguang Community, Xili Street Nanshan District, Shenzhen City		
DRAWN BY : Sera	CHECKED BY: XD			
DESIGNED BY: Sera	APPROVED BY: XD			
TITLE : LTC2-2405-3216 Specification		DOCUMENT NO.	3216	SPEC REV.
				P1

9. Taping Package and Label Marking: (unit: mm)


(1) Quantity/Reel: 5000pcs/Reel

(2) Carrier tape dimensions

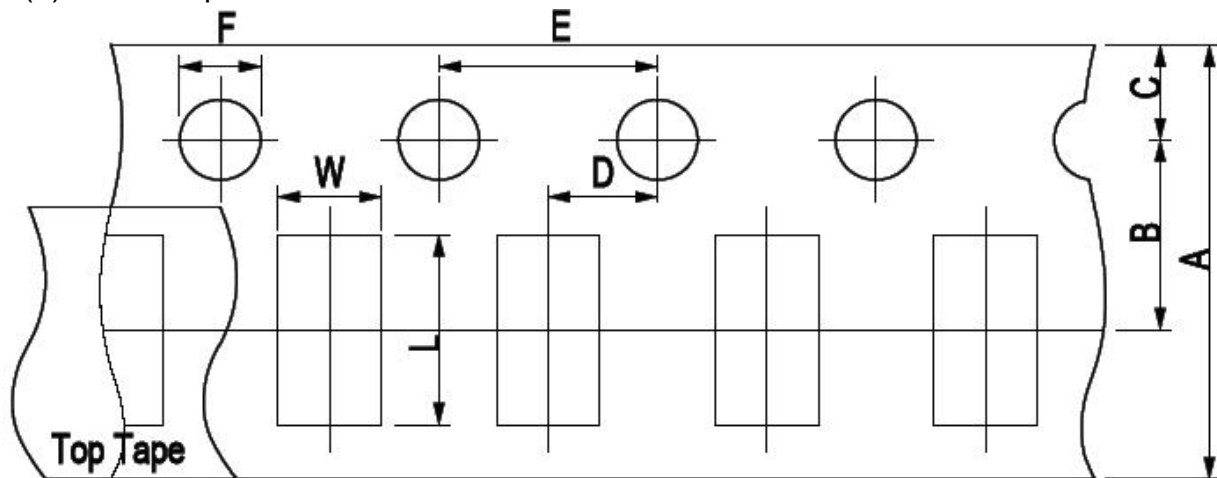

Type	A	B	C	D	E	F	L	W
2450-21	8.00 ± 0.3	3.50 ± 0.05	1.75 ± 0.1	2.00 ± 0.05	4.00 ± 0.1	1.50 ± 0.1	2.30 ± 0.1	1.55 ± 0.1

(3) Taping reel dimensions

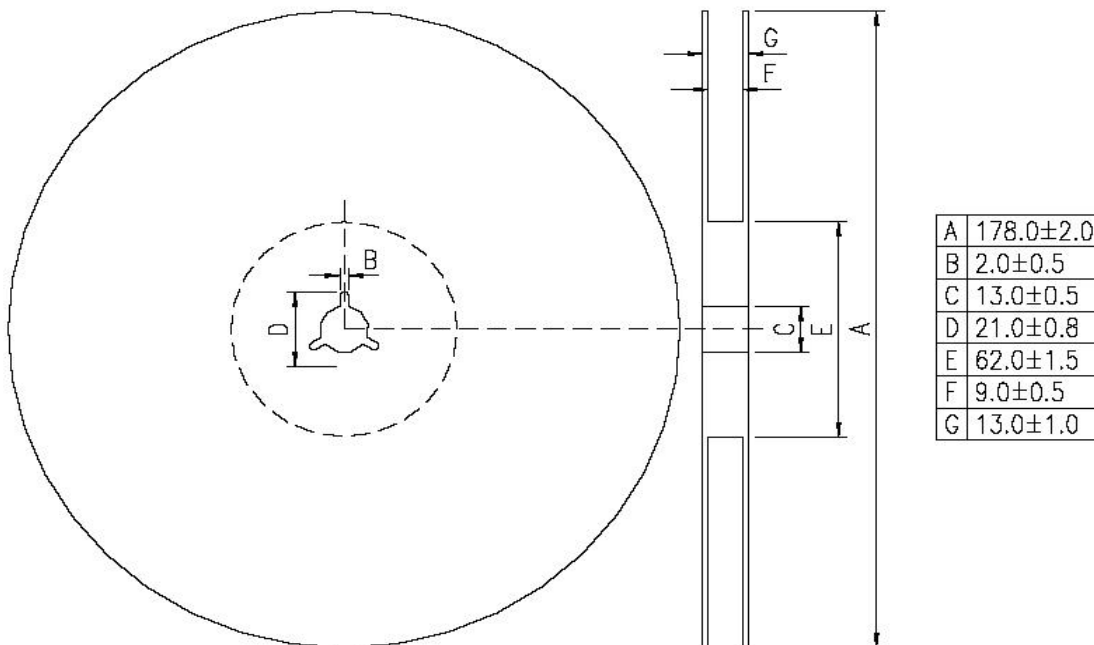

UNLESS OTHER SPECIFIED TOLERANCES ON :

X=± X.X=± X.XX=

ANGLES = ± HOLEDIA = ±

SCALE : N/A

UNIT : mm

DRAWN BY : Sera

CHECKED BY: XD

DESIGNED BY: Sera

APPROVED BY: XD

TITLE : LTC2-2405-3216 Specification

**NewTranx Information Technology
(Shenzhen) Co., Ltd.**

ADD:Room 1302-1303, Block A, Nanshan Zhiqiu Industrial Park,
No. 3185, Shahe West Road, Shuguang Community, Xili Street
Nanshan District, Shenzhen City

**DOCUMENT
NO.**

3216

SPEC REV.

P1