


TEST REPORT

Product Name : Tablet
Brand Name : N/A
Model : S26ultra
Series Model : See page 6
FCC ID : 2BMLZ-S26ULTRA
Applicant : **HENGXING WEIYE TECHNOLOGY CO., LIMITED**
Address : ROOM 1602 16/F LUCKY CENTRENO 165-171 WAN CHAI
ROAD WAN CHAI HK
Manufacturer : **SHENZHEN TENG HAO DA INDUSTRIAL Co.,Ltd**
Address : Floor 5 No.4 Buliding LeZhuJiao Industrial Park Hangcheng Street
Baoan District Shen Zhen
Standard(s) : FCC CFR Title 47 Part 15 Subpart B
ICES-003 Issue 7
Date of Receipt : Feb. 24, 2026
Date of Test : Feb. 24, 2026~ Mar. 03, 2026
Issued Date : Mar. 04, 2026

Issued By: **Guangdong Asia Hongke Test Technology Limited**
B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street,
Bao'an District, Shenzhen, Guangdong, China
Tel.: +86 0755-230967639 Fax.: +86 0755-230967639

Reviewed by: 
Aalen.Ye

Approved by: 
Allen Wang



Note: This device has been tested and found to comply with the standard(s) listed, this test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory. This report shall not be reproduced except in full, without the written approval of Guangdong Asia Hongke Test Technology Limited. If there is a need to alter or revise this document, the right belongs to Guangdong Asia Hongke Test Technology Limited, and it should give a prior written notice of the revision document. This test report must not be used by the client to claim product endorsement.



Report Revise Record

Report Version	Issued Date	Notes
M0	Mar. 04, 2026	Initial Release

Contents

1	TEST SUMMARY.....	4
1.1	TEST STANDARDS	4
1.2	TEST SUMMARY	4
1.3	TEST FACILITY	5
1.4	MEASUREMENT UNCERTAINTY	5
2	GENERAL INFORMATION	6
2.1	ENVIRONMENTAL CONDITIONS	6
2.2	GENERAL DESCRIPTION OF EUT	6
2.3	DESCRIPTION OF TEST MODES	6
2.4	SPECIAL ACCESSORIES	7
2.5	EQUIPMENT LIST FOR THE TEST	7
3	TEST CONDITIONS AND RESULTS.....	8
3.1	CONDUCTED EMISSION	8
3.2	RADIATED EMISSION.....	11
4	TEST SETUP PHOTOGRAPHS OF EUT	21
5	PHOTOGRAPHS OF EUT	22

1 TEST SUMMARY

1.1 Test Standards

The tests were performed according to following standards:

[47 CFR FCC Part 15 Subpart B](#) - Unintentional Radiators

[ICES-003 Issue 7](#) - Information Technology Equipment (including Digital Apparatus)

[ANSI C63.4: 2014](#) – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

1.2 Test Summary

Test Item	Section in CFR 47	Test Result
AC Power Line Conducted Emission	FCC Part 15 B (Section15.107) ICES-003 Issue 7 (Section 3.1)	PASS
Electric Field Radiated Emissions	FCC Part 15 B (Section15.109) ICES-003 Issue 7 (Section3.2)	PASS

1.3 Test Facility

Test Laboratory:

Guangdong Asia Hongke Test Technology Limited

B1/F, Building 11, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

The test facility is recognized, certified or accredited by the following organizations:

FCC-Registration No.: 251906 Designation Number: CN1376

Guangdong Asia Hongke Test Technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

IC —Registration No.: 31737 CAB identifier: CN0165

The 3m Semi-anechoic chamber of Guangdong Asia Hongke Test Technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 31737

A2LA-Lab Cert. No.: 7133.01

Guangdong Asia Hongke Test Technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

1.4 Measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Guangdong Asia Hongke Test Technology Limited's quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Asia Hongke laboratory is reported:

Test	Measurement Uncertainty	Notes
Power Line Conducted Emission	9KHz~30MHz ± 1.20 dB	(1)
Radiated Emission	9KHz~30MHz ± 3.10 dB	(1)
Radiated Emission	30MHz~1GHz ± 3.75 dB	(1)
Radiated Emission	1GHz~18GHz ± 3.88 dB	(1)
Radiated Emission	18GHz~40GHz ± 3.88 dB	(1)
RF power, conducted	30MHz~6GHz ± 0.16 dB	(1)
RF power density, conducted	± 0.24 dB	(1)
Spurious emissions, conducted	± 0.21 dB	(1)
Temperature	$\pm 1^{\circ}\text{C}$	(1)
Humidity	$\pm 3\%$	(1)
DC and low frequency voltages	$\pm 1.5\%$	(1)
Time	$\pm 2\%$	(1)
Duty cycle	$\pm 2\%$	(1)

The report uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty Multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%

2 GENERAL INFORMATION

2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2 General Description of EUT

Product Name:	Tablet
Model/Type reference:	S26ultra
Serial Model:	X17Ultra, X9+, X9 Ultra, S27Ultra, K26 ultra, X26Ultra, X26MAX ,Tab S10 FE+, Tab S11, Tab S11Ultra, Tab S12Ultra, i17 Pro, i17 Pro Max, Air1, Air11pro, Air13, Air13mini, Air14pro
Power Supply:	DC 5V from adapter DC 3.80V from Rechargeable Li-ion battery
Hardware Version:	WT_F36-Y_61&62_MP_BBA_MB_V9.2_20241216
Software Version:	N/A
I.O port	Type-C

2.3 Description of Test Modes

The device, according to the function of the EUT, select the following operating modes for testing.

Test Modes:	
Mode 1	Data transfer with PC
Mode 2	Charging with adapter

Note:

1. Pre-testing on all test modes, only the worst case mode was recorded in this report.
2. After the pre-testing, the following test modes were found to be the worst mode for the corresponding test items and recorded in the report

Test item	Test mode (Worse case operation mode)
EMI	Test mode 1

2.4 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

Description	Manufacturer	Model	Serial No.	Provided by	Other
Notebook	Lenovo	T450s	TP00049A	Test lab	/
Adapter	Lenovo	A17-065N2A	SA10J20161	Test lab	/
/	/	/	/	/	/
/	/	/	/	/	/

2.5 Equipment List for the Test

Radiation Emission measurement						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
☒ 1	EMI Measuring Receiver	R&S	ESR	101160	2025.09.23	2026.09.22
☒ 2	Low Noise Pre Amplifier	SCHWARZBEC K	BBV 9745	00282	2025.09.23	2026.09.22
☒ 3	Low Noise Pre Amplifier	COM-MW	DLAN8-18000- 40000-1066	08233242	2025.06.26	2026.06.25
☒ 4	Low Noise Pre Amplifier	COM-MW	DLAN8-1000- 18000-1021	05231256	2025.06.26	2026.06.25
☒ 5	Spectrum Analyzer	R&S	FSV40	101470	2025.09.23	2026.09.22
☒ 6	Passive Loop	ETS	6512	00165355	2024.08.29	2026.08.28
☒ 7	TRILOG Super Broadband test Antenna	SCHWARZBEC K	VULB9168	01434	2024.08.29	2027.08.28
☒ 8	Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	452	2024.08.29	2027.08.28
☒ 9	Horn Antenna 15-40GHz	SCHWARZBEC K	BBHA9170	BBHA9170367	2024.08.28	2027.08.27
☒ 10	6dB Attenuator	JFW	50FPE-006	4360846-949-1	2025.09.23	2026.09.22
☒ 11	Filter	COM-MW	ZBSF6-C5150- 5350-1049	1049	2025.09.23	2026.09.22
☒ 12	Filter	COM-MW	ZBSF6-C5470- 5725-1750	1750	2025.09.23	2026.09.22
☒ 13	Filter	COM-MW	ZBSF6-C5725- 5850-1627	1627	2025.09.23	2026.09.22
☒ 14	RE Software	EZ	EZ-EMC_RE	Ver.AIT-03A	N/A	N/A

☒ Conducted Emission Test Equipment (AiT shielded room)						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1	EMI Test Receiver	R&S	ESPI	100771	2025.09.23	2026.09.22
2	LISN	R&S	NNLK 8129	8130179	2025.09.23	2026.09.22
3	ISN	TESEQ	T800	29429	2025.09.23	2026.09.22
4	Pulse Limiter	R&S	ESH3-Z2	102789	2025.09.23	2026.09.22
5	CE Software	EZ	EZ-EMC_CE	Ver.AIT- 03A	N/A	N/A

Note: ☐ is not applicable in this Test Report. ☒ is applicable in this test report.

3 TEST CONDITIONS AND RESULTS

3.1 Conducted Emission

LIMIT


For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

FREQUENCY (MHz)	☐ Class A (dBuV)		☒ Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

TEST PROCEDURE


- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4-2014.
- Support equipment, if needed, was placed as per ANSI C63.4-2014.
- All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4-2014.
- The EUT received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- All support equipments received AC power from a second LISN, if any.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- During the above scans, the emissions were maximized by cable manipulation.


TEST SETUP

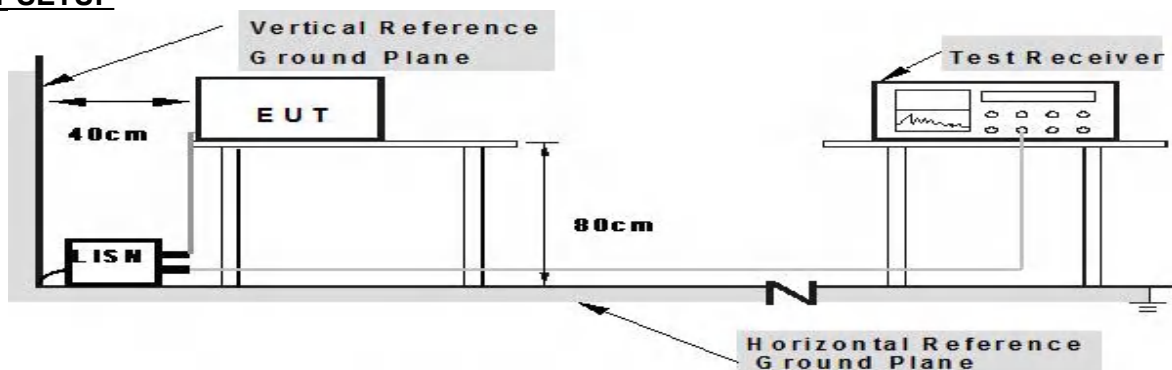

**Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

TEST RESULTS

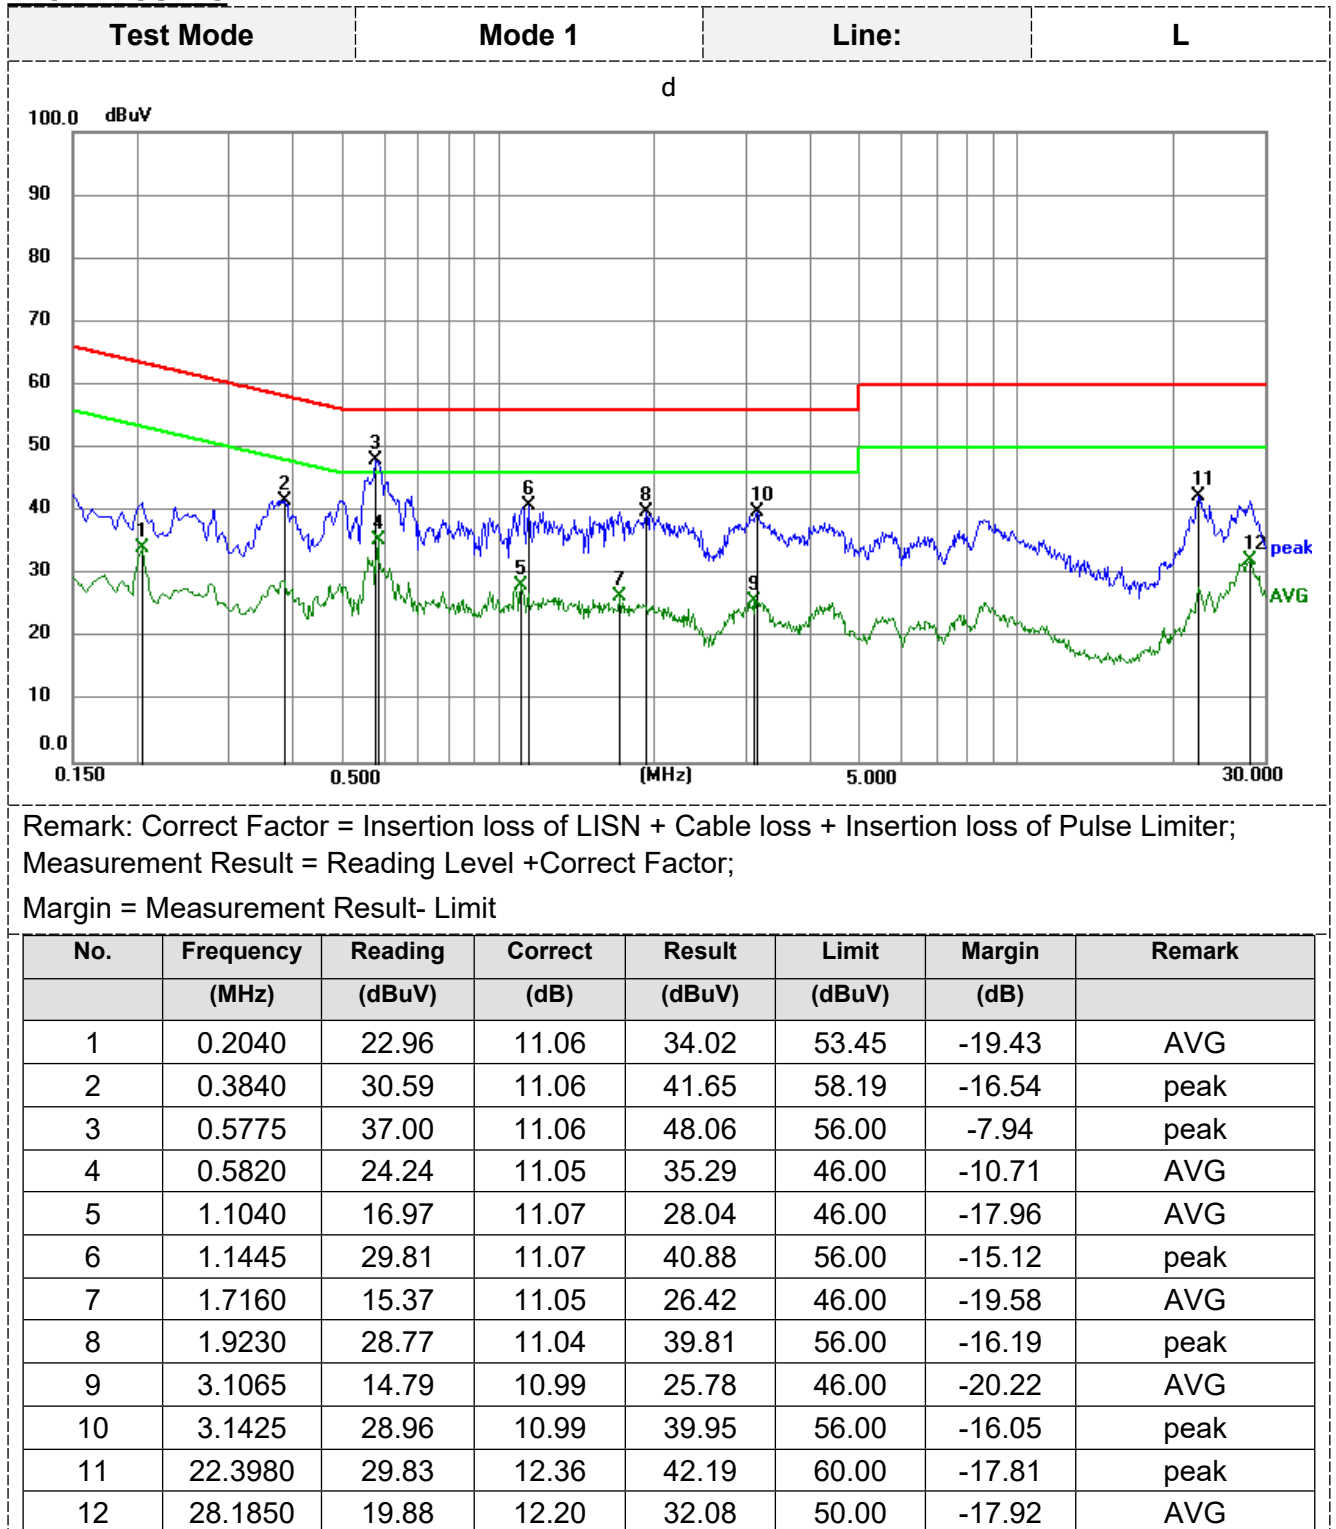

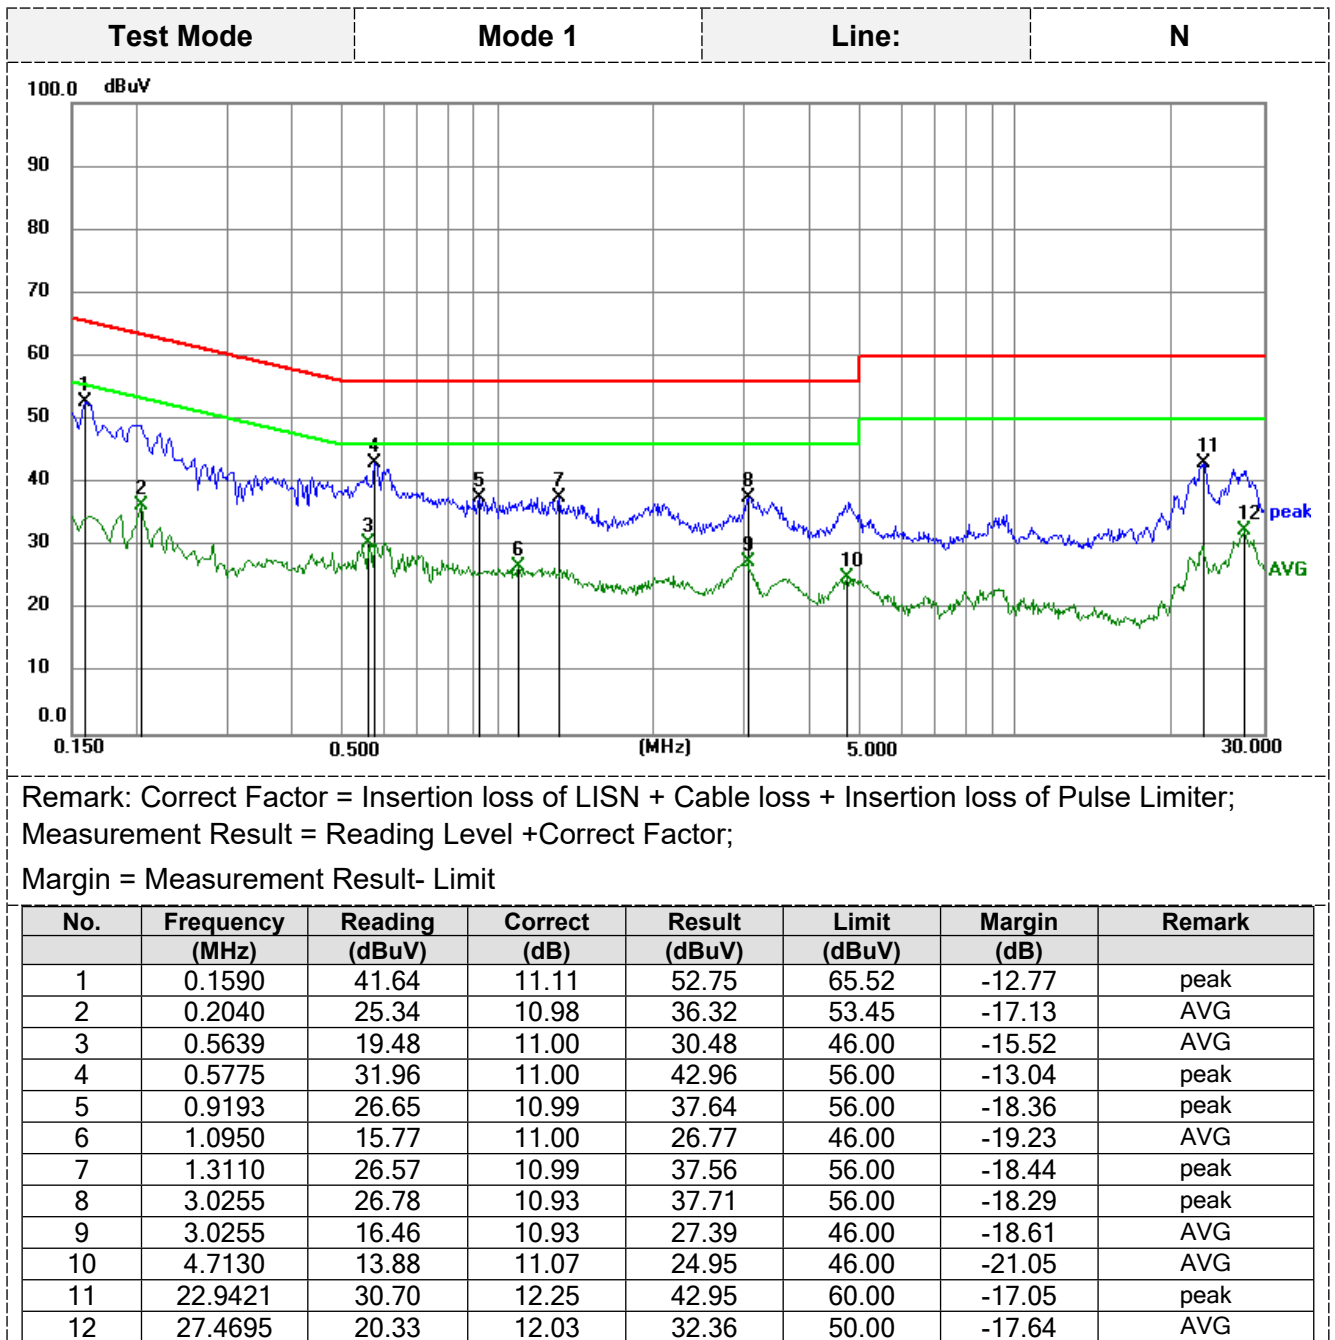

3.2 Radiated Emission

LIMITS

LIMITS OF RADIATED EMISSION MEASUREMENT (Below 1000MHz)

FREQUENCY (MHz)	☐ Class A (at 10m)	☒ Class B (at 3m)
	dBuV/m	dBuV/m
30 ~ 88	39.0	40.0
88 ~ 216	43.5	43.5
216 ~ 960	46.5	46.0
Above 960	49.5	54.0

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (at 3m) dBuV/m		Class B (at 3m) dBuV/m	
	Peak	Avg	Peak	Avg
Above 1000	80	60	74	54

Notes:


- 1) The limit for radiated test was performed according to as following:
CISPR 22/ FCC PART 15B /ICES-003.
- 2) The tighter limit applies at the band edges.
- 3) Emission level (dBuV/m)=20log Emission level (uV/m).

TEST PROCEDURE


- a) The measuring distance of at 3m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- e) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP (AV) Limits and then no additional QP Mode measurement performed.
- f) For the actual test configuration, please refer to the related Item –EUT Test Photos.

TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

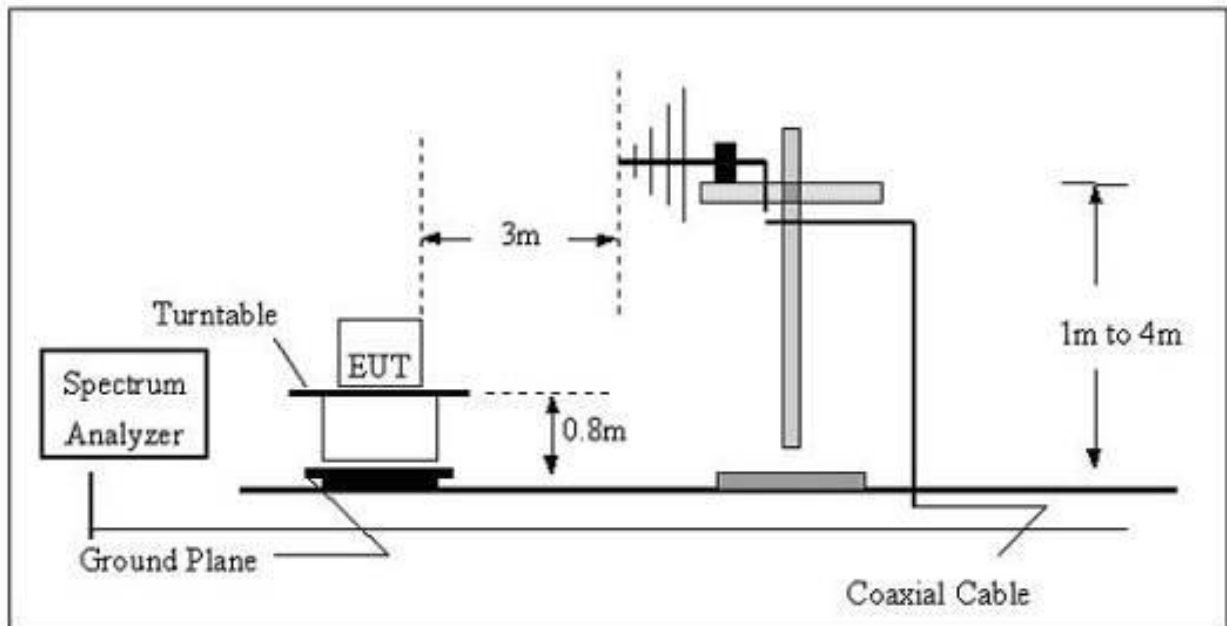

(B) Radiated Emission Test Set-UP Frequency Above 1GHz

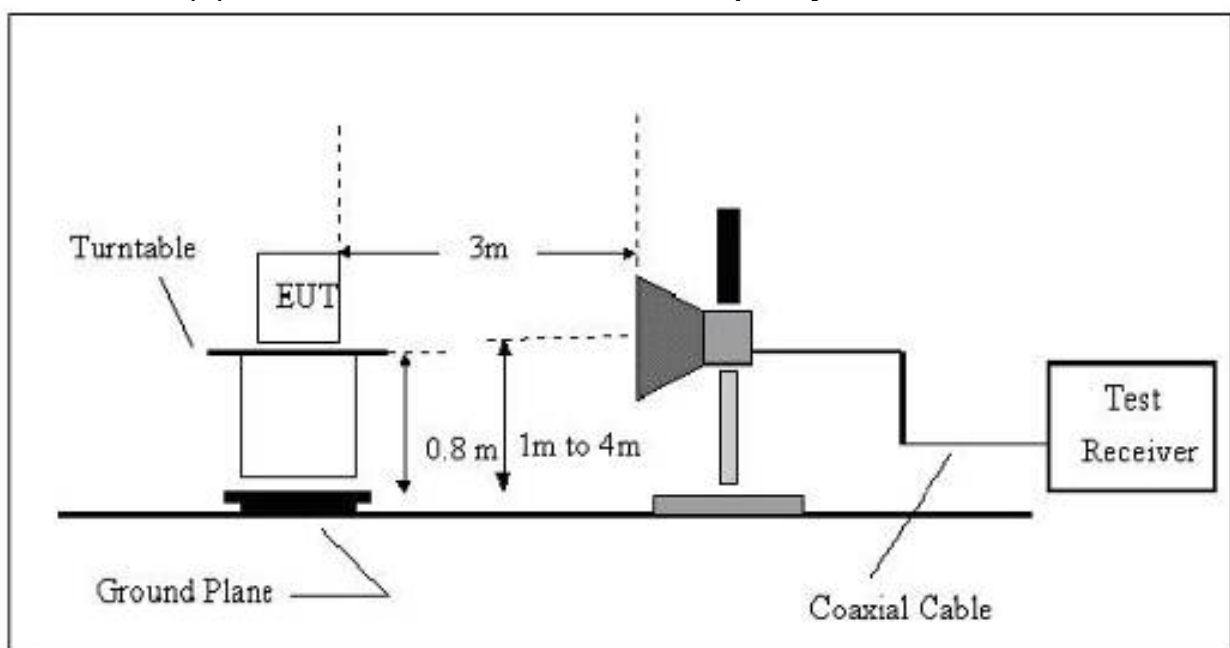

30-1GHz:

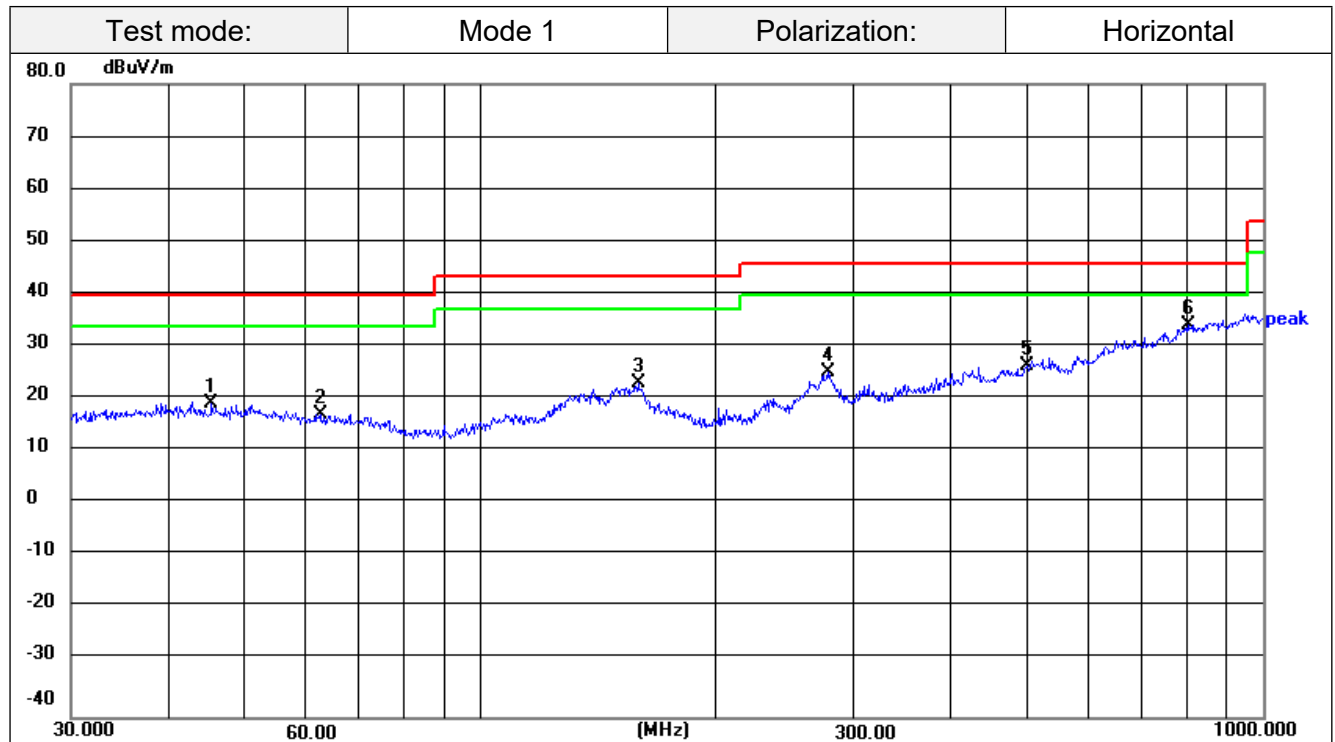


Remark:

Emission Level = Reading + Factor;


Factor = Antenna Factor + Cable Loss – Pre-amplifier;

Margin= Emission Level - Limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	45.3754	29.06	-9.50	19.56	40.00	-20.44	peak
2	62.4313	28.13	-10.59	17.54	40.00	-22.46	peak
3	159.2251	32.25	-8.96	23.29	43.50	-20.21	peak
4	278.0668	34.15	-8.52	25.63	46.00	-20.37	peak
5	499.4246	29.20	-2.60	26.60	46.00	-19.40	peak
6	801.7863	30.67	3.75	34.42	46.00	-11.58	peak

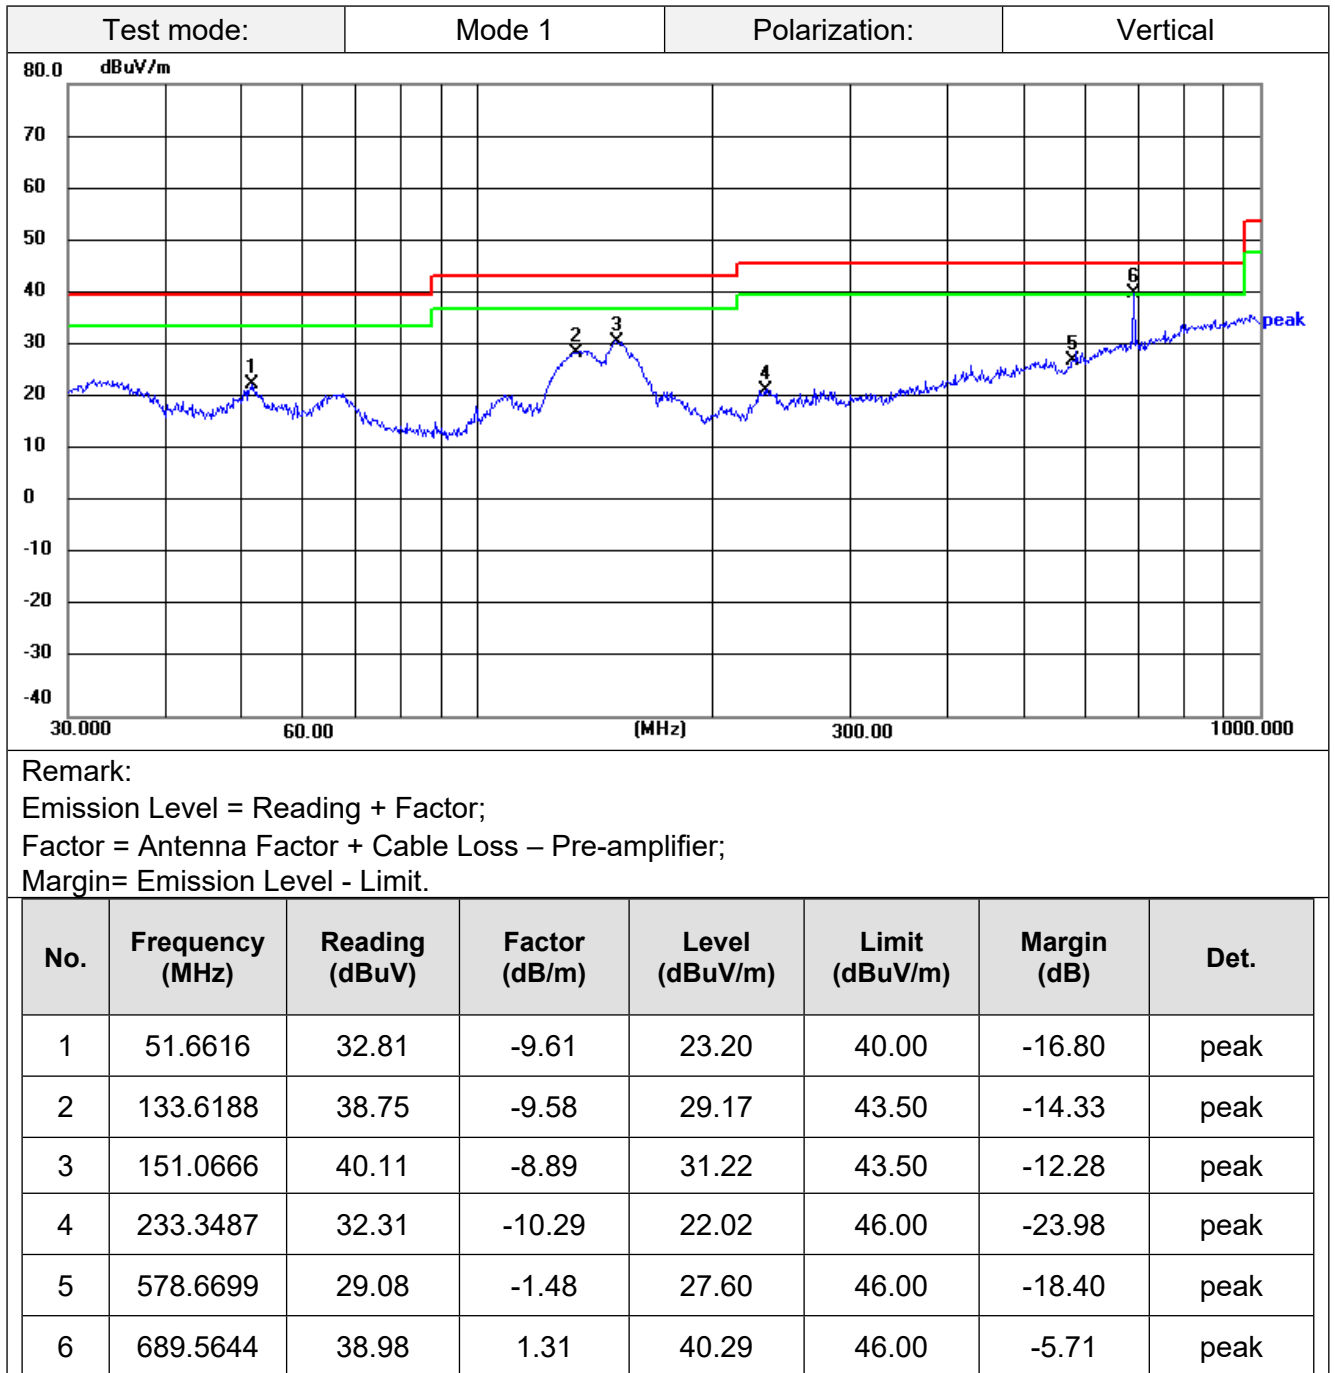

Above 1G:

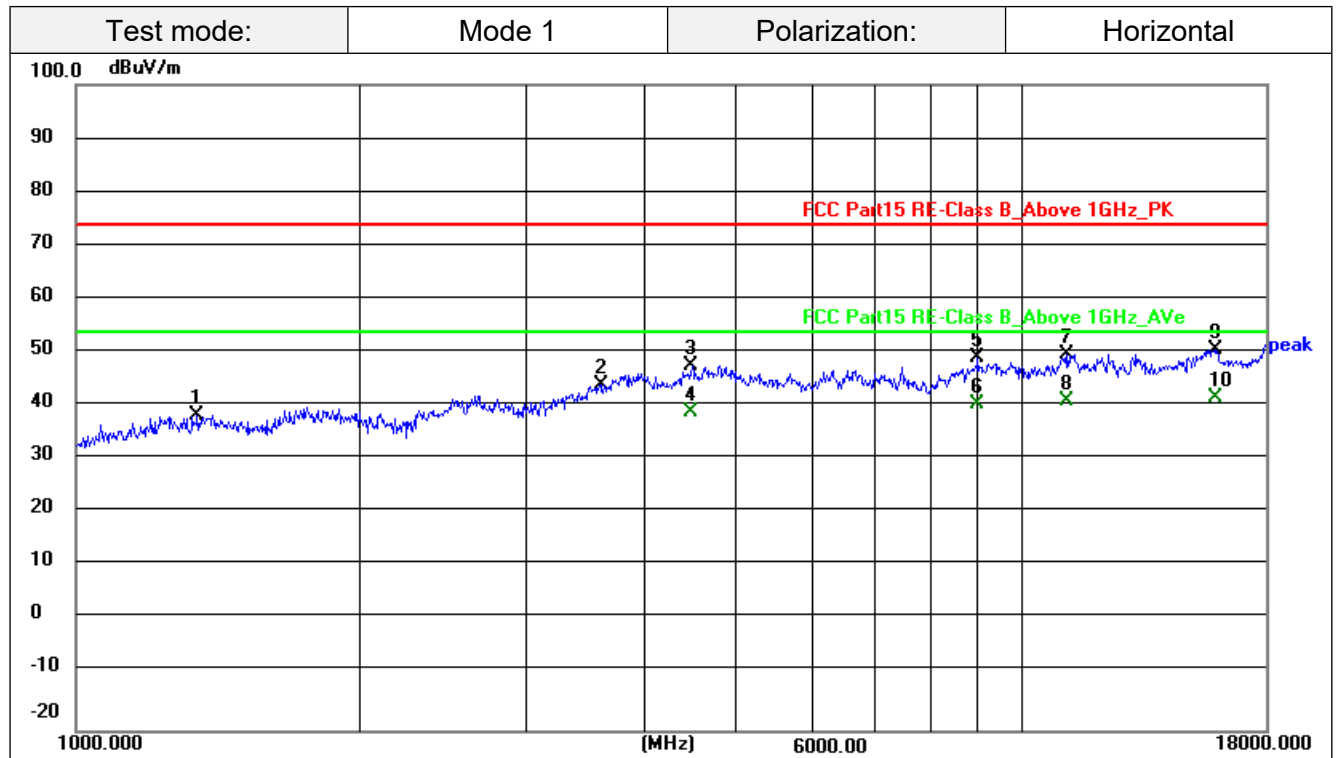


Remark:

Emission Level = Reading + Factor;

Factor = Antenna Factor + Cable Loss – Pre-amplifier;

Margin= Emission Level - Limit.

No.	Frequency	Reading	Factor	Level	Limit	Margin	Det.
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1346.380	64.51	-25.90	38.61	74.00	-35.39	peak
2	3584.709	62.83	-18.47	44.36	74.00	-29.64	peak
3	4483.446	63.66	-15.65	48.01	74.00	-25.99	peak
4	4483.446	54.90	-15.65	39.25	54.00	-14.75	AVG
5	8956.208	53.61	-4.24	49.37	74.00	-24.63	peak
6	8956.208	44.93	-4.24	40.69	54.00	-13.31	AVG
7	11108.157	50.89	-0.89	50.00	74.00	-24.00	peak
8	11108.157	42.22	-0.89	41.33	54.00	-12.67	AVG
9	15923.882	51.38	-0.55	50.83	74.00	-23.17	peak
10	15923.882	42.53	-0.55	41.98	54.00	-12.02	AVG

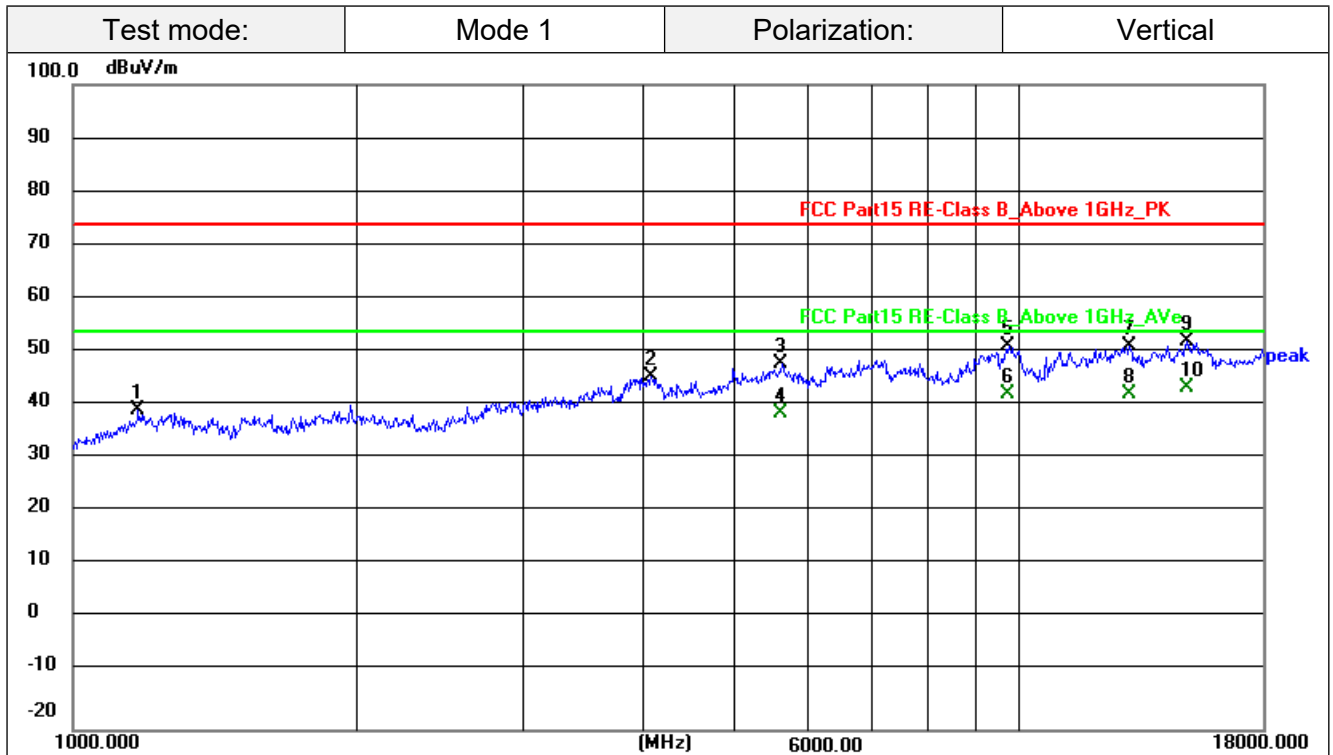


Remark:

Emission Level = Reading + Factor;

Factor = Antenna Factor + Cable Loss – Pre-amplifier;

Margin= Emission Level - Limit.

No.	Frequency	Reading	Factor	Level	Limit	Margin	Det.
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1173.999	65.11	-25.69	39.42	74.00	-34.58	peak
2	4079.102	62.56	-16.86	45.70	74.00	-28.30	peak
3	5605.889	60.17	-12.15	48.02	74.00	-25.98	peak
4	5605.889	51.22	-12.15	39.07	54.00	-14.93	AVG
5	9733.657	54.77	-3.32	51.45	74.00	-22.55	peak
6	9733.657	45.83	-3.32	42.51	54.00	-11.49	AVG
7	13048.503	53.47	-2.15	51.32	74.00	-22.68	peak
8	13048.503	44.54	-2.15	42.39	54.00	-11.61	AVG
9	14968.770	52.78	-0.60	52.18	74.00	-21.82	peak
10	14968.770	44.28	-0.60	43.68	54.00	-10.32	AVG

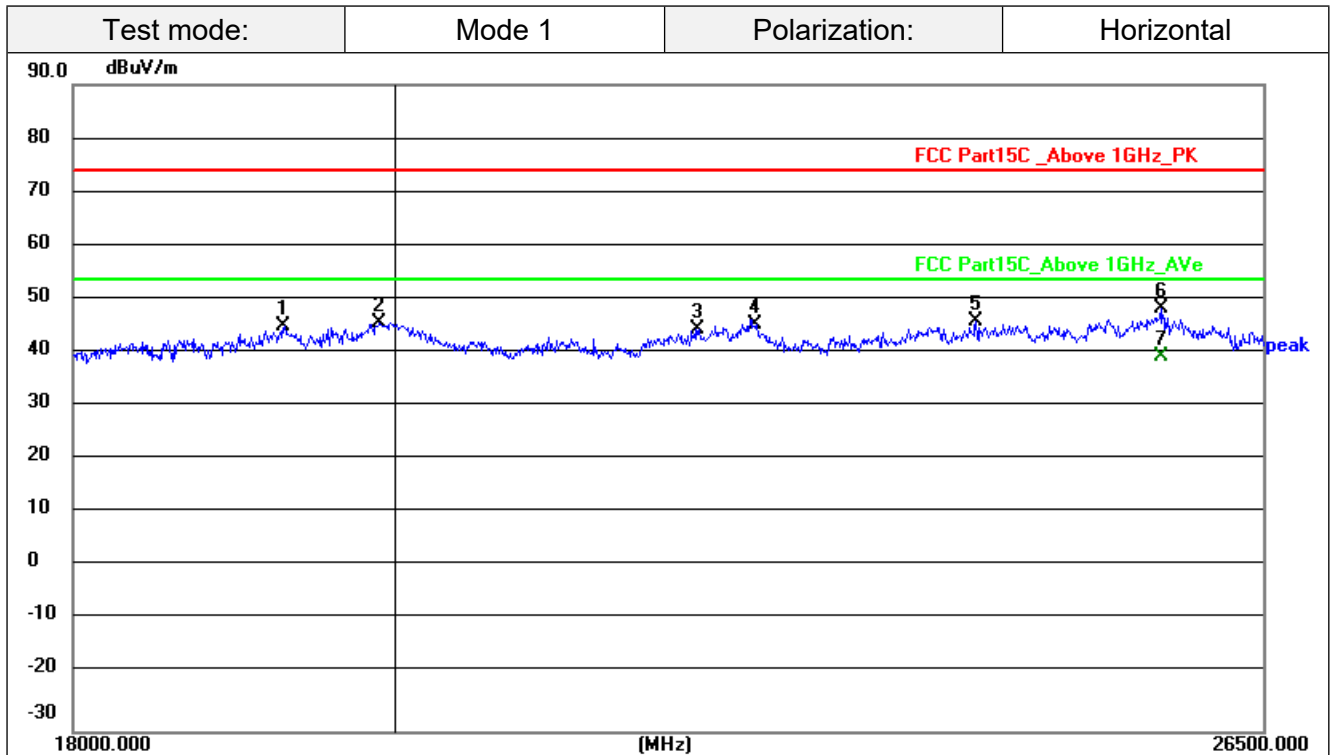


Remark:

Emission Level = Reading + Factor;

Factor = Antenna Factor + Cable Loss – Pre-amplifier;

Margin= Emission Level - Limit.

No.	Frequency	Reading	Factor	Level	Limit	Margin	Det.
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	19288.841	62.93	-17.55	45.38	74.00	-28.62	peak
2	19890.387	62.77	-16.88	45.89	74.00	-28.11	peak
3	22064.479	61.75	-16.99	44.76	74.00	-29.24	peak
4	22476.196	62.94	-17.26	45.68	74.00	-28.32	peak
5	24144.304	61.77	-15.62	46.15	74.00	-27.85	peak
6	25638.992	64.70	-16.13	48.57	74.00	-25.43	peak
7	25638.992	55.78	-16.13	39.65	54.00	-14.35	AVG

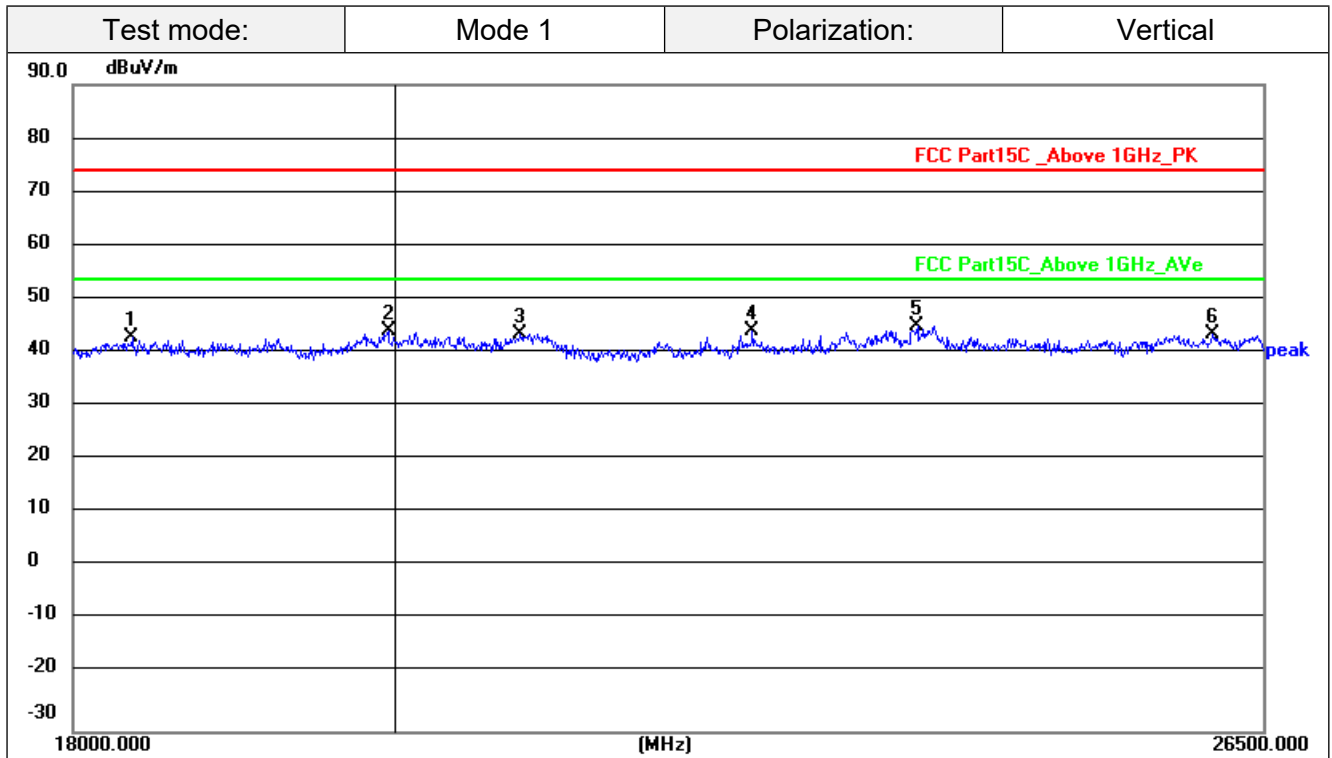


Remark:


Emission Level = Reading + Factor;

Factor = Antenna Factor + Cable Loss – Pre-amplifier;

Margin= Emission Level - Limit.

No.	Frequency	Reading	Factor	Level	Limit	Margin	Det.
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	18351.483	61.51	-18.31	43.20	74.00	-30.80	peak
2	19943.540	61.10	-16.82	44.28	74.00	-29.72	peak
3	20818.397	60.34	-16.43	43.91	74.00	-30.09	peak
4	22449.263	61.52	-17.24	44.28	74.00	-29.72	peak
5	23690.116	61.32	-15.93	45.39	74.00	-28.61	peak
6	26081.068	59.28	-15.53	43.75	74.00	-30.25	peak

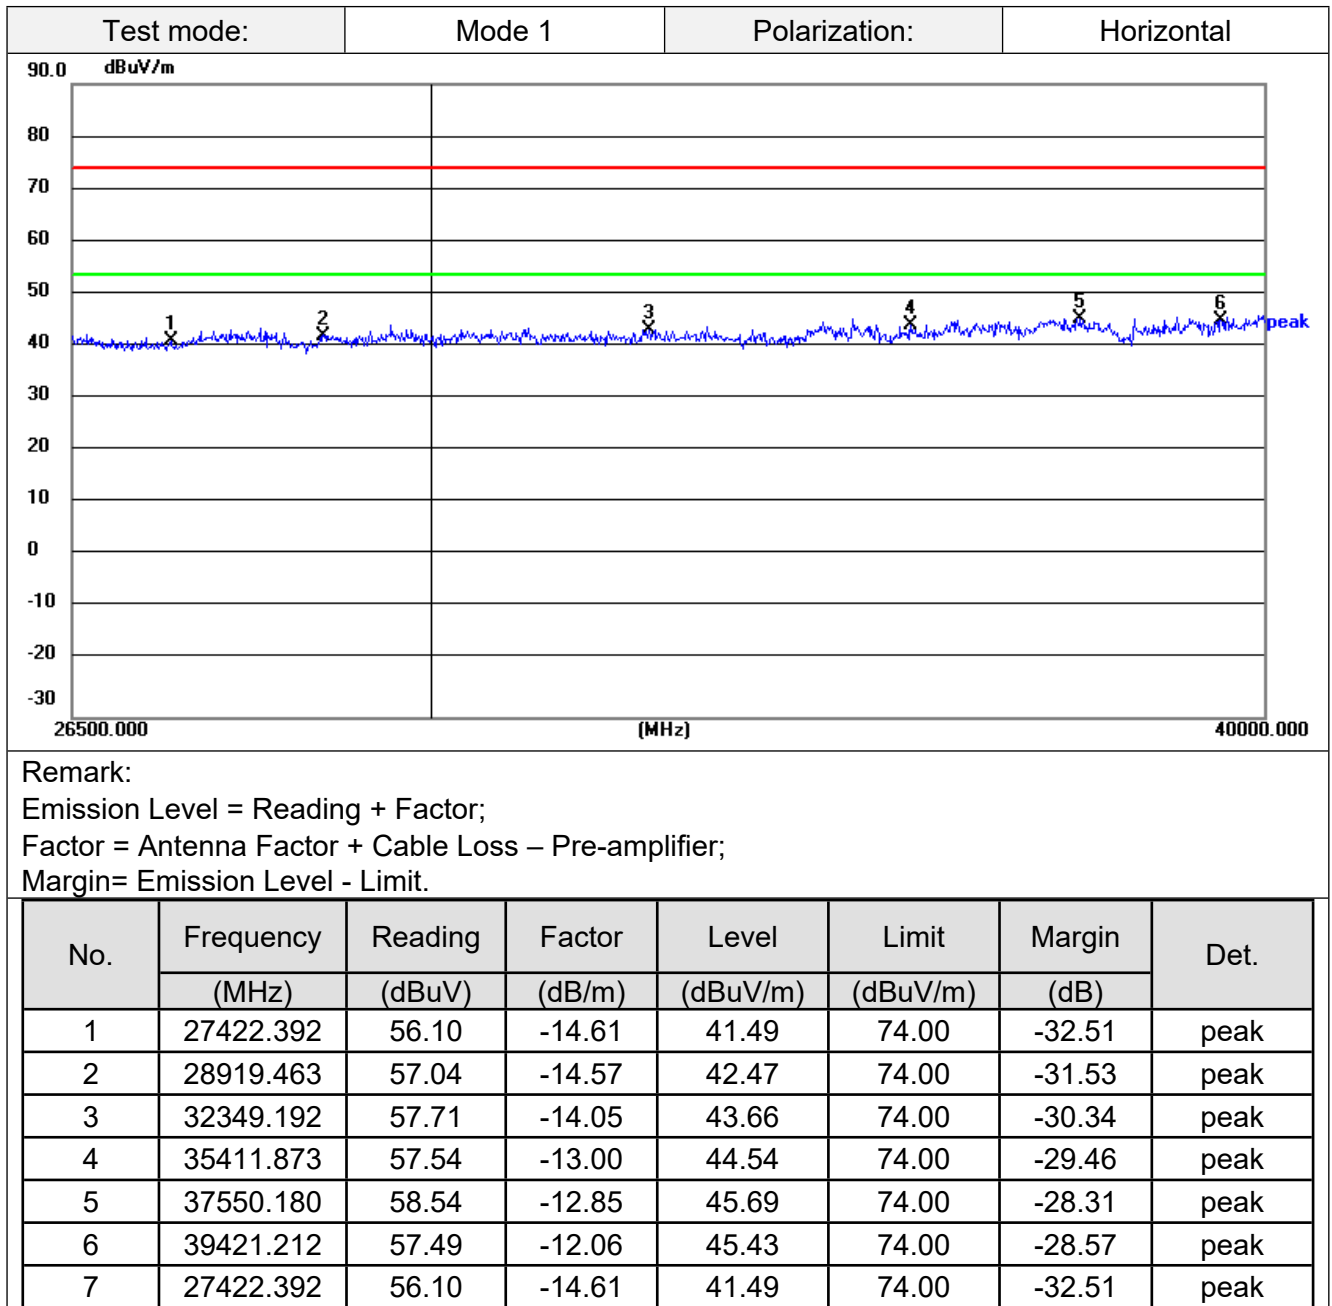

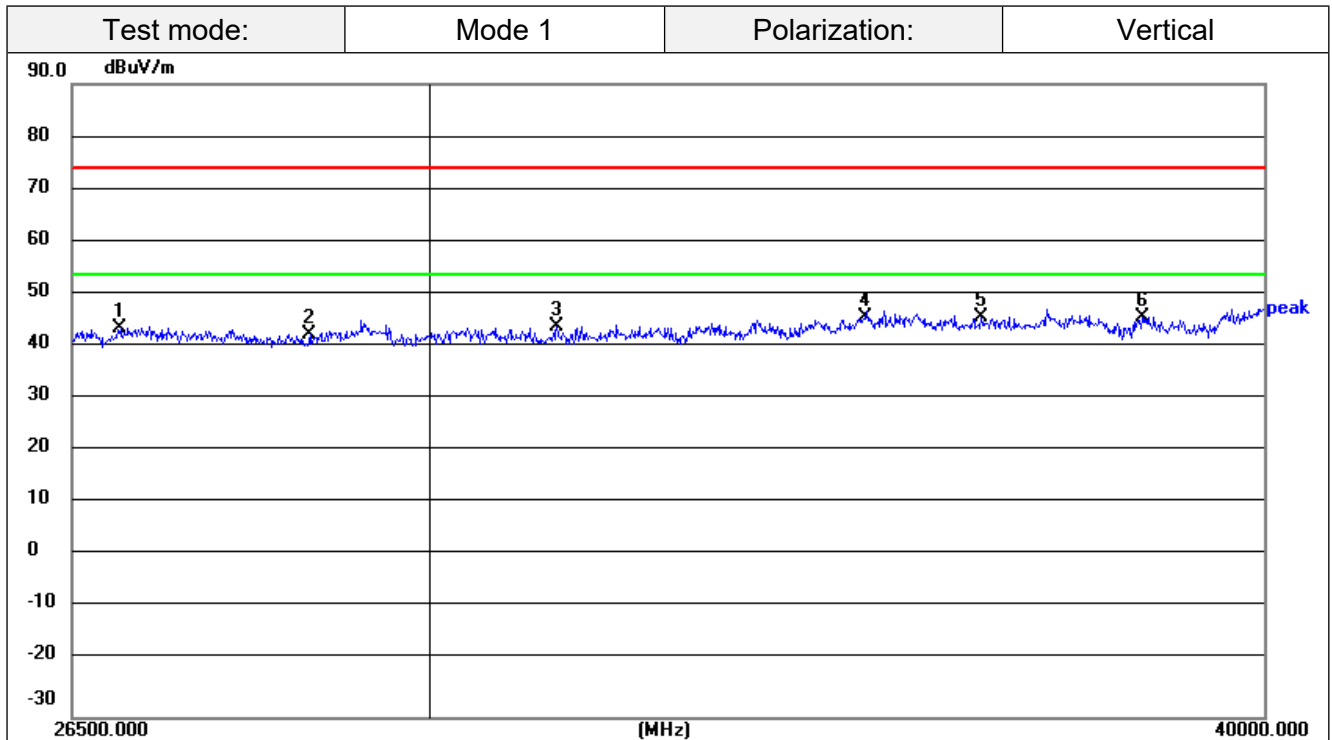

Remark:

Emission Level = Reading + Factor;

Factor = Antenna Factor + Cable Loss – Pre-amplifier;

Margin= Emission Level - Limit.



No.	Frequency	Reading	Factor	Level	Limit	Margin	Det.
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	26954.476	58.58	-14.80	43.78	74.00	-30.22	peak
2	28786.410	57.29	-14.60	42.69	74.00	-31.31	peak
3	31347.437	58.22	-14.09	44.13	74.00	-29.87	peak
4	34847.782	58.55	-12.69	45.86	74.00	-28.14	peak
5	36293.103	59.04	-13.20	45.84	74.00	-28.16	peak
6	38364.385	58.19	-12.22	45.97	74.00	-28.03	peak

4 Test Setup Photographs of EUT

Conducted Emission




Radiated Emission

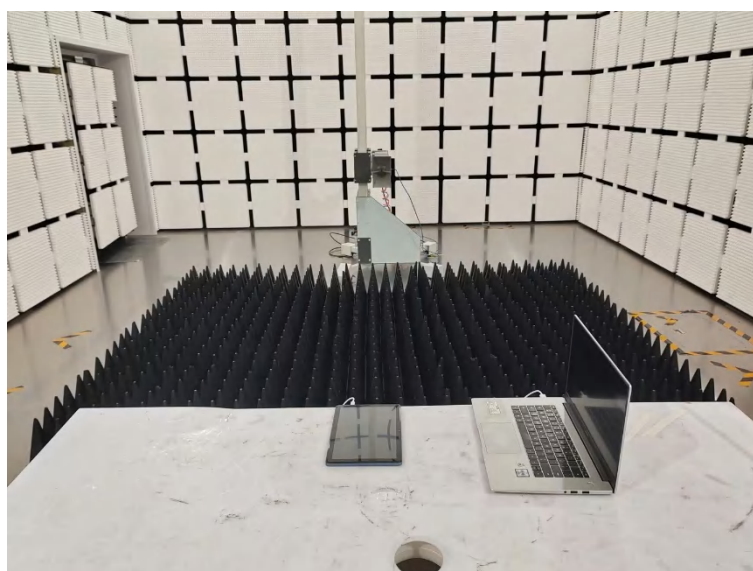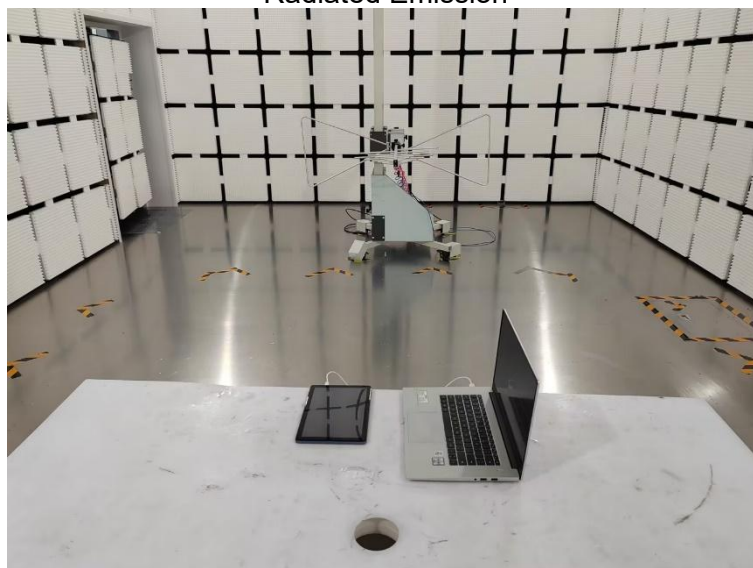



5 Photographs of EUT


External Photos

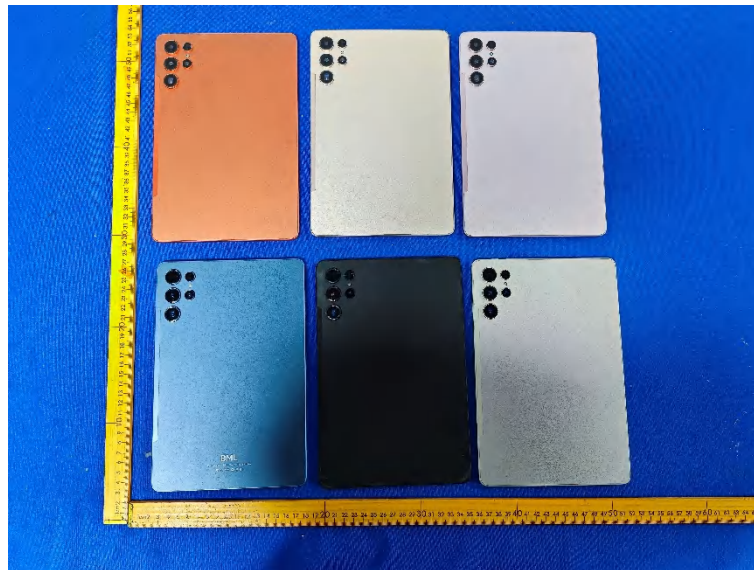

S




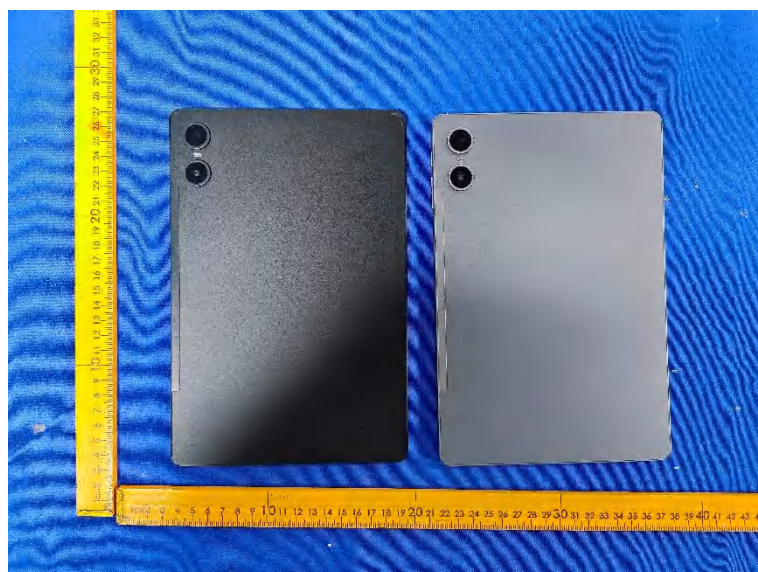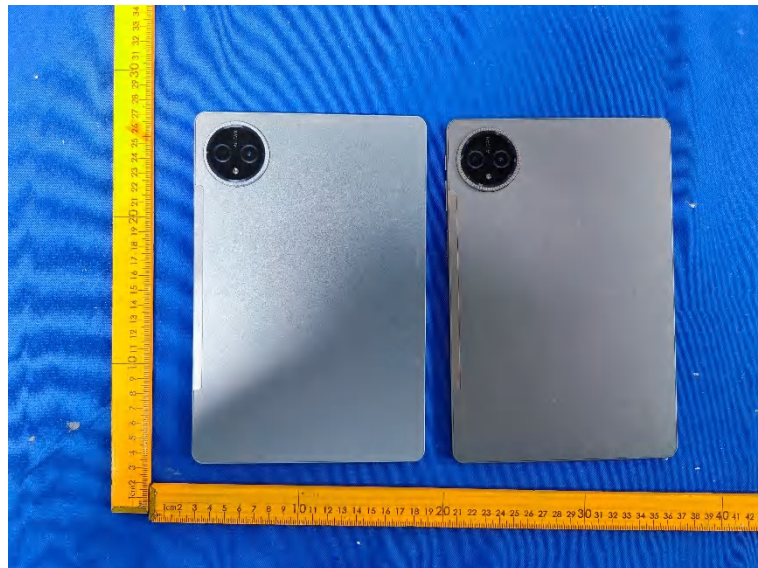

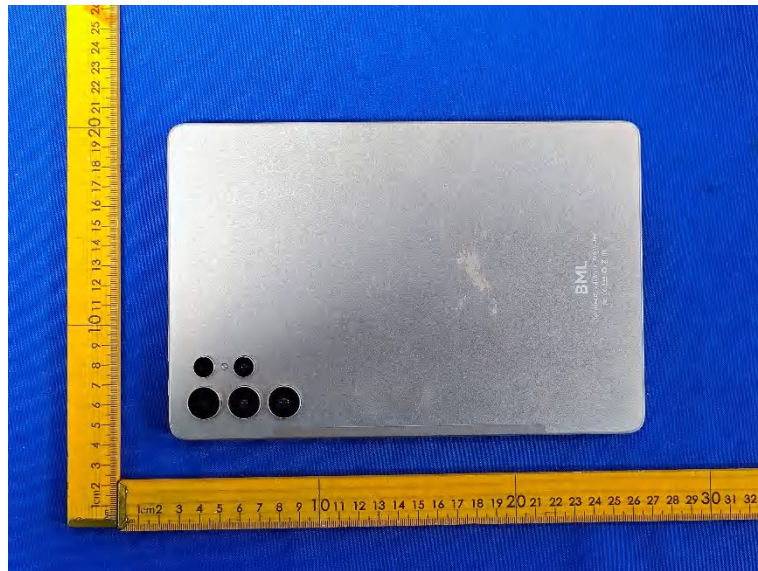



Internal photos

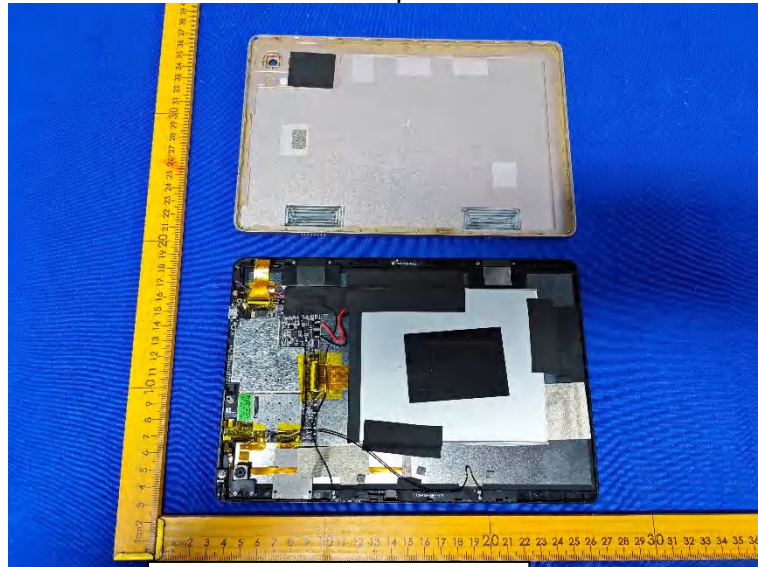


WWAN DIV Antenna






WLAN/BT Antenna

WWAN main Antenna

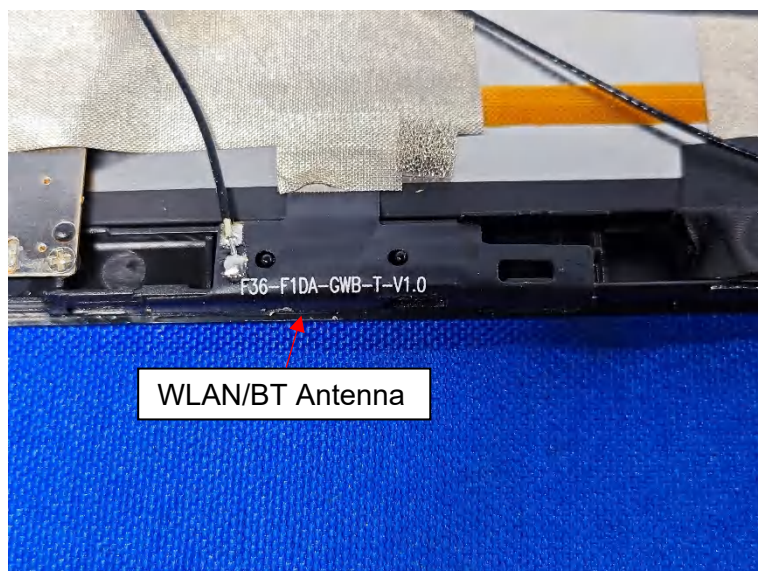

WLAN/BT Antenna

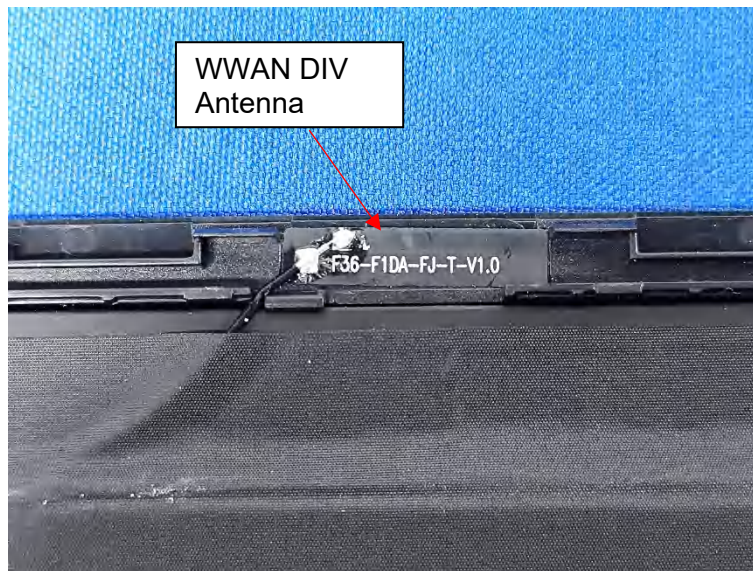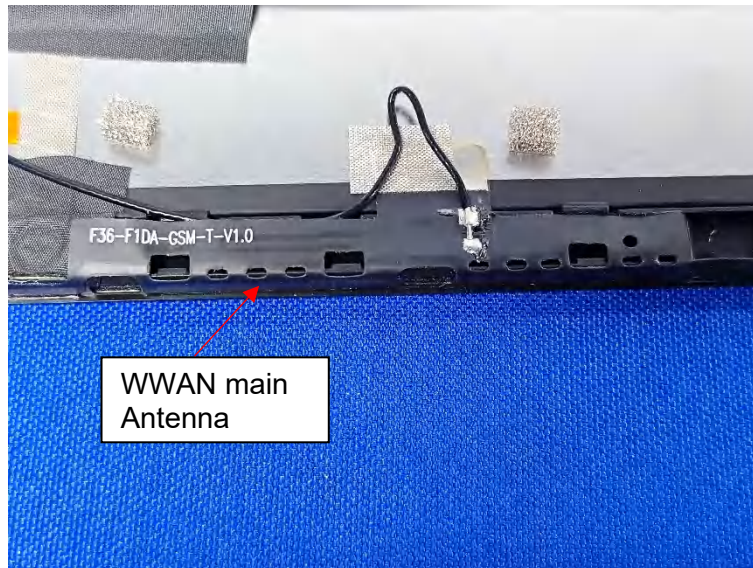

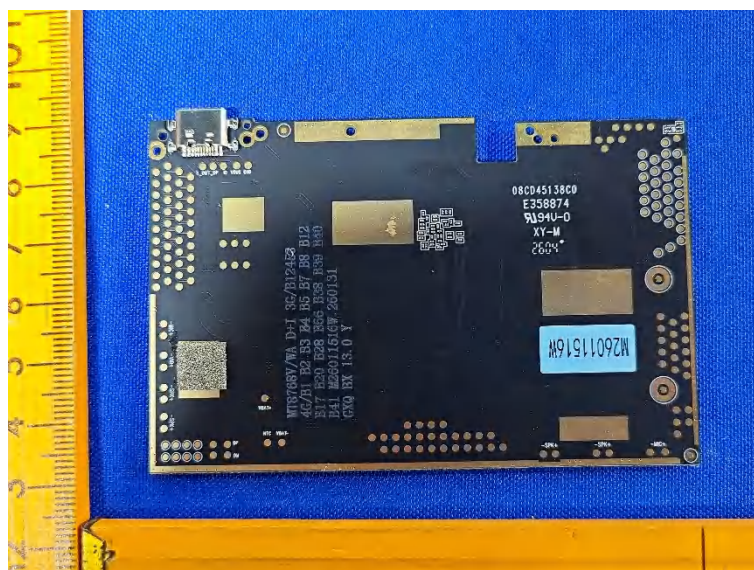



***** End of Report *****