


RF TEST REPORT

Applicant	Play For Dream (Shanghai) Technologies Co., Ltd.
FCC ID	2BMM9-MRD3A0
Product	PLAY FOR DREAM MR
Brand	PLAY FOR DREAM
Model	PFDM D3
Report No.	R2411A1737-R5
Issue Date	January 15, 2025

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15E (2023)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.



Prepared by: Xu Ying



Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report.....	4
1.2. Test Facility	4
1.3. Testing Location.....	4
2. General Description of Equipment Under Test.....	5
2.1. Applicant and Manufacturer Information	5
2.2. General Information	5
3. Applied Standards.....	7
4. Test Configuration.....	8
5. Test Case Results.....	12
5.1. 99% OBW & Emission Bandwidth	12
5.2. Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	47
5.3. Maximum Power Spectral Density (E.I.R.P.).....	87
5.4. Frequency Stability	590
5.5. In-Band Emission (Mask).....	593
5.6. Contention-Based Protocol.....	800
5.7. Unwanted Emission	809
5.8. Conducted Emission.....	1232
5.9. U-NII devices Operational restrictions for 6 GHz	1235
6. Main Test Instruments	1236
ANNEX A: The EUT Appearance.....	1237
ANNEX B: Test Setup Photos	1238

Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Verdict
1	Antenna Requirement	15.203	PASS
2	99% OBW & Emission Bandwidth	15.407(a) C63.10 12.4	PASS
3	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	15.407(a)	PASS
4	Maximum Power Spectral Density (E.I.R.P.)	15.407(a)	PASS
5	Frequency Stability	15.407(g)	PASS
6	In-Band Emission (Mask)	15.407(b)(7)	PASS
7	Contention-Based Protocol	15.407(d)(6)	PASS
8	Unwanted Emissions	15.407(b)	PASS
9	Conducted Emissions	15.207	PASS
10	Operational restrictions for 6 GHz U-NII devices	15.407(d)	PASS
Date of Testing: November 25, 2024 ~ December 27, 2024			
Date of Sample Received: November 19, 2024			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard. All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3. Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Kain.Xu@cpt.eurofinscn.com

2. General Description of Equipment Under Test

2.1. Applicant and Manufacturer Information

Applicant	Play For Dream (Shanghai) Technologies Co., Ltd.
Applicant address	Room 501, Building No 3, Caosong Road No.1, Xinqiao Town, Songjiang District, Shanghai City, China
Manufacturer	Play For Dream (Shanghai) Technologies Co., Ltd.
Manufacturer address	Room 501, Building No 3, Caosong Road No.1, Xinqiao Town, Songjiang District, Shanghai City, China

2.2. General Information

EUT Description			
Model	PFDM D3		
Lab internal SN	R2411A1737/S01		
Hardware Version	4.0		
Software Version	D3_DEV_3.0.1.290		
Power Supply	Battery / AC adapter		
Antenna Type	Internal Antenna		
Antenna Connector	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)		
Antenna Gain	Band	Antenna 1 (dBi)	Antenna 2 (dBi)
	U-NII-5	2.86	2.52
	U-NII-6	2.53	2.66
	U-NII-7	2.79	2.66
	U-NII-8	2.70	2.81
Directional Gain	Band	For Power (dBi)	For PSD (dBi)
	U-NII-5	2.86	5.87
	U-NII-6	2.66	5.67
	U-NII-7	2.79	5.80
	U-NII-8	2.81	5.82
Operating Frequency Range(s)	U-NII-5 (5925MHz-6425MHz) U-NII-6 (6425MHz-6525MHz) U-NII-7 (6525MHz-6875MHz) U-NII-8 (6875MHz-7125MHz)		
Modulation Type	802.11ax (HE20/ HE40/ HE80/ HE160): OFDMA 802.11be (EHT20/ EHT40/ EHT80/ EHT160/EHT320): OFDMA		
Max. Conducted Power	20.35 dBm		
Operating temperature range	-10 ° C to 45° C		
Operating voltage range	7.4 V to 8.9 V		

Testing temperature range	-30 ° C to 50° C
Testing voltage range	7.4 V - 8 V - 8.9 V
State DC voltage	8V
EUT Accessory	
Adapter	Manufacturer: Shenzhen Kosun Industrial Co., Ltd. Model:623005
Data Cable	Manufacturer: Shenzhen Zhishang Technology Co., LTD 1200±20mm, Shielded
Note:1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant.	

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards:

FCC CFR47 Part 15E (2023) Unlicensed National Information Infrastructure Devices

ANSI C63.10-2013

Reference standard:

KDB 987594 D01 U-NII 6GHz General Requirements v03

KDB 987594 D02 U-NII 6GHz EMC Measurement v03

KDB 987594 D04 UN6GHZ Pre-Approval Guidance checklist v03

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

4. Test Configuration

Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (X axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Mode	Data Rate		
	Antenna 1	Antenna 2	MIMO
802.11ax HE20	MCS0	MCS0	MCS0
802.11ax HE40	MCS0	MCS0	MCS0
802.11ax HE80	MCS0	MCS0	MCS0
802.11ax HE160	MCS0	MCS0	MCS0
802.11be EHT20	MCS0	MCS0	MCS0
802.11be EHT40	MCS0	MCS0	MCS0
802.11be EHT80	MCS0	MCS0	MCS0
802.11be EHT160	MCS0	MCS0	MCS0
802.11be EHT320	MCS0	MCS0	MCS0

The worst case Antenna mode for each of the following tests for Wi-Fi:

Test Cases	ANT 1	ANT 2	MIMO
Emission Bandwidth	O	--	--
Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	O	O	O
Maximum Power Spectral Density (PSD)	O	O	O
Frequency Stability	O	--	--
In-Band Emission (Mask)	O	--	--
Contention-Based Protocol	--	--	O
Unwanted Emissions	--	--	O
Conducted Emissions	--	--	O

TB /MRU Mode

Test Cases	MIMO
Emission Bandwidth	--
Maximum Equivalent Isotopically Radiated Power (E.I.R.P.)	O
Maximum Power Spectral Density (PSD)	O
Frequency Stability	--
In-Band Emission (Mask)	O
Contention-Based Protocol	--
Unwanted Emissions	O
Conducted Emissions	--

Wireless Technology and Frequency Range

Wireless Technology		Channel/Frequency (MHz)																
		Bandwidth 20 MHz	Bandwidth 40 MHz	Bandwidth 80 MHz	Bandwidth 160 MHz	Bandwidth 320 MHz												
Wi-Fi	U-NII-5	1/5955	3/5965	7/5985	15/6025	31/6105	--	--										
		5/5975																
		9/5995	11/6005															
		13/6015																
		17/6035	19/6045	23/6065														
		21/6055																
		25/6075	27/6085															
		29/6095																
		33/6115	35/6125	39/6145	47/6185	63/6265												
		37/6135																
		41/6155	43/6165															
		45/6175																
		49/6195	51/6205	55/6225														
		53/6215																
		57/6235	59/6245															
		61/6255																
		65/6275	67/6285	71/6305	79/6345	95/6425												
		69/6295																
		73/6315	75/6325															
		77/6335																
		81/6355	83/6365	87/6385														
		85/6375																
		89/6395	91/6405															
		93/6415																
	U-NII-6	97/6435	99/6445	103/6465	111/6505	127/6585												
		101/6455																
		105/6475	107/6485															
		109/6495																
		113/6515	115/6525	119/6545														
	117/6535																	
	121/6555	123/6565																
	125/6575																	
	U-NII-7	129/6595	131/6605	135/6625	135/6665	159/6745												
		133/6615																
		137/6635	139/6645															
		141/6655																

		145/6675	147/6685	151/6705				
		149/6695						
		153/6715	155/6725					
		157/6735						
		161/6755	163/6765	167/6785	175/6825			
		165/6775						
		169/6795	171/6805					
		173/6815						
		177/6835	179/6845	183/6865				
		181/6855						
	185/6875	187/6885						
	189/6895							
	U-NII-8	193/6915	195/6925	199/6945	207/6985	--	191/6905	--
		197/6935						
		201/6955	203/6965					
		205/6975						
		209/6995	211/7005	215/7025				
		213/7015						
		217/7035	219/7045					
		221/7055						
		225/7075	227/7085	--	--	--		
		229/7095						
		233/7115	--					

5. Test Case Results

5.1. 99% OBW & Emission Bandwidth

Ambient Condition

Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

Method of Measurement


FOR 99% OCCUPIED BANDWIDTH

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to SAMPLE. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

FOR 26dB BANDWIDTH

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Test Setup



Limits

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320MHz.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.


Test Results:

Mode	Carrier frequency (MHz)	Minimum 26 dB bandwidth (MHz)	Conclusion
802.11ax HE 20 SISO	5955	23.19	PASS
	6175	23.05	PASS
	6415	23.14	PASS
	6435	23.28	PASS
	6475	22.95	PASS
	6515	23.62	PASS
	6535	22.93	PASS
	6695	23.36	PASS
	6855	23.44	PASS
	6875	23.52	PASS
	6895	23.31	PASS
	6995	23.92	PASS
	7115	23.01	PASS
802.11ax HE40 SISO	5965	44.78	PASS
	6165	43.68	PASS
	6405	44.53	PASS
	6445	44.30	PASS
	6485	44.28	PASS
	6525	43.82	PASS
	6565	44.72	PASS
	6685	44.02	PASS
	6845	43.68	PASS
	6885	44.58	PASS
	6925	43.73	PASS
	6965	44.42	PASS
	7085	43.40	PASS
802.11ax HE80 SISO	5985	88.11	PASS
	6145	88.60	PASS
	6385	87.20	PASS
	6465	87.35	PASS
	6545	87.77	PASS
	6625	87.51	PASS
	6705	89.15	PASS
	6785	87.40	PASS
	6865	89.72	PASS
	6945	87.71	PASS
	7025	89.41	PASS
802.11ax HE160 SISO	6025	171.90	PASS
	6185	171.80	PASS


	6345	172.10	PASS
	6505	169.10	PASS
	6665	171.80	PASS
	6825	170.90	PASS
	6985	172.20	PASS
802.11be EHT 20 SISO	5955	23.13	PASS
	6175	23.43	PASS
	6415	23.09	PASS
	6435	23.09	PASS
	6475	22.77	PASS
	6515	23.07	PASS
	6535	23.26	PASS
	6695	23.18	PASS
	6855	23.03	PASS
	6875	22.76	PASS
	6895	22.89	PASS
	6995	22.72	PASS
	7115	23.26	PASS
802.11be EHT 40 SISO	5965	44.11	PASS
	6165	44.08	PASS
	6405	44.08	PASS
	6445	44.27	PASS
	6485	44.60	PASS
	6525	44.43	PASS
	6565	44.41	PASS
	6685	43.93	PASS
	6845	44.47	PASS
	6885	44.57	PASS
	6925	44.27	PASS
	6965	44.12	PASS
	7085	44.79	PASS
802.11be EHT 80 SISO	5985	87.11	PASS
	6145	87.85	PASS
	6385	87.64	PASS
	6465	88.20	PASS
	6545	87.60	PASS
	6625	88.04	PASS
	6705	86.84	PASS
	6785	87.47	PASS
	6865	87.35	PASS
	6945	88.05	PASS
	7025	87.83	PASS
802.11be EHT 160	6025	173.90	PASS

SISO	6185	174.00	PASS
	6345	172.00	PASS
	6505	176.70	PASS
	6665	173.50	PASS
	6825	171.40	PASS
	6985	172.40	PASS
802.11be EHT 320 SISO	6105	334.70	PASS
	6265	334.50	PASS
	6585	336.80	PASS
	6745	334.50	PASS
	6905	335.80	PASS


802.11ax EHT20 SISO_5955

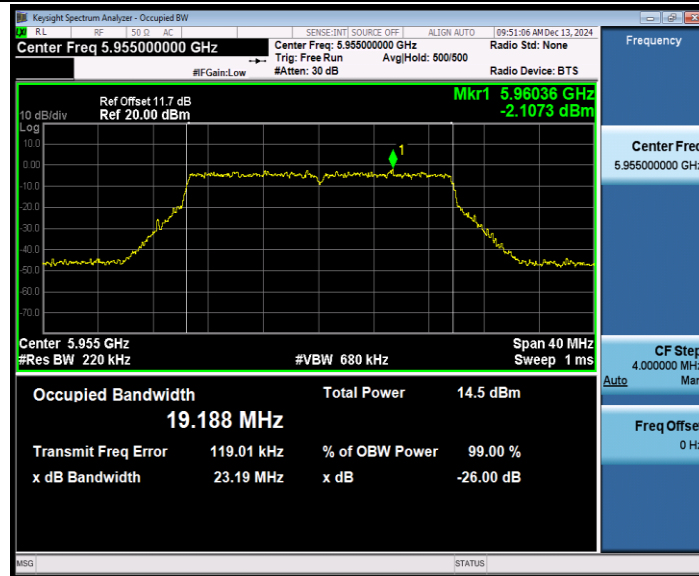


802.11ax EHT20 SISO_6175

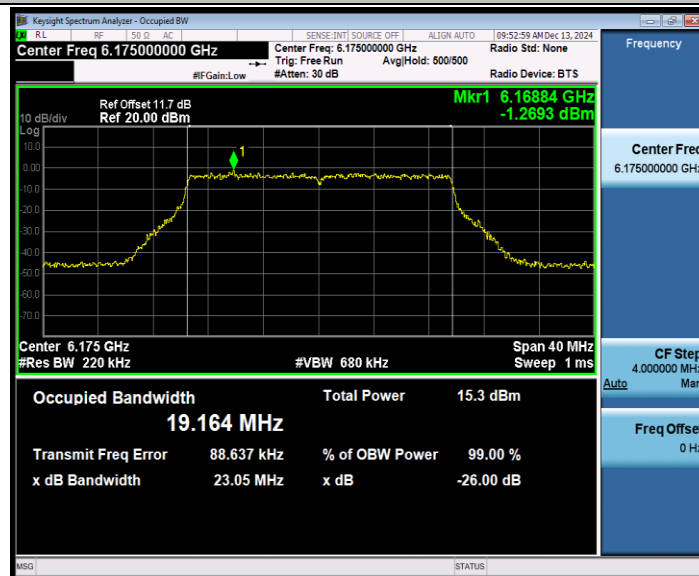


802.11ax EHT20 SISO_6415

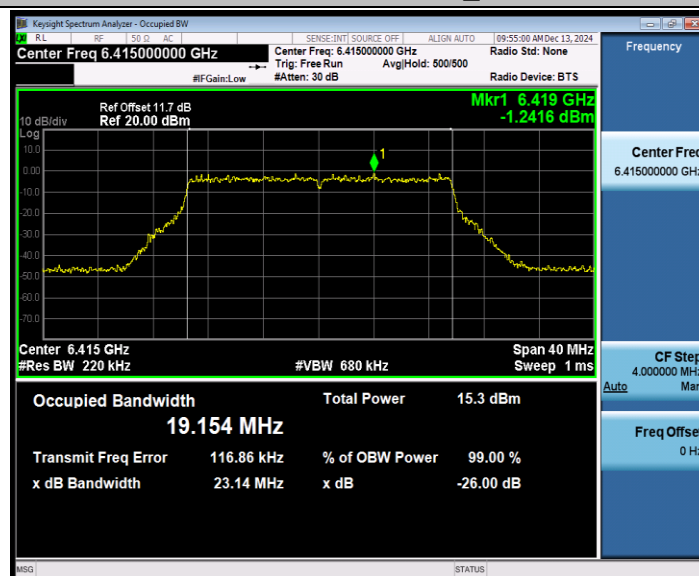


802.11ax EHT20 SISO_6535

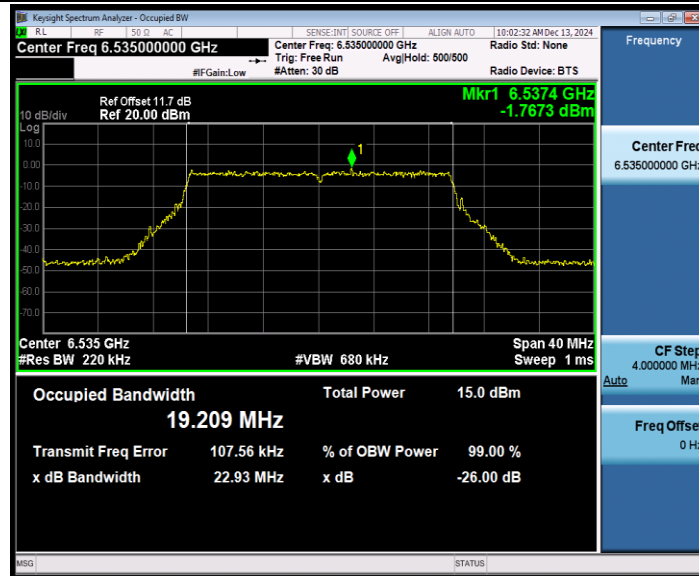


802.11ax EHT20 SISO_6695

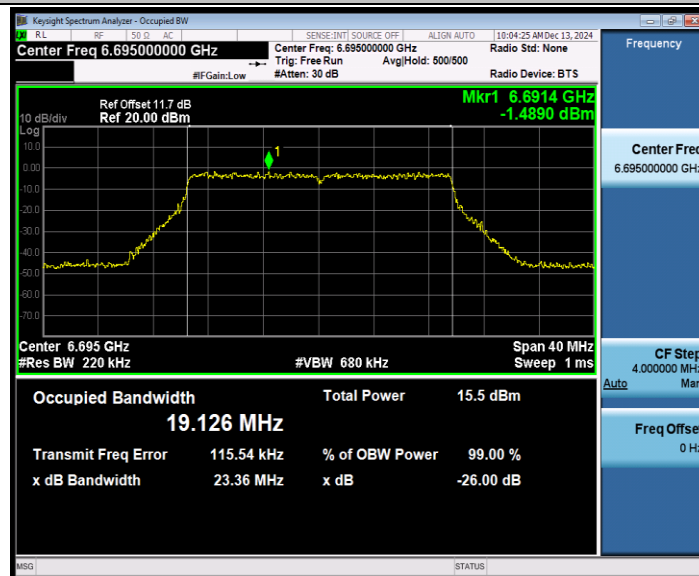


802.11ax EHT20 SISO_6855

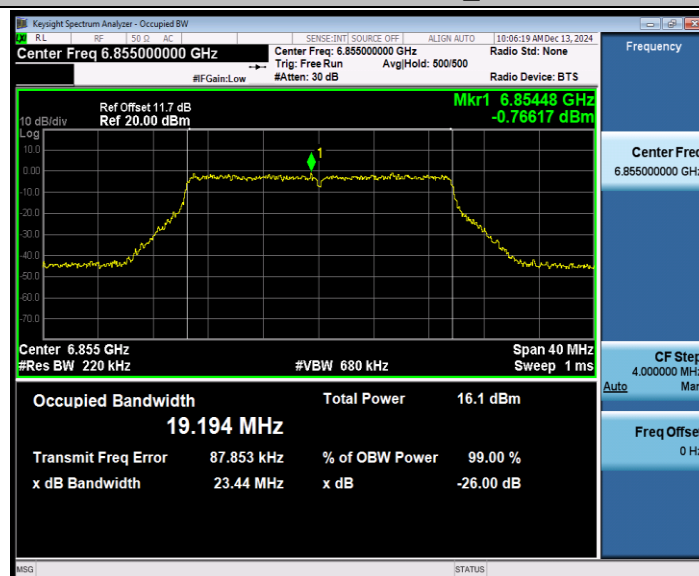


802.11ax EHT20 SISO_6875

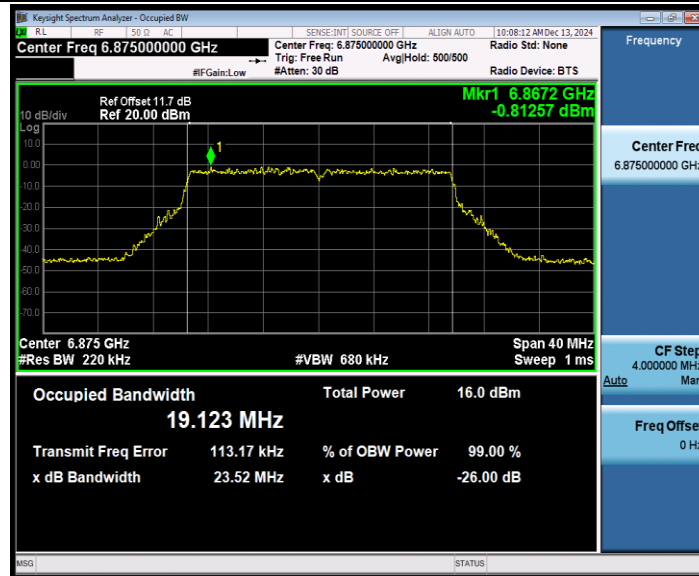


802.11ax EHT20 SISO_6895

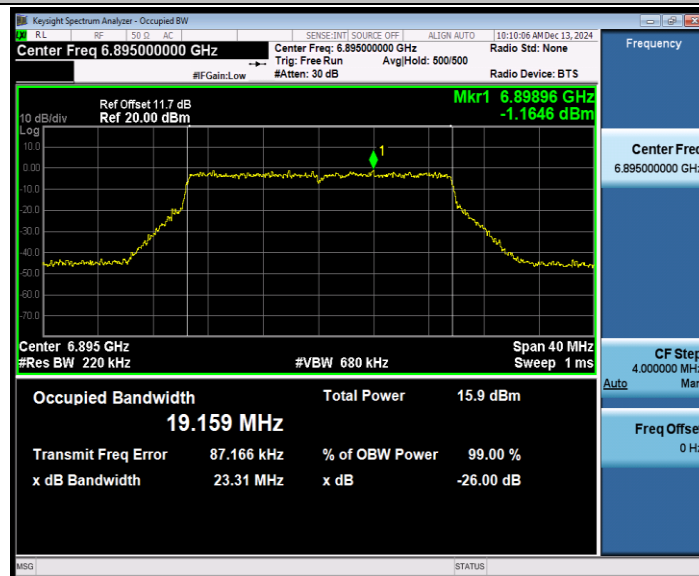


802.11ax EHT20 SISO_6995

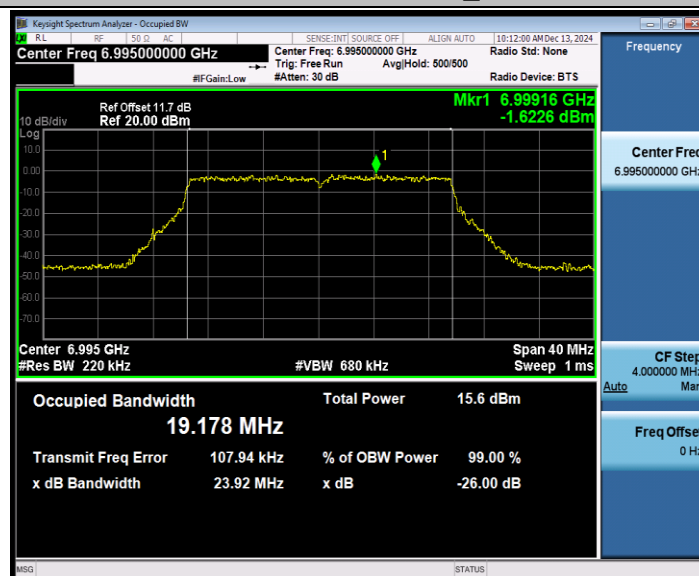

802.11ax EHT20 SISO_7115

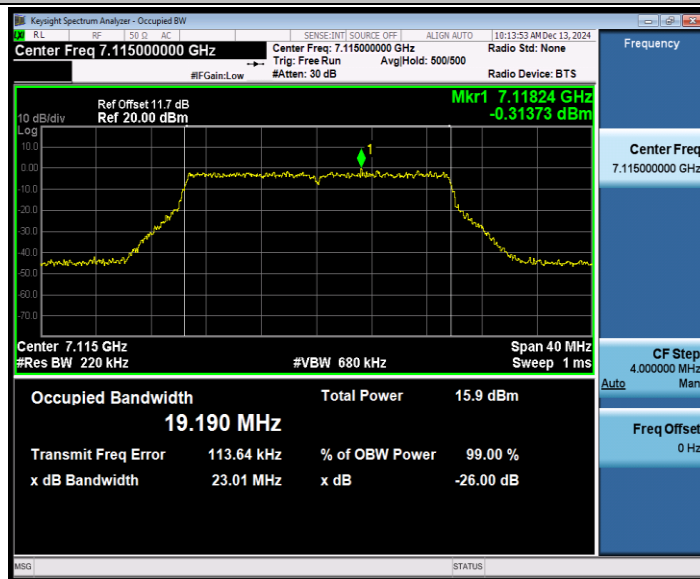

802.11ax EHT40 SISO_5965

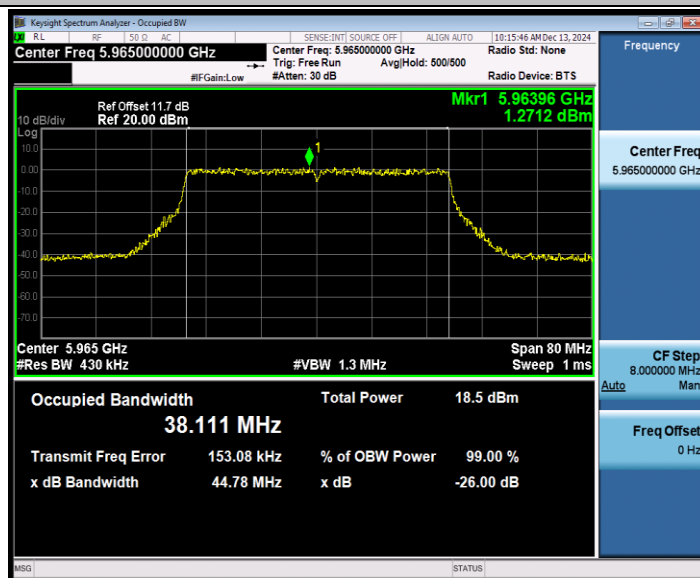


802.11ax EHT40 SISO_6165




802.11ax EHT40 SISO_6405




802.11ax EHT40 SISO_6445

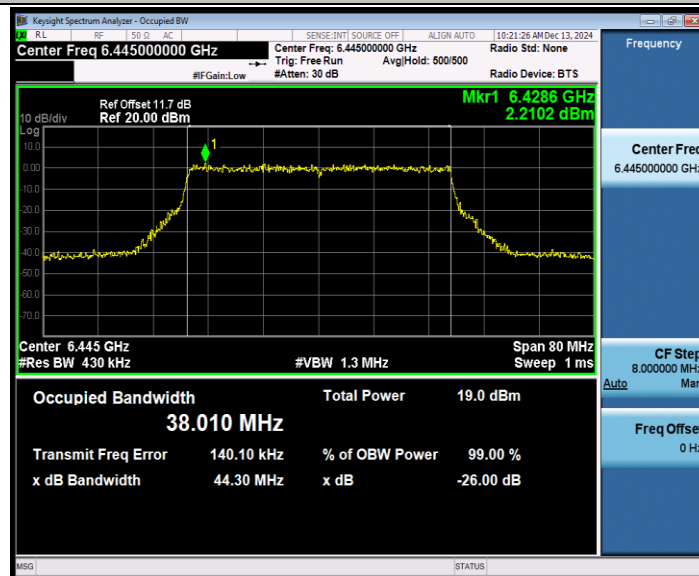


802.11ax EHT40 SISO_6485

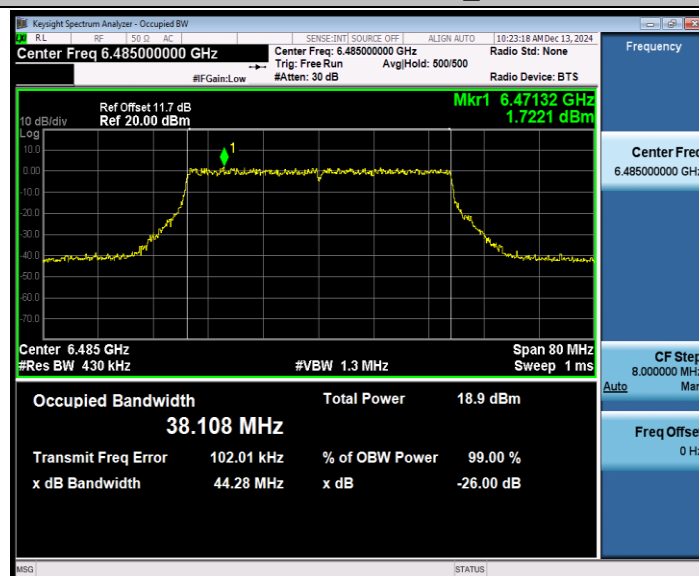


802.11ax EHT40 SISO_6965

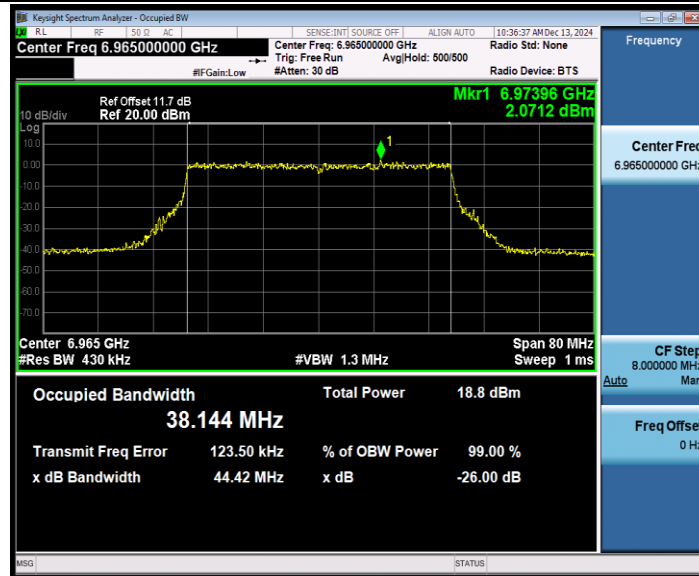


802.11ax EHT40 SISO_7085

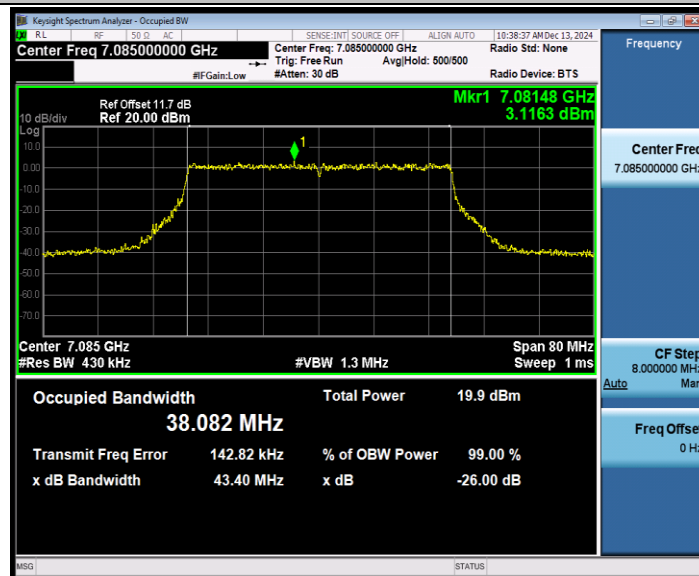


802.11ax EHT80 SISO_5985

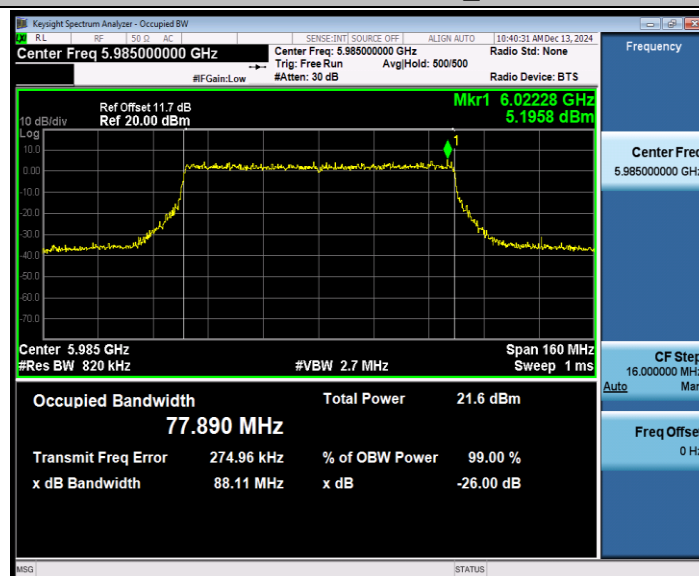


802.11ax EHT80 SISO_6545

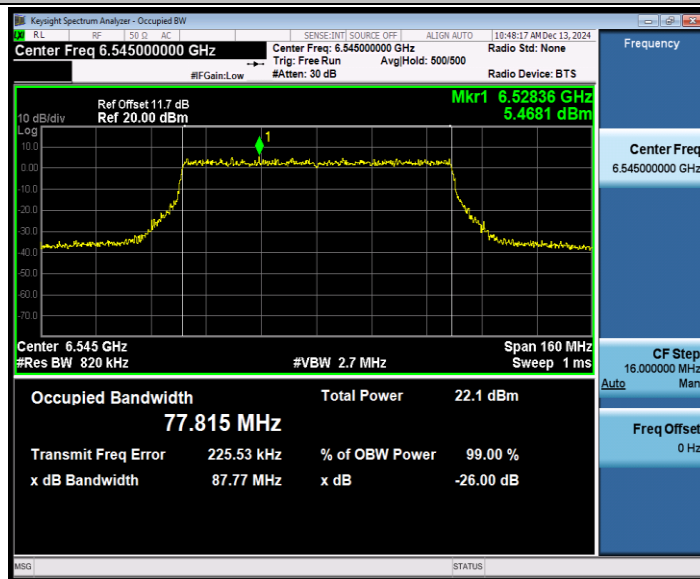


802.11ax EHT80 SISO_6625

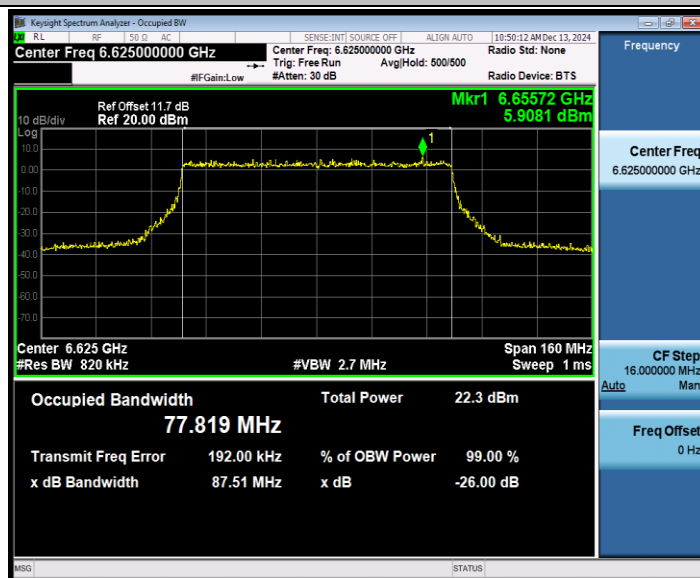


802.11ax EHT80 SISO_6705

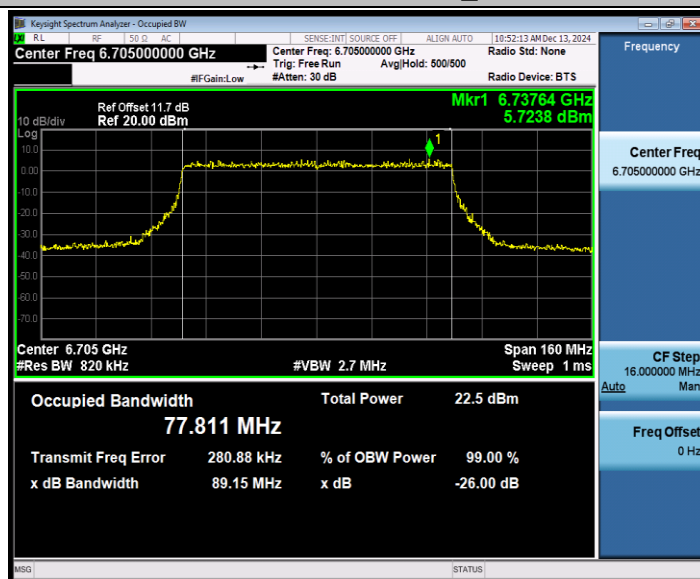


802.11ax EHT80 SISO_6785

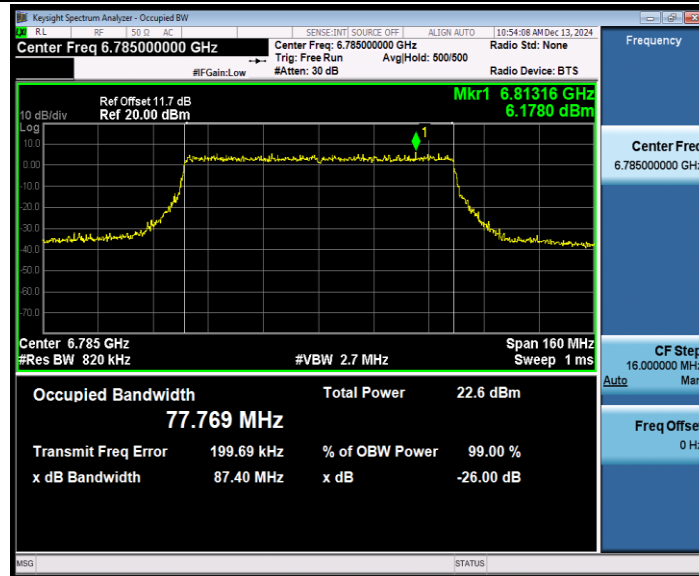


802.11ax EHT80 SISO_6865

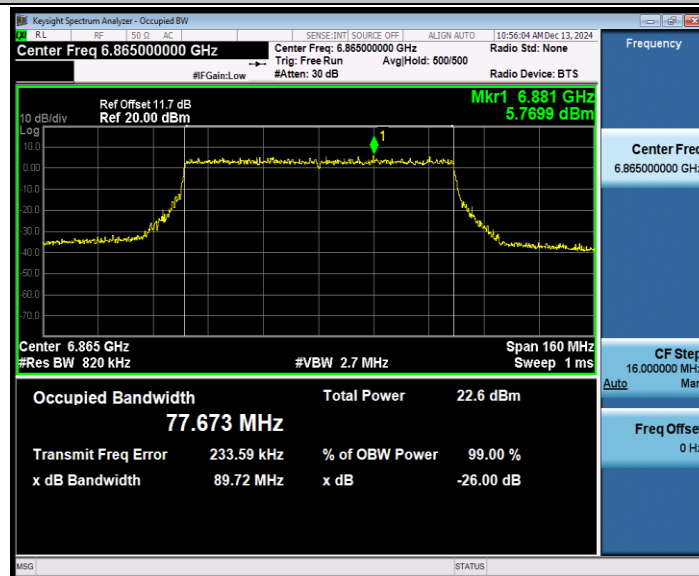


802.11ax EHT80 SISO_6945

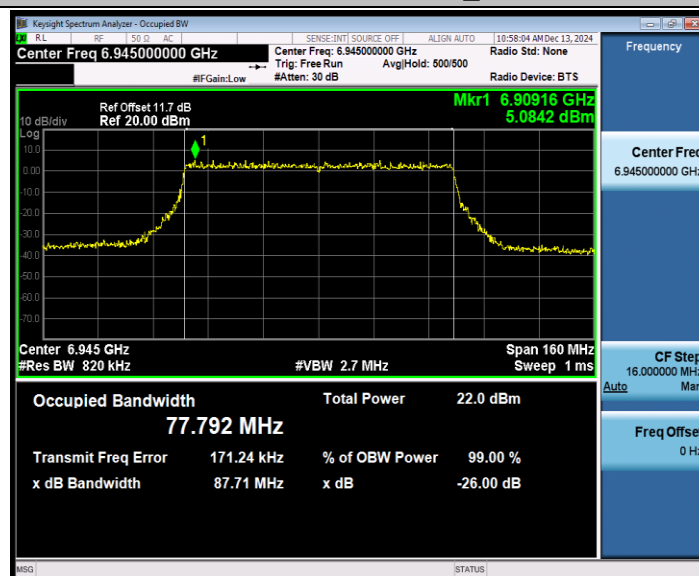


802.11ax EHT80 SISO_7025

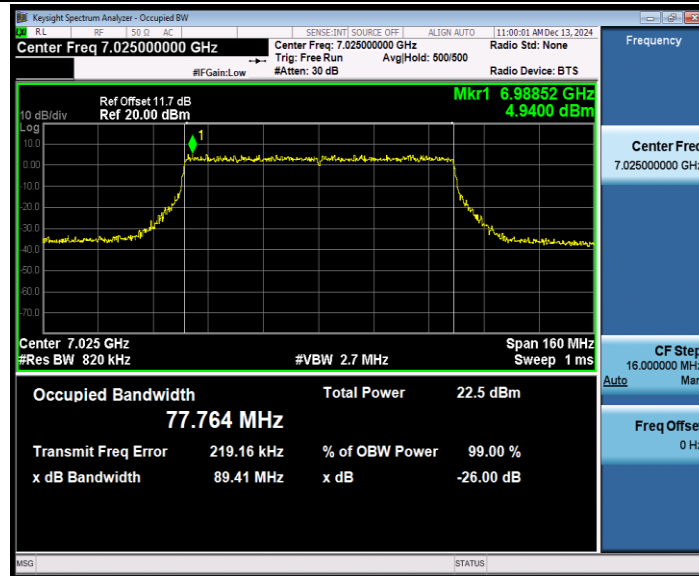


802.11ax EHT160 SISO_6025

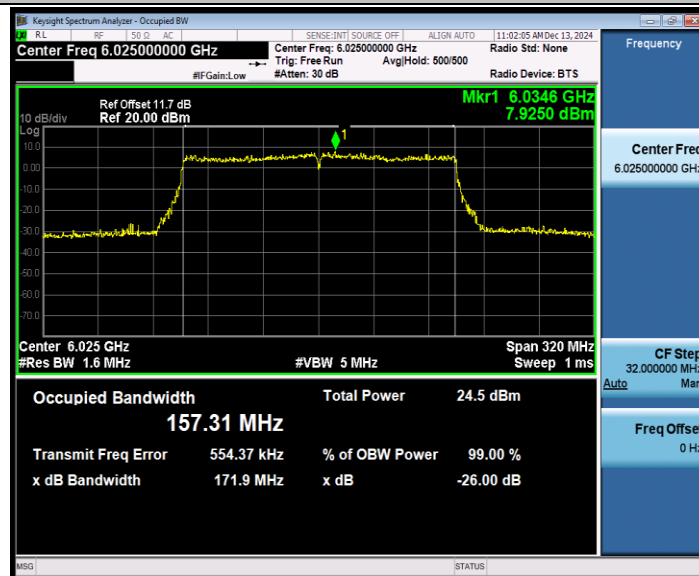


802.11ax EHT160 SISO_6185

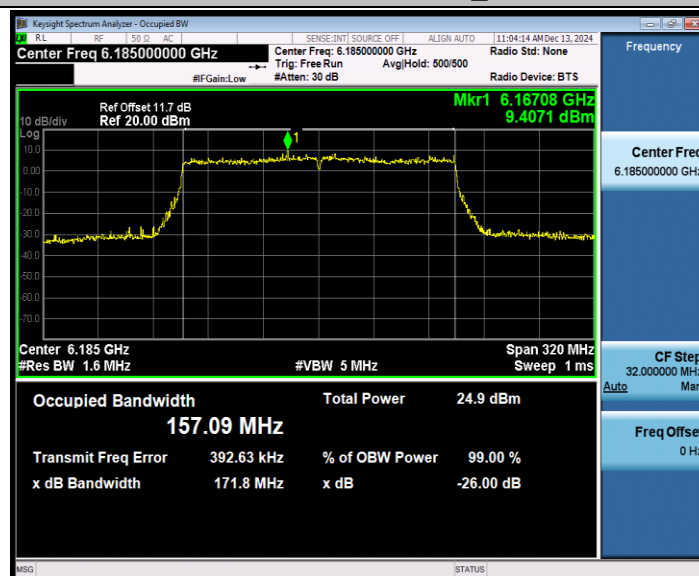


802.11ax EHT160 SISO_6345

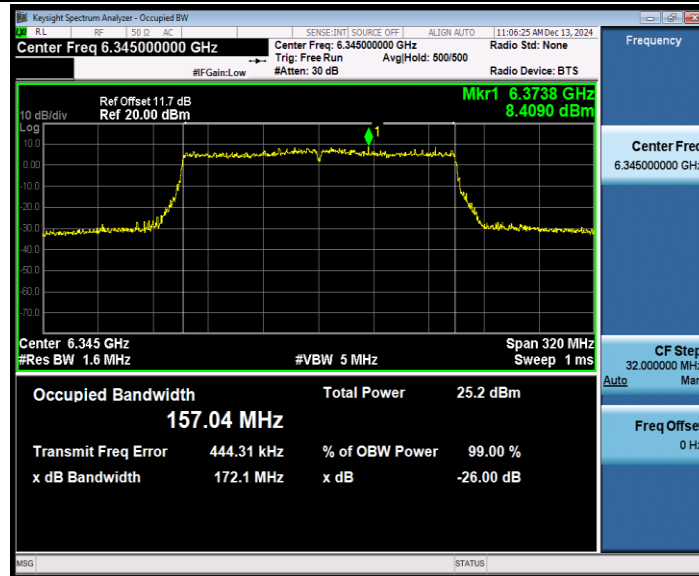


802.11ax EHT160 SISO_6505

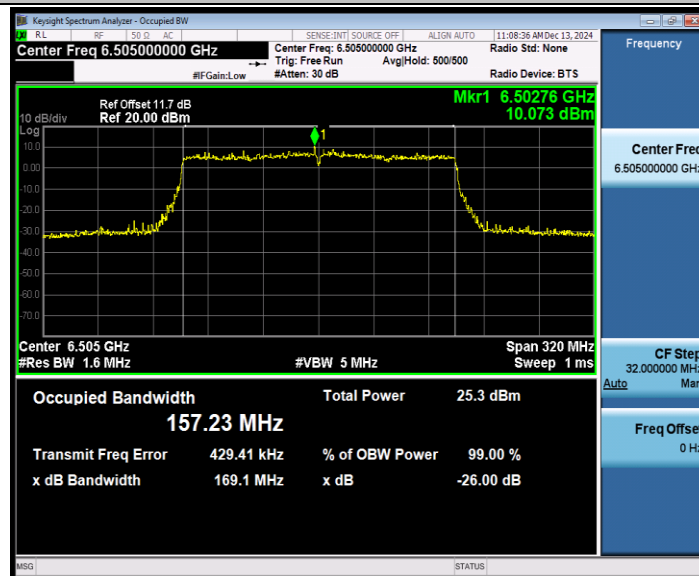

802.11ax EHT160 SISO_6665

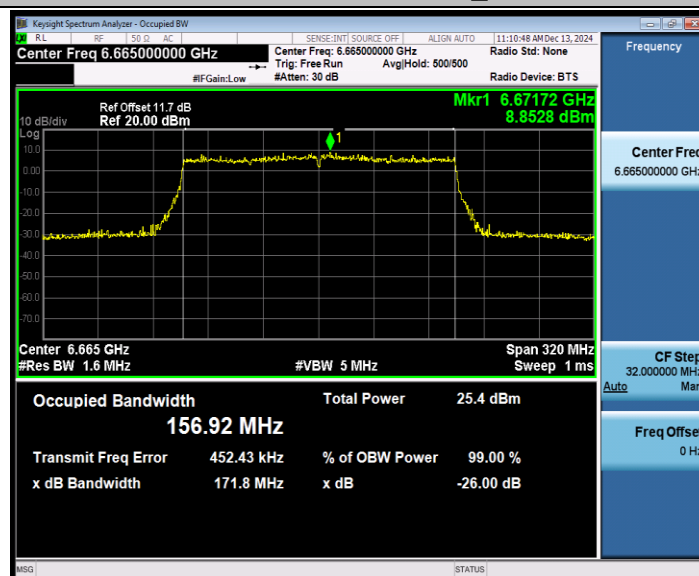

802.11ax EHT160 SISO_6825

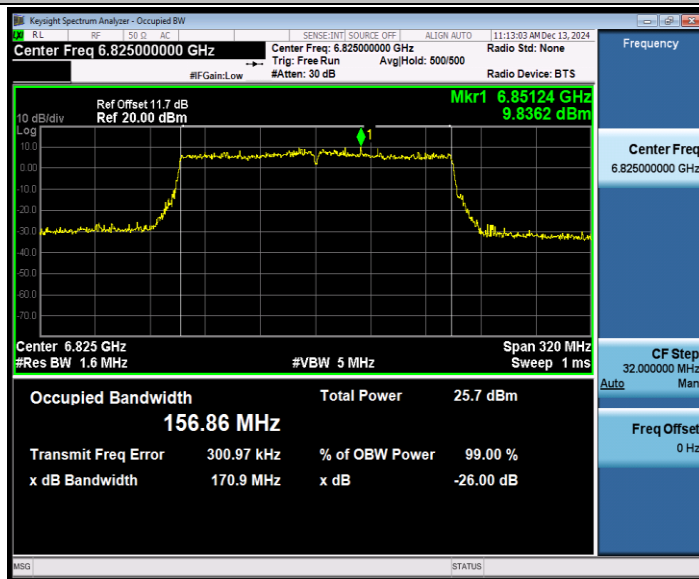

802.11ax EHT160 SISO_6985



802.11be EHT20 SISO_5955

