



TEST REPORT

Eurofins KCTL Co.,Ltd.
 65, Sinwon-ro, Yeongtong-gu,
 Suwon-si, Gyeonggi-do, 16677, Korea
 TEL: 82-70-4904-0113 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
 KR25-SPF0041
 Page (1) of (75)



1. Client

- Name : Kohler Ventures, Inc.
- Address : 917 Alma St, Palo Alto, CA 94301 USA
- Date of Receipt : 2025-05-26

2. Use of Report : Certification

3. Name of Product and Model : Attachment V1
 ◦ Model Name : KV010101
 ◦ Manufacturer and Country of Origin : Kohler Ventures, Inc. / USA

4. FCC ID : 2BMN9-KV010101

5. Date of Test : 2025-05-29~ 2025-05-30

6. Location of Test : ☒ Permanent Testing Lab ☐ On Site Testing
 (Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)

7. Test Standards : IEEE 1528-2013, ANSI/IEEE C95.1, KDB Publication

8. Test Results : Refer to the test result in the test report

Affirmation	Tested by	Technical Manager
	Name : Hankyul Jung (Signature)	Name : Gyuhyun Shim (Signature)

2025-09-08

Eurofins KCTL Co.,Ltd.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by Eurofins KCTL Co.,Ltd.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-4904-0113 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR25-SPF0041 Page (2) of (75)	 KCTL
---	--	---

REPORT REVISION HISTORY

Date	Revision	Page No
2025-09-08	Originally issued	-

This report shall not be reproduced except in full, without the written approval of Eurofins KCTL Co.,Ltd. This document may be altered or revised by Eurofins KCTL Co.,Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by Eurofins KCTL Co.,Ltd. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

☐ **Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:**

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

☒ **Statement not required by the standard or client used for type testing**

1. Identification when information is provided by the customer: Information marked " #" is provided by the customer. - Disclaimer: This information is provided by the customer and can affect the validity of results.

CONTENTS

1.	General information.....	4
2.	Device information	5
3.	Specific Absorption Rate	8
4.	SAR Measurement Procedures.....	9
5.	RF Exposure Limits	10
6.	FCC SAR General Measurement Procedures.....	11
7.	RF Average Conducted Output Power.....	14
8.	System Verification	17
9.	SAR Test Results	19
10.	SAR Measurement Variability.....	21
11.	Measurement Uncertainty.....	22
12.	Test Equipment Information	23
13.	Test System Verification Results.....	24
14.	Test Results	28
	Appendixes List.....	32
	Appendix A. Calibration certificate	33
	Appendix B. SAR Tissue Specification.....	70
	Appendix C. #Antenna Location & Distance.....	71
	Appendix D. EUT Photo	72
	Appendix E. Test Setup Photo.....	75
	End of test report	75

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-4904-0113 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR25-SPF0041 Page (4) of (75)	 
---	--	---

1. General information

Client : Kohler Ventures, Inc.
 Address : 917 Alma St, Palo Alto, CA 94301 USA
 Manufacturer : Kohler Ventures, Inc.
 Address : 202, Building B, 61, Busong 3-gil, Jiksan-eup, Seobuk-gu, Cheonan-si,
 Chungcheongnam-do, Republic of Korea
 Laboratory : Eurofins KCTL Co.,Ltd.
 Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
 Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
 VCCI Registration No. : R-3327, G-198, C-3706, T-1849
 CAB Identifier: KR0040, ISED Number: 8035A
 KOLAS No.: KT231

1.1 Report Overview

This report details the results of testing carried out on the samples listed in section 2, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this test report is used in any configuration other than that detailed in the test report, the manufacturer must ensure the new configuration complies with all relevant standards and certification requirements. Any mention of Eurofins KCTL Co.,Ltd. Wireless lab or testing done by Eurofins KCTL Co.,Ltd. Wireless lab made in connection with the distribution or use of the tested product must be approved in writing by Eurofins KCTL Co.,Ltd. Wireless lab.

2. Device information

2.1 Basic description

Product Name		Attachment V1		
Product Model Name		KV010101		
Product Manufacturer		Kohler Ventures, Inc.		
Product Serial Number	Radiation	AT10917400498M		
	Conduction	A240822009B		
Device Overview		Band & Mode	Operating Modes	Tx Frequency (MHz)
		2.4 GHz WLAN	Data	2 412.0 ~ 2 462.0
		U-NII-1	Data	5 180.0 ~ 5 240.0
		U-NII-2A	Data	5 260.0 ~ 5 320.0
		U-NII-2C	Data	5 500.0 ~ 5 720.0
		U-NII-3	Data	5 745.0 ~ 5 825.0

2.2 Summary of SAR Test Results

Band	Equipment Class	Highest Reported
		1g SAR (W/kg)
		Body
WLAN 2.4 GHz	DTS	0.88
U-NII-2A	NII	0.60
U-NII-2C	NII	0.68
U-NII-3	NII	0.50
Simultaneous SAR per KDB 690783 D01v01r03		N/A

2.3 #Antenna information

Antenna Type	FlexPIFA Antenna				
Band	WLAN 2.4 GHz	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
Peak gain (dBi)	2.5	3.0	3.0	3.0	3.0

2.4 #Maximum Tune-up power

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

2.4.1 #Maximum WLAN Output Power

Band	Mode	Channel	Output Power(dBm)	
			Target	Max. Allowed
WLAN 2.4 GHz	802.11b	All Channel	15.00	16.00
	802.11g	All Channel	12.00	13.00
	802.11n(HT20)	All Channel	11.00	12.00
U-NII	802.11a	All Channel	9.00	10.00
	802.11n(HT20)	All Channel	9.00	10.00
	802.11n(HT40)	All Channel	9.00	10.00
	802.11ac(VHT20)	All Channel	9.00	10.00
	802.11ac(VHT40)	All Channel	9.00	10.00
	802.11ac(VHT80)	All Channel	9.00	10.00

2.5 SAR Test Configurations

2.5.1 #DUT Antenna Locations

A diagram showing the location of the device antennas. Please refer to Appendix C.

2.5.2 SAR Test Exclusion Considerations

Tx	Frequency (MHz)	Output power		Separation distances (mm)						Exclusion					
		dBm	mW	Front	Rear	Left	Right	Top	Bottom	Front	Rear	Left	Right	Top	Bottom
2.4 GHz	2462	16.00	40	5	5	31.2	137.1	9.0	66.2	12.55 Measure	N/A	2.02 EXEMPT	966mW EXEMPT	6.97 Measure	257mW EXEMPT
UNII-2A	5320	10.00	10							4.61 Measure	N/A	0.74 EXEMPT	936mW EXEMPT	2.56 EXEMPT	227mW EXEMPT
UNII-2C	5720	10.00	10							4.78 Measure	N/A	0.77 EXEMPT	933mW EXEMPT	2.66 EXEMPT	225mW EXEMPT
UNII-3	5825	10.00	10							4.83 Measure	N/A	0.78 EXEMPT	933mW EXEMPT	2.68 EXEMPT	224mW EXEMPT

Note 1: For distances < 5mm, a distance of 5mm is used to determine SAR exclusion and estimated SAR value.

Note 2: Output power is the maximum rated power (including tune-up or manufacturing tolerances) and includes source-based averaging.

Note 3: If the antenna separation distance is > 50mm then the value listed is the output power threshold, above which SAR measurement is required. For separation <= 50mm the value is the KDB 447498 calculated value and must be less than 3.0 for SAR exemption.

Note 4: Formulas round separation distance to nearest mm and power to nearest mW before calculating thresholds or exemption values.

Note 5 : The rear side is excluded from the test because it cannot be proximate to the human body by the structure mounted on the object intended for use (see Appendix D. EUT Photo).

2.6 #Simultaneous Transmission Configurations

This product does not support simultaneous transmission.

2.7 SAR Test Methods and Procedures

The tests documented in this report were performed in accordance with IEEE 1528-2013 and the following published KDB procedures:

- IEEE 1528-2013
- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- April 2019 TCB Workshop Notes (Tissue Simulating Liquids)

3. Specific Absorption Rate

3.1 Introduction

The SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational / controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement Procedures

4.1 SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan & Zoom Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot and Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly. Area Scan & Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx _{Area} , Δy _{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx _{Zoom} , Δy _{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz _{Zoom} (n)		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	Δz _{Zoom} (1): between 1st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		Δz _{Zoom} (n>1): between subsequent points	≤ 1.5 · Δz _{Zoom} (n-1) mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

5. RF Exposure Limits

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Partial Peak SAR ¹⁾ (Partial)	1.60 mW/g	8.00 mW/g
Partial Average SAR ²⁾ (Whole Body)	0.08 mW/g	0.40 mW/g
Partial Peak SAR ³⁾ (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

- 1) The spatial Peak value of the SAR averaged over any 1g gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- 2) The spatial Average value of the SAR averaged over the whole body.
- 3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-4904-0113 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR25-SPF0041 Page (11) of (75)	
--	---	---

6. FCC SAR General Measurement Procedures

6.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

6.2 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

6.2.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 – 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

6.2.2 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is $\leq 0.4 \text{ W/kg}$, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is $\leq 0.8 \text{ W/kg}$ or all test positions are measured.

6.2.3 2.4 GHz SAR Test Requirement

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following.

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM are additionally evaluated for SAR if highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

6.2.4 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz band, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel band width, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

6.2.5 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements.

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-4904-0113 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR25-SPF0041 Page (13) of (75)	 KCTL
---	---	---

6.2.6 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.




7. RF Average Conducted Output Power

7.1 WLAN Average Conducted Output Power

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.

Power Measurement Setup

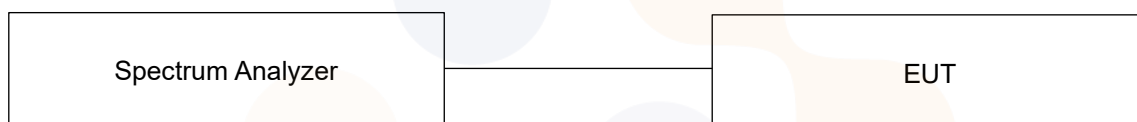

7.1.1 WLAN Average Conducted Output Power

Band	Freq. [MHz]	Channel	Mode		
			802.11b	802.11g	802.11n
WLAN 2.4 GHz	2 412.0	1	15.71	12.39	11.53
	2 437.0	6	15.38	11.96	11.15
	2 462.0	11	14.95	11.97	10.91
Band	Freq. [MHz]	Channel	802.11a	802.11n	802.11ac
NII (20 MHz)	5 180.0	36	9.32	9.15	9.25
	5 200.0	40	9.30	9.19	9.24
	5 220.0	44	9.21	9.18	9.20
	5 240.0	48	9.61	9.33	9.41
	5 260.0	52	9.47	9.57	9.48
	5 280.0	56	9.68	9.49	9.61
	5 300.0	60	9.50	8.94	9.17
	5 320.0	64	9.72	9.40	9.37
	5 500.0	100	9.00	9.10	9.09
	5 600.0	120	8.53	8.53	8.43
	5 620.0	124	8.49	8.47	8.24
	5 720.0	144	8.23	8.21	8.18
	5 745.0	149	9.48	9.37	9.54
	5 785.0	157	9.47	9.49	9.35
	5 825.0	165	9.63	9.59	9.53
Band	Freq. [MHz]	Channel	802.11n		802.11ac
NII (40 MHz)	5 190.0	38	9.74		9.65
	5 230.0	46	9.81		9.87
	5 270.0	54	9.75		9.61
	5 310.0	62	9.71		9.66
	5 510.0	102	9.33		9.37
	5 590.0	118	8.93		8.76
	5 630.0	126	8.81		8.68
	5 710.0	142	8.84		8.62
	5 755.0	151	9.72		9.77
	5 795.0	159	9.91		9.67
Band	Freq. [MHz]	Channel	802.11ac		
NII (80 MHz)	5 210.0	42	9.39		
	5 290.0	58	9.68		
	5 530.0	106	8.69		
	5 610.0	122	8.72		
	5 690.0	138	8.74		
	5 775.0	155	9.65		

7.2 Wireless Band Duty Cycle

Wireless Bands	Frequency Bands	Mode	Duty Cycle (%)
WLAN	WLAN 2.4 GHz	802.11b	99.76
	U-NII	802.11ac(VHT80)	94.05



8. System Verification

8.1 Measurement date and environment

Shield room	Date	Environment	
		Temperature (°C)	Humidity (%)
8F – 6	2025-05-29	22.1 ~ 22.3	55.7 ~ 55.9
	2025-05-30	22.2 ~ 22.5	55.8 ~ 56.1

8.2 Tissue Verification

The dielectric properties for this Tissue Simulant Liquids were measured by using the SPEAG Model DAK3.5 Dielectric Probe in conjunction with Agilent E5071B Network Analyzer (300 kHz – 8 500 MHz). The Conductivity (σ) and Permittivity (ϵ_r) are listed in Table 1. For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Liquids was $(22 \pm 2) ^\circ\text{C}$.

Freq. (MHz)	Date	Permittivity (ρ)	Conductivity (ϵ_r)	Temp. (°C)
2 450.0	2025-05-29	$39.20 \pm 5 \%$ (37.24 ~ 41.16)	$1.80 \pm 5 \%$ (1.71 ~ 1.89)	21.35
		38.50	1.84	
5 250.0	2025-05-30	$35.95 \pm 5 \%$ (34.15 ~ 37.75)	$4.71 \pm 5 \%$ (4.47 ~ 4.95)	21.38
		34.30	4.75	
5 600.0		$35.50 \pm 5 \%$ (33.73 ~ 37.28)	$5.07 \pm 5 \%$ (4.82 ~ 5.32)	
		33.80	5.22	
5 800.0		$35.30 \pm 5 \%$ (33.54 ~ 37.07)	$5.27 \pm 5 \%$ (5.01 ~ 5.53)	
		34.40	5.26	


<Table 1. Measurement result of Tissue electric parameters>

8.3 Test System Verification

The microwave circuit arrangement for system verification is sketched below picture.

The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the Table 2.

During the tests, the ambient temperature of the laboratory was in the range $(22 \pm 2) ^\circ\text{C}$, the relative humidity was in the range $(50 \pm 20)\%$ and the liquid depth Above the ear/grid reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

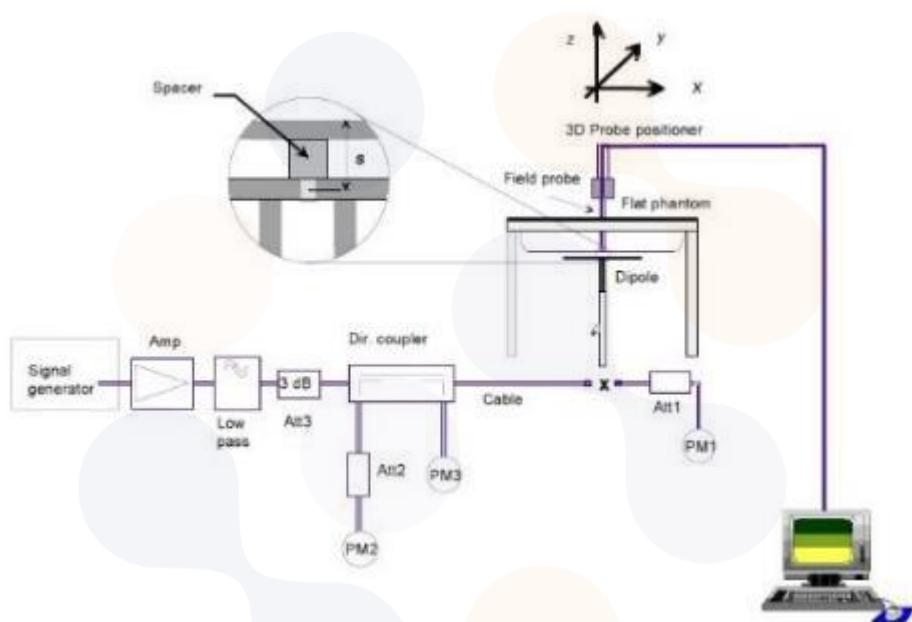

Frequency (MHz)	Date	Tissue Type	Verification Kit	Probe S/N	Limit/Measured (Normalized to 1 W)	Deviation (%)
					Recommended 1g	
2 450.0	2025-05-29	HSL	D2450V2 SN: 1091	EX3DV4 SN: 7772	51.40 $\pm$ 10 % (46.26~56.54) 50.70	-1.36
5 250.0	2025-05-30	HSL	D5GHzV2 SN: 1134	EX3DV4 SN: 7772	79.00 $\pm$ 10 % (71.10~86.90) 77.30	-2.15
5 600.0					82.40 $\pm$ 10 % (74.16~90.64) 82.90	0.61
5 800.0					78.60 $\pm$ 10 % (70.74~86.46) 81.30	3.44

<Table 2. System Verification>

9. SAR Test Results

9.1 Standalone Body SAR Test Results

WLAN 2.4 GHz										
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Plot No.
802.11b	Front	0	2 412.0	15.71	16.00	1.069	1.002	0.821	0.879	1
		0	2 437.0	15.38	16.00	1.153	1.002	0.723	0.835	
	Top	0	2 412.0	15.71	16.00	1.069	1.002	0.224	0.240	
	Repeated SAR Test									
	Front	0	2 412.0	15.71	16.00	1.069	1.002	0.798	0.855	

U-NII-2A										
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Plot No.
802.11ac (VHT80)	Front	0	5 290.0	9.68	10.00	1.076	1.063	0.528	0.604	2

U-NII-2C										
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Plot No.
802.11ac (VHT80)	Front	0	5 690.0	8.74	10.00	1.337	1.063	0.479	0.681	3

U-NII-3										
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Plot No.
802.11ac (VHT80)	Front	0	5 775.0	9.65	10.00	1.084	1.063	0.435	0.501	4


General Notes:

1. According to test procedures specified in IEEE1528-2013 and FCC KDB publication 447498 D01v06, the DUT was tested in all operating configurations, but only worst-case SAR values were reported
2. Only standard batteries were used for all tests and fully charged.
3. The depth of tissue-equivalent liquids in the phantom was at least 15cm.
4. The manufacturer guarantees that the tested devices have same physical, mechanical and thermal characteristics and meet the requirements for expected operational tolerances.
5. Measured SAR values were scaled up by applying the power scaling factor to comply FCC KDB publication 447498 D01v06

Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-4904-0113 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR25-SPF0041 Page (20) of (75)	 KCTL
---	---	---

WLAN Notes:

1. According to KDB publication 248227 D01v02r02, the channel with the highest measured output power of DSSS was selected for WLAN SAR test and OFDM modes (WLAN 2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
2. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance.
3. When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
5. During the test, the WLAN transmission was monitored through the spectrum analyzer.

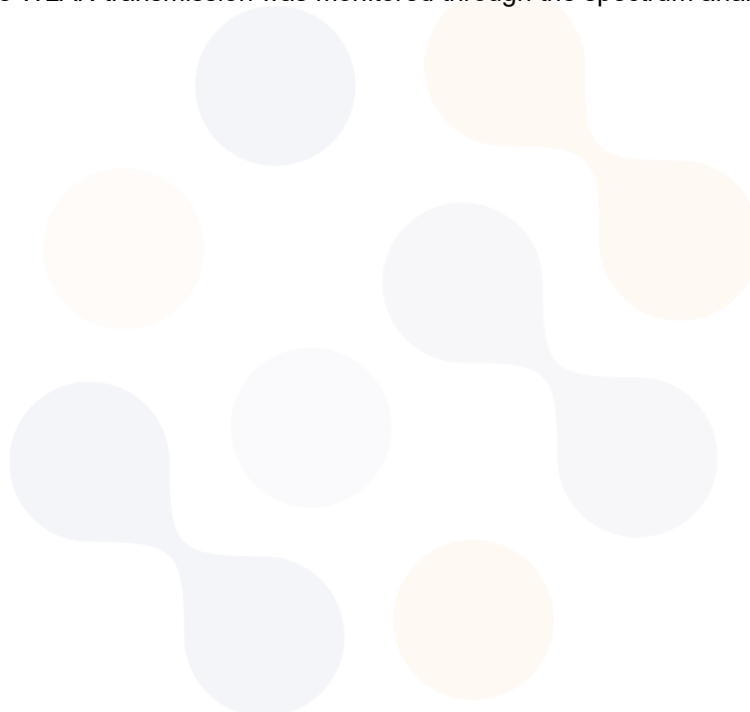

10. SAR Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg.
- 2) **When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.**
- 3) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Band	Mode	EUT Position	Separation Distance (mm)	Frequency (MHz)	Measured 1 g SAR (W/kg)	Repeated 1g SAR (W/kg)	Ratio
WLAN 2.4GHz	802.11b	Front	0	2 412.0	0.821	0.798	1.03

11. Measurement Uncertainty

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is $< 1.5 \text{ W/kg}$ and the measured 10-g SAR within a frequency band is $< 3.75 \text{ W/kg}$. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Standard 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5 W/kg and highest measured 10-g SAR is less 3.75 W/kg . Therefore, the measurement uncertainty table is not required in this report.



Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-70-4904-0113 FAX: 82-505-299-8311 www.kctl.co.kr	Report No.: KR25-SPF0041 Page (23) of (75)	
---	---	---

12. Test Equipment Information

Test Platform	SPEAG DASY8 System			
Version	DASY8: 16.4.0.5005			
Location	Eurofins KCTL Co.,Ltd. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea			
Manufacture	SPEAG			
Hardware Reference				
Equipment	Model	Serial Number	Date of Calibration	Due date of next Calibration
Shield Room	-	8F - 6	-	-
DASY8 Robot	TX2-60L	F/22/0042066/A/001	-	-
Phantom	ELI Phantom V8.0	2189	-	-
Mounting Device	Laptop Holder	-	-	-
DAE	DAE4	1759	2024-11-19	2025-11-19
Probe	EX3DV4	7772	2024-09-23	2025-09-23
MICROWAVE GENERATOR	SMP02	100295	2024-12-12	2025-12-12
Power Meter	ML2438A	2323002	2024-07-03	2025-07-03
Power Sensor	E9301A	US39210857	2024-11-04	2025-11-04
	E9301A	MY41499102	2024-11-04	2025-11-04
Attenuator	PE7005-10	2228-4	2025-01-17	2026-01-17
	PE7005-10	2228-5	2024-12-11	2025-12-11
	PE7005-10	2228-6	2024-12-11	2025-12-11
Power Amplifier	AMP2027ADB	10005	2025-04-24	2026-04-24
Dual Directional Coupler	772D	2839A160504	2025-04-24	2026-04-24
Low Pass Filter	VLF-3000+	31831	2025-04-24	2026-04-24
	VLF-6000+	31838	2025-04-24	2026-04-24
Dipole Validation Kits	D2450V2	1091	2024-09-13	2026-09-13
	D5GHzV2	1134	2024-01-17	2026-01-17
ENA Series Network Analyzer	E5071B	MY42403524	2025-02-10	2026-02-10
Dielectric Assessment Kit	DAKS-3.5	1165	2024-11-18	2025-11-18
VECTOR REFLECTOMETER	R140B	22420003	2024-11-18	2025-11-18
Humidity/Temp	PC-5400TRH	PC-5400TRH-2	2024-11-06	2025-11-06
Spectrum Analyzer	FSP7	100289	2024-12-11	2025-12-11

13. Test System Verification Results

Eurofins KCTL Co.,Ltd.

Measurement Report for D2450V2 - SN1091, FRONT, Validation band, UID 0 -, (2450.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D2450V2 - SN1091, S peag	10.0 x 10.0 x 290.0	1091	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 10.00	Validation band	CW, 0--	2450.000	6.65	1.84	38.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 - 2189	HBBL-600-10000 , 2025-05-29	EX3DV4 - SN7772, 2024-09-23	DAE4 Sn1759, 2024-11-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 144.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-05-29	2025-05-29
psSAR1g [W/kg]	4.77	5.07
psSAR8g [W/kg]	2.51	2.65
psSAR10g [W/kg]	2.27	2.41
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		-0.04
Peak SAR [W/kg]		9.80

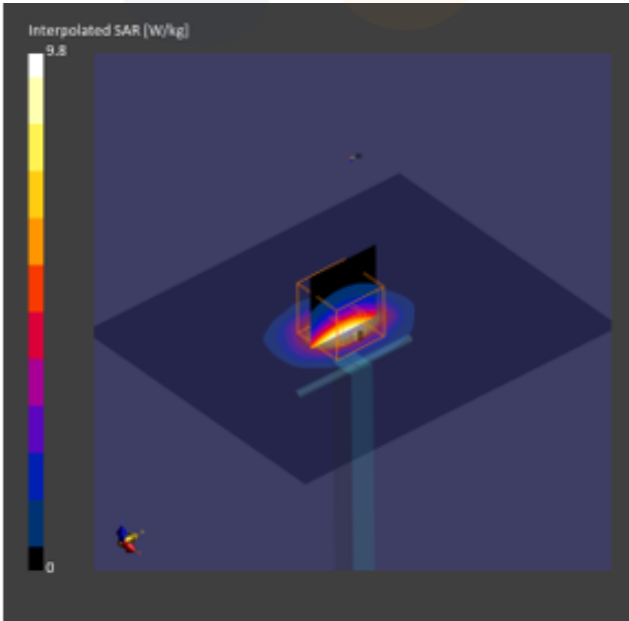

Eurofins KCTL Co.,Ltd.

Measurement Report for D5GHzV2, FRONT, D5GHz, UID 0 -, (5250.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D5GHzV2, Speag	10.0 x 10.0 x 300.0	1134	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 10.00	D5GHz	CW, 0--	5250.000	5.26	4.75	34.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 - 2189	HBBL-600-10000 , 2025-05-30	EX3DV4 - SN7772, 2024-09-23	DAE4 Sn1759, 2024-11-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-05-30	2025-05-30
psSAR1g [W/kg]	6.27	7.73
psSAR8g [W/kg]	2.32	2.68
psSAR10g [W/kg]	2.01	2.33
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		-0.09
Peak SAR [W/kg]		32.3

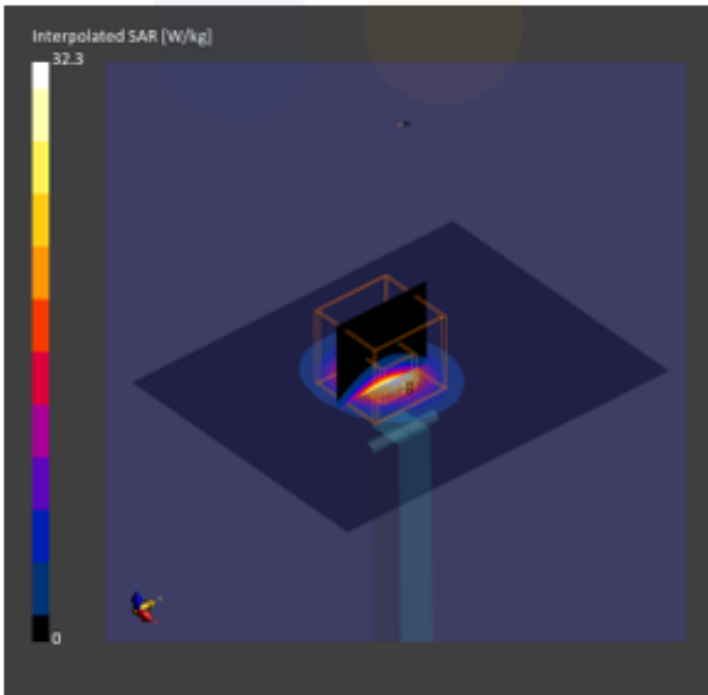

Eurofins KCTL Co.,Ltd.

Measurement Report for D5GHzV2, FRONT, D5GHz, UID 0 -, (5600.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D5GHzV2, Speag	10.0 x 10.0 x 300.0	1134	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 10.00	D5GHz	CW, 0--	5600.000	4.8	5.22	33.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 - 2189	HBBL-600-10000 , 2025-05-30	EX3DV4 - SN7772, 2024-09-23	DAE4 Sn1759, 2024-11-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-05-30	2025-05-30,
psSAR1g [W/kg]	6.78	8.29
psSAR8g [W/kg]	2.47	2.87
psSAR10g [W/kg]	2.15	2.49
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		0.03
Peak SAR [W/kg]		34.9

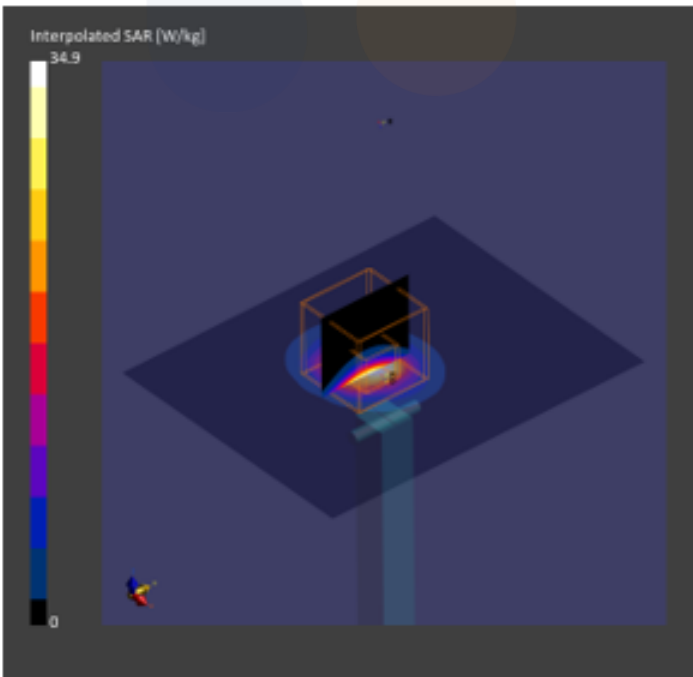

Eurofins KCTL Co.,Ltd.

Measurement Report for D5GHzV2, FRONT, D5GHz, UID 0 -, (5800.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
D5GHzV2, Speag	10.0 x 10.0 x 300.0	1134	Validation Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 10.00	D5GHz	CW, 0--	5800.000	4.72	5.26	34.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 - 2189	HBBL-600-10000 , 2025-05-30	EX3DV4 - SN7772, 2024-09-23	DAE4 Sn1759, 2024-11-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-05-30	2025-05-30
psSAR1g [W/kg]	6.73	8.13
psSAR8g [W/kg]	2.44	2.81
psSAR10g [W/kg]	2.12	2.44
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		-0.00
Peak SAR [W/kg]		34.2

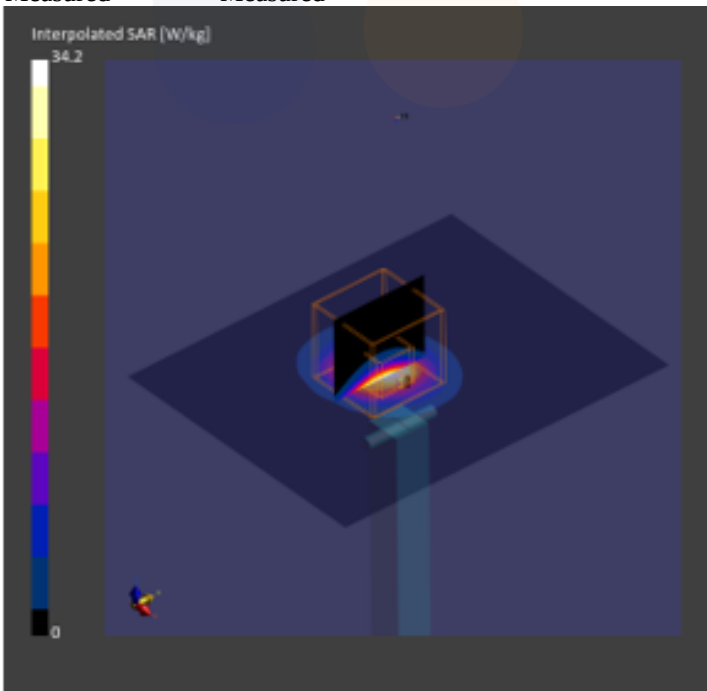

14. Test Results

1)

Eurofins KCTL Co.,Ltd.

Measurement Report for Device, FRONT, Custom Band, UID 0 -, Channel 1 (2412.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
KV010101, Kohler Ventures, Inc.	205.0 x 85.0 x 25.0	AT10917400498M	Multimedia Device (IT+A/V)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 0.00	WLAN 2.4G	CW, 0--	2412.000, 1	6.65	1.81	38.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 - 2189	HBBL-600-10000, 2025-05-29	EX3DV4 - SN7772, 2024-09-23	DAE4 Sn1759, 2024-11-19

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	168.0 x 264.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	No	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-05-29	2025-05-29
psSAR1g [W/kg]	0.728	0.821
psSAR8g [W/kg]	0.353	0.362
psSAR10g [W/kg]	0.316	0.322
psAPD (1.0cm2, sq) [W/m2]		N/A
psAPD (4.0cm2, sq) [W/m2]		N/A
Power Drift [dB]		-0.01
Peak SAR [W/kg]		1.83

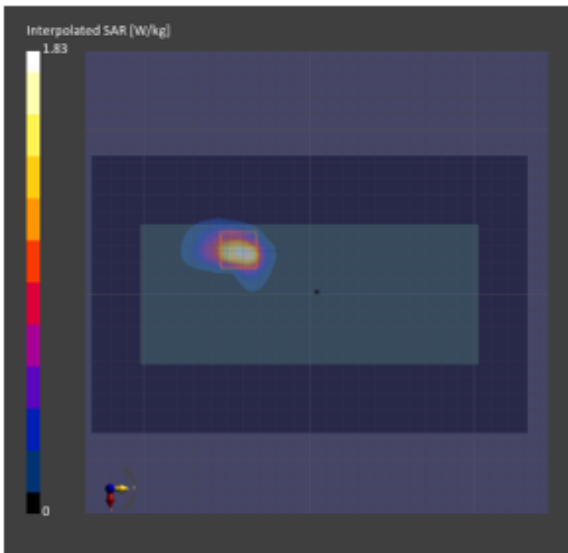

2)

Eurofins KCTL Co.,Ltd.

Measurement Report for Device, FRONT, Custom Band, UID 0 -, Channel 58 (5290.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
KV010101, Kohler Ventures, Inc.	205.0 x 85.0 x 25.0	AT10917400498M	Multimedia Device (IT+A/V)

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 0.00	WLAN 5G	CW, 0--	5290.000, 58	5.26	4.93	34.4

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 - 2189	HBBL-600-10000 , 2025-05-30	EX3DV4 - SN7772, 2024-09-23	DAE4 Sn1759, 2024-11-19

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 140.0	24.0 x 24.0 x 22.0	Date	2025-05-30	2025-05-30
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	psSAR1g [W/kg]	0.490	0.528
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.178	0.182
Graded Grid	No	Yes	psSAR10g [W/kg]	0.156	0.158
Grading Ratio	N/A	1.5	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		-0.07
Scan Method	Measured	Measured	Peak SAR [W/kg]		2.19

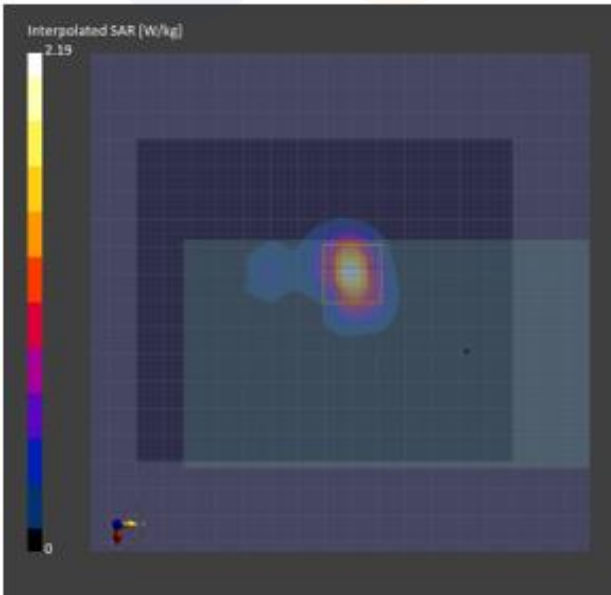

3)

Eurofins KCTL Co.,Ltd.

Measurement Report for Device, FRONT, Custom Band, UID 0 -, Channel 138 (5690.000MHz)

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
KV010101, Kohler Ventures, Inc.	205.0 x 85.0 x 25.0	AT10917400498M	Multimedia Device (IT+A/V)

Exposure Conditions


Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 0.00	WLAN 5G	CW, 0--	5690.000, 138	4.8	5.39	34.2

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 - 2189	HBBL-600-10000 , 2025-05-30	EX3DV4 - SN7772, 2024-09-23	DAE4 Sn1759, 2024-11-19

Scan Setup

	Area Scan	Zoom Scan	Measurement Results	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 140.0	24.0 x 24.0 x 22.0	Date	2025-05-30	2025-05-30
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	psSAR1g [W/kg]	0.466	0.479
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.177	0.178
Graded Grid	No	Yes	psSAR10g [W/kg]	0.156	0.156
Grading Ratio	N/A	1.5	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		-0.07
Scan Method	Measured	Measured	Peak SAR [W/kg]		2.11

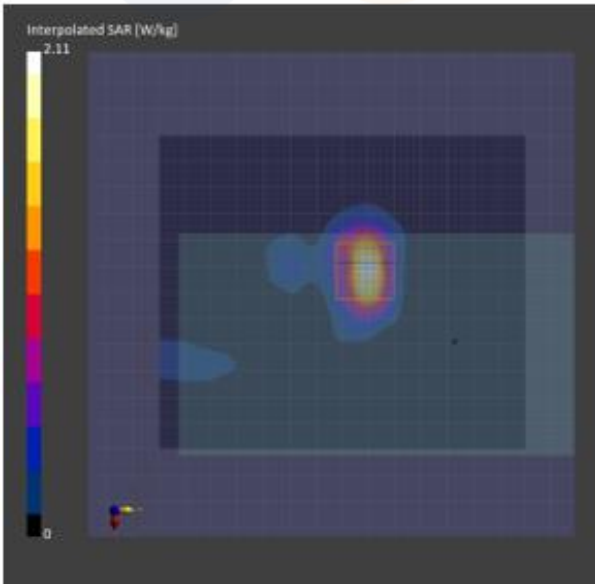


4)
Eurofins KCTL Co.,Ltd.
Measurement Report for Device, FRONT, Custom Band, UID 0 -, Channel 155 (5775.000MHz)

Device under Test Properties			
Model, Manufacturer	Dimensions [mm]	Serial Number	DUT Type
KV010101, Kohler Ventures, Inc.	205.0 x 85.0 x 25.0	AT10917400498M	Multimedia Device (IT+A/V)

Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 0.00	Custom Band	CW, 0--	5775.000, 155	4.72	5.29	34.4

Hardware Setup			
Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 - 2189	HBBL-600-10000 , 2025-05-30	EX3DV4 - SN7772, 2024-09-23	DAE4 Sn1759, 2024-11-19

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 140.0	24.0 x 24.0 x 22.0	Date	2025-05-30	2025-05-30
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4	psSAR1g [W/kg]	0.396	0.435
Sensor Surface [mm]	3.0	1.4	psSAR8g [W/kg]	0.164	0.163
Graded Grid	No	Yes	psSAR10g [W/kg]	0.146	0.144
Grading Ratio	N/A	1.5	psAPD (1.0cm2, sq) [W/m2]		N/A
MAIA	N/A	N/A	psAPD (4.0cm2, sq) [W/m2]		N/A
Surface Detection	VMS + 6p	VMS + 6p	Power Drift [dB]		-0.12
Scan Method	Measured	Measured	Peak SAR [W/kg]		1.91

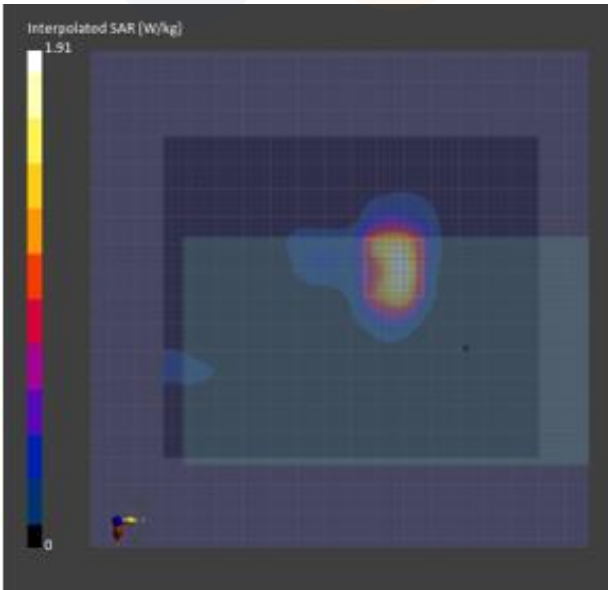

Appendixes List

Appendix A	A.1 Probe Calibration certificate (EX3DV4_7772) A.2 Dipole Calibration certificate (D2450V2_1091) A.3 Dipole Calibration certificate (D5GHZv2_1134) A.4 Justification for Extended SAR Dipole Calibrations
Appendix B	SAR Tissue Specification
Appendix C	#Antenna Location & Distance
Appendix D	EUT Photo
Appendix E	Test Setup Photo

