

Antenna Specification

Specifications


Shenzhen Eagle Rider Electronics Co., Ltd.

Summary

Room C619, Building B, Western Silicon Valley, No. 5010 Bao'an Avenue, Caowei Community, Bao'an District, Shenzhen

ITEM	SPEC.	
Model Name	IBM 2.4 GHz	
Center Frequency	2405MHz	-3.04 dBi
	2441 MHz	-2.39dBi
	2475 MHz	-2.95 dBi
MAX. GAIN	-2.39 dBi	
Polarization	Horizontal	
Azimuth Beam Pattern	Omni-directional	
Impedance	50 Ω	
Antenna Length	2.16cm	


Antenna Photo & Length (mm)

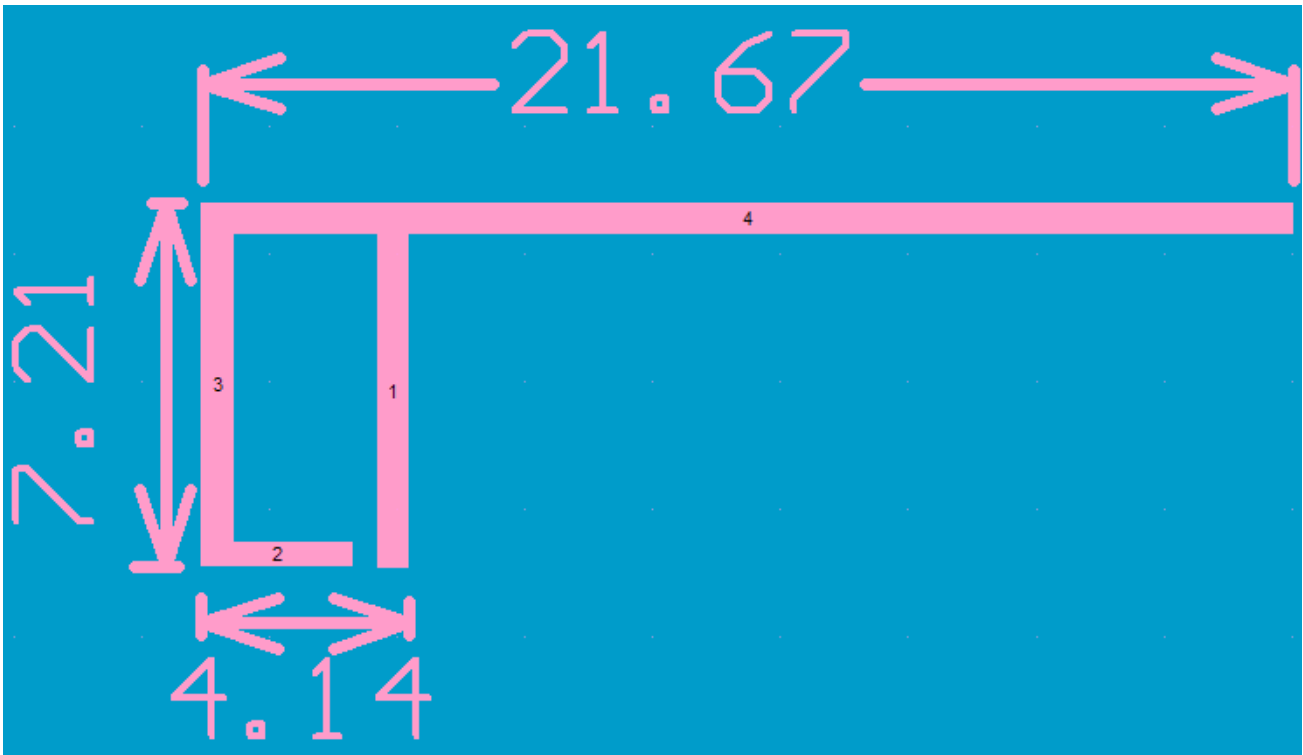

1.
Main antenna : 2405 MHz

1.1 Horizontal

◆XY-plane

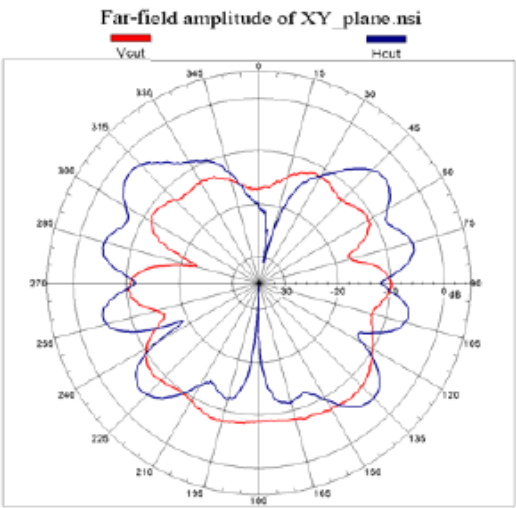


Unit : dBi

	Peak gain	Avg. gain
H cut	-3.04	-8.82
V cut	-7.19	-11.29
Total	-2.52	-6.53

1.2 Vertical

◆XZ-plane

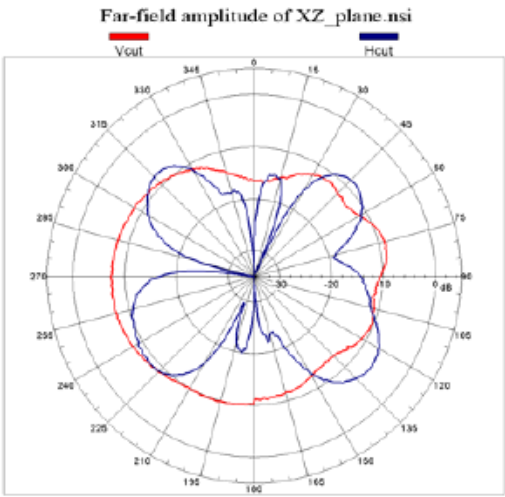


	Peak gain	Avg. gain
H cut	-6.44	-13.24
V cut	-7.34	-10.57
Total	-5.38	-8.35

1.
Main antenna : 2441 MHz

2.1 Horizontal

◆XY-plane

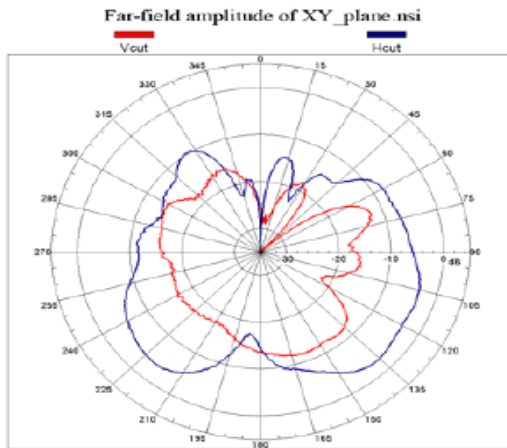


Unit : dBi

	Peak gain	Avg. gain
H cut	-2.89	-8.89
V cut	-11.81	-16.63
Total	-2.39	-8.05

2.2

Vertica

◆XZ-plane

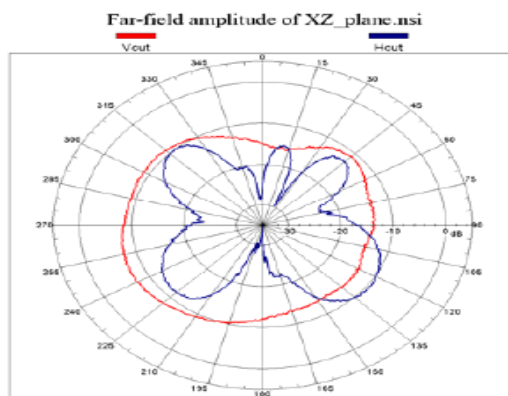


	Peak gain	Avg. gain
H cut	-9.56	-15.85
V cut	-7.29	-11.21
Total	-6.27	-9.66

3. Main antenna : 2475 MHz

3.1 Horizontal


◆YZ-plane

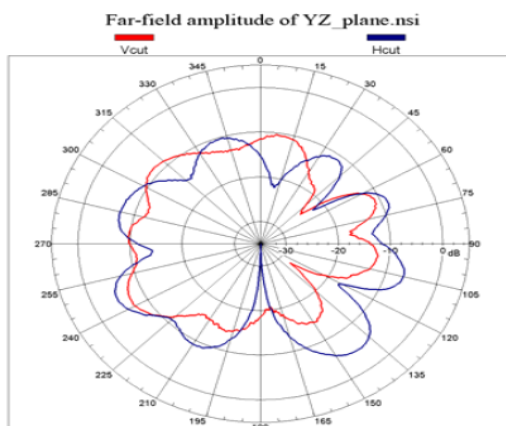

	Peak gain	Avg. gain
H cut	-4.74	-10.75
V cut	-7.09	-13.11
Total	-2.95	-8.49

3.2 Vertical

◆YZ-plane

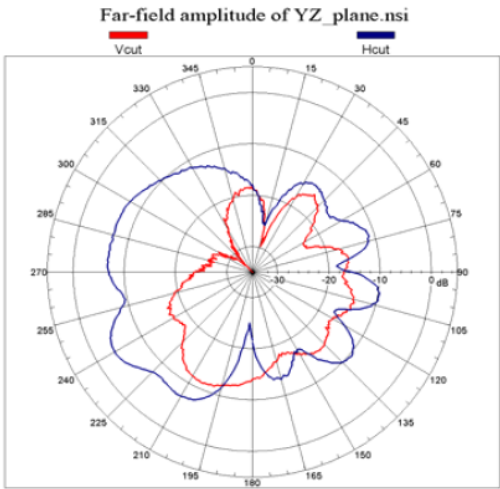

	Peak gain	Avg. gain
H cut	-3.99	-11.25
V cut	-11.31	-18.08
Total	-3.79	-10.11

4. Result

Center Frequency	Maximum Ant Gain	
2405MHz	H	-3.04 dBi
	V	-6.44 dBi
2441MHz	H	-2.39dBi
	V	-6.27 dBi
2475 MHz	H	-2.95 dBi
	V	-3.79dBi