



FCC Test Report

FCC ID: 2BMP7-XS15

Applicant: Shenzhen Tailefeng Communications Co., Ltd

Address: 518, Building 420, Bagua Ling Industrial Zone, Yuanling Street, Futian District, Shenzhen, Guangdong Province, China

Manufacturer: Shenzhen Tailefeng Communications Co., Ltd

Address: 518, Building 420, Bagua Ling Industrial Zone, Yuanling Street, Futian District, Shenzhen, Guangdong Province, China

Product Name: WCDMA digital mobile phone

Trade Mark: ONEMYTH

Model Number: XS 15

Date of Receipt: Oct. 15, 2025

Test Date: Oct. 15, 2025 - Dec. 08, 2025

Date of Report: Dec. 08, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC CFR Title 47 Part22 Subpart H
FCC CFR Title 47 Part24 Subpart E
ANSI/ TIA/ EIA-603-D-2010
FCC KDB 971168 D01 Power Meas. License Digital Systems v02v02
ANSI C63.26:2015

Test Result: Pass

Report Number: DLE-251015106R

Prepared (Test Engineer): Alisa Song

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.

**TABLE OF CONTENTS**

Test Report Declaration	Page
1. TEST SUMMARY	3
2. GENERAL PRODUCT INFORMATION	4
2.1. Description of Device (EUT)	4
2.2. Product Function	4
2.3. Independent Operation Modes	5
3. TEST SITES.....	5
3.1. Test Facilities.....	5
3.2. Measurement Uncertainty	5
3.3. List of Test and Measurement Instruments	6
4. TEST SET-UP	7
4.1. Principle of Configuration Selection	7
4.2. Block Diagram of Test Set-up	7
4.3. Test Environment:	7
5. EMISSION TEST RESULTS	8
5.1. Conducted RF Output Power	8
5.2. -26dB and 99% Occupied Bandwidth	10
5.3. Peak to Average Ratio	11
5.4. Frequency Stability	12
5.5. Conducted Spurious Emissions	16
5.6. Conducted Out of Band Emissions	17
5.7. Transmitter Radiated Power (EIRP/ERP).....	18
5.8. Radiated Out of Band Emissions.....	21
6. PHOTOGRAPHS OF TEST SET-UP	25
7. PHOTOGRAPHS OF THE EUT	25

**1. TEST SUMMARY**

Test Items	Test Requirement	Result
Conducted RF Output Power	2.1046	PASS
Peak to Average Ratio	2.1055, 22.355 24.235	PASS
99% & -26 dB Occupied Bandwidth	2.1049, 22.917 24.238,	PASS
Frequency Stability	2.1055, 22.355 24.235,	PASS
Conducted Out of Band Emissions	2.1051, 2.1057 22.917, 24.238	PASS
Band Edge	2.1051, 2.1057 22.917, 24.238	PASS
Transmitter Radiated Power (EIPR/ERP)	22.913, 24.232	PASS
Radiated Out of Band Emissions	2.1053, 2.1057 22.917, 24.238	PASS



2. GENERAL PRODUCT INFORMATION

2.1. Description of Device (EUT)

Product Name:	WCDMA digital mobile phone
Trade Mark:	ONEMYTH
Model Number:	XS 15
Model Difference	N/A
Operation Frequency:	GSM 850: Tx: 824.20 - 848.80MHz; Rx: 869.20 - 893.80MHz GSM1900: Tx: 1850.20 - 1909.80MHz; Rx: 1930.20 - 1989.80MHz WCDMA Band 2: Tx: 1850.00 - 1910.00MHz; Rx: 1930.00 - 1990.00MHz WCDMA Band 5: Tx: 824.00 - 849.00MHz; Rx: 869.00 - 894.00MHz
Modulation technology:	GSM Mode with GMSK Modulation WCDMA Mode with BPSK Modulation HSDPA Mode with QPSK, 16QAM Modulation HSUPA Mode with QPSK, 16QAM Modulation
Antenna Type:	Internal Antenna
Antenna gain:	GSM850: -1.52dBi, GSM1900:-1.55dBi, WCDMA Band 2: -1.54dBi, WCDMA Band 5: -1.53dBi
Power supply:	DC 5V from adapter DC 3.8V from battery
Hardware Version	HV1.0
Software Version	SV1.0

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.

2.2. Product Function

Refer to Technical Construction Form and User Manual.



2.3. Independent Operation Modes

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Test modes		
Band	Radiated	Conducted
GSM	GSM/GPRS/EGPRS	GSM/GPRS/EGPRS
WCDMA	RMC/ HSDPA/ HSUPA	RMC/ HSDPA/ HSUPA

Test Channel(MHz)			
Band	Low	Middle	High
GSM850	824.20	836.60	848.80
GSM1900	1850.20	1880.00	1909.80
WCDMA Band 2	1852.4	1880	1907.6
WCDMA Band 5	826.4	836.6	846.6

Note: we pretest all voltage, only the DC 3.8V was worst mode, and the data show in the report.

3. TEST SITES

3.1. Test Facilities

Site Description

Name of Firm : Shenzhen DL Testing Technology Co., Ltd.

101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory

Site Location : Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street,
Longgang District, Shenzhen, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

3.2. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$



3.3. List of Test and Measurement Instruments

3.3.1. For conducted emission at the mains terminals test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
843 Shielded Room	ChengYu	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
EMI Receiver	R&S	ESR	101421	Oct. 25, 2025	Oct. 24, 2026
LISN	R&S	ENV216	102417	Oct. 25, 2025	Oct. 24, 2026
843 Cable 1#	ChengYu	CE Cable	001	Oct. 25, 2025	Oct. 24, 2026
843 Cable 1#	FUJIKURA	843C1#	001	Oct. 25, 2025	Oct. 24, 2026

3.3.2. For radiated test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Oct. 25, 2025	Oct. 24, 2026
Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Oct. 25, 2025	Oct. 24, 2026
Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Oct. 25, 2025	Oct. 24, 2026
Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Oct. 25, 2025	Oct. 24, 2026
Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Oct. 25, 2025	Oct. 24, 2026
Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Oct. 25, 2025	Oct. 24, 2026
Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Oct. 25, 2025	Oct. 24, 2026
Amplifier(18GHz-40GHz)	Quanjuda	DLE-161	97	Oct. 25, 2025	Oct. 24, 2026
Loop Antenna(9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Oct. 25, 2025	Oct. 24, 2026
RF cables1 (9kHz-1GHz)	ChengYu	966	004	Oct. 25, 2025	Oct. 24, 2026
RF cables2 (1GHz-40GHz)	ChengYu	966	003	Oct. 25, 2025	Oct. 24, 2026
Antenna connector	Florida RF Labs	N/A	RF 01#	Oct. 25, 2025	Oct. 24, 2026
Power probe	KEYSIGHT	U2021XA	MY55210018	Oct. 25, 2025	Oct. 24, 2026
Signal Analyzer	Agilent	N9020A	MY55370280	Oct. 25, 2025	Oct. 24, 2026
Test Receiver	R&S	ESU 40	100376	Oct. 25, 2025	Oct. 24, 2026
D.C. Power Supply	LongWei	PS-305D	010964729	Oct. 25, 2025	Oct. 24, 2026
Signal Amplifier	DAZE	ZN3380B	11235	Oct. 25, 2025	Oct. 24, 2026
High Pass filter	KANGMAI	WHKX1.0/1.5G-10SS	40	Oct. 25, 2025	Oct. 24, 2026
Filter	COM-MW	ZBSF-C836.5-25-X	BCTC042	Oct. 25, 2025	Oct. 24, 2026
Filter	COM-MW	ZBSF-C1747.5-75-X2	BCTC045	Oct. 25, 2025	Oct. 24, 2026
Filter	COM-MW	ZBSF-C1880-60-X2	BCTC047	Oct. 25, 2025	Oct. 24, 2026
Splitter	Agilent	11435B	1125162	Oct. 25, 2025	Oct. 24, 2026
RF CONDUCTED TEST					
System Simulator	Agilent	E5515C	GB43130252	Oct. 25, 2025	Oct. 24, 2026
Spectrum Analyzer	Agilent	N9020A	MY45108040	Oct. 25, 2025	Oct. 24, 2026
DC Power Supply	LongWei	PS-305D	010965682	Oct. 25, 2025	Oct. 24, 2026
Constant temperature and humidity box	GF	GTH-800-40-2P	MAA9906-012	Oct. 25, 2025	Oct. 24, 2026
Universal radio communication tester	R&S	CMW500	115295	Oct. 25, 2025	Oct. 24, 2026



4. TEST SET-UP

4.1. Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

4.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators

EUT

4.3. Test Environment:

Ambient conditions in the test laboratory:

Items	Actual
Temperature (°C)	21~23
Humidity (%RH)	50~65



5. EMISSION TEST RESULTS

5.1. Conducted RF Output Power

5.1.1. Limit

According to FCC section 2.1046(a), FCC part22.913(a), FCC part22.50(a) and FCC part 24.232(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

5.1.2. Test Setup

The EUT, which is powered by the adapter, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power.

5.1.3. Test Result

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT.

Pass, the table and plot please see annex.

The conducted power tables are as follows:

Average Conducted Power(dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency	824.20	836.60	848.80	1850.20	1880.00	1909.80
GSM	24.22	25.11	25.11	28.14	27.21	27.21
GPRS (GMSK, 1 TX slot)	24.63	25.15	25.76	28.16	27.83	27.53
GPRS (GMSK, 2 TX slot)	23.85	24.24	24.55	27.35	27.04	26.55
GPRS (GMSK, 3 TX slot)	21.15	22.26	22.63	25.25	25.25	24.41
GPRS (GMSK, 4 TX slot)	20.31	21.05	21.41	24.31	24.16	23.63
EGPRS(GMSK, 1 TX slot)	17.83	18.68	19.63	25.25	24.75	24.71
EGPRS(GMSK, 2 TX slot)	16.52	17.25	18.55	24.23	23.86	23.55
EGPRS(GMSK, 3 TX slot)	14.63	15.46	16.82	22.44	22.52	21.36
EGPRS(GMSK, 4 TX slot)	13.67	13.52	14.74	20.61	20.66	20.15



Average Conducted Power(dBm)						
Band	WCDMA Band 2			WCDMA Band 5		
Frequency	1852.4	1880.0	1907.6	826.4	836.6	846.6
RMC 12.2Kbps	21.35	21.21	21.52	21.21	21.21	21.28
HSDPA Subtest-1	20.25	20.63	20.23	20.63	20.73	20.34
HSDPA Subtest-2	19.43	19.94	19.41	20.45	20.52	20.58
HSDPA Subtest-3	18.44	18.11	18.56	19.85	19.33	19.52
HSDPA Subtest-4	18.26	18.86	18.52	19.13	19.52	19.38
HSUPA Subtest-1	18.52	20.52	20.03	19.52	20.53	20.41
HSUPA Subtest-2	20.04	20.16	20.21	20.64	20.65	20.65
HSUPA Subtest-3	18.41	19.21	18.84	18.21	19.41	19.85
HSUPA Subtest-4	20.52	20.41	20.66	20.73	20.73	20.41
HSUPA Subtest-5	18.43	19.66	19.67	19.41	20.85	20.28



5.2. -26dB and 99% Occupied Bandwidth

5.2.1. Limit

According to FCC section 2.1049 and FCC part22.99 and FCC part24.131, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth,

5.2.2. Test Setup

The EUT, which is powered by the adapter, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power.

5.2.3. Test Result

Pass, the table and plot please see annex.




5.3. Peak to Average Ratio

5.3.1. Limit

According to FCC section 22.99, 24.131 the peak to average ratio(PAR) of the transmission may not exceed 13dB.

5.3.2. Test Setup

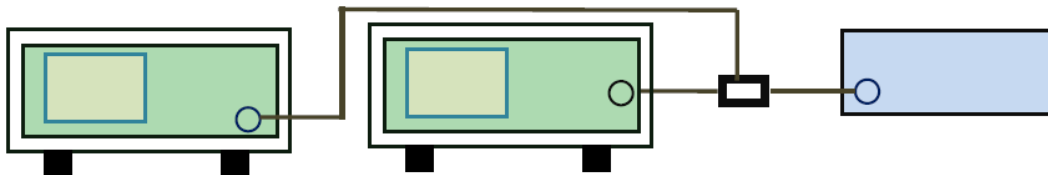

5.3.3. Test Procedure

According with KDB 971168 v02r02

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

5.3.4. Test Result

Pass, the table and plot please see annex.




5.4. Frequency Stability

5.4.1. Limit

According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -40°C to $+80^{\circ}\text{C}$ at intervals of not more than 10°C .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

5.4.2. Test Setup

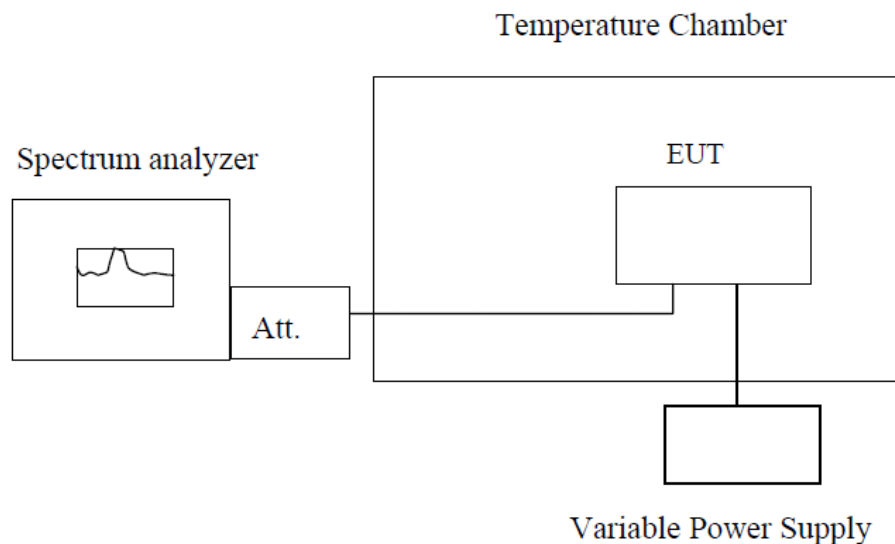

Note : Measurement setup for testing on Antenna connector

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber.

The EUT is commanded by the System Simulator (SS) to operate at the maximum output power

5.4.3. Test Result

The nominal, highest and lowest extreme voltages are separately 3.8VDC, 4.18VDC and 3.42VDC

which are specified by the applicant; the normal temperature here used is 25°C . The frequency

deviation limit of 850MHz band is $\pm 2.5\text{ppm}$, and 1900MHz is $\pm 1\text{ppm}$

For LTE mode, only test the max bandwidth.

The table and plot please see annex.



Test Conditions			Frequency Deviation			Result
Band	Power(Vdc)	Temperature(°C)	Frequency Error(Hz)	ppm	Limit	
GSM850 Middle channel 836.0MHz	3.8	-40	42	0.0554	±2.5	PASS
	3.8	-30	56	0.0641		
	3.8	-20	67	0.0802		
	3.8	-10	34	0.0441		
	3.8	0	112	0.1336		
	3.8	10	23	0.0252		
	3.8	20	45	0.0514		
	3.8	30	66	0.0733		
	3.8	40	54	0.0641		
	3.8	50	21	0.0274		
	3.8	60	34	0.0436		
	3.8	70	43	0.0555		
	3.8	80	78	0.0941		
	4.18	25	126	0.1547		
	3.8	25	32	0.0336		
	3.42	25	76	0.0955		
EGPRS850 Middle channel 836.0MHz	3.8	-40	65	0.0752	±2.5	PASS
	3.8	-30	32	0.036		
	3.8	-20	76	0.0941		
	3.8	-10	89	0.1036		
	3.8	0	23	0.0252		
	3.8	10	46	0.0541		
	3.8	20	75	0.0894		
	3.8	30	22	0.0274		
	3.8	40	78	0.0933		
	3.8	50	32	0.0353		
	3.8	60	78	0.0941		
	3.8	70	21	0.0258		
	3.8	80	89	0.1036		
	4.18	25	119	0.1455		
	3.8	25	32	0.0321		
	3.42	25	98	0.1147		



Test Conditions			Frequency Deviation			Result
Band	Power(Vdc)	Temperature(°C)	Frequency Error(Hz)	ppm	Limit	
GSM1900 Middle channel 1880.0MHz	3.8	-40	67	0.0336	±2.5	PASS
	3.8	-30	56	0.0252		
	3.8	-20	65	0.0314		
	3.8	-10	78	0.0436		
	3.8	0	98	0.0552		
	3.8	10	86	0.0441		
	3.8	20	66	0.0336		
	3.8	30	82	0.0441		
	3.8	40	69	0.0355		
	3.8	50	73	0.0374		
	3.8	60	77	0.0436		
	3.8	70	89	0.0452		
	3.8	80	112	0.0536		
	4.18	25	121	0.0652		
	3.8	25	77	0.0441		
	3.42	25	89	0.0436		
EGPRS1900 Middle channel 1880.0MHz	3.8	-40	56	0.0225	±2.5	PASS
	3.8	-30	78	0.0436		
	3.8	-20	23	0.0155		
	3.8	-10	87	0.0441		
	3.8	0	32	0.0136		
	3.8	10	51	0.0252		
	3.8	20	43	0.0221		
	3.8	30	57	0.0336		
	3.8	40	88	0.0441		
	3.8	50	54	0.0222		
	3.8	60	63	0.0347		
	3.8	70	57	0.0352		
	3.8	80	34	0.0136		
	4.18	25	132	0.0752		
	3.8	25	78	0.0441		
	3.42	25	99	0.0563		



Test Conditions			Frequency Deviation			Result
Band	Power(Vdc)	Temperature(°C)	Frequency Error(Hz)	ppm	Limit	
WCDMA Band 2 Middle channel 1880MHz	3.8	-40	32	0.0152	±2.5	PASS
	3.8	-30	45	0.0232		
	3.8	-20	21	0.0114		
	3.8	-10	56	0.0221		
	3.8	0	67	0.0352		
	3.8	10	65	0.0336		
	3.8	20	34	0.0152		
	3.8	30	23	0.0124		
	3.8	40	76	0.0408		
	3.8	50	75	0.0341		
	3.8	60	75	0.0336		
	3.8	70	78	0.0452		
	3.8	80	76	0.0421		
	4.18	25	124	0.0674		
	3.8	25	78	0.0436		
	3.42	25	89	0.0422		
WCDMA Band 5 Middle channel 836.6MHz	3.8	-40	75	0.0841	±2.5	PASS
	3.8	-30	88	0.1036		
	3.8	-20	32	0.0341		
	3.8	-10	76	0.0925		
	3.8	0	56	0.0636		
	3.8	10	78	0.0941		
	3.8	20	78	0.0925		
	3.8	30	54	0.0633		
	3.8	40	123	0.1452		
	3.8	50	32	0.0314		
	3.8	60	87	0.1036		
	3.8	70	45	0.0552		
	3.8	80	76	0.0936		
	4.18	25	165	0.1974		
	3.8	25	78	0.0921		
	3.42	25	97	0.1136		




5.5. Conducted Spurious Emissions

5.5.1. Limit

According to FCC section 22.917(a) and FCC section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

5.5.2. Test Setup

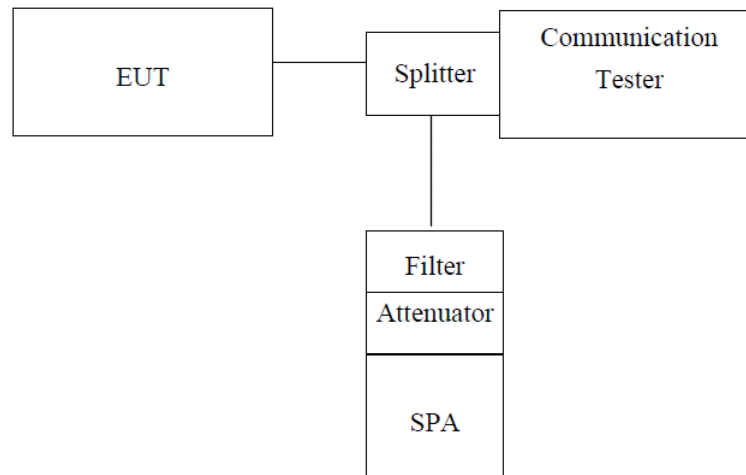

Note: Measurement setup for testing on Antenna connector

5.5.3. Measurement Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 100KHz, Start=30MHz, Stop= 10th harmonic.

Limit = -13dBm

5.5.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.

For LTE mode, the plot only show the min and max bandwidth's data.

Pass, the table and plot please see annex.




5.6. Conducted Out of Band Emissions

5.6.1. Limit

According to FCC section 22.917(b) and FCC section 24.238(b), in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

5.6.2. Test Setup

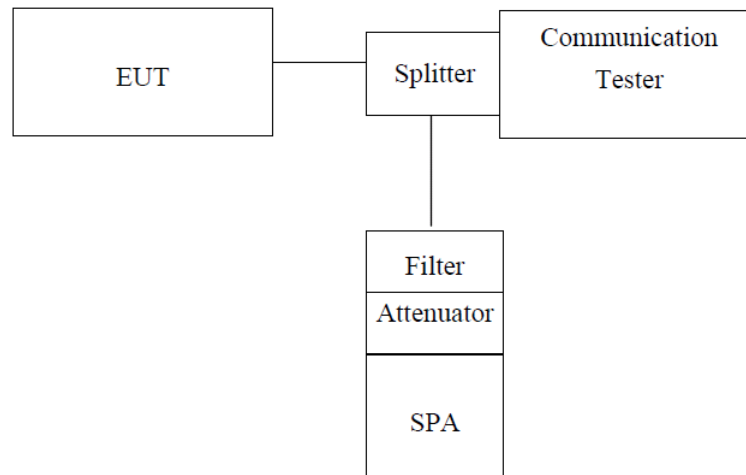

Note: Measurement setup for testing on Antenna connector

5.6.3. Measurement Procedure

The EUT, which is powered by the adapter, is coupled to the Spectrum Analyzer and the System Simulator with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the System Simulator to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the System Simulator.

RBW is set to 3kHz,VBW is set to 10kHz for GSM 850, GSM 1900

RBW is set to 51kHz,VBW is set to 160kHz for WCDMA Band 5, WCDMA Band 2

5.6.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.

Pass, the table and plot please see annex.




5.7. Transmitter Radiated Power (EIRP/ERP)

5.7.1. Limit


According to FCC section 22.913, the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7Watts, and FCC section 24.232, the broadband PCS mobile station is limited to 2 Watts e.i.r.p. peak power.

5.7.2. Test Setup


Below 1GHz

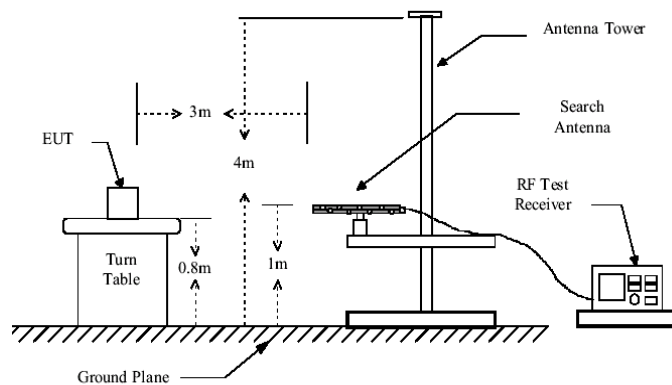

Above 1GHz

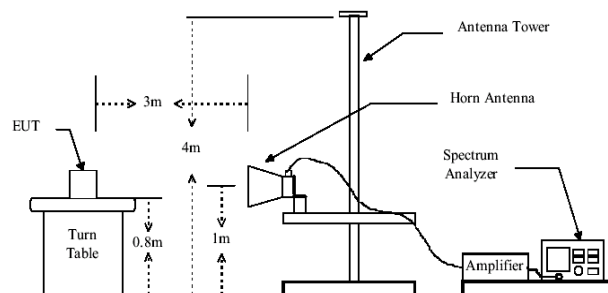

Substituted method:

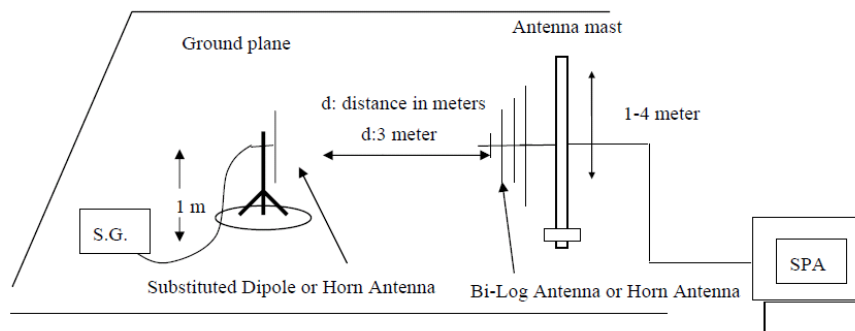

5.7.3. Measurement Procedure

The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. all test in Full-Anechoic Chamber.



During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$$

5.7.4. Test Result

Pass, the table and plot please see annex.

EUT mode	Channel	Antenna Pol.	S.G. output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)	Result
GSM 850	Lowest	V	7.33	19.33	2.52	24.14	38.45	Pass
		H	7.74	19.33	2.52	24.55		
	Middle	V	7.22	19.5	2.6	24.12	38.45	Pass
		H	7.13	19.5	2.6	24.03		
	Highest	V	7.15	19.94	2.71	24.38	38.45	Pass
		H	7.41	19.94	2.71	24.64		
EGPRS8 50	Lowest	V	7.23	19.33	2.52	24.04	38.45	Pass
		H	7.14	19.33	2.52	23.95		
	Middle	V	7.23	19.5	2.6	24.13	38.45	Pass
		H	7.58	19.5	2.6	24.48		
	Highest	V	7.63	19.94	2.71	24.86	38.45	Pass
		H	7.64	19.94	2.71	24.87		
EUT mode	Channel	Antenna Pol.	S.G. output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Result
GSM1900	Lowest	V	7.21	15.68	1.65	21.24	33.00	Pass
		H	7.56	15.68	1.65	21.59		
	Middle	V	7.15	15.7	1.67	21.18	33.00	Pass
		H	7.63	15.7	1.67	21.66		
	Highest	V	7.54	15.7	1.71	21.53	33.00	Pass
		H	7.41	15.7	1.71	21.4		
EGPRS1 900	Lowest	V	7.63	15.68	1.65	21.66	33.00	Pass
		H	7.57	15.68	1.65	21.6		
	Middle	V	7.15	15.7	1.67	21.18	33.00	Pass
		H	7.53	15.7	1.67	21.56		
	Highest	V	7.25	15.7	1.71	21.24	33.00	Pass
		H	7.74	15.7	1.71	21.73		



EUT mode	Channel	Antenna Pol.	S.G. output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Result
WCDMA Band 2	Lowest	V	4.36	10.36	1.65	13.07	33.00	Pass
		H	4.24	10.36	1.65	12.95		
	Middle	V	4.68	9.51	1.67	12.52	33.00	Pass
		H	4.83	9.51	1.67	12.67		
	Highest	V	4.52	10.15	1.71	12.96	33.00	Pass
		H	4.63	10.15	1.71	13.07		

EUT mode	Channel	Antenna Pol.	S.G. output (dBm)	Antenna Gain (dBd)	Cable Loss (dB)	ERP (dBm)	Limit (dBm)	Result
WCDMA Band 5	Lowest	V	3.42	10.12	2.52	11.02	38.45	Pass
		H	3.41	10.12	2.52	11.01		
	Middle	V	3.16	9.63	2.6	10.19	38.45	Pass
		H	3.45	9.63	2.6	10.48		
	Highest	V	3.24	10.14	2.71	10.67	38.45	Pass
		H	3.36	10.14	2.71	10.79		



5.8. Radiated Out of Band Emissions


5.8.1. Limit

According to FCC section 22.917(a) and section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10\log(P)$ dB. This calculated to be -13dBm.


The spurious emission with frequency band 1900 according to FCC section 2.1057.

5.8.2. Test Setup


Below 1GHz

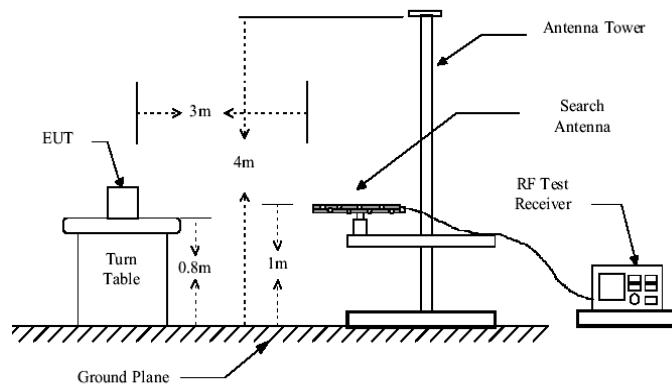

Above 1GHz

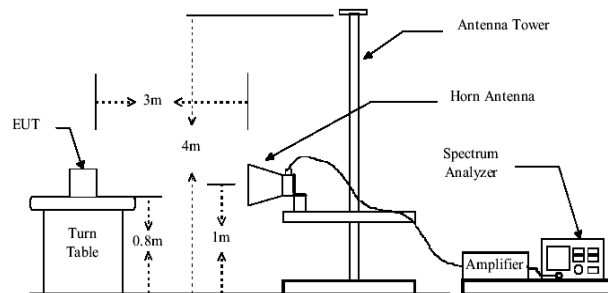

Substituted method:

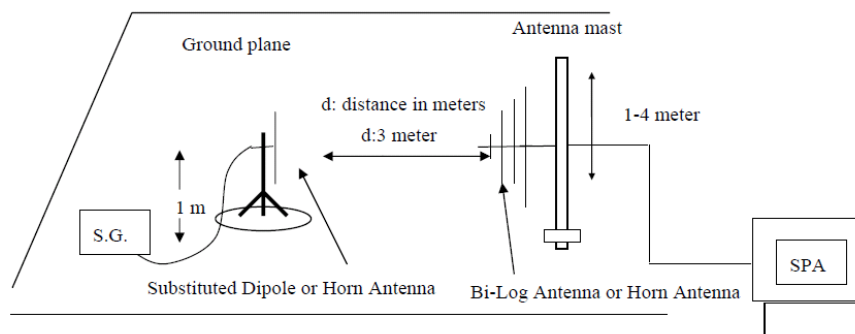



5.8.3. Measurement Procedure

The EUT was placed on a non-conductive, The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. all test in Full-Anechoic Chamber.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

$$\text{EIRP (Level)} = \text{S.G. output (dBm)} + \text{Antenna Gain(dBi)} - \text{Cable Loss (dB)}$$

Note: Measurement Uncertainty: ± 3.6 dB.

The data show only the worst results, and the other results are very low and not shown in the report.

5.8.4. Test Result

Band	Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
		Polarization	S.G. output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	Level (dBm)		
GSM850 Lowest	87.53	Vertical	-75.25	3.35	0.38	-72.28	-13	PASS
	1648.40	Vertical	-45.21	7.76	3.75	-41.20		
	2472.60	Vertical	-47.25	9.84	4.94	-42.35		
	3296.80	Vertical	-39.33	10.21	5.32	-34.44		
	4121.00	Vertical	-42.64	11.36	6.02	-37.30		
	4945.20	Vertical	-44.52	14.52	6.68	-36.68		
GSM850 Middle	88.46	Vertical	-75.23	3.35	0.38	-72.26	-13	PASS
	1673.20	Vertical	-47.52	7.76	3.75	-43.51		
	2509.80	Vertical	-46.63	9.84	4.94	-41.73		
	3346.40	Vertical	-42.26	10.21	5.32	-37.37		
	4183.00	Vertical	-41.17	11.36	6.02	-35.83		
	5019.60	Vertical	-45.52	14.52	6.68	-37.68		
GSM850 Highest	88.65	Vertical	-75.36	3.35	0.38	-72.39	-13	PASS
	1697.60	Vertical	-46.41	7.79	3.53	-42.15		
	2546.40	Vertical	-41.23	9.88	5.02	-36.37		
	3395.20	Vertical	-37.74	10.25	5.54	-33.03		
	4244.00	Vertical	-44.36	11.38	6.16	-39.14		
	5092.80	Vertical	-46.52	14.56	6.72	-38.68		



Band	Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
		Polarization	S.G. output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	Level (dBm)		
GSM1900 Lowest	87.54	Vertical	-75.66	3.35	0.38	-72.69	-13	PASS
	3700.40	Vertical	-45.52	7.76	3.75	-41.51		
	5550.60	Vertical	-46.64	9.84	4.94	-41.74		
	7400.80	Vertical	-39.21	10.21	5.32	-34.32		
	9251.00	Vertical	-42.43	11.36	6.02	-37.09		
	11101.20	Vertical	-44.65	14.52	6.68	-36.81		
GSM1900 Middle	88.70	Vertical	-74.41	3.35	0.38	-71.44	-13	PASS
	3760.00	Vertical	-47.66	7.76	3.75	-43.65		
	5640.00	Vertical	-46.52	9.84	4.94	-41.62		
	7520.00	Vertical	-42.23	10.21	5.32	-37.34		
	9400.00	Vertical	-41.25	11.36	6.02	-35.91		
	11280.00	Vertical	-45.37	14.52	6.68	-37.53		
GSM1900 Highest	88.76	Vertical	-74.63	3.35	0.38	-71.66	-13	PASS
	3819.60	Vertical	-46.21	7.79	3.53	-41.95		
	5729.40	Vertical	-41.86	9.88	5.02	-37.00		
	7639.20	Vertical	-37.34	10.25	5.54	-32.63		
	9549.00	Vertical	-44.85	11.38	6.16	-39.63		
	11458.80	Vertical	-46.96	14.56	6.72	-39.12		



Band	Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
		Polarization	S.G. output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	Level (dBm)		
WCDMA BAND 2 Lowest	87.15	Vertical	-74.55	3.35	0.38	-71.58	-13	PASS
	3704.80	Vertical	-45.47	7.76	3.75	-41.46		
	5557.20	Vertical	-46.36	9.84	4.94	-41.46		
	7409.60	Vertical	-39.42	10.21	5.32	-34.53		
	9262.00	Vertical	-42.35	11.36	6.02	-37.01		
	11114.40	Vertical	-44.23	14.52	6.68	-36.39		
WCDMA BAND 2 Middle	88.27	Vertical	-74.68	3.35	0.38	-71.71	-13	PASS
	3760.00	Vertical	-47.63	7.76	3.75	-43.62		
	5640.00	Vertical	-46.74	9.84	4.94	-41.84		
	7520.00	Vertical	-42.16	10.21	5.32	-37.27		
	9400.00	Vertical	-41.85	11.36	6.02	-36.51		
	11280.00	Vertical	-45.34	14.52	6.68	-37.50		
WCDMA BAND 2 Highest	88.21	Vertical	-74.37	3.35	0.38	-71.40	-13	PASS
	3815.20	Vertical	-46.43	7.79	3.53	-42.17		
	5722.80	Vertical	-41.21	9.88	5.02	-36.35		
	7630.40	Vertical	-37.66	10.25	5.54	-32.95		
	9538.00	Vertical	-44.85	11.38	6.16	-39.63		
	11445.60	Vertical	-46.23	14.56	6.72	-38.39		



Band	Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
		Polarization	S.G. output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	Level (dBm)		
WCDMA BAND 5 Lowest	87.15	Vertical	-74.25	3.35	0.38	-71.28	-13	PASS
	1652.80	Vertical	-45.68	7.76	3.75	-41.67		
	2479.20	Vertical	-46.54	9.84	4.94	-41.64		
	3305.60	Vertical	-39.47	10.21	5.32	-34.58		
	4132.00	Vertical	-42.36	11.36	6.02	-37.02		
	4958.40	Vertical	-44.57	14.52	6.68	-36.73		
WCDMA BAND 5 Middle	88.27	Vertical	-74.52	3.35	0.38	-71.55	-13	PASS
	1673.20	Vertical	-47.36	7.76	3.75	-43.35		
	2509.80	Vertical	-46.65	9.84	4.94	-41.75		
	3346.40	Vertical	-42.43	10.21	5.32	-37.54		
	4183.00	Vertical	-41.85	11.36	6.02	-36.51		
	5019.60	Vertical	-45.56	14.52	6.68	-37.72		
WCDMA BAND 5 Highest	88.21	Vertical	-74.64	3.35	0.38	-71.67	-13	PASS
	1693.20	Vertical	-46.36	7.79	3.53	-42.10		
	2539.80	Vertical	-41.35	9.88	5.02	-36.49		
	3386.40	Vertical	-37.21	10.25	5.54	-32.50		
	4233.00	Vertical	-44.63	11.38	6.16	-39.41		
	5079.60	Vertical	-46.75	14.56	6.72	-38.91		

6. PHOTOGRAPHS OF TEST SET-UP

Please see setup photo.

7. PHOTOGRAPHS OF THE EUT

Please see external photo and internal photo.

***** END OF REPORT *****