


Above 1GHz

Test Mode:	N20 Mode-2412MHz TX Mode	Test Voltage:	DC12V
Temperature: (°C):	23.6	Humidity (%):	53
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

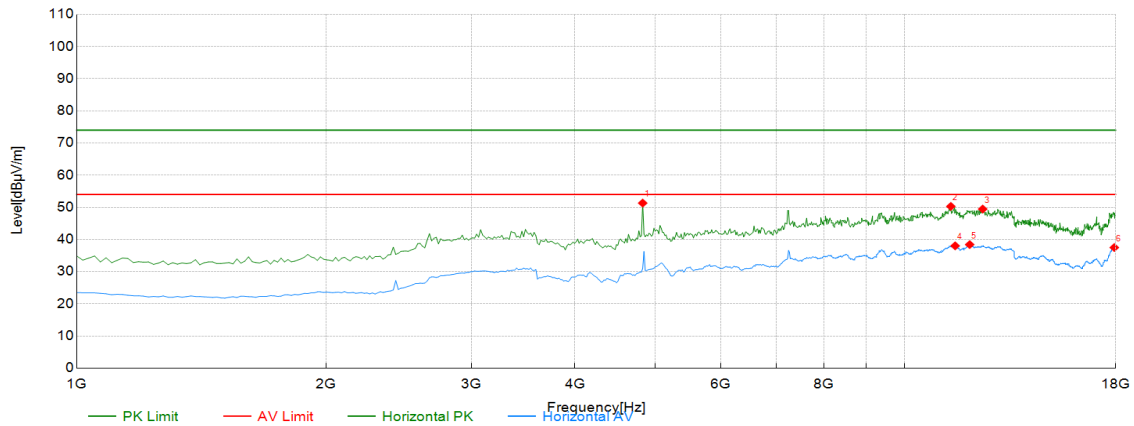

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4828.83	59.11	-7.78	51.33	74.00	22.67	PK	Horizont	PASS
2	11380.38	44.17	6.13	50.30	74.00	23.70	PK	Horizont	PASS
3	12435.44	42.46	7.00	49.46	74.00	24.54	PK	Horizont	PASS
4	11516.52	31.56	6.47	38.03	54.00	15.97	AV	Horizont	PASS
5	11992.99	30.69	7.73	38.42	54.00	15.58	AV	Horizont	PASS
6	17931.93	27.52	9.98	37.50	54.00	16.50	AV	Horizont	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)


3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N20 Mode-2412MHz TX Mode	Test Voltage:	DC12V
Temperature: (°C):	23.6	Humidity (%):	53
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

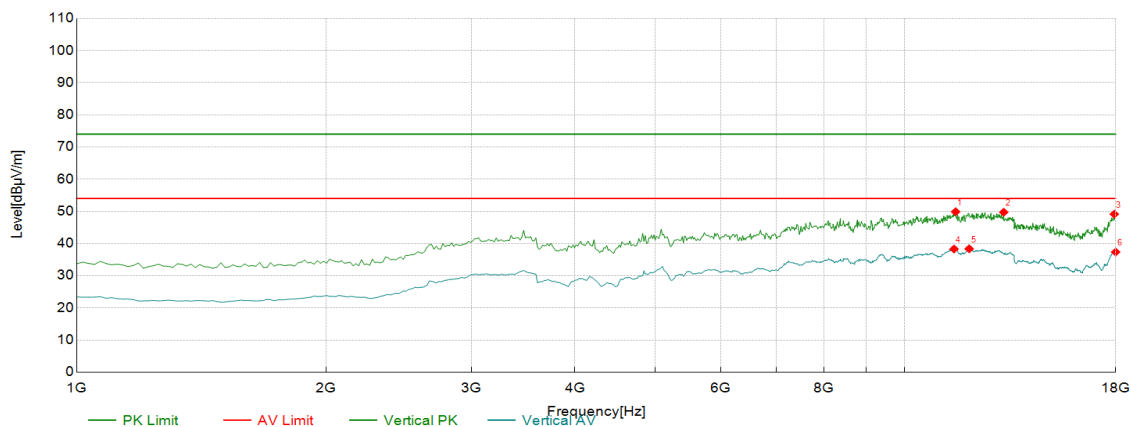

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	11533.53	43.41	6.47	49.88	74.00	24.12	PK	Vertical	PASS
2	13184.18	43.18	6.55	49.73	74.00	24.27	PK	Vertical	PASS
3	17931.93	39.15	9.98	49.13	74.00	24.87	PK	Vertical	PASS
4	11482.48	31.86	6.42	38.28	54.00	15.72	AV	Vertical	PASS
5	11975.98	30.71	7.63	38.34	54.00	15.66	AV	Vertical	PASS
6	18000.00	26.85	10.50	37.35	54.00	16.65	AV	Vertical	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)


3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N20 Mode-2437MHz TX Mode	Test Voltage:	DC12V
Temperature: (°C):	23.6	Humidity (%):	53
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

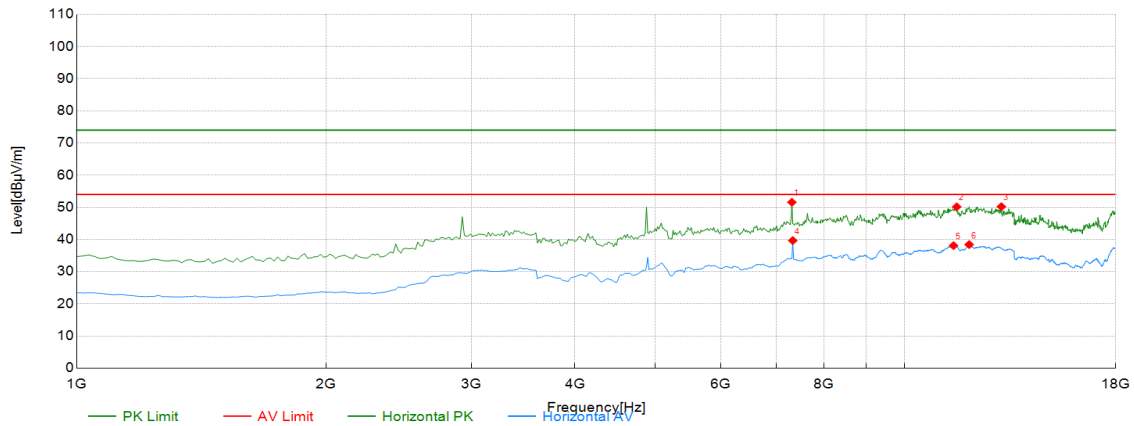

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	7313.31	54.92	-3.34	51.58	74.00	22.42	PK	Horizontal	PASS
2	11567.57	43.70	6.46	50.16	74.00	23.84	PK	Horizontal	PASS
3	13099.10	43.61	6.60	50.21	74.00	23.79	PK	Horizontal	PASS
4	7330.33	42.99	-3.32	39.67	54.00	14.33	AV	Horizontal	PASS
5	11465.47	31.73	6.37	38.10	54.00	15.90	AV	Horizontal	PASS
6	11975.98	30.80	7.63	38.43	54.00	15.57	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N20 Mode-2437MHz TX Mode	Test Voltage:	DC12V
Temperature: (°C):	23.6	Humidity (%):	53
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

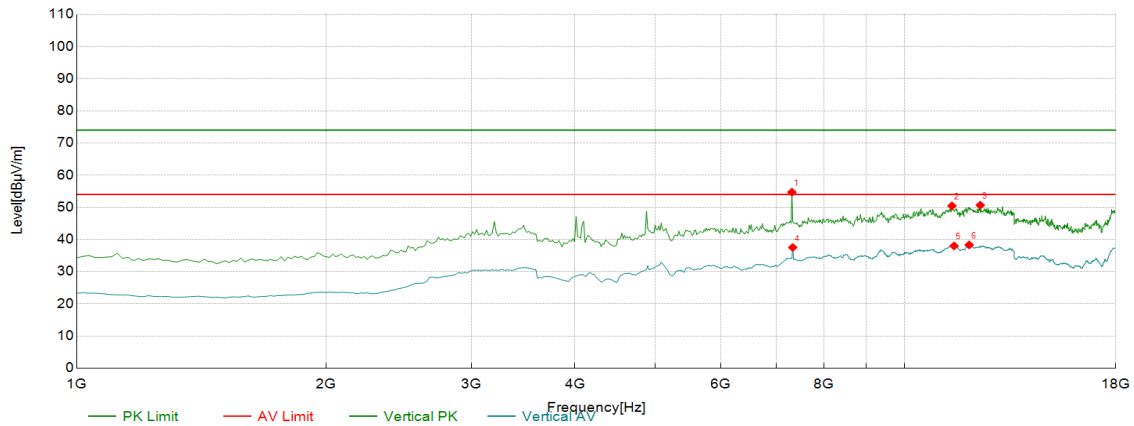

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	7313.31	58.05	-3.34	54.71	74.00	19.29	PK	Vertical	PASS
2	11414.41	44.22	6.23	50.45	74.00	23.55	PK	Vertical	PASS
3	12350.35	43.60	7.07	50.67	74.00	23.33	PK	Vertical	PASS
4	7330.33	40.85	-3.32	37.53	54.00	16.47	AV	Vertical	PASS
5	11482.48	31.59	6.42	38.01	54.00	15.99	AV	Vertical	PASS
6	11975.98	30.69	7.63	38.32	54.00	15.68	AV	Vertical	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)


3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N20 Mode-2462MHz TX Mode	Test Voltage:	DC12V
Temperature: (°C):	23.6	Humidity (%):	53
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

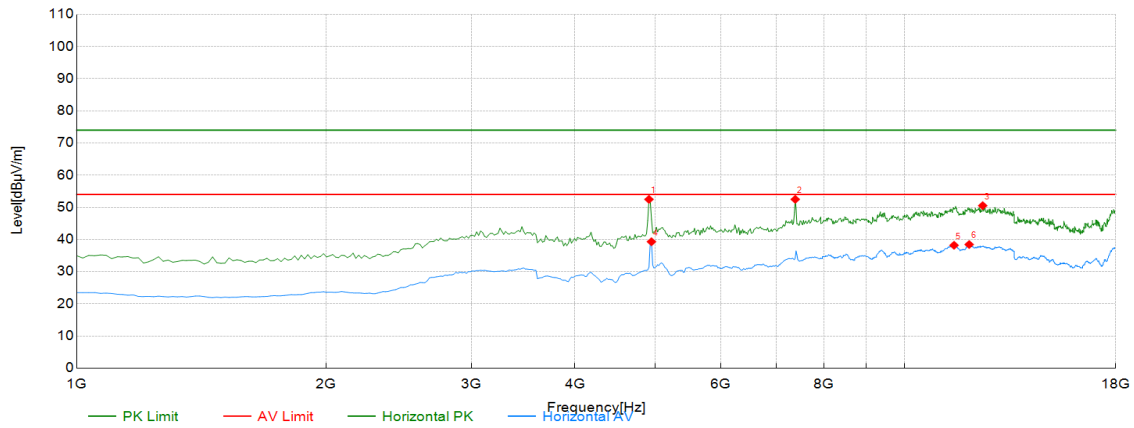

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4913.91	59.96	-7.48	52.48	74.00	21.52	PK	Horizont	PASS
2	7381.38	55.87	-3.38	52.49	74.00	21.51	PK	Horizont	PASS
3	12435.44	43.52	7.00	50.52	74.00	23.48	PK	Horizont	PASS
4	4947.95	46.73	-7.42	39.31	54.00	14.69	AV	Horizont	PASS
5	11482.48	31.78	6.42	38.20	54.00	15.80	AV	Horizont	PASS
6	11975.98	30.81	7.63	38.44	54.00	15.56	AV	Horizont	PASS

Remark:

1. Level (dBμV/m)= Factor (dB/m)+ Read Level (dBμV)

2. Margin (dB) =Limit(dBμV/m)-Level(dBμV/m)


3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N20 Mode-2462MHz TX Mode	Test Voltage:	DC12V
Temperature: (°C):	23.6	Humidity (%):	53
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

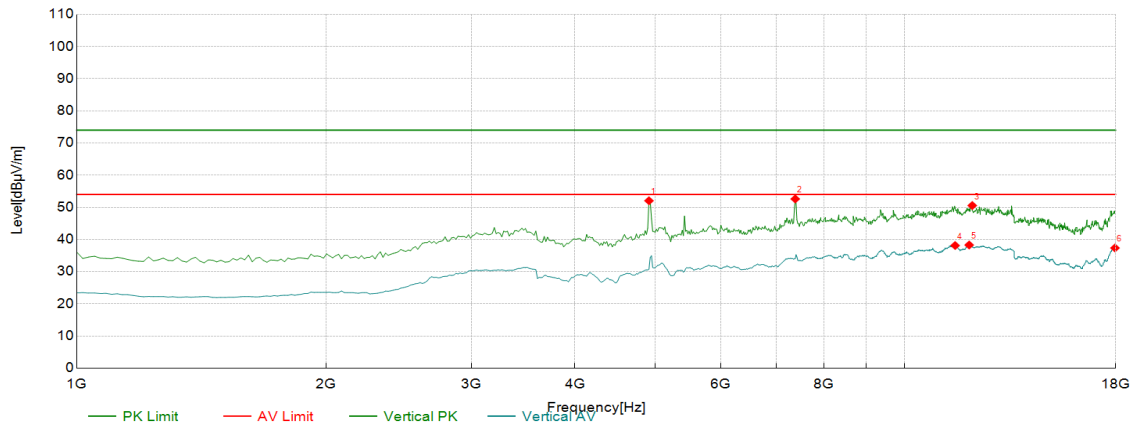

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4913.91	59.53	-7.48	52.05	74.00	21.95	PK	Vertical	PASS
2	7381.38	55.99	-3.38	52.61	74.00	21.39	PK	Vertical	PASS
3	12078.08	42.96	7.61	50.57	74.00	23.43	PK	Vertical	PASS
4	11516.52	31.66	6.47	38.13	54.00	15.87	AV	Vertical	PASS
5	11975.98	30.66	7.63	38.29	54.00	15.71	AV	Vertical	PASS
6	17965.97	27.11	10.25	37.36	54.00	16.64	AV	Vertical	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)


3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 Mode-2422MHz TX Mode	Test Voltage:	DC12V
Temperature: (°C):	23.6	Humidity (%):	53
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

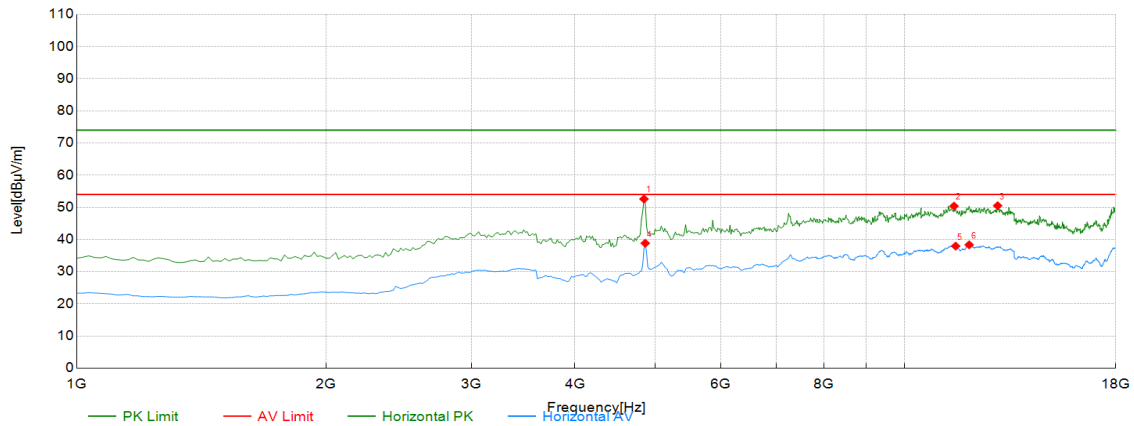

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4845.85	60.31	-7.72	52.59	74.00	21.41	PK	Horizont	PASS
2	11482.48	43.97	6.42	50.39	74.00	23.61	PK	Horizont	PASS
3	12962.96	43.82	6.69	50.51	74.00	23.49	PK	Horizont	PASS
4	4862.86	46.49	-7.64	38.85	54.00	15.15	AV	Horizont	PASS
5	11533.53	31.48	6.47	37.95	54.00	16.05	AV	Horizont	PASS
6	11975.98	30.71	7.63	38.34	54.00	15.66	AV	Horizont	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)


3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 Mode-2422MHz TX Mode	Test Voltage:	DC12V
Temperature: (°C):	23.6	Humidity (%):	53
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

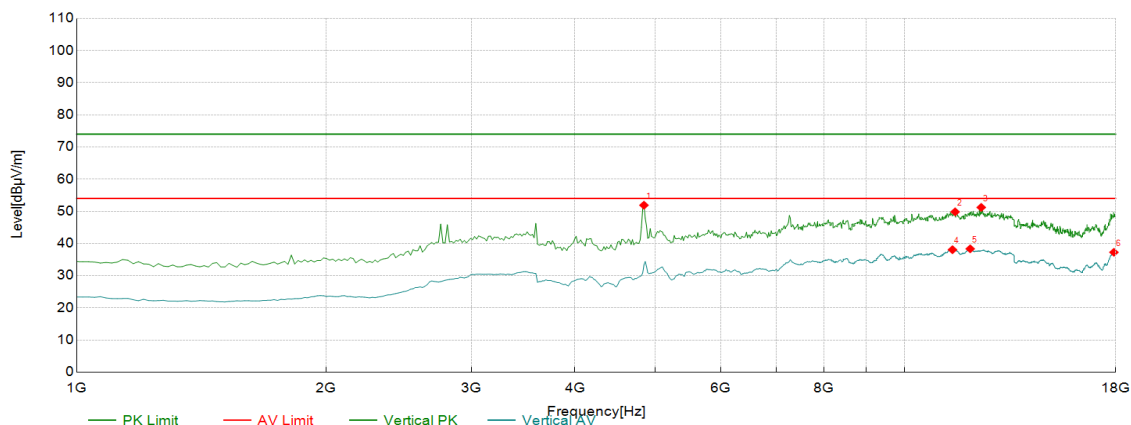

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4845.85	59.62	-7.72	51.90	74.00	22.10	PK	Vertical	PASS
2	11516.52	43.37	6.47	49.84	74.00	24.16	PK	Vertical	PASS
3	12384.38	44.16	7.07	51.23	74.00	22.77	PK	Vertical	PASS
4	11431.43	31.79	6.28	38.07	54.00	15.93	AV	Vertical	PASS
5	12010.01	30.60	7.75	38.35	54.00	15.65	AV	Vertical	PASS
6	17914.91	27.40	9.86	37.26	54.00	16.74	AV	Vertical	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)


3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 Mode-2437MHz TX Mode	Test Voltage:	DC12V
Temperature: (°C):	23.6	Humidity (%):	53
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

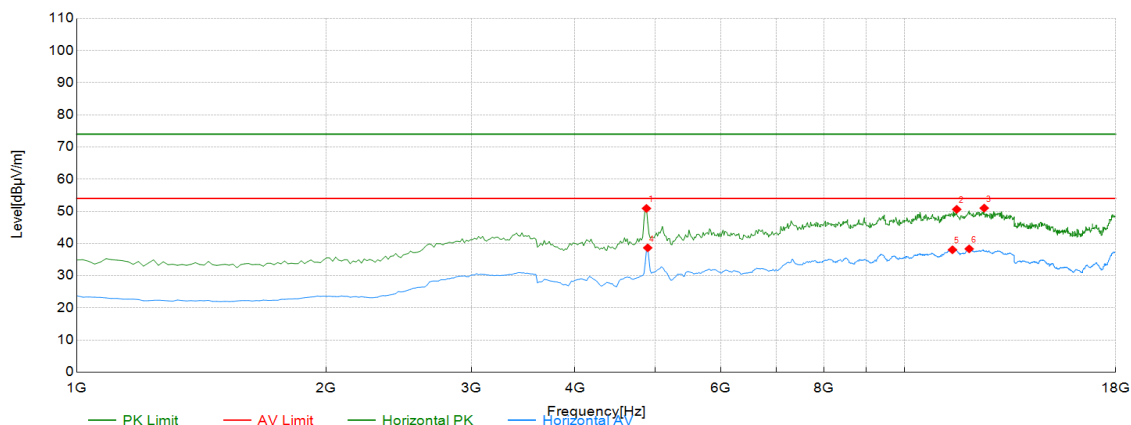

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4879.88	58.49	-7.59	50.90	74.00	23.10	PK	Horizont	PASS
2	11567.57	44.16	6.46	50.62	74.00	23.38	PK	Horizont	PASS
3	12486.49	44.10	6.90	51.00	74.00	23.00	PK	Horizont	PASS
4	4896.90	46.17	-7.52	38.65	54.00	15.35	AV	Horizont	PASS
5	11431.43	31.77	6.28	38.05	54.00	15.95	AV	Horizont	PASS
6	11975.98	30.70	7.63	38.33	54.00	15.67	AV	Horizont	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)


3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 Mode-2437MHz TX Mode	Test Voltage:	DC12V
Temperature: (°C):	23.6	Humidity (%):	53
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

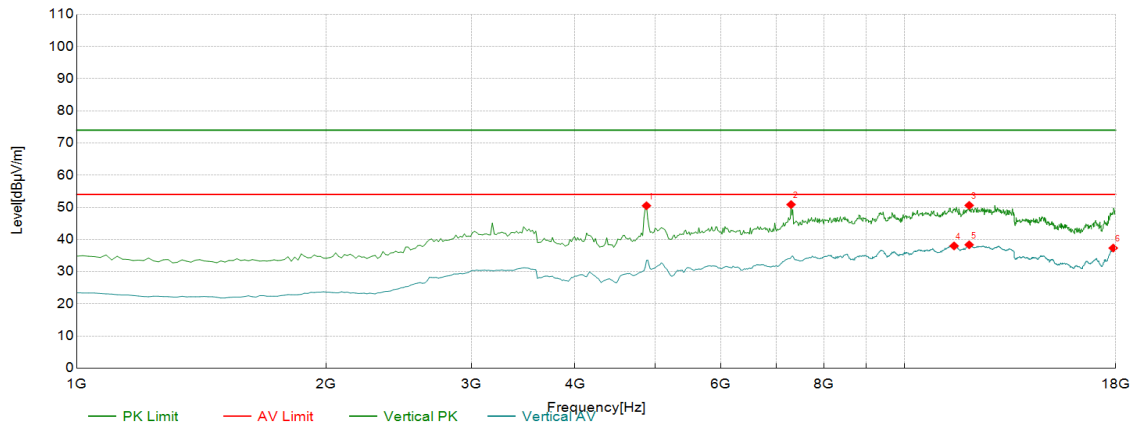

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4879.88	58.09	-7.59	50.50	74.00	23.50	PK	Vertical	PASS
2	7296.30	54.23	-3.37	50.86	74.00	23.14	PK	Vertical	PASS
3	11975.98	42.98	7.63	50.61	74.00	23.39	PK	Vertical	PASS
4	11482.48	31.58	6.42	38.00	54.00	16.00	AV	Vertical	PASS
5	11975.98	30.73	7.63	38.36	54.00	15.64	AV	Vertical	PASS
6	17880.88	27.75	9.59	37.34	54.00	16.66	AV	Vertical	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)


3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 Mode-2452MHz TX Mode	Test Voltage:	DC12V
Temperature: (°C):	23.6	Humidity (%):	53
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

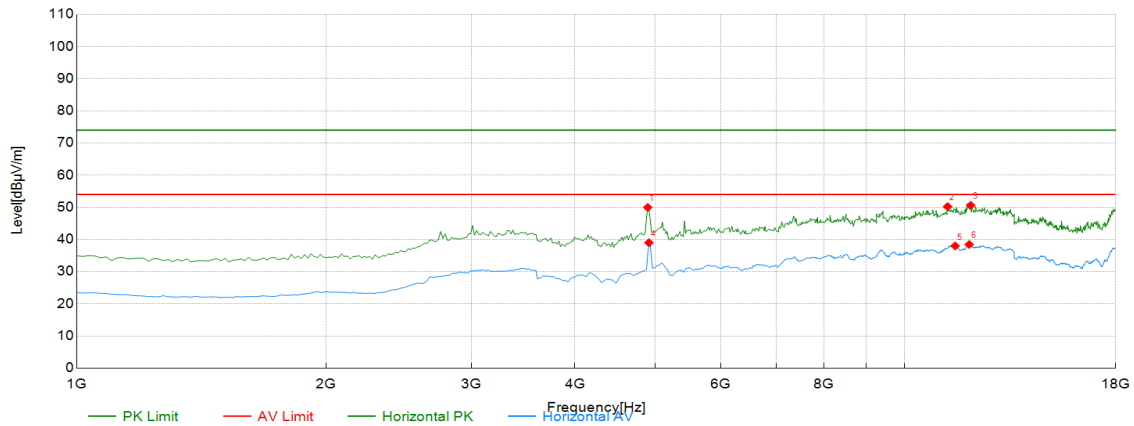

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4896.90	57.50	-7.52	49.98	74.00	24.02	PK	Horizontal	PASS
2	11278.28	44.39	5.83	50.22	74.00	23.78	PK	Horizontal	PASS
3	12027.03	42.90	7.72	50.62	74.00	23.38	PK	Horizontal	PASS
4	4913.91	46.49	-7.48	39.01	54.00	14.99	AV	Horizontal	PASS
5	11516.52	31.52	6.47	37.99	54.00	16.01	AV	Horizontal	PASS
6	11975.98	30.82	7.63	38.45	54.00	15.55	AV	Horizontal	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)


3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.



Test Mode:	N40 Mode-2452MHz TX Mode	Test Voltage:	DC12V
Temperature: (°C):	23.6	Humidity (%):	53
Atm. press. (kpa):	101.8		
Remark:	Only show the worst data.		

Test Graph

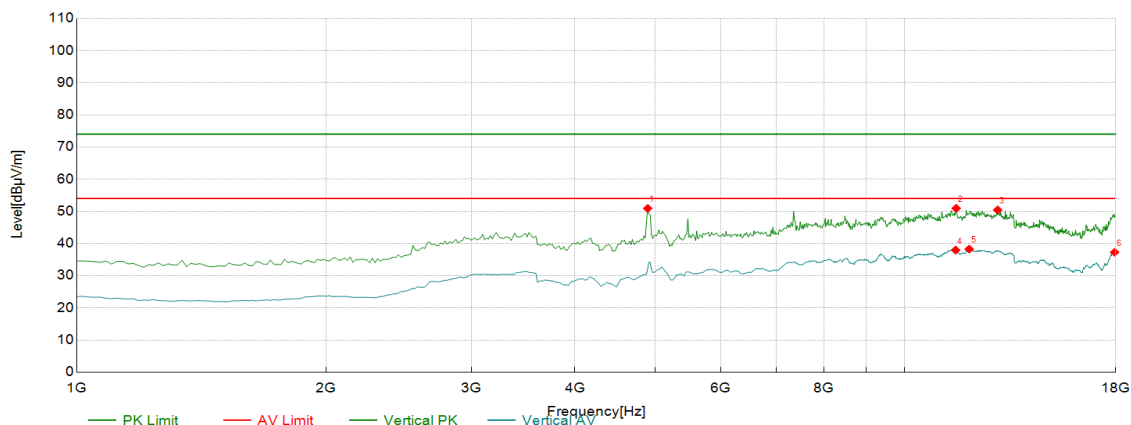

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity	Verdict
1	4896.90	58.43	-7.52	50.91	74.00	23.09	PK	Vertical	PASS
2	11550.55	44.47	6.47	50.94	74.00	23.06	PK	Vertical	PASS
3	12962.96	43.74	6.69	50.43	74.00	23.57	PK	Vertical	PASS
4	11533.53	31.47	6.47	37.94	54.00	16.06	AV	Vertical	PASS
5	11975.98	30.63	7.63	38.26	54.00	15.74	AV	Vertical	PASS
6	17948.95	27.17	10.11	37.28	54.00	16.72	AV	Vertical	PASS

Remark:

1. Level (dBμV/m) = Factor (dB/m) + Read Level (dBμV)

2. Margin (dB) = Limit (dBμV/m) - Level (dBμV/m)

3. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency. Test with highpass filter (Pass Frequency: 2.8-18G and 8-25G), and 18GHz-26.5GHz is the noise, No other signals were detected.

4. No report for the emission which below the prescribed limit.

