

Appendix A (5G WIFI-RSE Above 1GHz Test Result)

Test Data

1GHz-40GHz

Environmental Conditions

Temperature:	25.6 to 26.3 °C
Relative Humidity:	55 to 58 %
ATM Pressure:	100.2 kPa
Test Engineer:	Kevin Lv
Test Date:	2025-09-09 to 2025-10-12
EUT Operation Mode:	Transmitting


Test Result: Compliance, please refer to the below data.

Note 1: For 1GHz-6.6GHz, the fundamental with band reject filter.

Note 2: For 18GHz-40GHz, the maximum output power mode and channel: 802.11AX20 Low Channel 5180MHz was tested.

For Band 1


802.11A Low Channel 1GHz-6.6GHz_HORIZONTAL

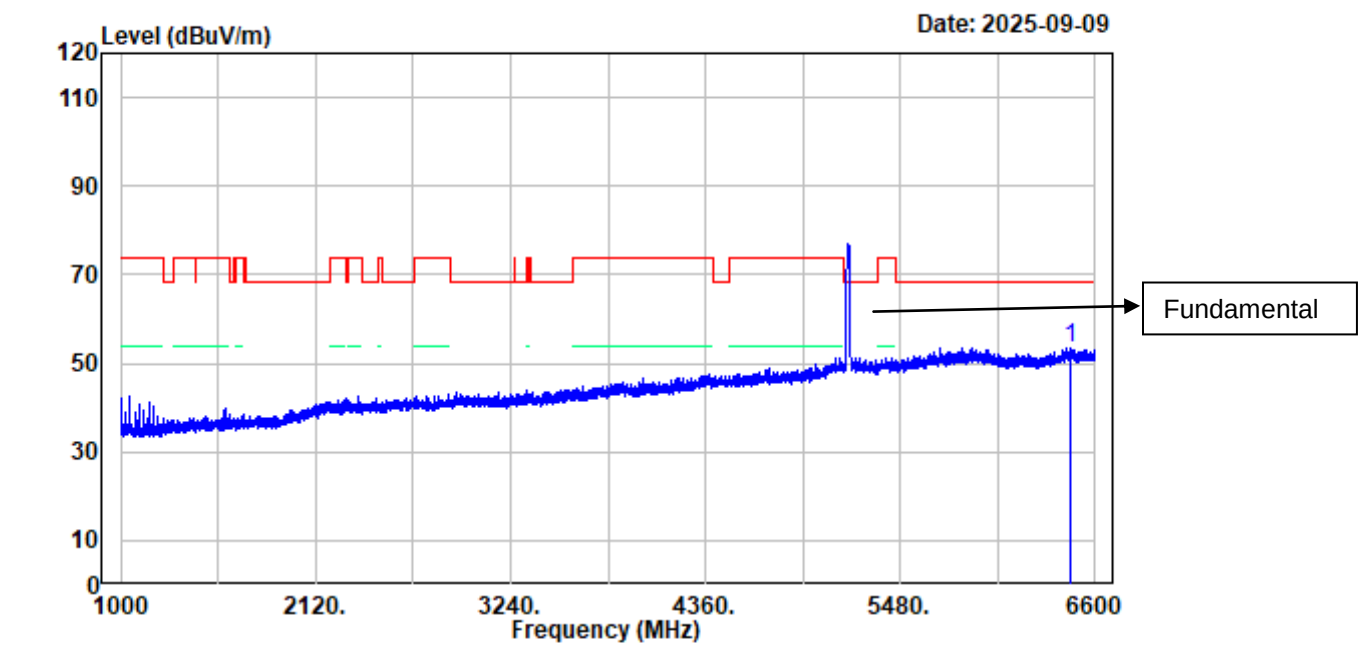

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5180MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6457.900	-3.51	56.89	53.38	68.20	-14.82	peak

802.11A Low Channel 1GHz-6.6GHz_VERTICAL

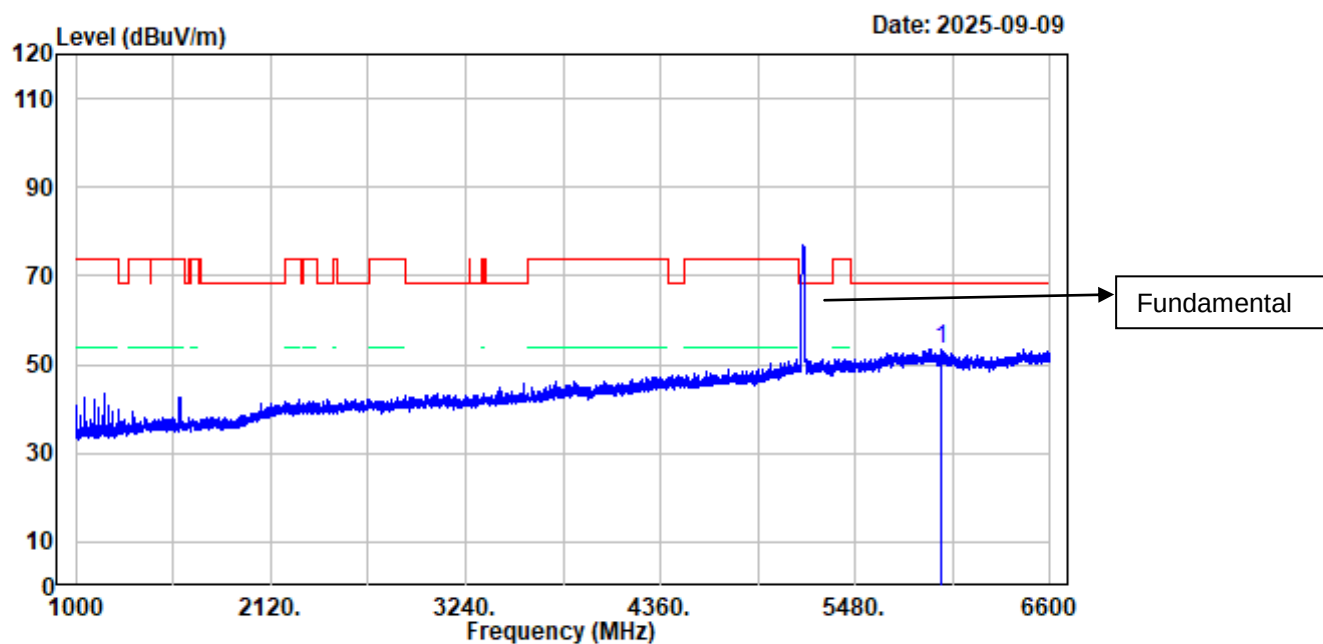

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5180MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5979.100	-4.80	58.42	53.62	68.20	-14.58	peak

802.11A Low Channel 6.6GHz-18GHz_HORIZONTAL

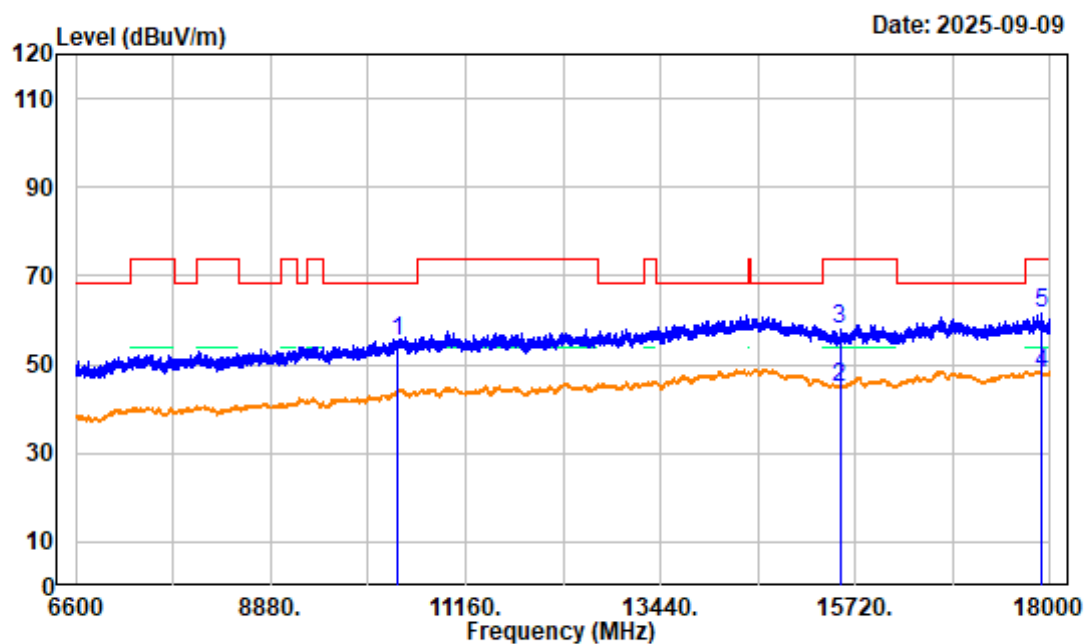

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5180MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.99	51.10	55.09	68.20	-13.11	peak
2	15540.000	4.85	40.03	44.88	54.00	-9.12	average
3	15540.000	4.85	52.99	57.84	74.00	-16.16	peak
4	17891.700	8.28	39.51	47.79	54.00	-6.21	average
5	17891.700	8.28	53.10	61.38	74.00	-12.62	peak

802.11A Low Channel 6.6GHz-18GHz_VERTICAL

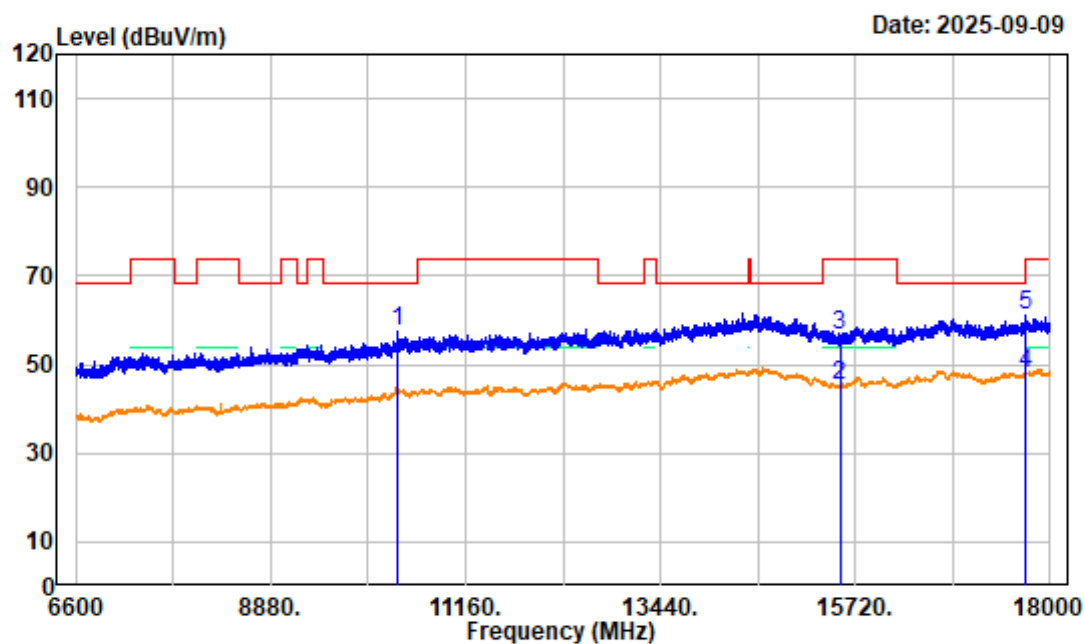

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5180MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.99	53.42	57.41	68.20	-10.79	peak
2	15540.000	4.85	40.58	45.43	54.00	-8.57	average
3	15540.000	4.85	51.56	56.41	74.00	-17.59	peak
4	17705.030	7.66	40.32	47.98	54.00	-6.02	average
5	17705.030	7.66	53.30	60.96	74.00	-13.04	peak

802.11A Low Channel Bandedge_HORIZONTAL

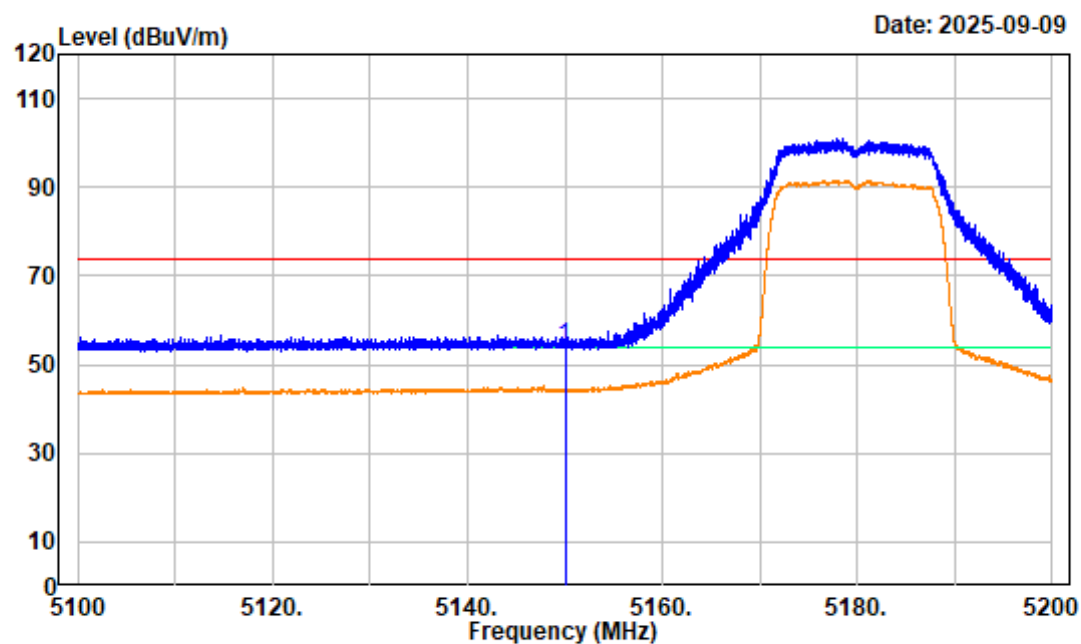

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5180MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-6.04	60.03	53.99	74.00	-20.01	peak

802.11A Low Channel Bandedge_VERTICAL

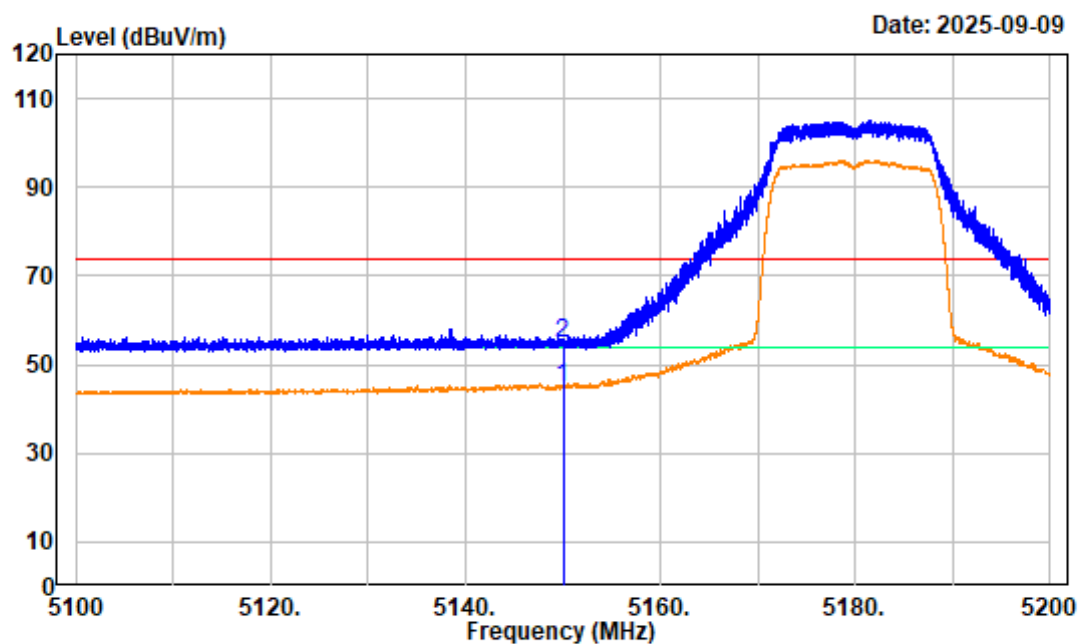

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5180MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-6.04	50.66	44.62	54.00	-9.38	average
2	5150.000	-6.04	60.67	54.63	74.00	-19.37	peak


802.11A Middle Channel 1GHz-6.6GHz_HORIZONTAL

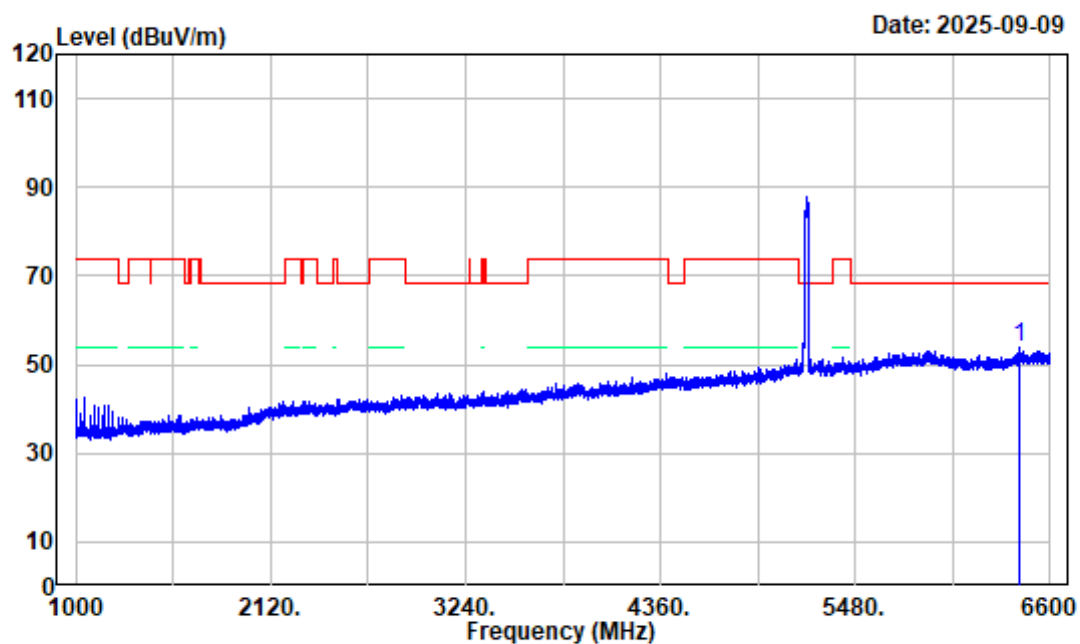

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11A Middle Channel 5200MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6424.300	-3.56	57.53	53.97	68.20	-14.23	peak


802.11A Middle Channel 1GHz-6.6GHz_VERTICAL

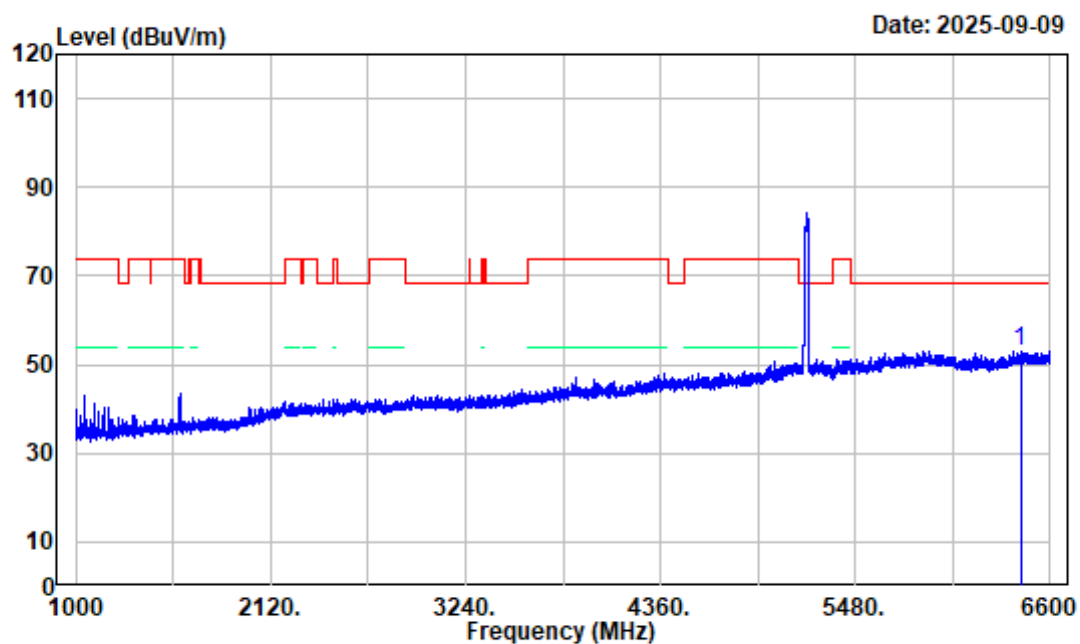

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11A Middle Channel 5200MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6429.900	-3.54	56.70	53.16	68.20	-15.04	peak

802.11A Middle Channel 6.6GHz-18GHz_HORIZONTAL

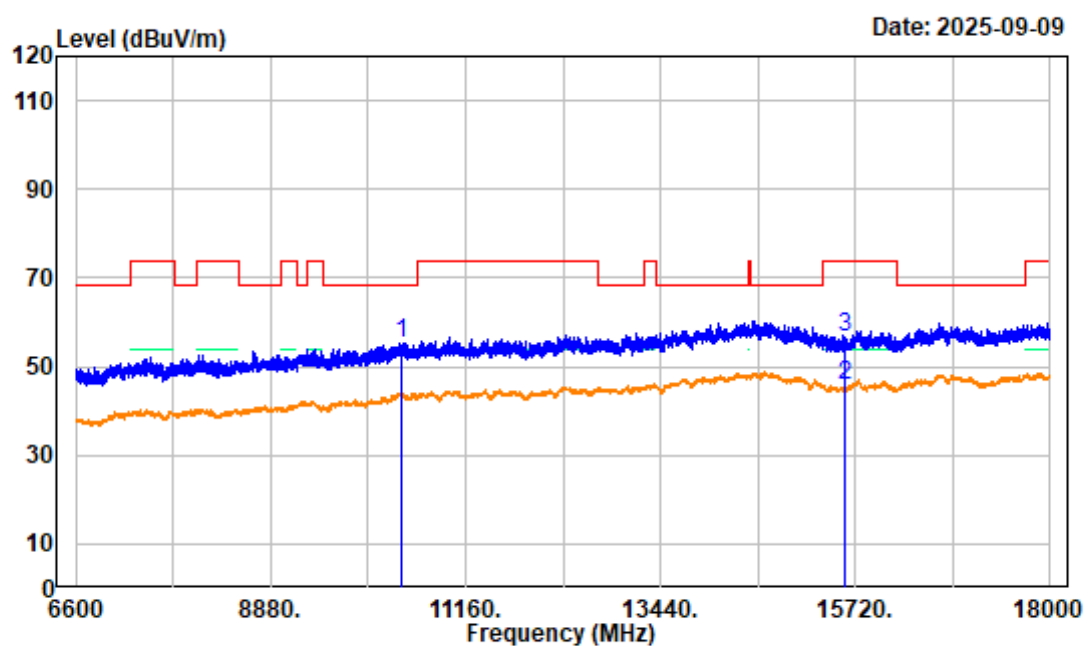

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Middle Channel 5200MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.18	51.25	55.43	68.20	-12.77	peak
2	15600.000	4.69	40.89	45.58	54.00	-8.42	average
3	15600.000	4.69	51.85	56.54	74.00	-17.46	peak

802.11A Middle Channel 6.6GHz-18GHz_VERTICAL

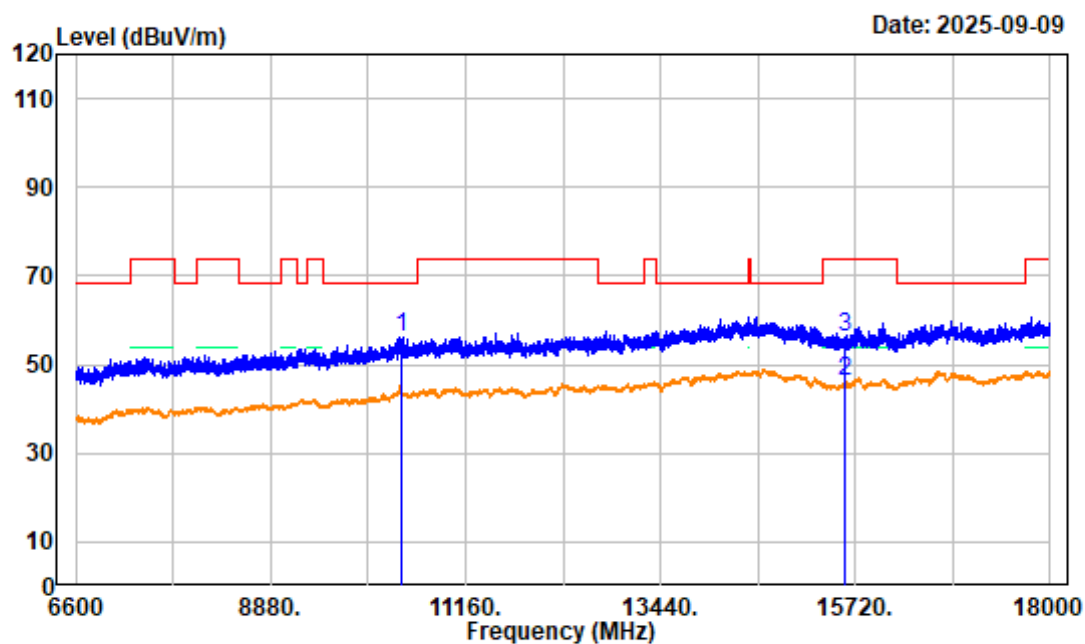

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Middle Channel 5200MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.18	52.15	56.33	68.20	-11.87	peak
2	15600.000	4.69	41.30	45.99	54.00	-8.01	average
3	15600.000	4.69	51.28	55.97	74.00	-18.03	peak

802.11A High Channel 1GHz-6.6GHz_HORIZONTAL

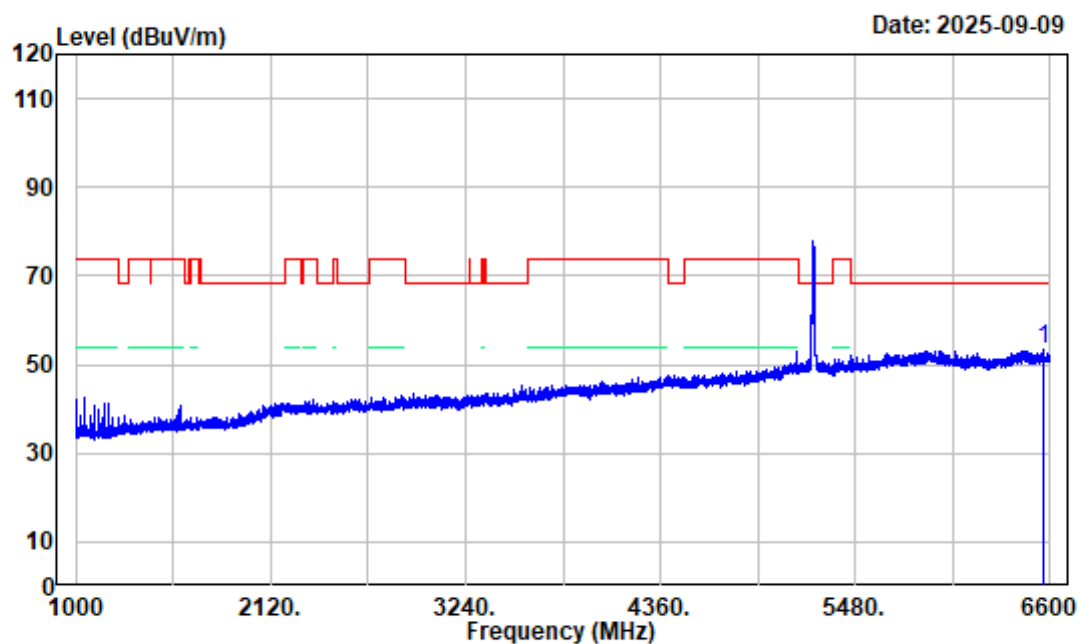

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5240MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6560.800	-3.61	56.85	53.24	68.20	-14.96	peak


802.11A High Channel 1GHz-6.6GHz_VERTICAL

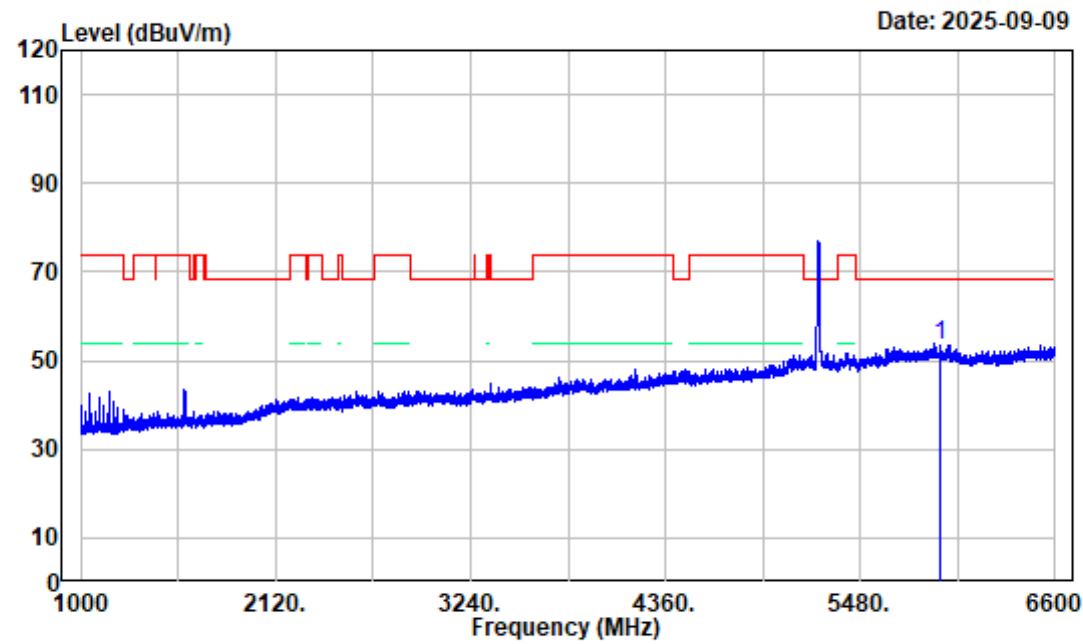

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5240MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5941.300	-4.52	58.08	53.56	68.20	-14.64	peak

802.11A High Channel 6.6GHz-18GHz_HORIZONTAL

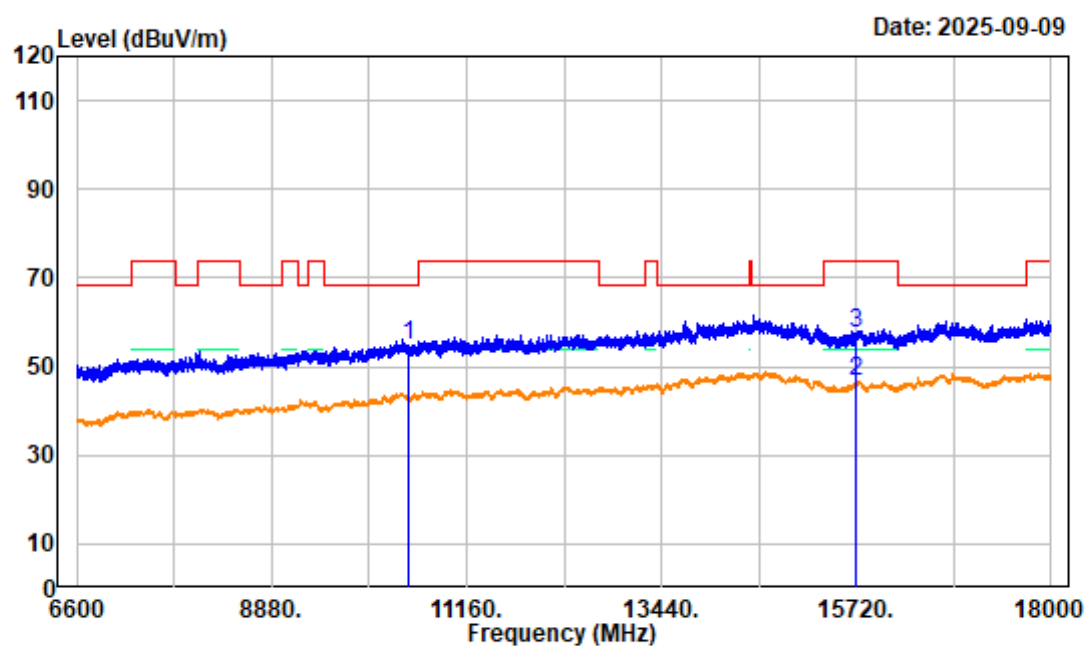

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5240MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

			Read	Limit	Over	
Freq	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.000	4.01	51.00	55.01	68.20	-13.19	peak
2 15720.000	4.85	41.69	46.54	54.00	-7.46	average
3 15720.000	4.85	52.71	57.56	74.00	-16.44	peak

802.11A High Channel 6.6GHz-18GHz_VERTICAL

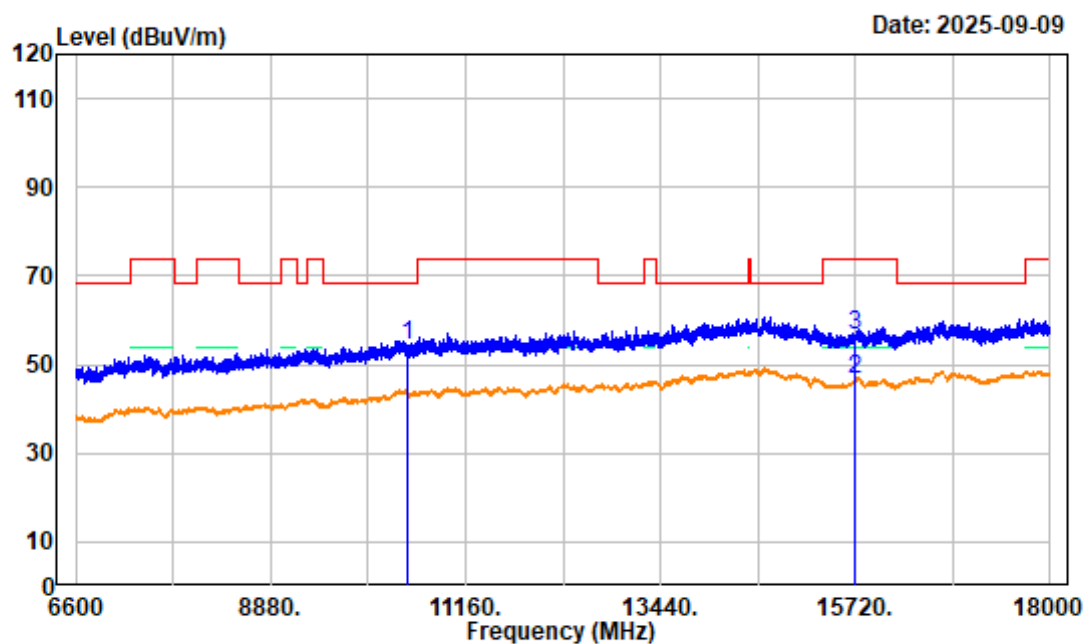

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5240MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10480.000	4.01	50.28	54.29	68.20	-13.91	peak
2	15720.000	4.85	41.80	46.65	54.00	-7.35	average
3	15720.000	4.85	51.77	56.62	74.00	-17.38	peak

802.11A High Channel Bandedge_HORIZONTAL

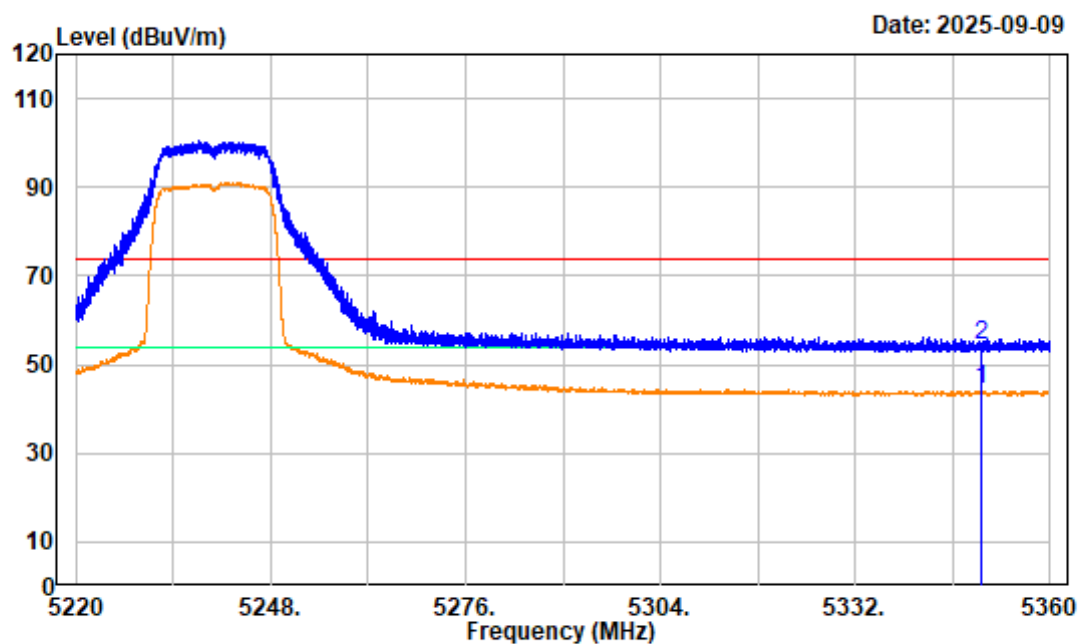

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5240MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	49.94	44.25	54.00	-9.75	average
2	5350.000	-5.69	59.89	54.20	74.00	-19.80	peak

802.11A High Channel Bandedge_VERTICAL

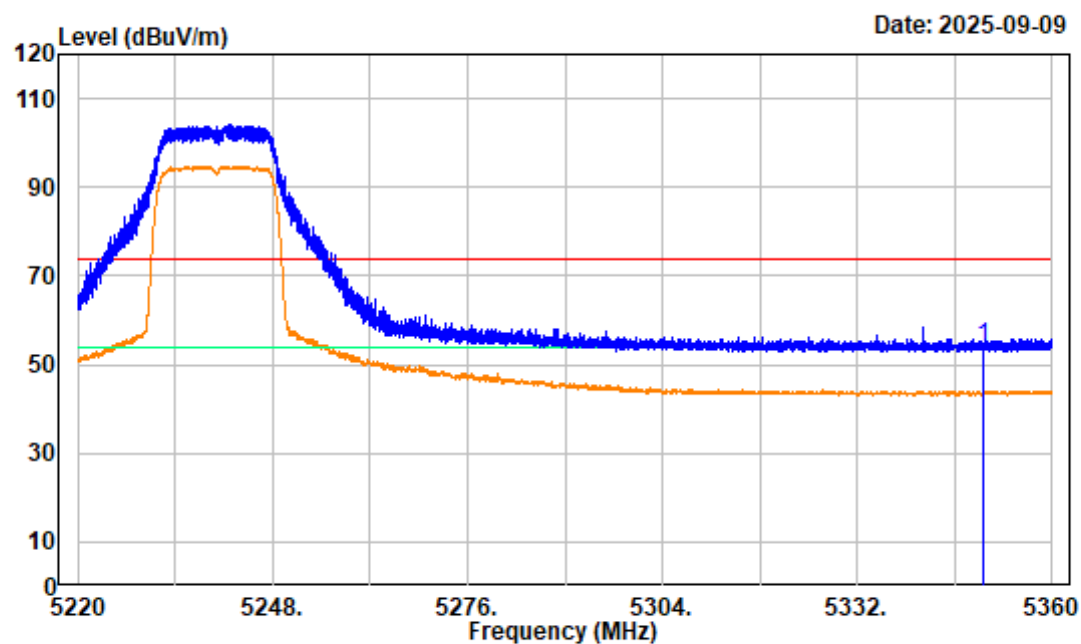

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5240MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	59.58	53.89	74.00	-20.11	peak


802.11AC20 Low Channel 1GHz-6.6GHz_HORIZONTAL

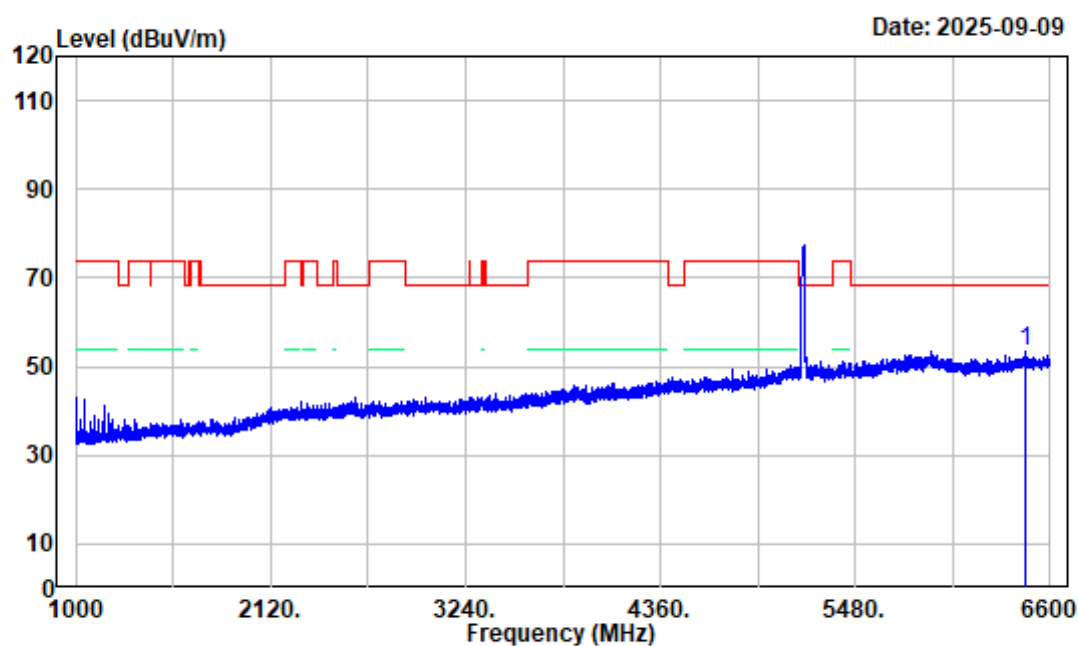

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 Low Channel 5180MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6463.500	-3.56	57.16	53.60	68.20	-14.60	peak


802.11AC20 Low Channel 1GHz-6.6GHz_VERTICAL

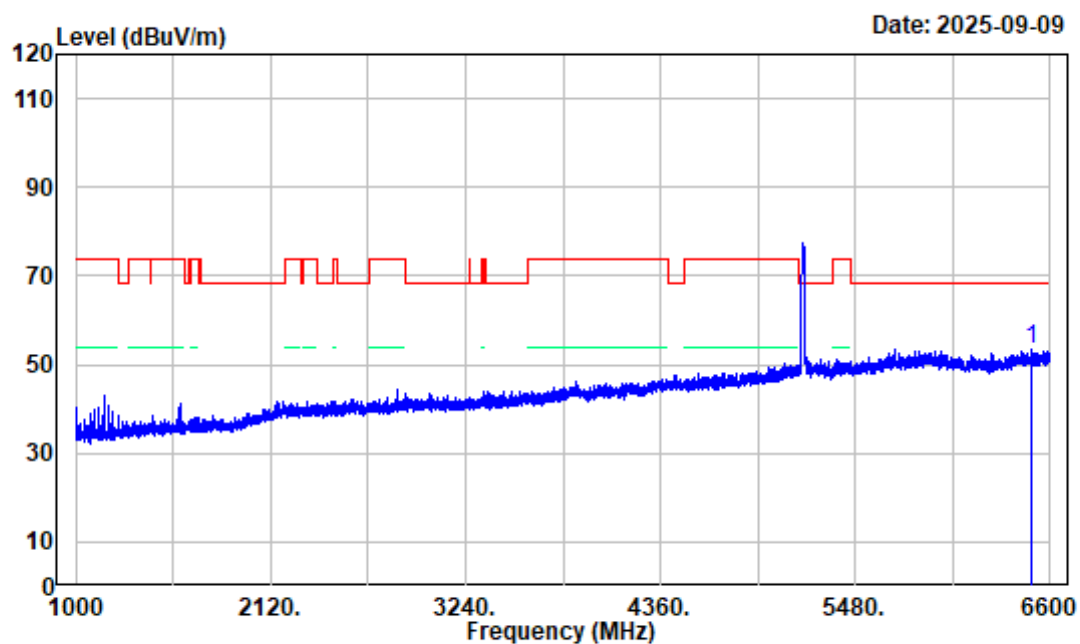

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 Low Channel 5180MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6495.000	-3.81	57.19	53.38	68.20	-14.82	peak

802.11AC20 Low Channel 6.6GHz-18GHz_HORIZONTAL

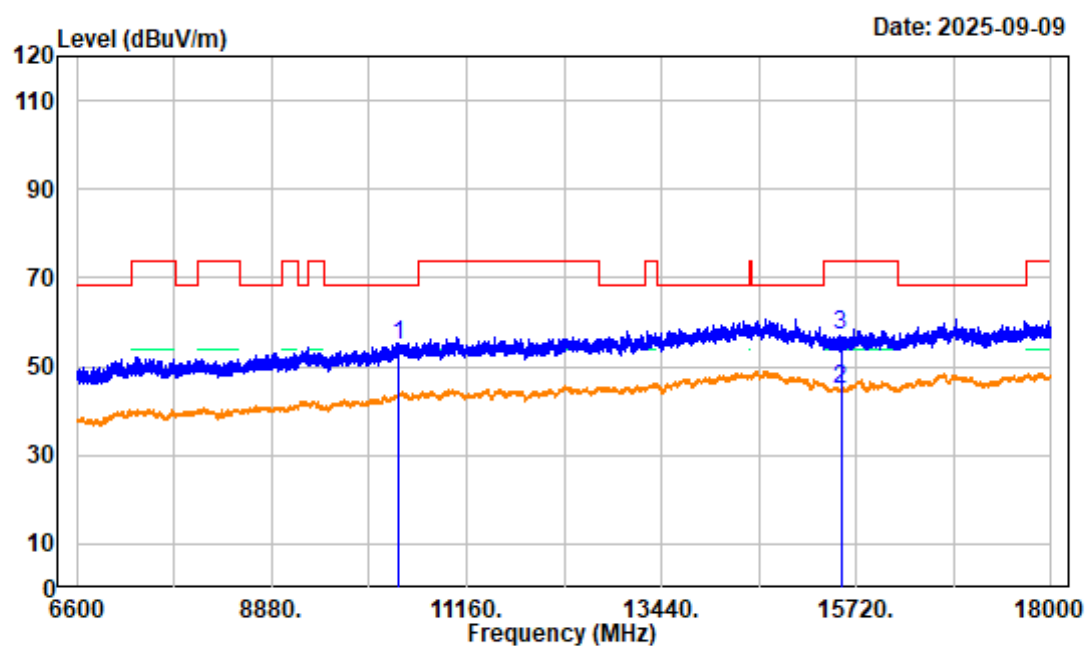

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5180MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.99	50.58	54.57	68.20	-13.63	peak
2	15540.000	4.85	40.14	44.99	54.00	-9.01	average
3	15540.000	4.85	52.07	56.92	74.00	-17.08	peak

802.11AC20 Low Channel 6.6GHz-18GHz_VERTICAL

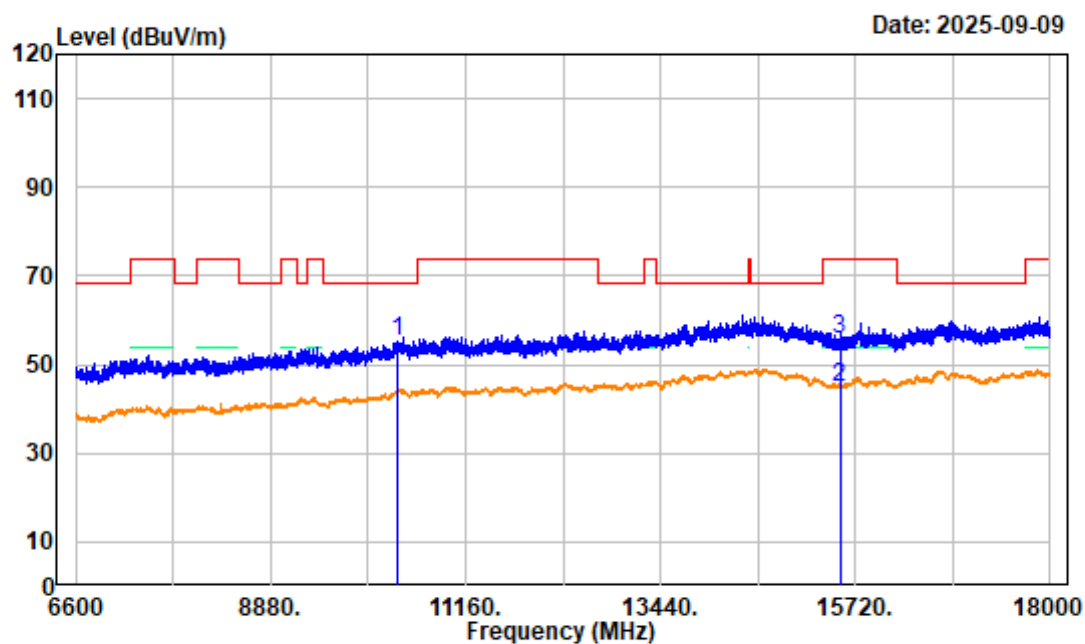

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5180MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

			Read	Limit	Over	
Freq	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.000	3.99	51.23	55.22	68.20	-12.98	peak
2 15540.000	4.85	39.98	44.83	54.00	-9.17	average
3 15540.000	4.85	51.04	55.89	74.00	-18.11	peak

802.11AC20 Low Channel Bandedge_HORIZONTAL

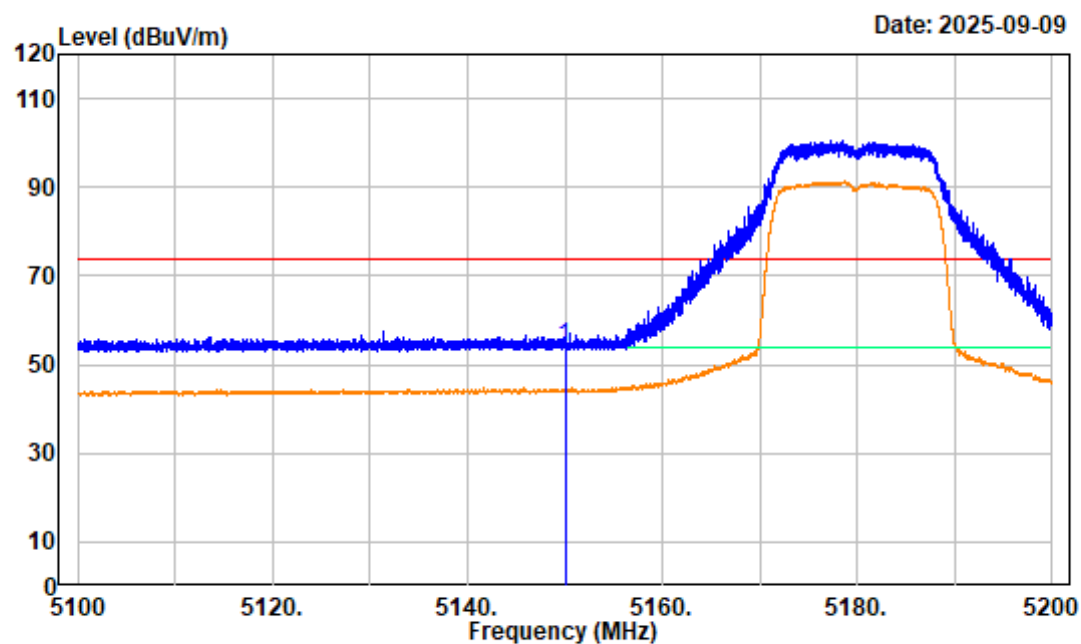

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5180MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-6.04	59.96	53.92	74.00	-20.08	peak

802.11AC20 Low Channel Bandedge_VERTICAL

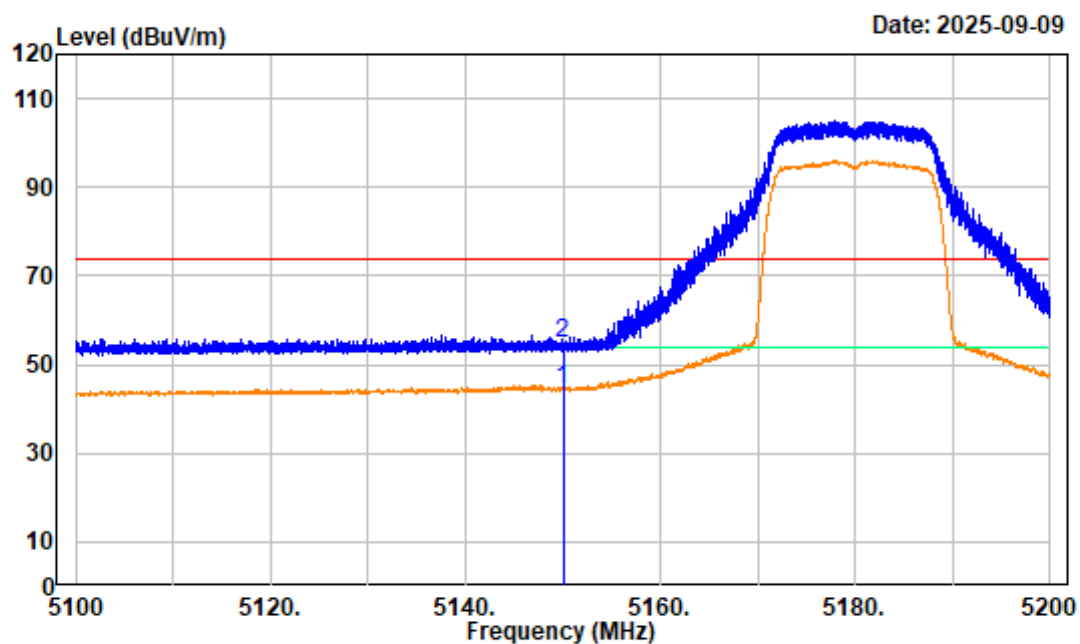

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5180MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-6.04	50.57	44.53	54.00	-9.47	average
2	5150.000	-6.04	60.62	54.58	74.00	-19.42	peak


802.11AC20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

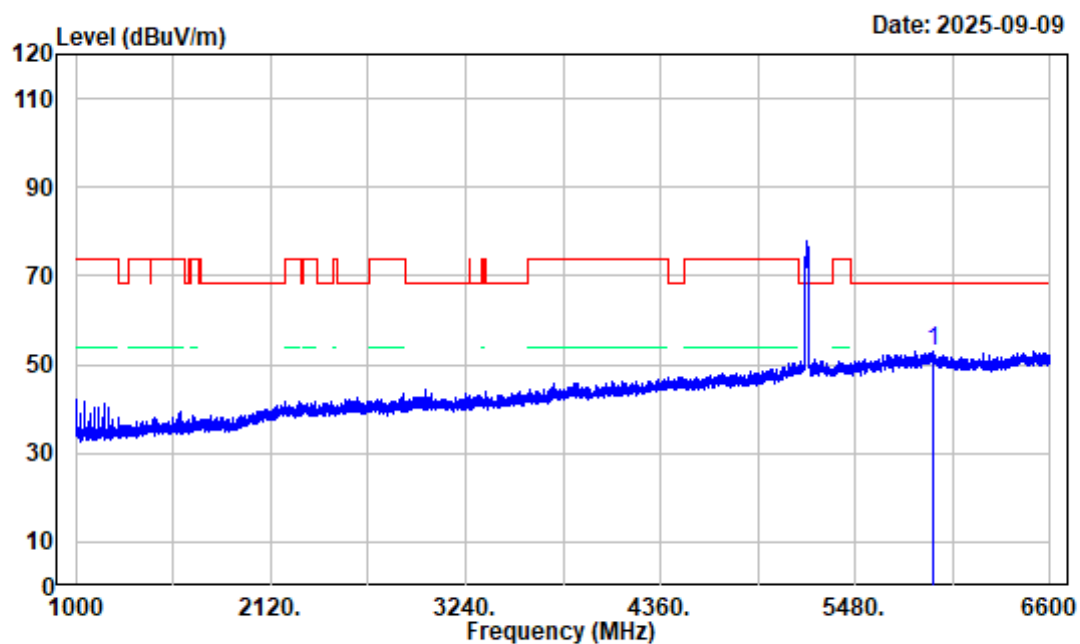

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 Middle Channel 5200MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5925.900	-4.27	57.35	53.08	68.20	-15.12	peak

802.11AC20 Middle Channel 1GHz-6.6GHz_VERTICAL

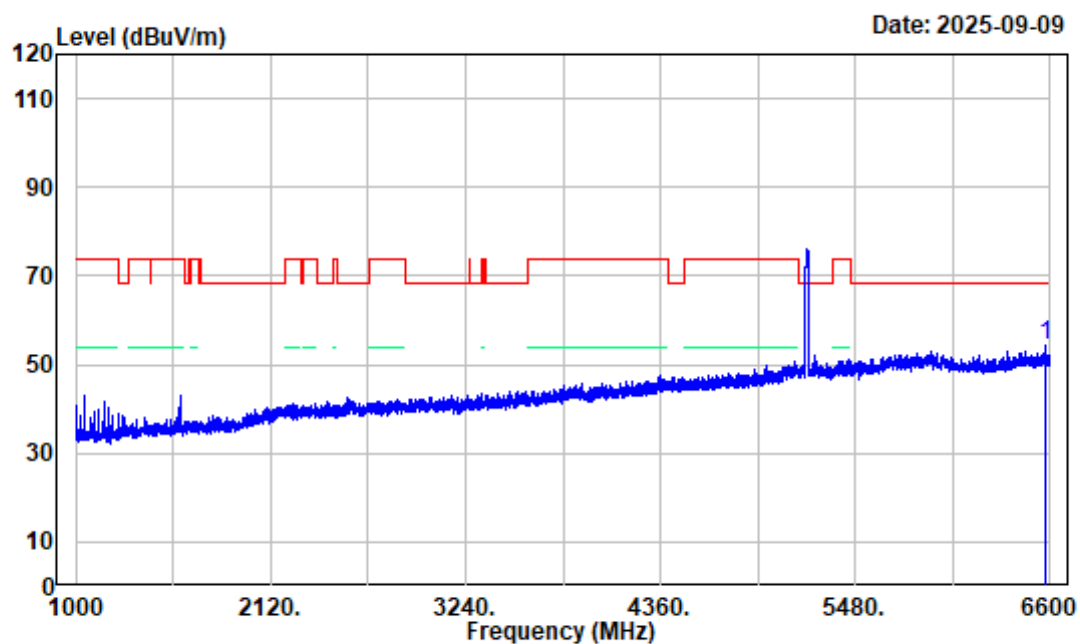

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Middle Channel 5200MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6574.100	-3.57	57.82	54.25	68.20	-13.95	peak

802.11AC20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

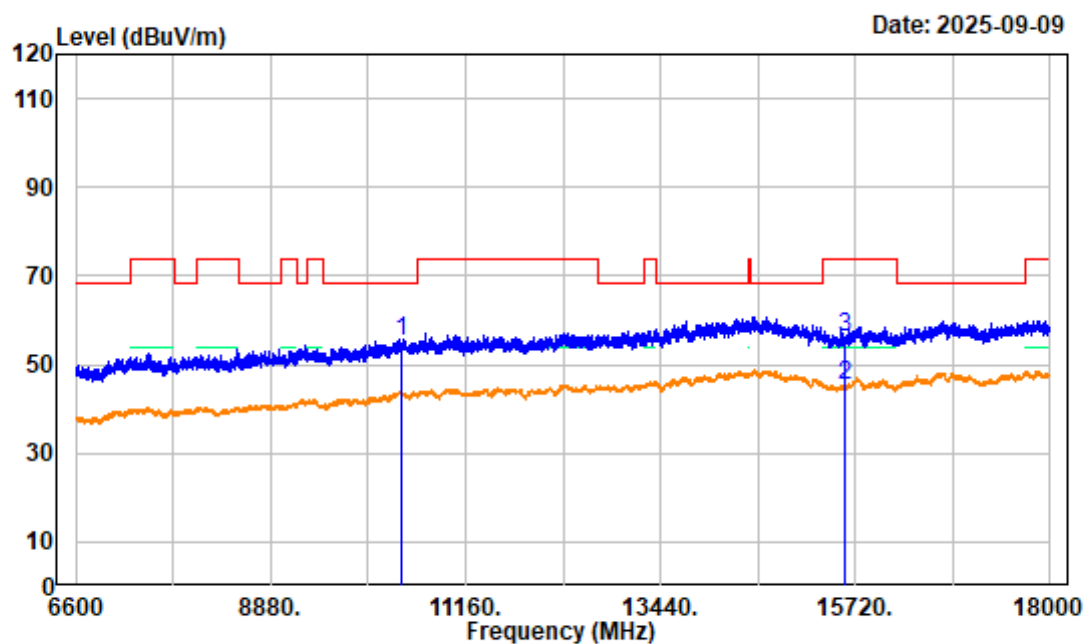

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Middle Channel 5200MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.18	51.06	55.24	68.20	-12.96	peak
2	15600.000	4.69	40.53	45.22	54.00	-8.78	average
3	15600.000	4.69	51.55	56.24	74.00	-17.76	peak

802.11AC20 Middle Channel 6.6GHz-18GHz_VERTICAL

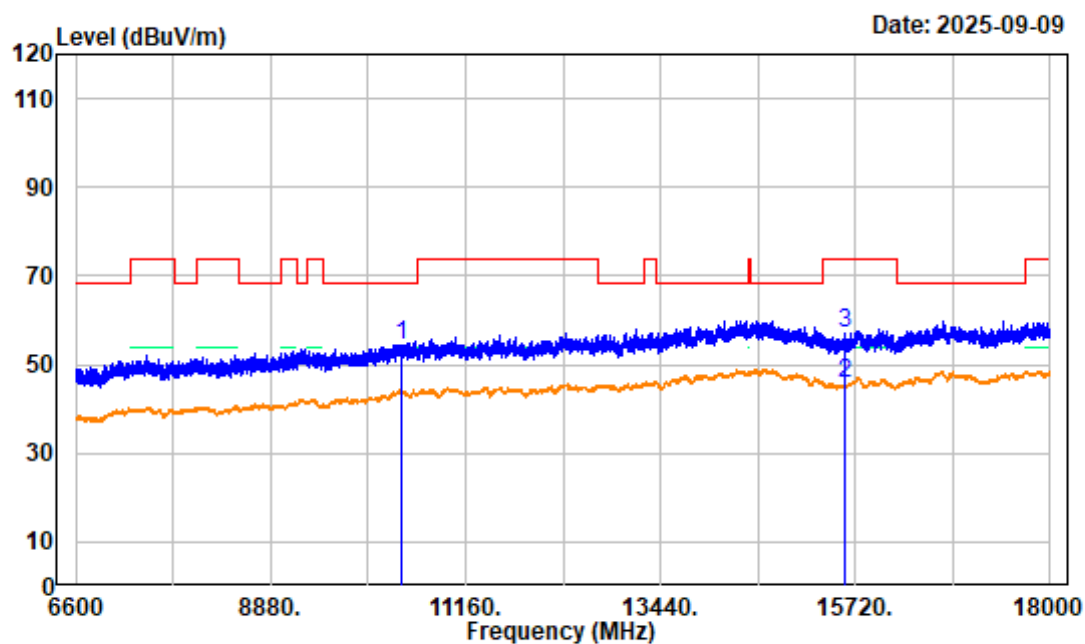

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Middle Channel 5200MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10400.000	4.18	50.20	54.38	68.20	-13.82	peak
2	15600.000	4.69	41.15	45.84	54.00	-8.16	average
3	15600.000	4.69	52.19	56.88	74.00	-17.12	peak


802.11AC20 High Channel 1GHz-6.6GHz_HORIZONTAL

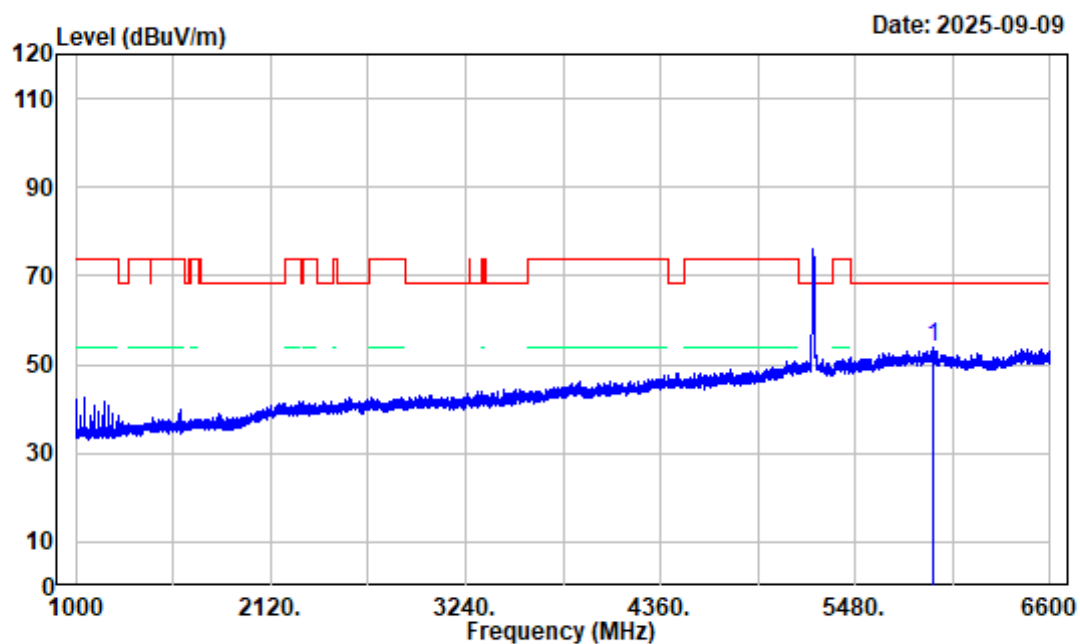

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 High Channel 5240MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5925.900	-4.27	58.01	53.74	68.20	-14.46	peak


802.11AC20 High Channel 1GHz-6.6GHz_VERTICAL

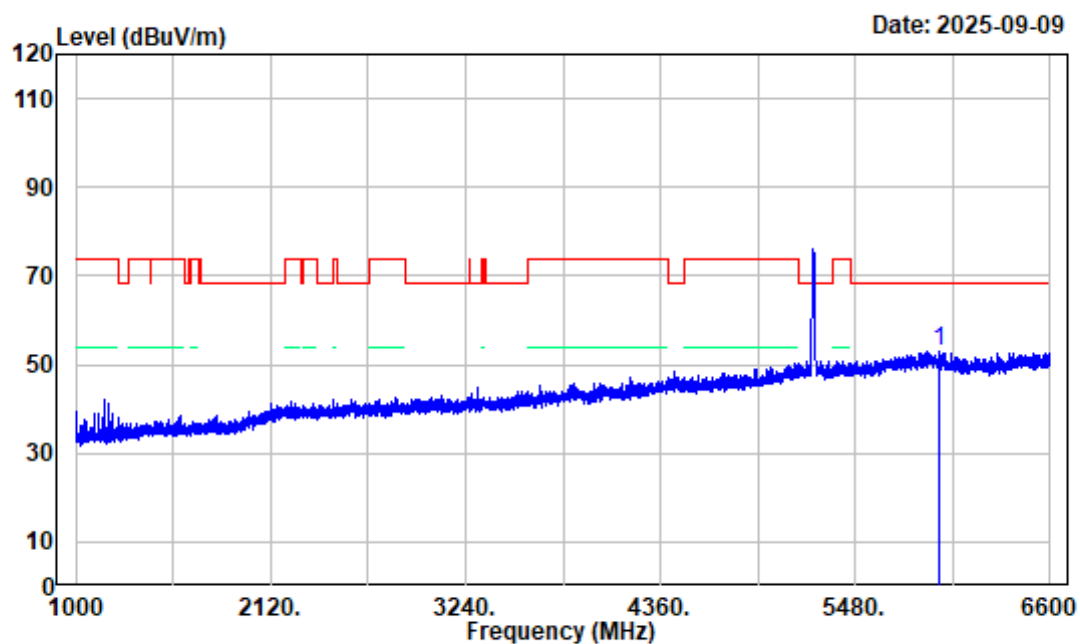

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 High Channel 5240MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5958.100	-4.70	57.79	53.09	68.20	-15.11	peak

802.11AC20 High Channel 6.6GHz-18GHz_HORIZONTAL

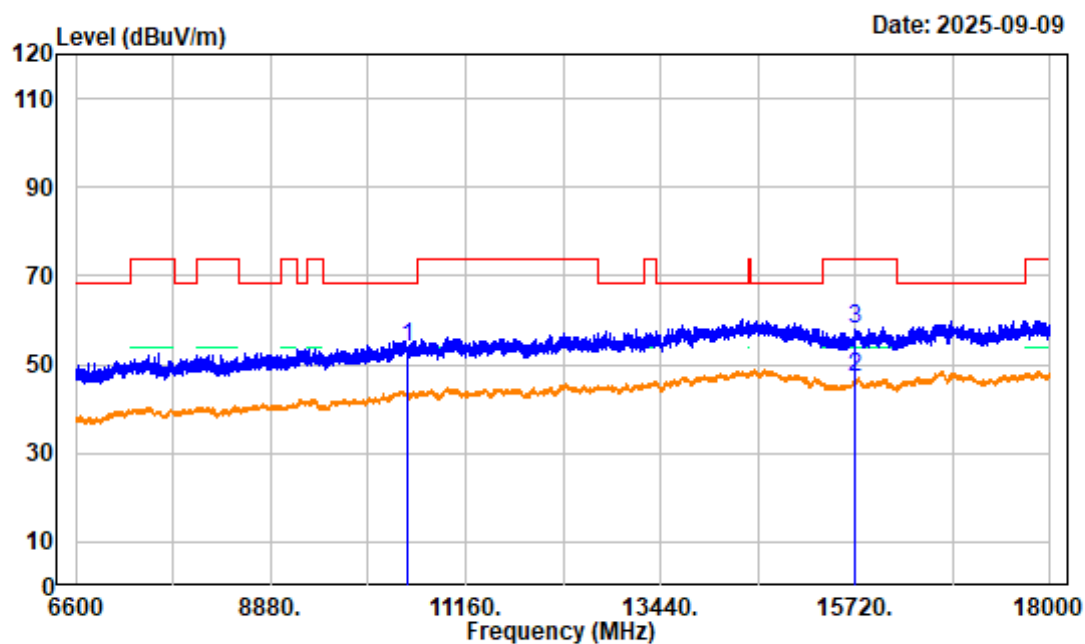

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5240MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

			Read	Limit	Over	
Freq	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.000	4.01	49.82	53.83	68.20	-14.37	peak
2 15720.000	4.85	42.07	46.92	54.00	-7.08	average
3 15720.000	4.85	53.08	57.93	74.00	-16.07	peak

802.11AC20 High Channel 6.6GHz-18GHz_VERTICAL

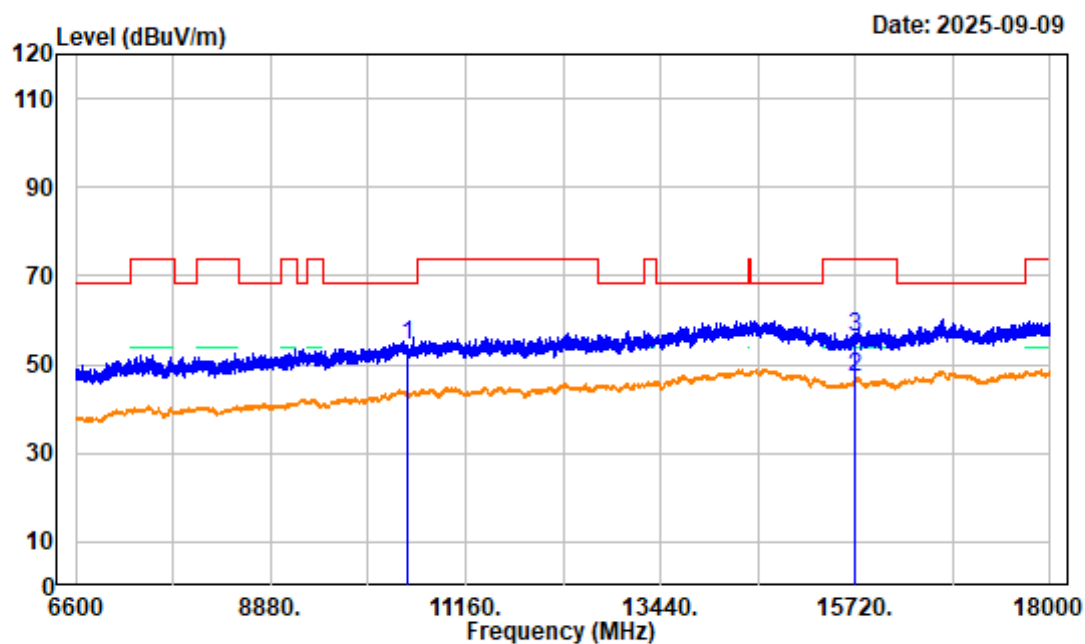

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5240MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

			Read	Limit	Over	
Freq	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.000	4.01	50.46	54.47	68.20	-13.73	peak
2 15720.000	4.85	42.28	47.13	54.00	-6.87	average
3 15720.000	4.85	51.26	56.11	74.00	-17.89	peak

802.11AC20 High Channel Bandedge_HORIZONTAL

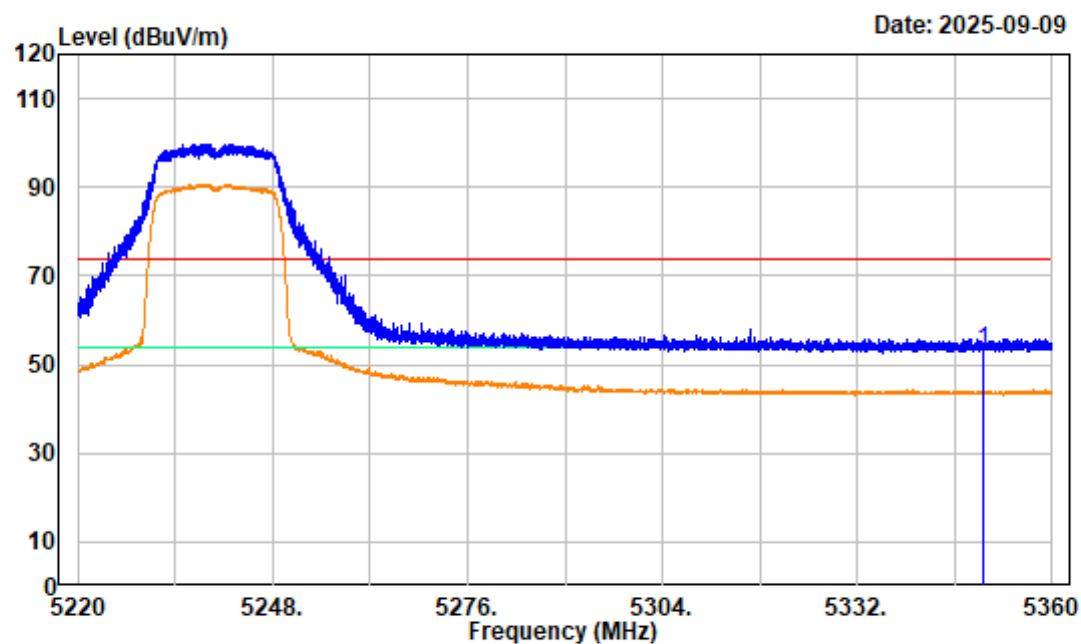

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5240MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	58.59	52.90	74.00	-21.10	peak

802.11AC20 High Channel Bandedge_VERTICAL

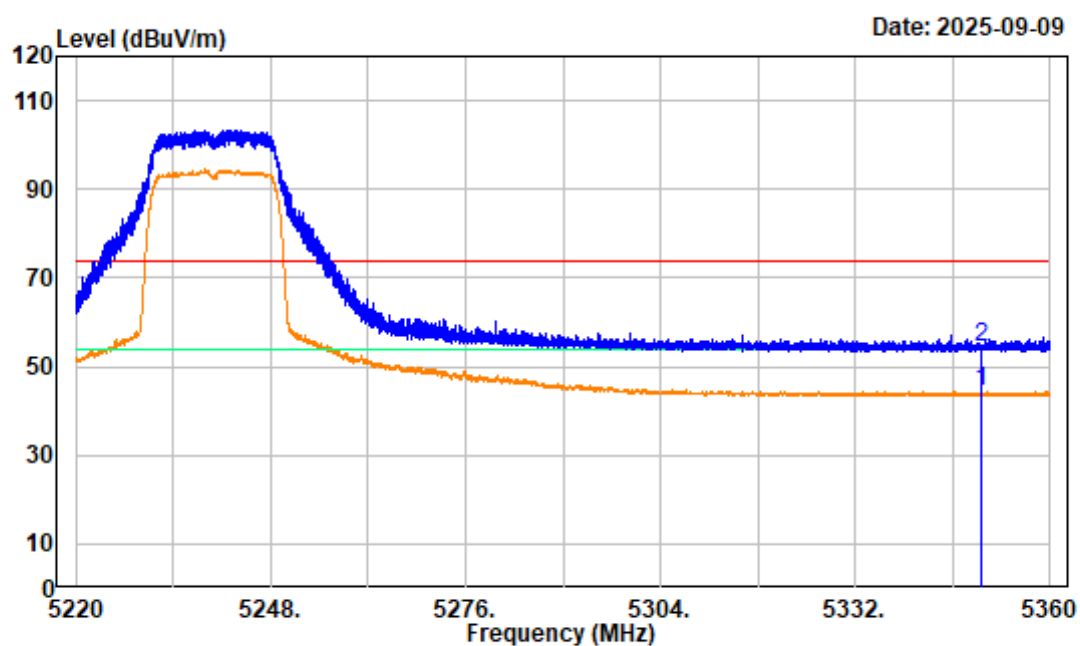

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5240MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	49.95	44.26	54.00	-9.74	average
2	5350.000	-5.69	59.97	54.28	74.00	-19.72	peak

802.11AC40 Low Channel 1GHz-6.6GHz_HORIZONTAL

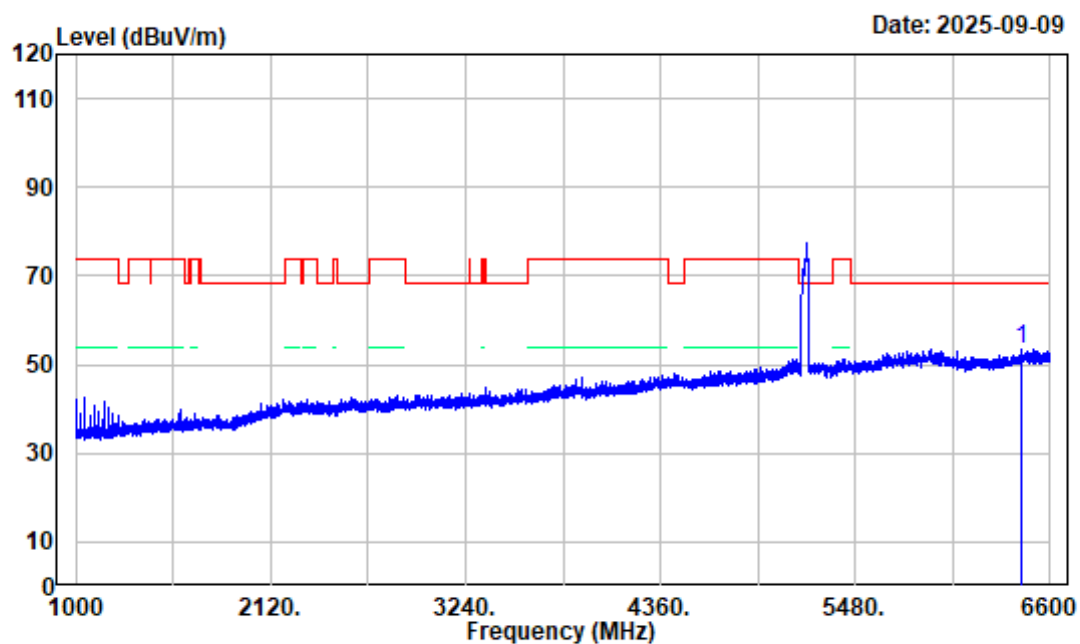

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5190MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6433.400	-3.53	56.84	53.31	68.20	-14.89	peak


802.11AC40 Low Channel 1GHz-6.6GHz_VERTICAL

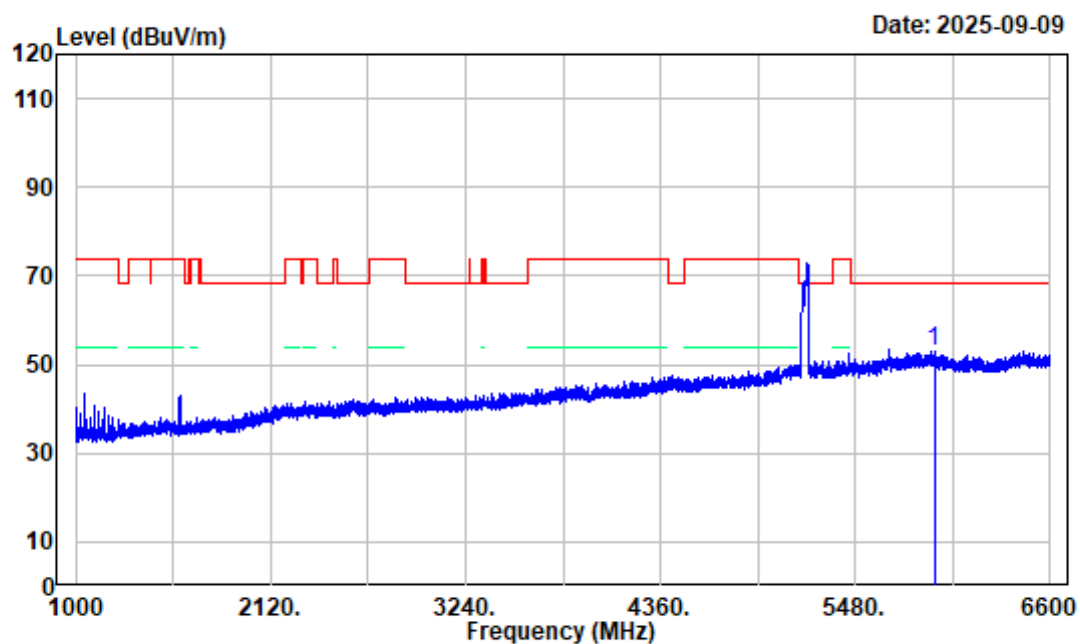

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC40 Low Channel 5190MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

			Read	Limit	Over	
	Freq	Factor	Level	Level	Line	Limit Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5933.600	-4.40	57.60	53.20	68.20	-15.00 peak

802.11AC40 Low Channel 6.6GHz-18GHz_HORIZONTAL

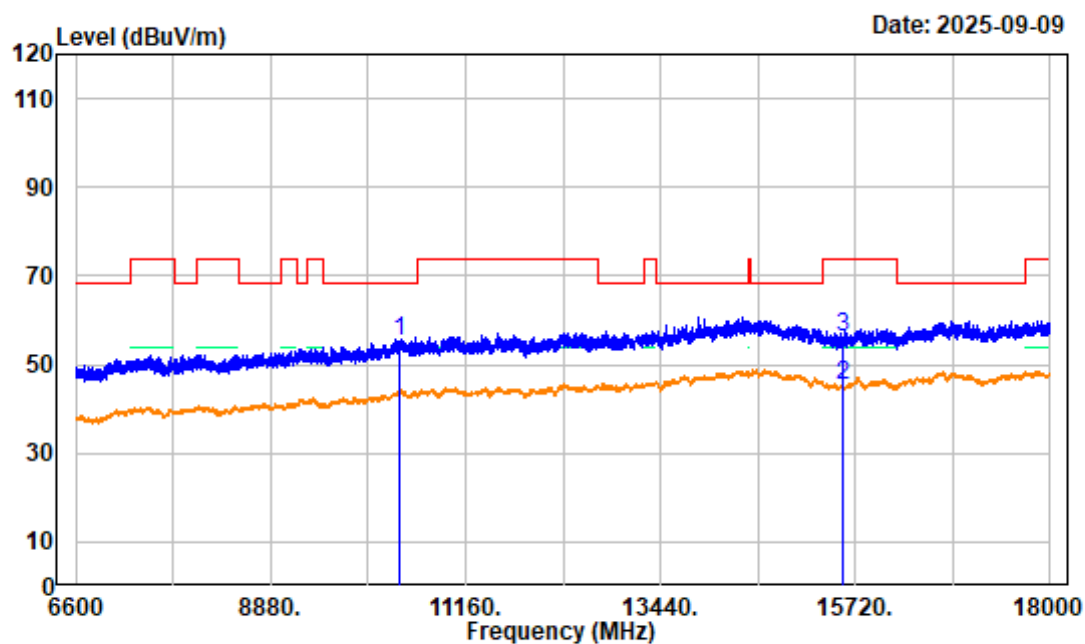

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5190MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz		dB/m	dBuV	dBuV/m	dBuV/m	dB
1	10380.000	4.09	51.13	55.22	68.20	-12.98	peak
2	15570.000	4.80	40.53	45.33	54.00	-8.67	average
3	15570.000	4.80	51.56	56.36	74.00	-17.64	peak

802.11AC40 Low Channel 6.6GHz-18GHz_VERTICAL

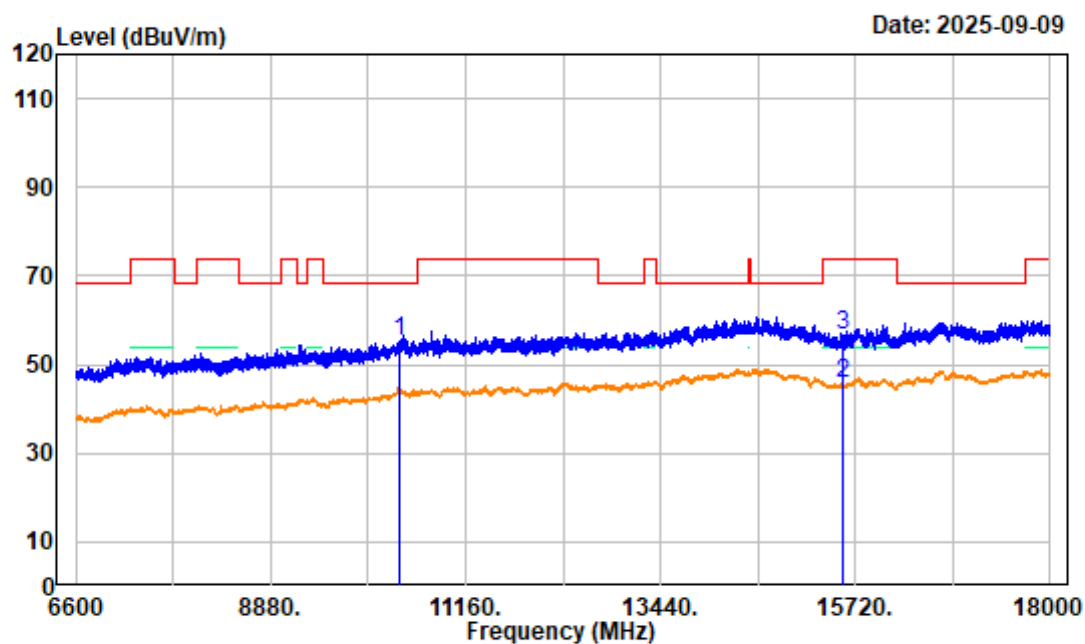

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5190MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

			Read	Limit	Over	
Freq	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10380.000	4.09	51.31	55.40	68.20	-12.80	peak
2 15570.000	4.80	40.73	45.53	54.00	-8.47	average
3 15570.000	4.80	51.78	56.58	74.00	-17.42	peak

802.11AC40 Low Channel Bandedge_HORIZONTAL

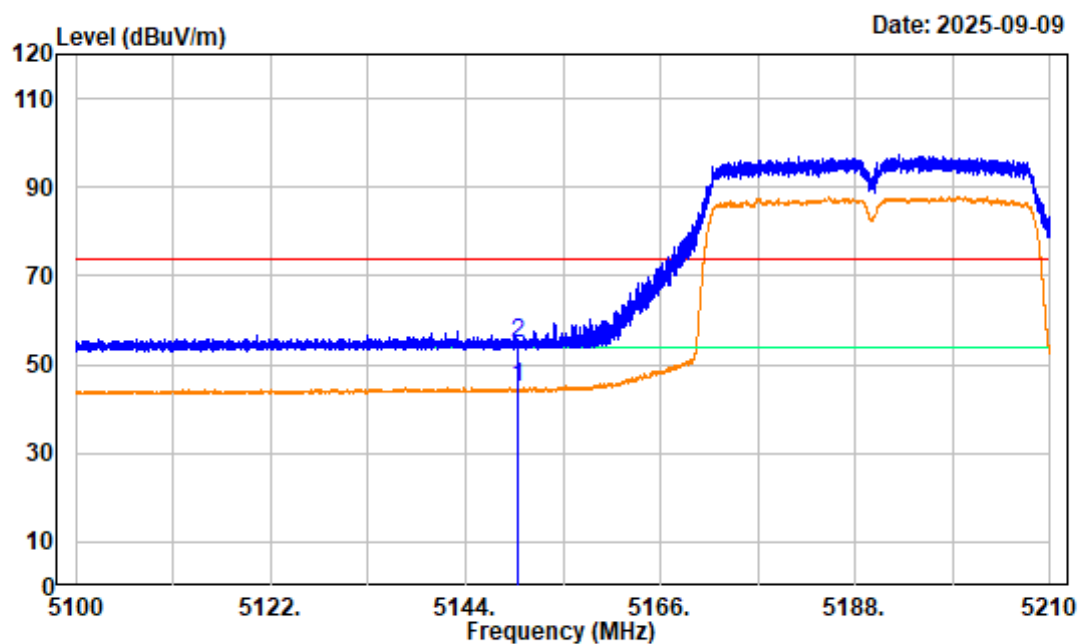

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5190MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-6.04	50.87	44.83	54.00	-9.17	average
2	5150.000	-6.04	60.91	54.87	74.00	-19.13	peak

802.11AC40 Low Channel Bandedge_VERTICAL

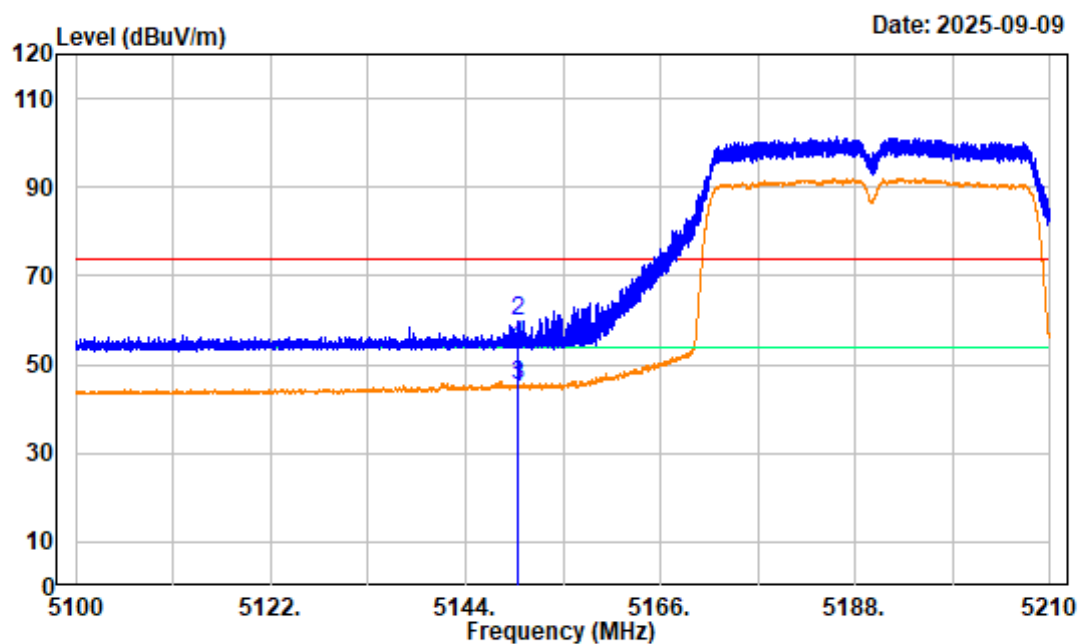

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5190MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5149.926	-6.04	50.88	44.84	54.00	-9.16	Average
2	5149.926	-6.04	65.93	59.89	74.00	-14.11	Peak
3	5150.000	-6.04	51.44	45.40	54.00	-8.60	average
4	5150.000	-6.04	60.42	54.38	74.00	-19.62	peak


802.11AC40 High Channel 1GHz-6.6GHz_HORIZONTAL

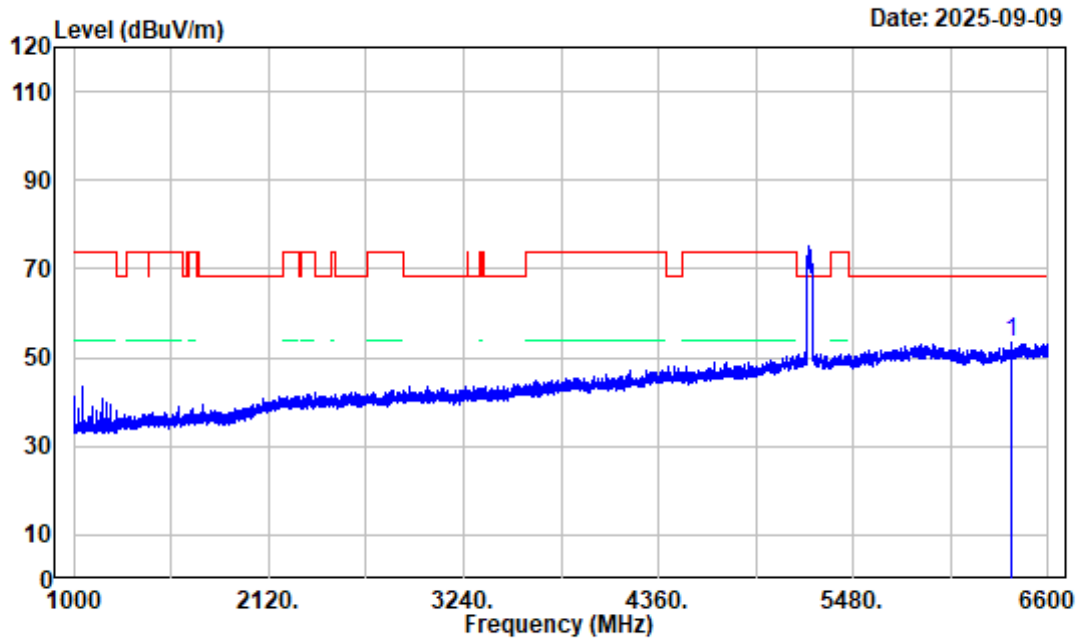

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC40 High Channel 5230MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6390.700	-3.82	57.43	53.61	68.20	-14.59	peak


802.11AC40 High Channel 1GHz-6.6GHz_VERTICAL

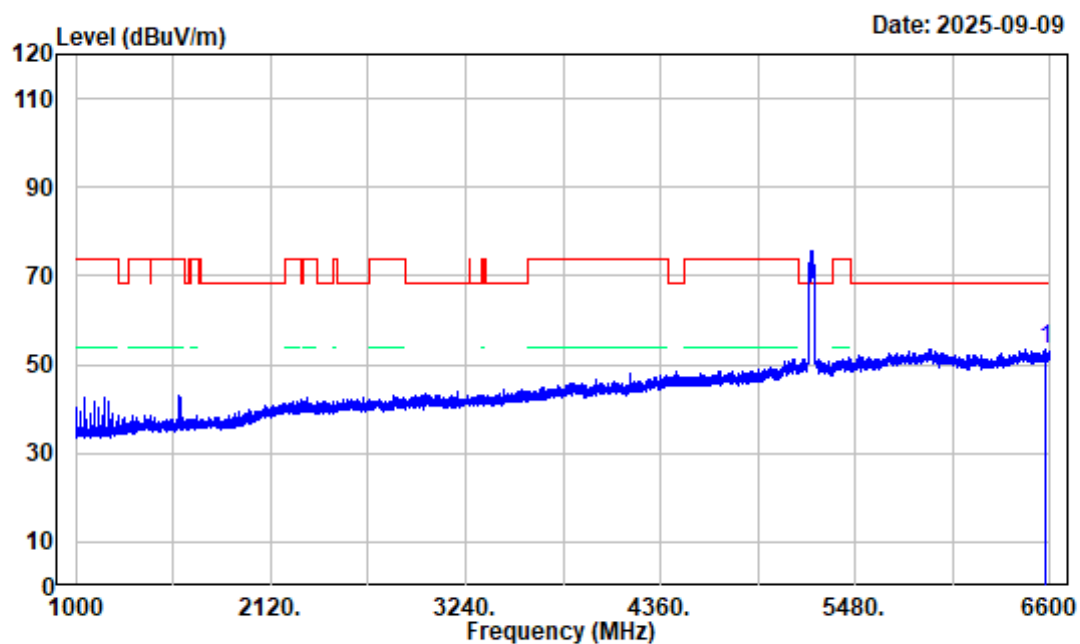

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC40 High Channel 5230MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6572.700	-3.57	57.21	53.64	68.20	-14.56	peak

802.11AC40 High Channel 6.6GHz-18GHz_HORIZONTAL

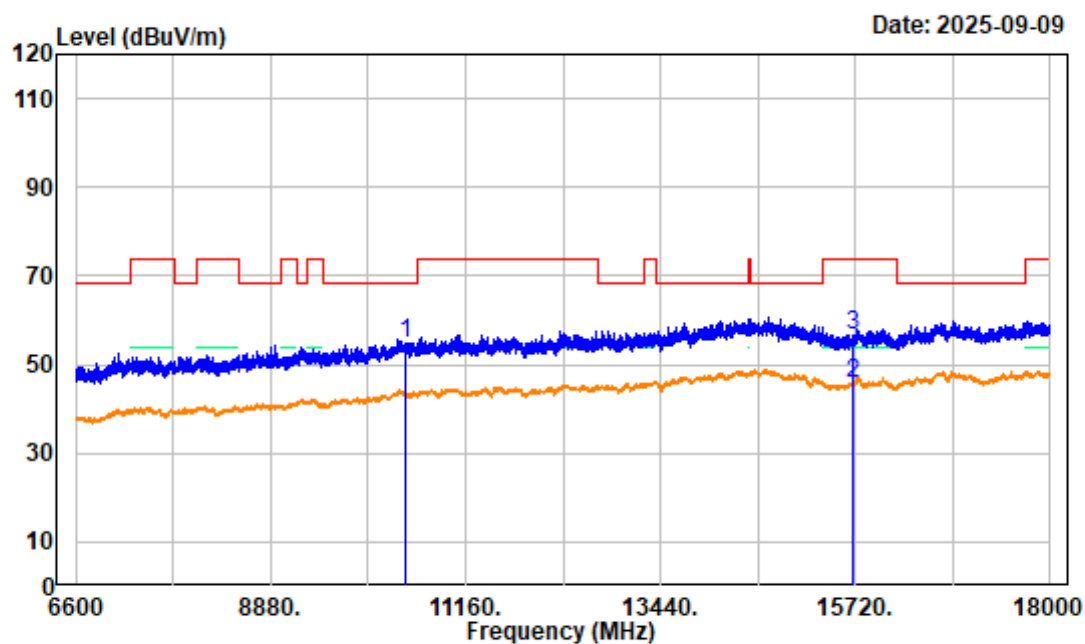

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5230MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

			Read	Limit	Over	
Freq	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10460.000	4.20	50.81	55.01	68.20	-13.19	peak
2 15690.000	4.62	41.15	45.77	54.00	-8.23	average
3 15690.000	4.62	52.17	56.79	74.00	-17.21	peak

802.11AC40 High Channel 6.6GHz-18GHz_VERTICAL

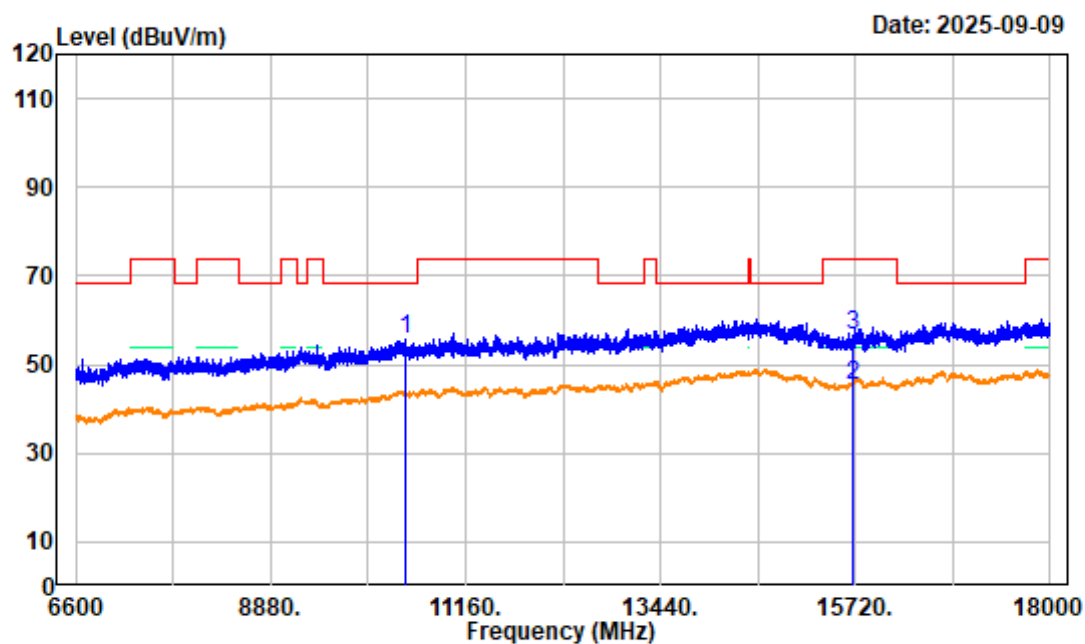

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5230MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	4.20	51.37	55.57	68.20	-12.63	peak
2	15690.000	4.62	40.80	45.42	54.00	-8.58	average
3	15690.000	4.62	51.83	56.45	74.00	-17.55	peak

802.11AC40 High Channel Bandedge_HORIZONTAL

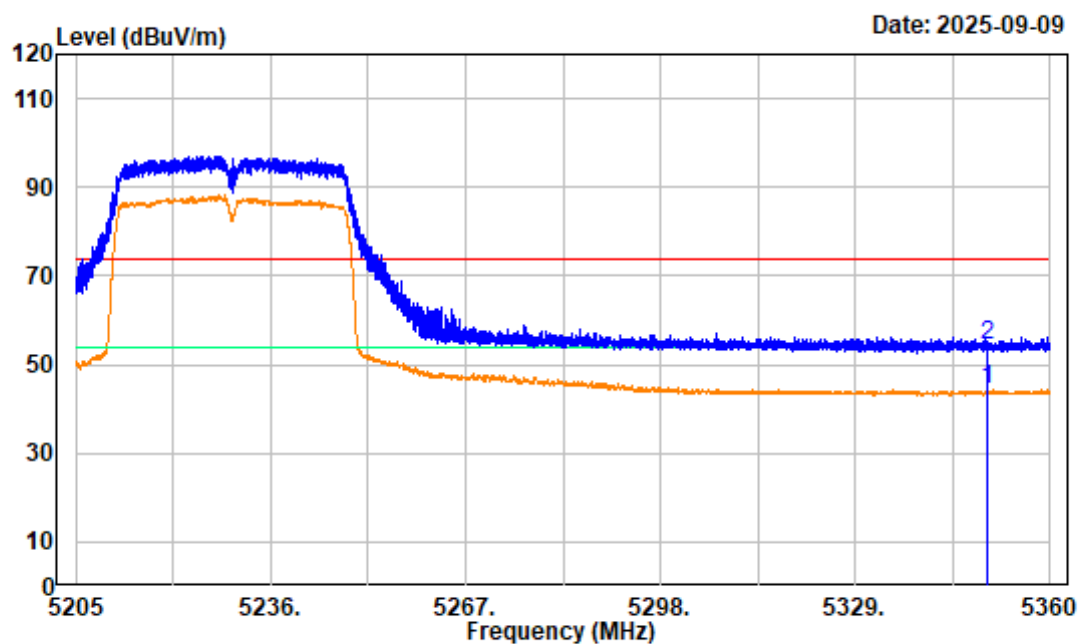

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5230MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	50.09	44.40	54.00	-9.60	average
2	5350.000	-5.69	60.14	54.45	74.00	-19.55	peak

802.11AC40 High Channel Bandedge_VERTICAL

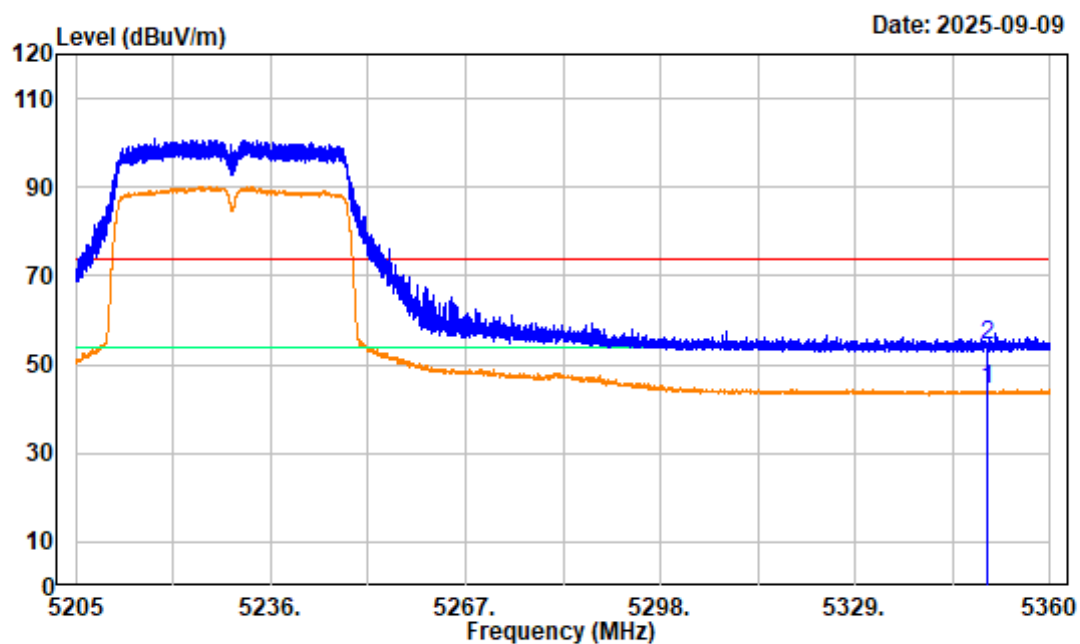

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5230MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	50.15	44.46	54.00	-9.54	average
2	5350.000	-5.69	60.16	54.47	74.00	-19.53	peak


802.11AX20 Low Channel 1GHz-6.6GHz_HORIZONTAL

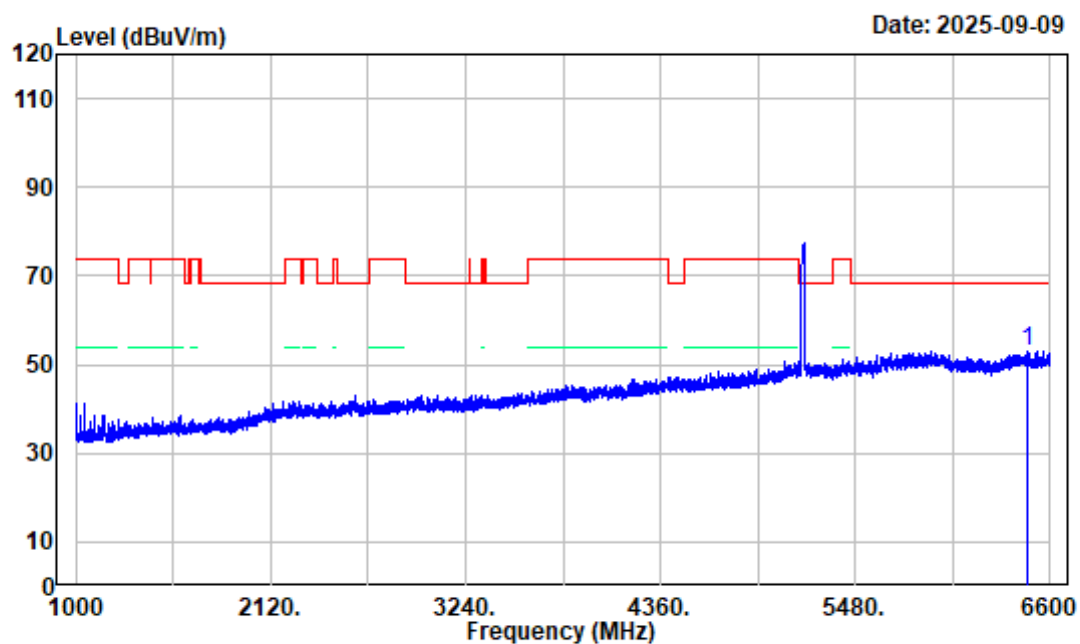

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX20 Low Channel 5180MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6467.700	-3.59	56.64	53.05	68.20	-15.15	peak


802.11AX20 Low Channel 1GHz-6.6GHz_VERTICAL

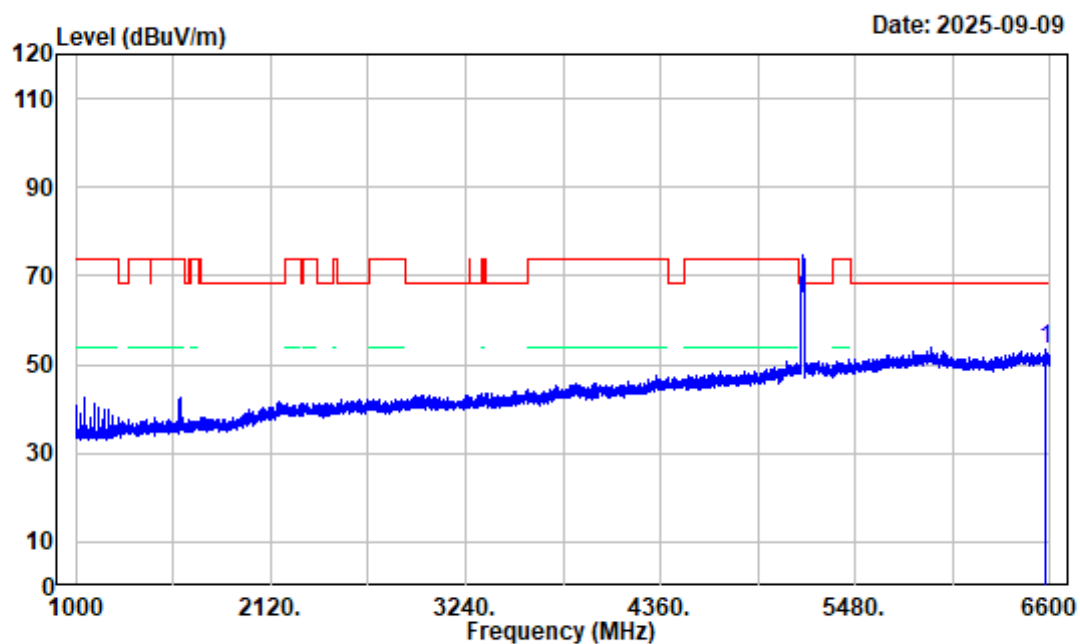

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX20 Low Channel 5180MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6569.200	-3.58	56.91	53.33	68.20	-14.87	peak

802.11AX20 Low Channel 6.6GHz-18GHz_HORIZONTAL

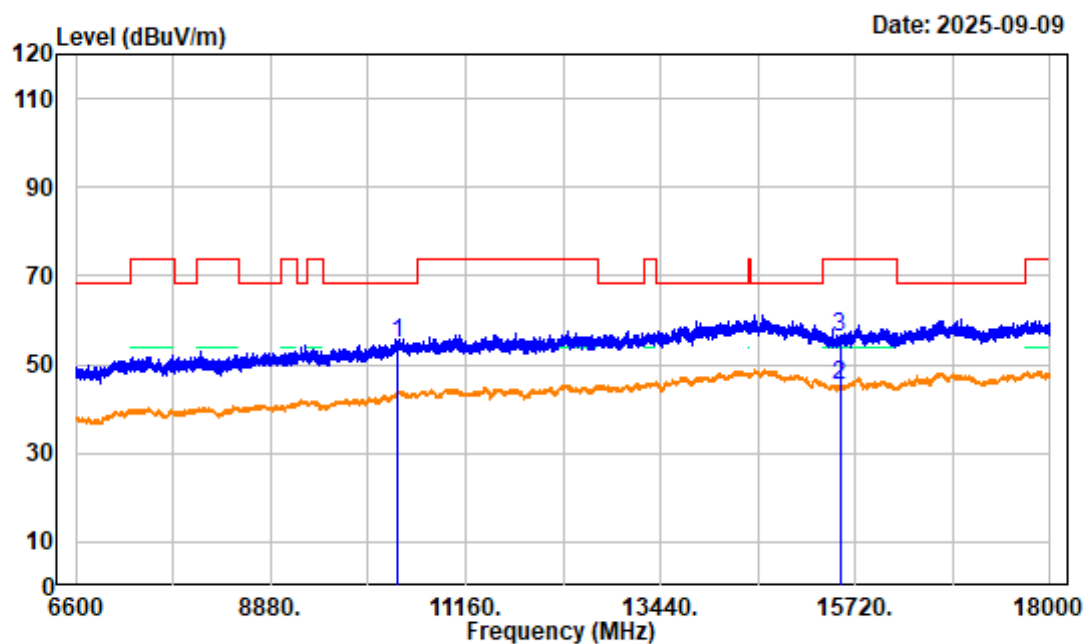

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5180MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

			Read	Limit	Over	
Freq	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10360.000	3.99	50.94	54.93	68.20	-13.27	peak
2 15540.000	4.85	40.24	45.09	54.00	-8.91	average
3 15540.000	4.85	51.17	56.02	74.00	-17.98	peak

802.11AX20 Low Channel 6.6GHz-18GHz_VERTICAL

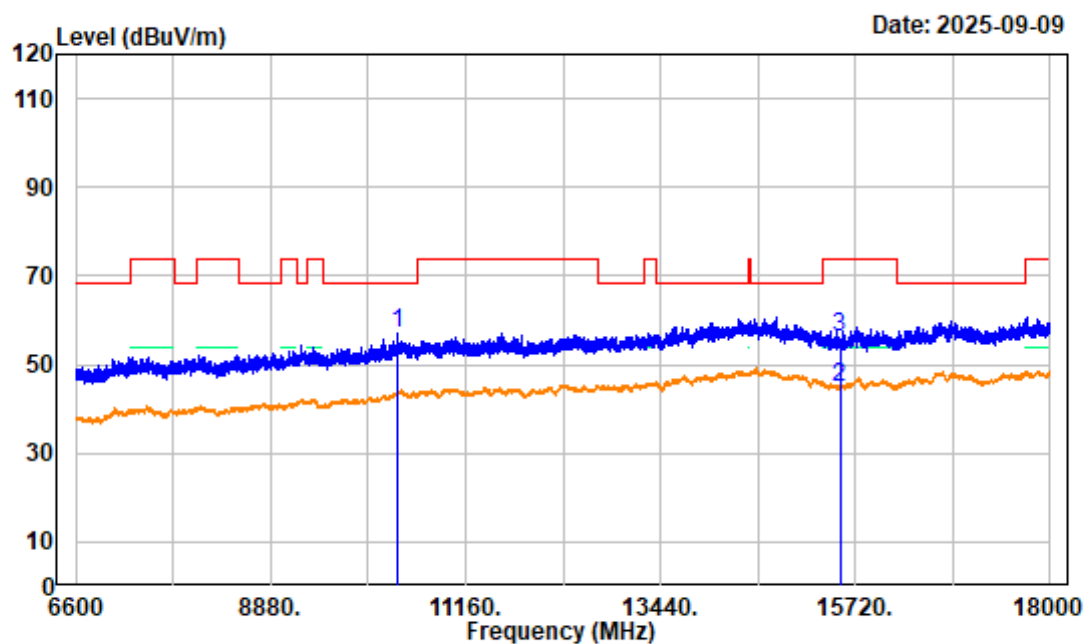

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5180MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10360.000	3.99	53.01	57.00	68.20	-11.20	peak
2	15540.000	4.85	40.16	45.01	54.00	-8.99	average
3	15540.000	4.85	51.15	56.00	74.00	-18.00	peak


802.11AX20 Low Channel 18GHz-26.5GHz_HORIZONTAL

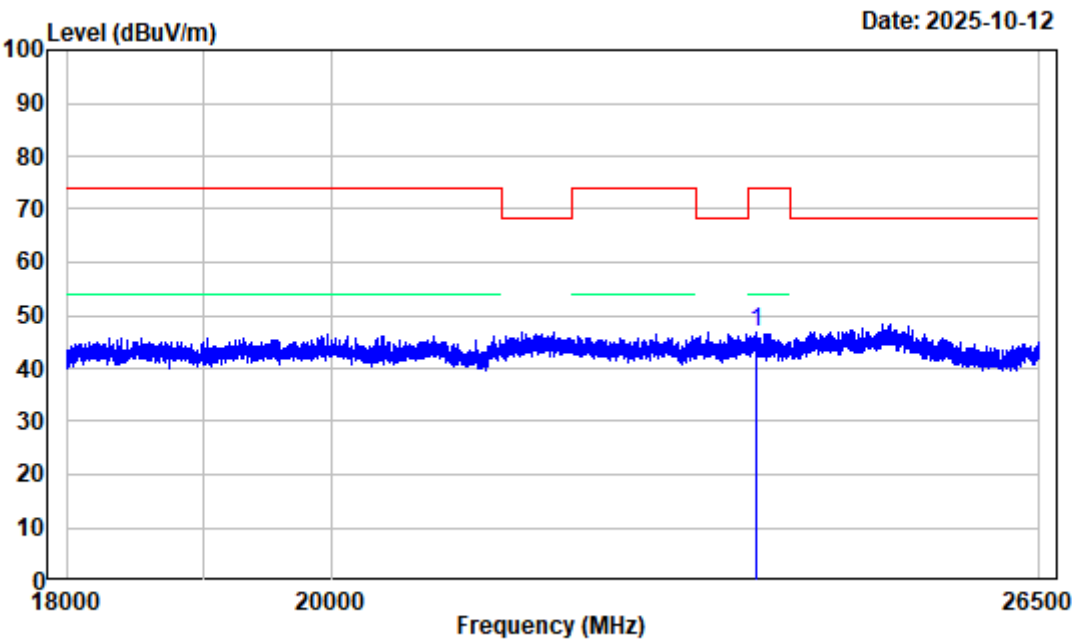

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5180MHz 18GHz-26.5GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 23675.880	1.30	45.45	46.75	74.00	-27.25	Peak


802.11AX20 Low Channel 18GHz-26.5GHz_VERTICAL

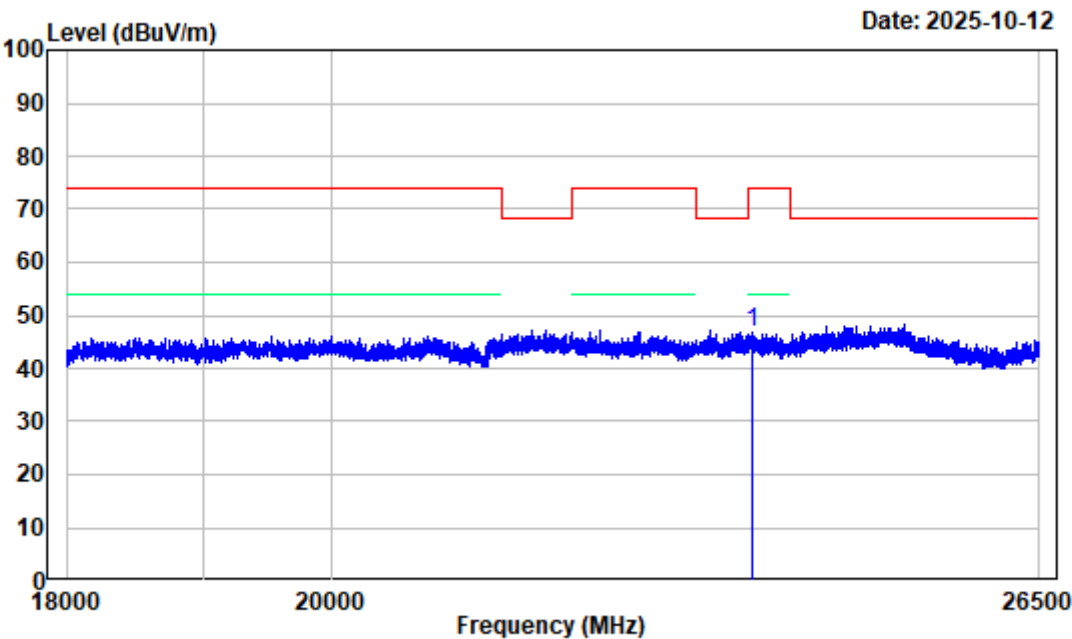

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5180MHz 18GHz-26.5GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 23649.310	-2.19	49.01	46.82	74.00	-27.18	Peak

802.11AX20 Low Channel 26.5GHz-40GHz_HORIZONTAL

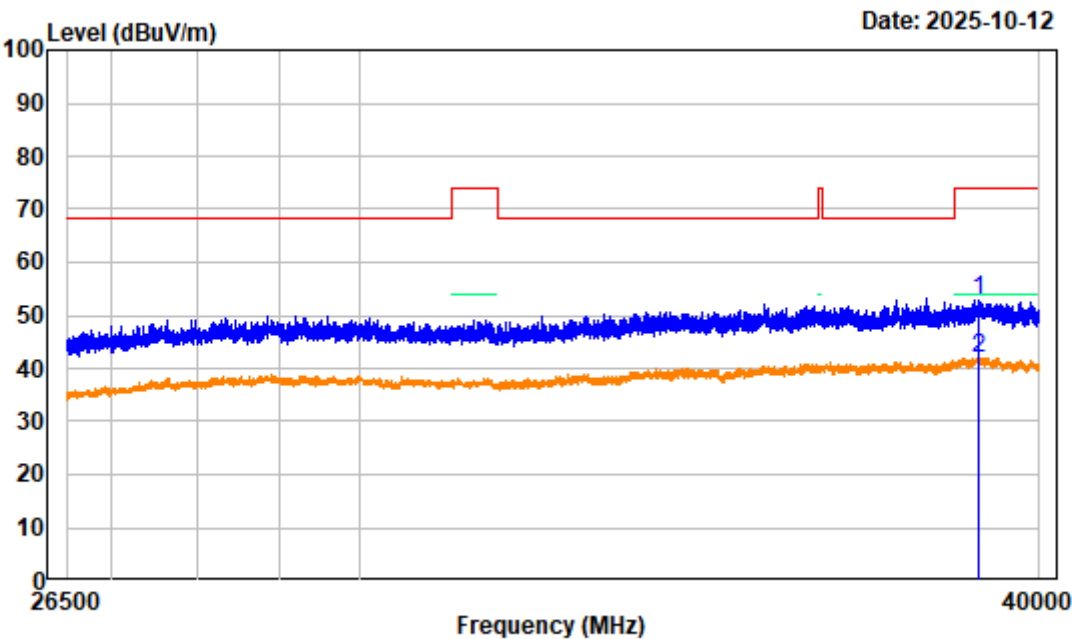

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5180MHz 26.5GHz-40GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	38975.690	3.66	49.22	52.88	74.00	-21.12	Peak
2	38975.690	3.66	38.20	41.86	54.00	-12.14	Average


802.11AX20 Low Channel 26.5GHz-40GHz_VERTICAL

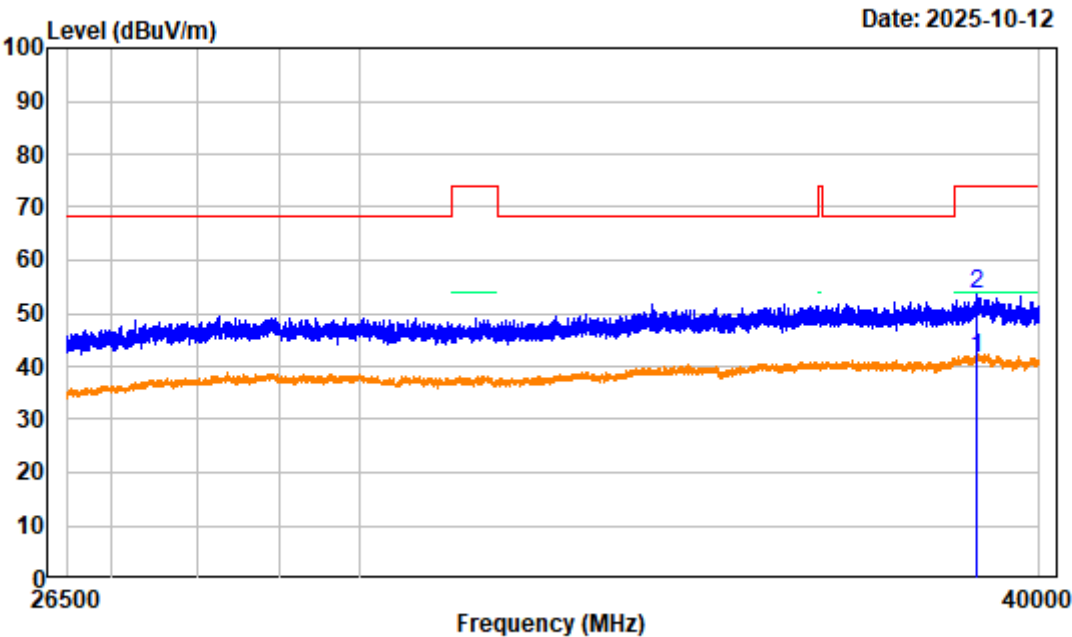

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5180MHz 26.5GHz-40GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 38940.250	3.08	38.49	41.57	54.00	-12.43	Average
2 38940.250	3.08	50.52	53.60	74.00	-20.40	Peak

802.11AX20 Low Channel Bandedge_HORIZONTAL

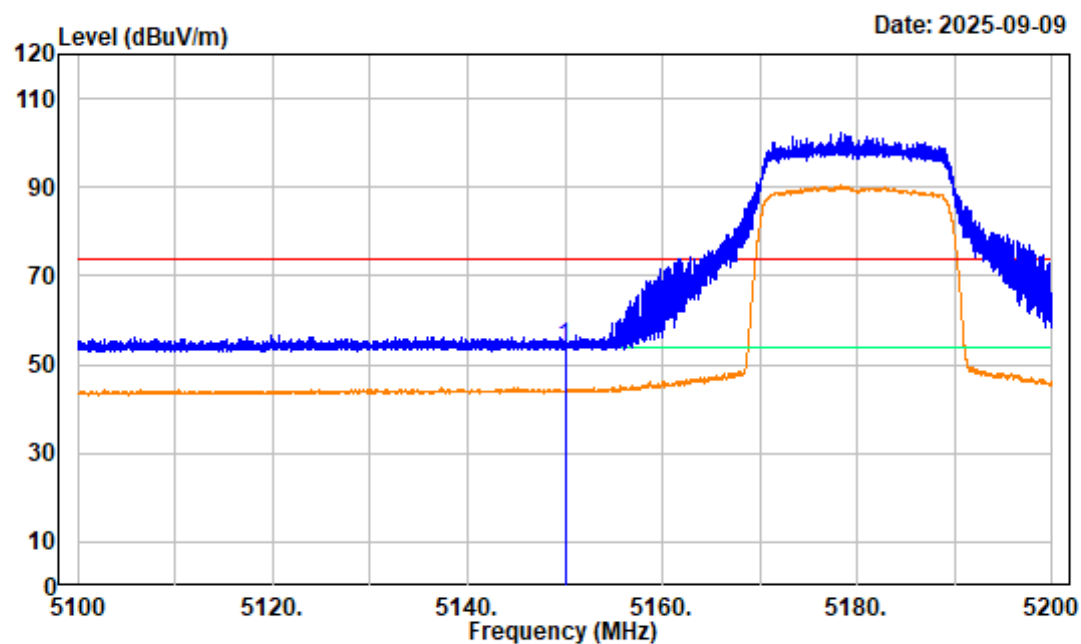

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5180MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-6.04	59.78	53.74	74.00	-20.26	peak

802.11AX20 Low Channel Bandedge_VERTICAL

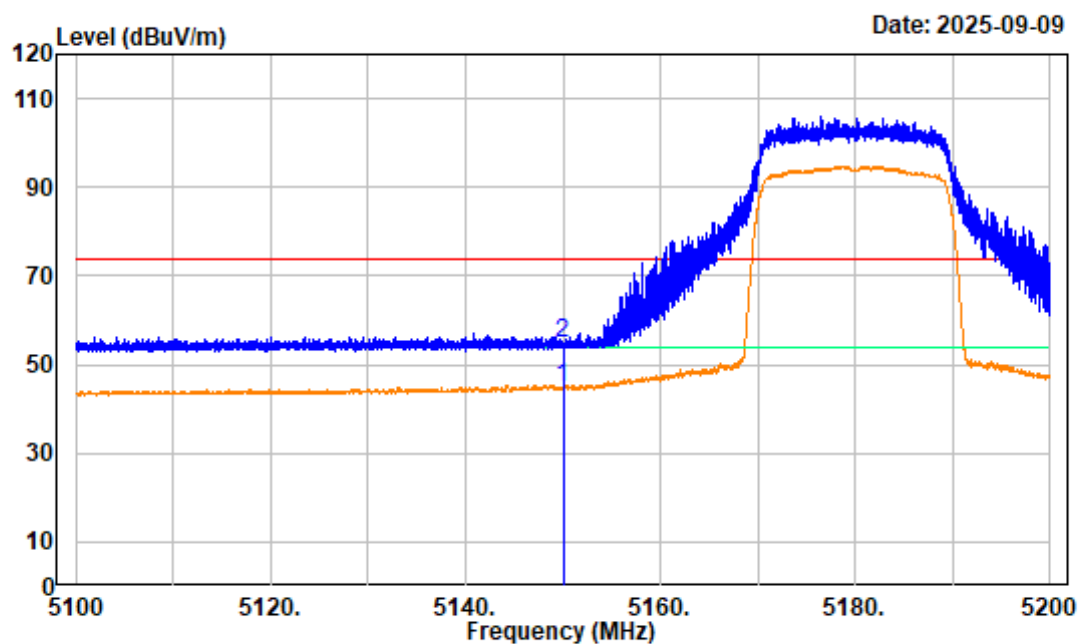

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5180MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-6.04	50.90	44.86	54.00	-9.14	average
2	5150.000	-6.04	60.92	54.88	74.00	-19.12	peak

802.11AX20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

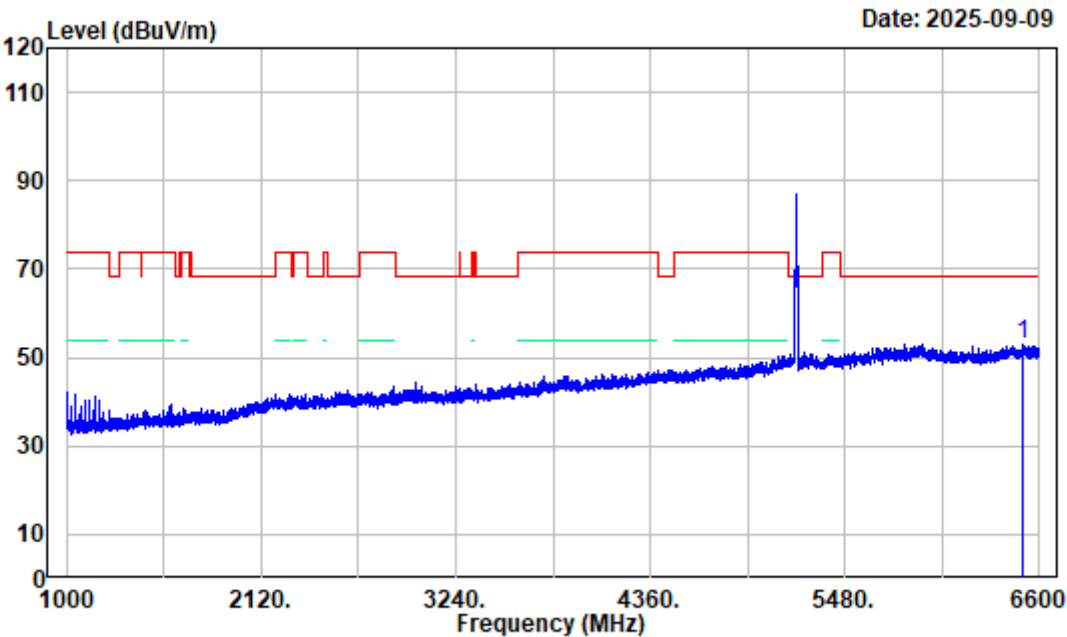

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Middle Channel 5200MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6500.600	-3.85	56.81	52.96	68.20	-15.24	Peak


802.11AX20 Middle Channel 1GHz-6.6GHz_VERTICAL

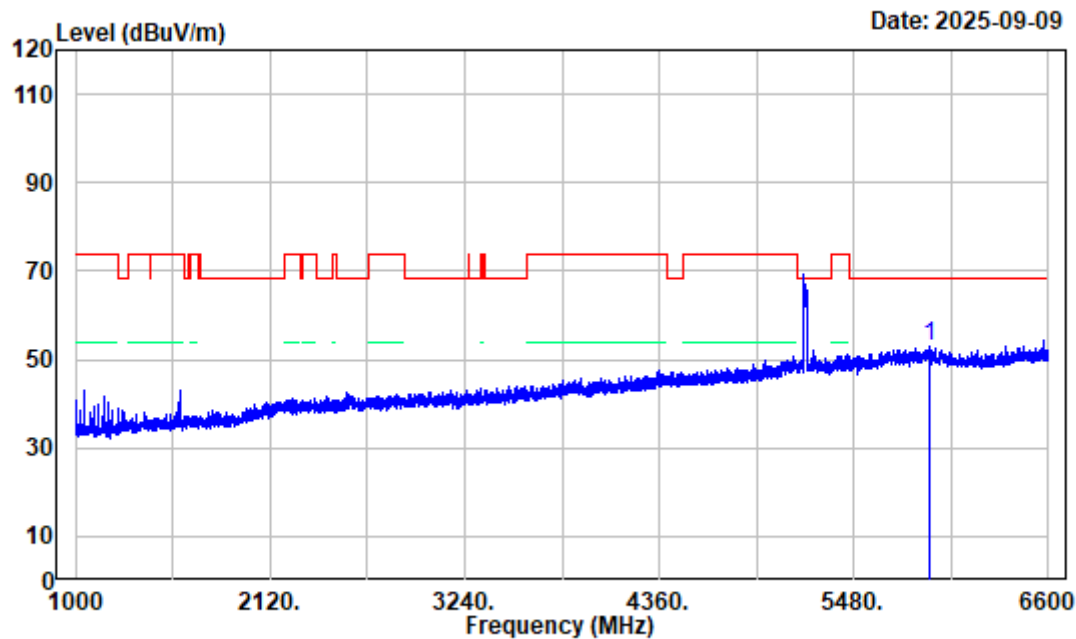

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5200MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq Factor		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5911.900	-4.04	57.00	52.96	68.20	-15.24	Peak


802.11AX20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

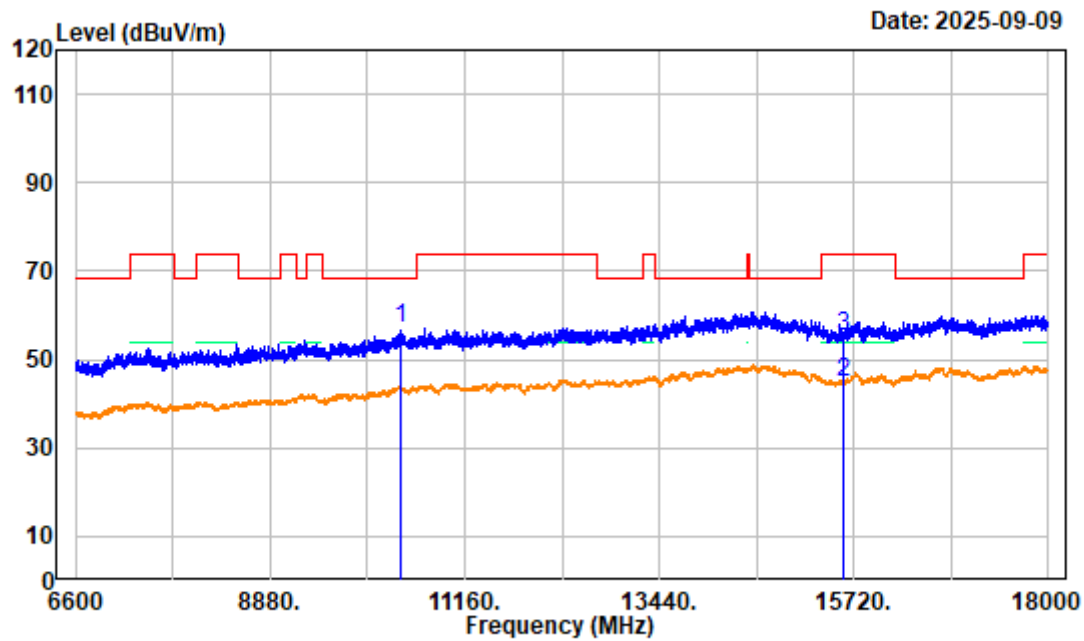

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5200MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10400.000	4.18	53.10	57.28	68.20	-10.92	peak
2 15600.000	4.69	40.19	44.88	54.00	-9.12	average
3 15600.000	4.69	50.53	55.22	74.00	-18.78	peak


802.11AX20 Middle Channel 6.6GHz-18GHz_VERTICAL

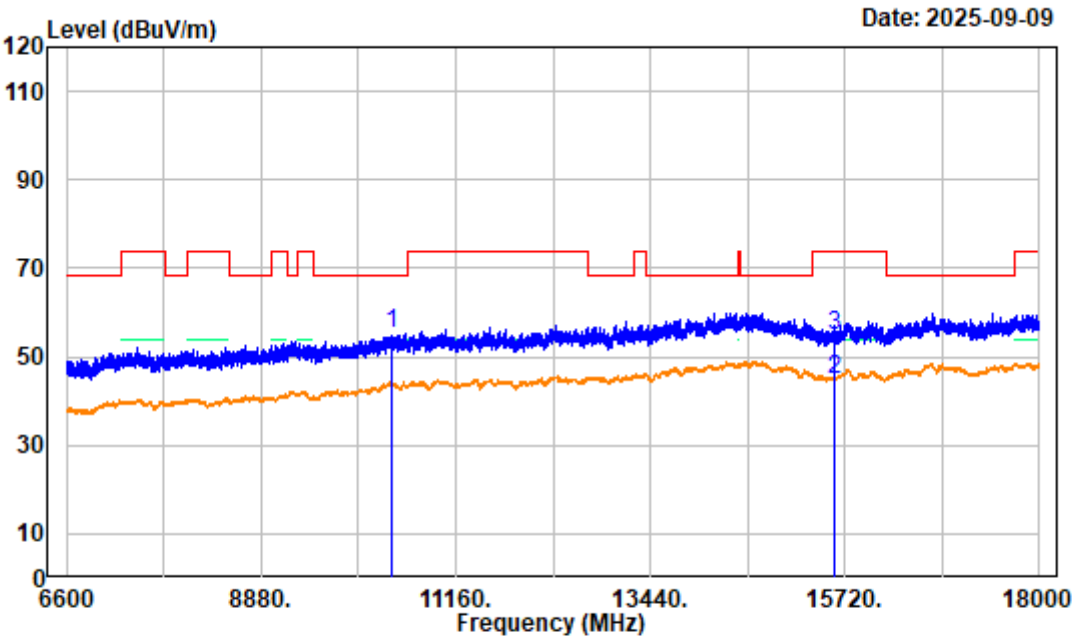

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Middle Channel 5200MHz 6.6GHz-18GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Freq	Factor	Read		Limit	Over	Remark
		Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10400.000	4.18	51.17	55.35	68.20	-12.85	peak
2 15600.000	4.69	40.19	44.88	54.00	-9.12	average
3 15600.000	4.69	50.14	54.83	74.00	-19.17	peak


802.11AX20 High Channel 1GHz-6.6GHz_HORIZONTAL

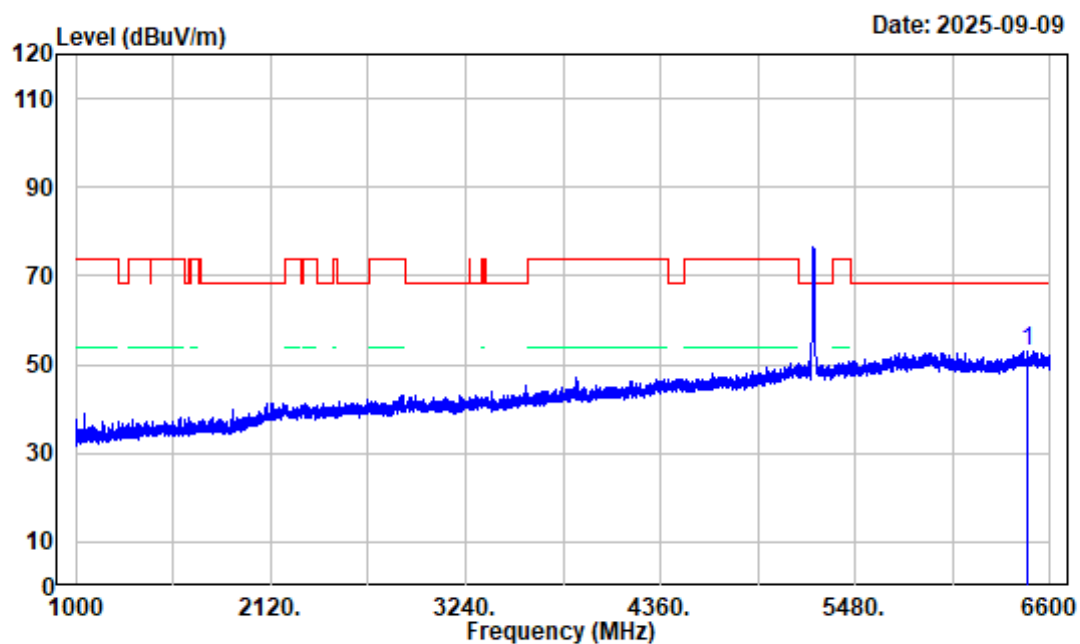

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX20 High Channel 5240MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6474.700	-3.64	56.78	53.14	68.20	-15.06	peak


802.11AX20 High Channel 1GHz-6.6GHz_VERTICAL

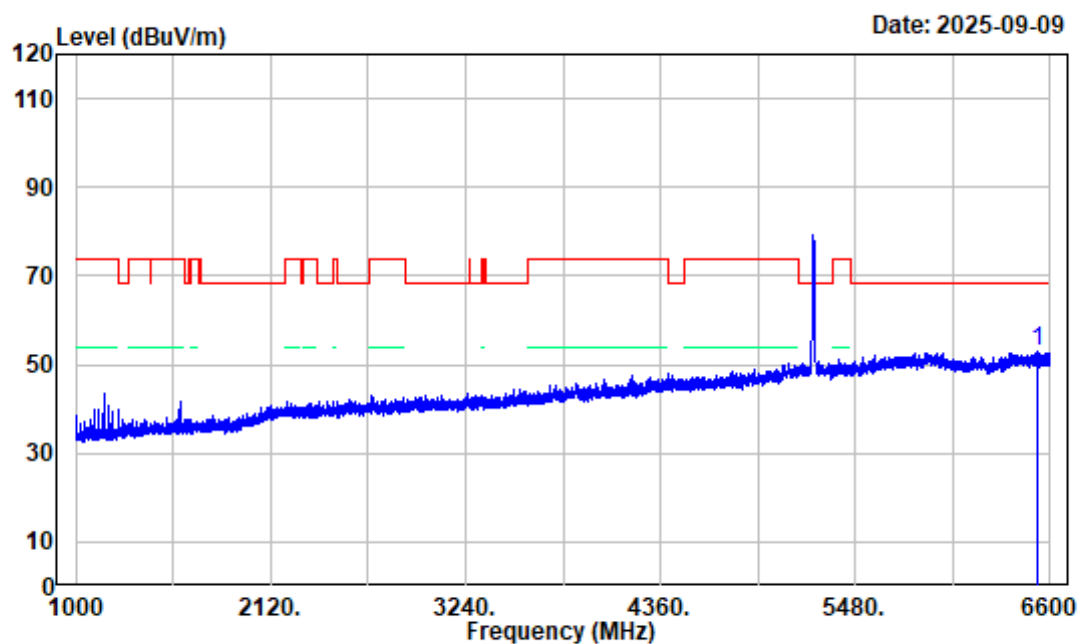

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX20 High Channel 5240MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6530.700	-3.72	56.65	52.93	68.20	-15.27	peak

802.11AX20 High Channel 6.6GHz-18GHz_HORIZONTAL

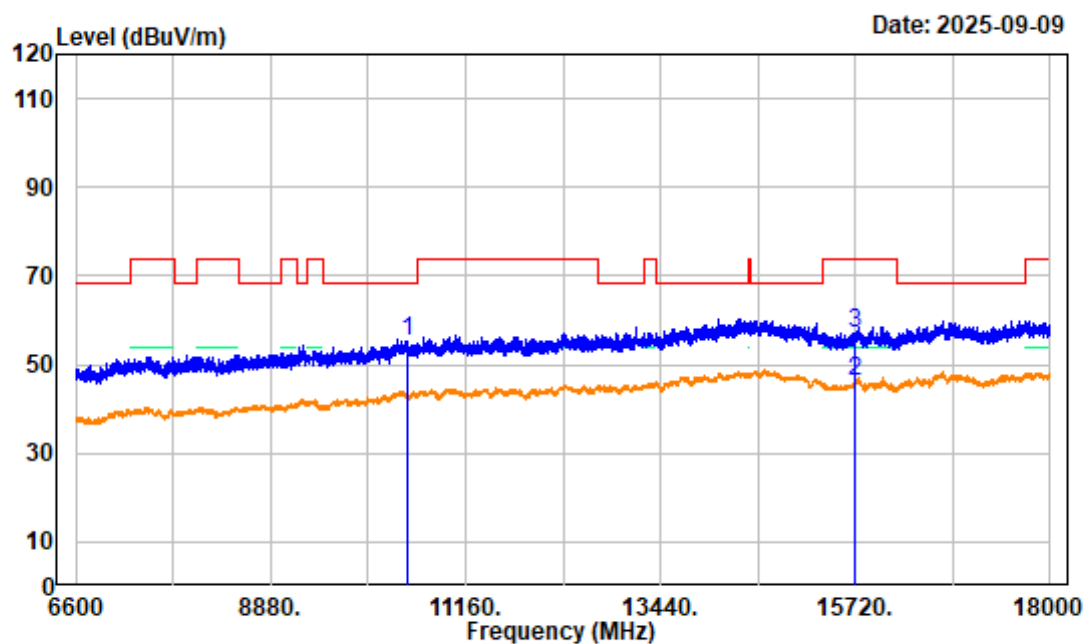

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5240MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

			Read	Limit	Over	
Freq	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.000	4.01	51.15	55.16	68.20	-13.04	peak
2 15720.000	4.85	41.33	46.18	54.00	-7.82	average
3 15720.000	4.85	52.35	57.20	74.00	-16.80	peak

802.11AX20 High Channel 6.6GHz-18GHz_VERTICAL

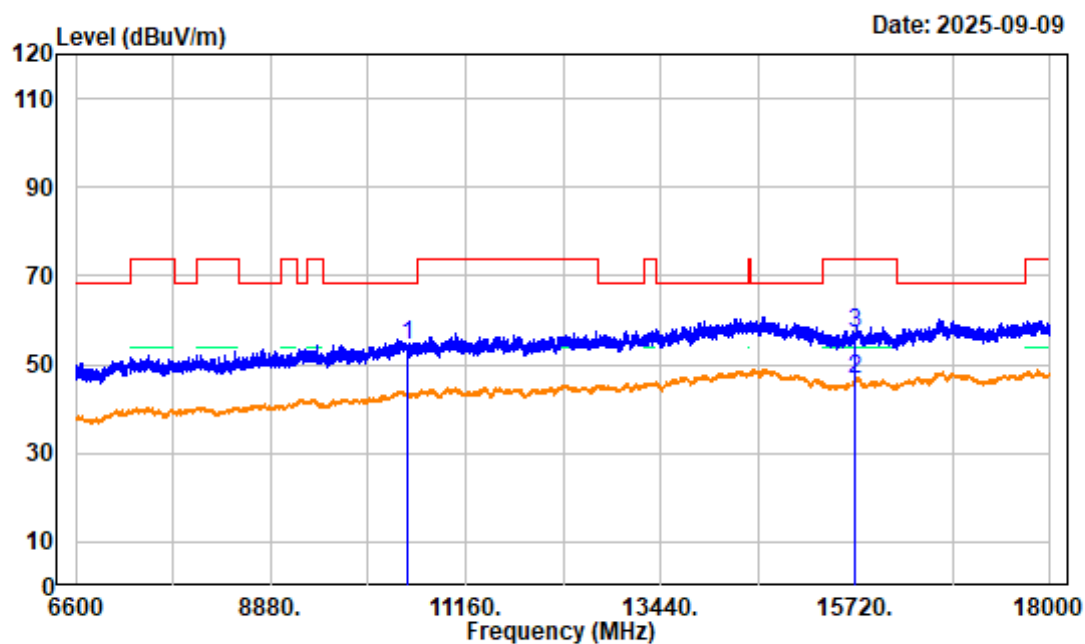

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5240MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

			Read	Limit	Over	
Freq	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10480.000	4.01	50.41	54.42	68.20	-13.78	peak
2 15720.000	4.85	41.95	46.80	54.00	-7.20	average
3 15720.000	4.85	52.02	56.87	74.00	-17.13	peak

802.11AX20 High Channel Bandedge_HORIZONTAL

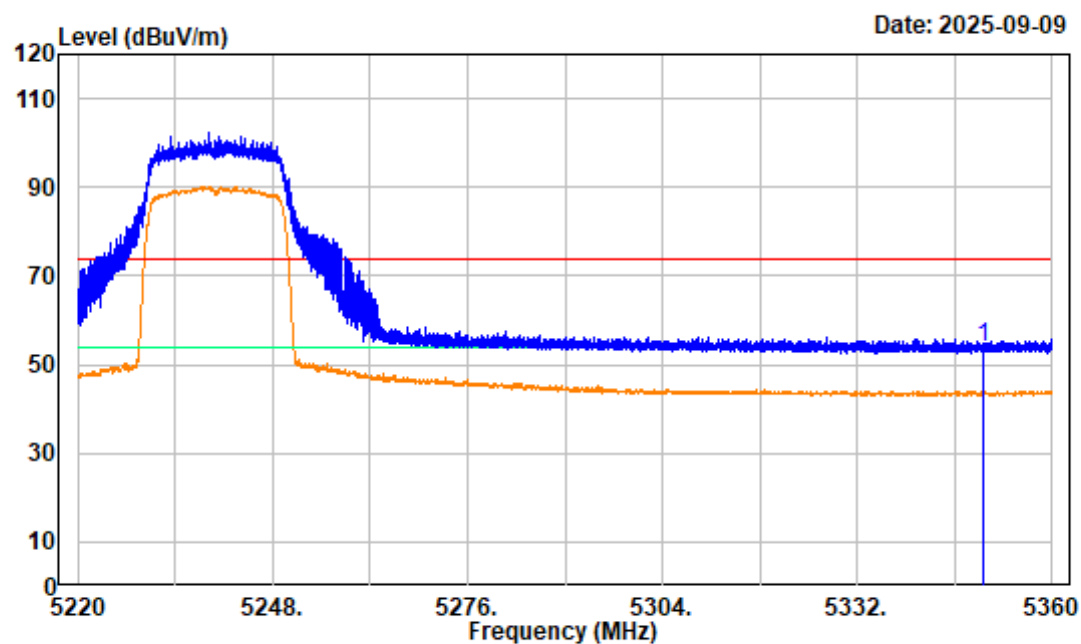

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5240MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	59.48	53.79	74.00	-20.21	peak


802.11AX20 High Channel Bandedge_VERTICAL

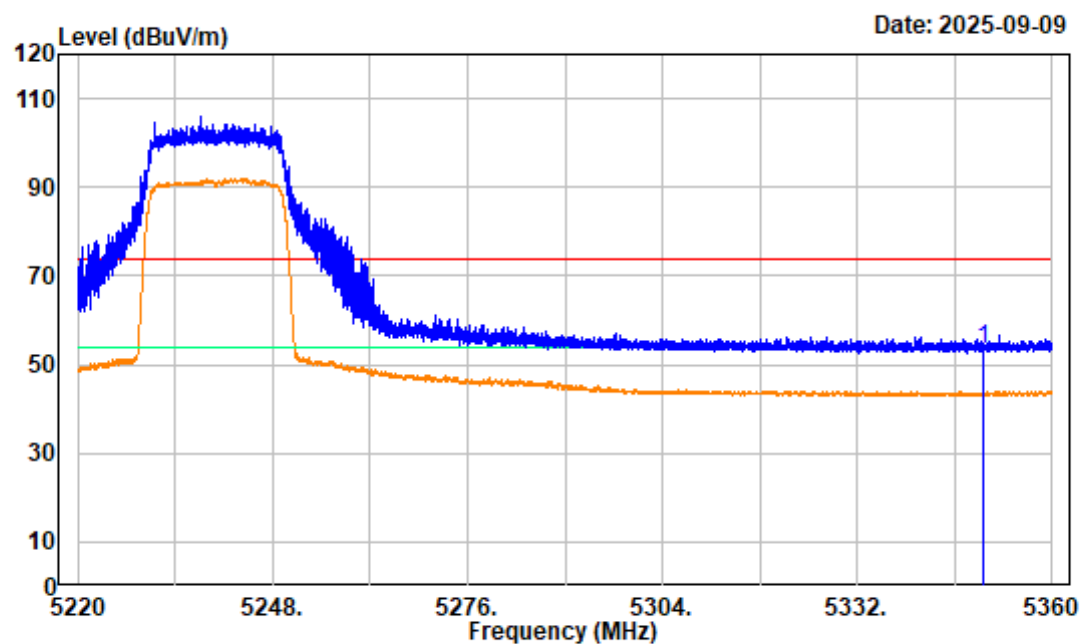

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX20 High Channel 5240MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	58.95	53.26	74.00	-20.74	peak

802.11AX40 Low Channel 1GHz-6.6GHz_HORIZONTAL

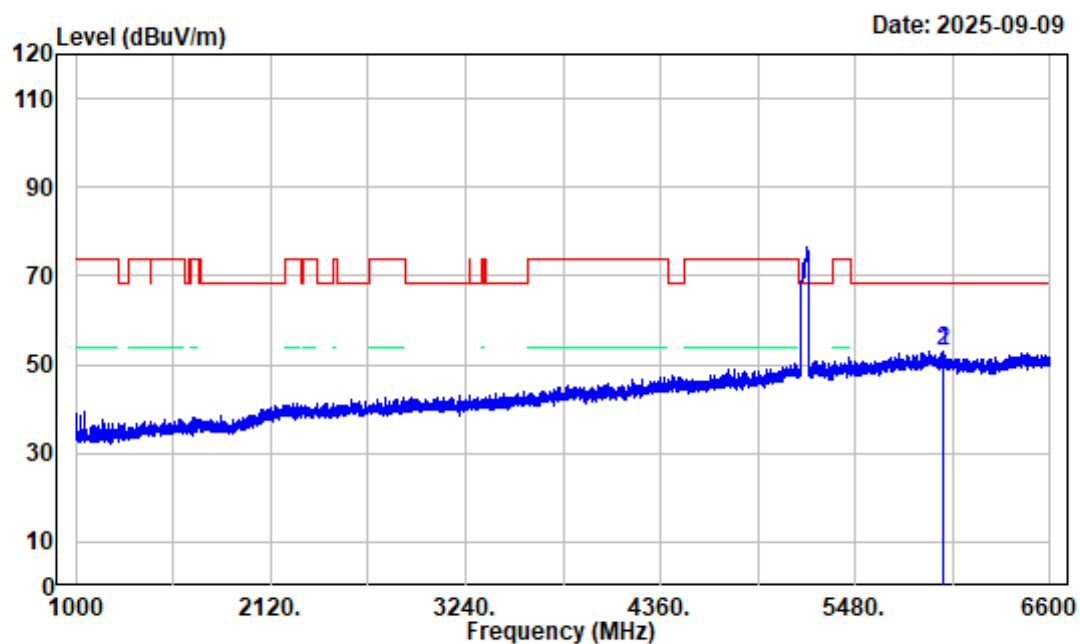

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5190MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5981.900	-4.81	57.75	52.94	68.20	-15.26	peak
2	5981.900	-4.81	57.75	52.94	68.20	-15.26	peak


802.11AX40 Low Channel 1GHz-6.6GHz_VERTICAL

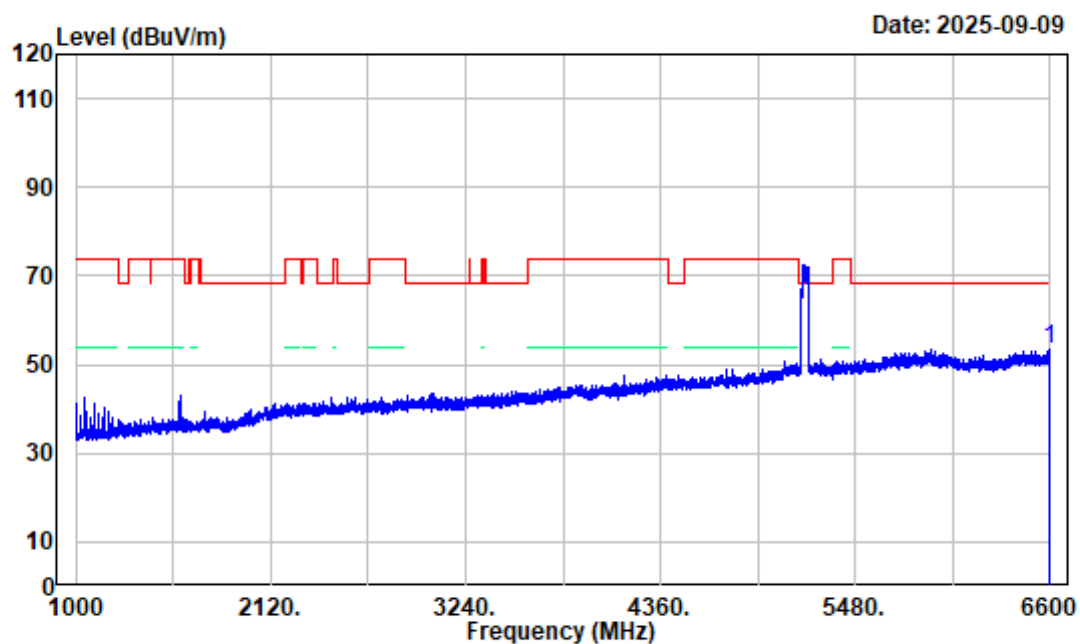

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX40 Low Channel 5190MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6594.400	-3.50	56.86	53.36	68.20	-14.84	peak

802.11AX40 Low Channel 6.6GHz-18GHz_HORIZONTAL

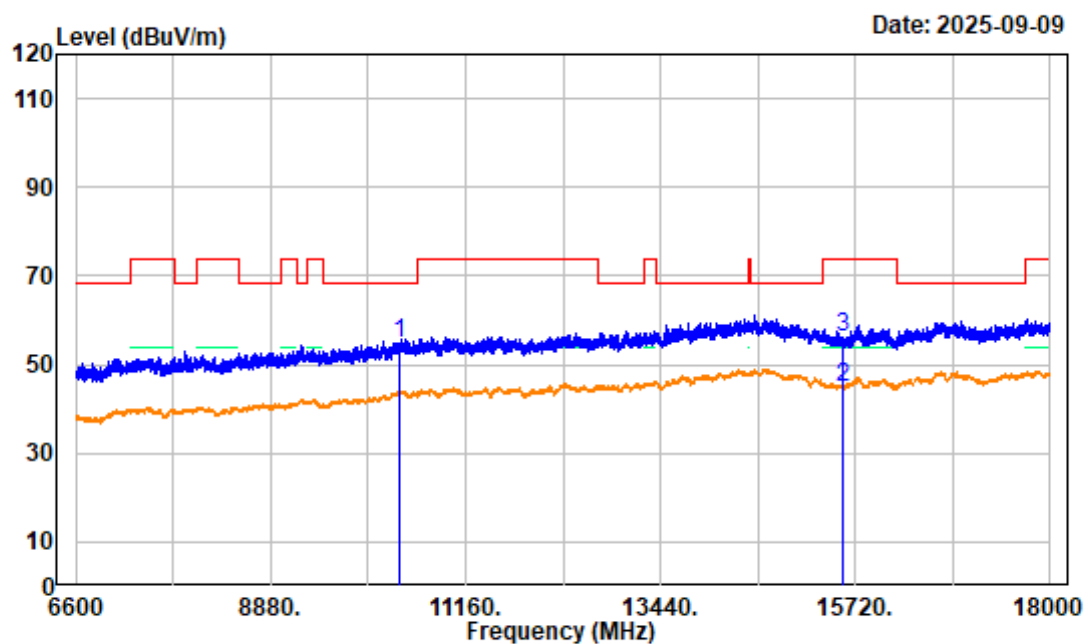

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5190MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10380.000	4.09	50.72	54.81	68.20	-13.39	peak
2	15570.000	4.80	40.13	44.93	54.00	-9.07	average
3	15570.000	4.80	51.17	55.97	74.00	-18.03	peak

802.11AX40 Low Channel 6.6GHz-18GHz_VERTICAL

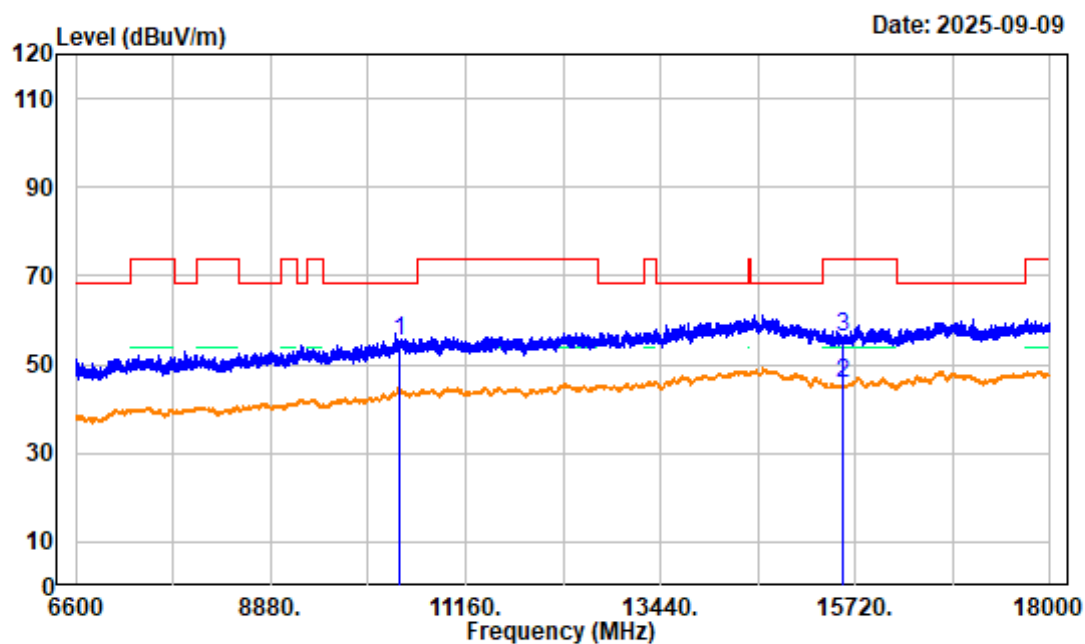

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5190MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10380.000	4.09	50.97	55.06	68.20	-13.14	peak
2	15570.000	4.80	41.13	45.93	54.00	-8.07	average
3	15570.000	4.80	51.17	55.97	74.00	-18.03	peak

802.11AX40 Low Channel Bandedge_HORIZONTAL

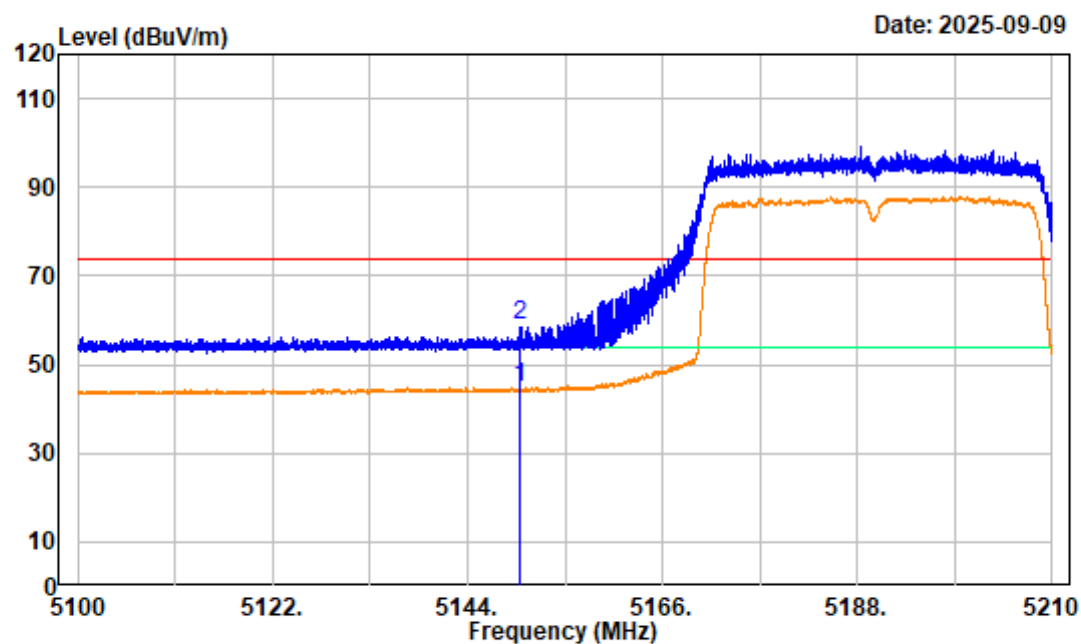

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5190MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-6.04	50.85	44.81	54.00	-9.19	Average
2	5150.000	-6.04	64.90	58.86	74.00	-15.14	peak

802.11AX40 Low Channel Bandedge_VERTICAL

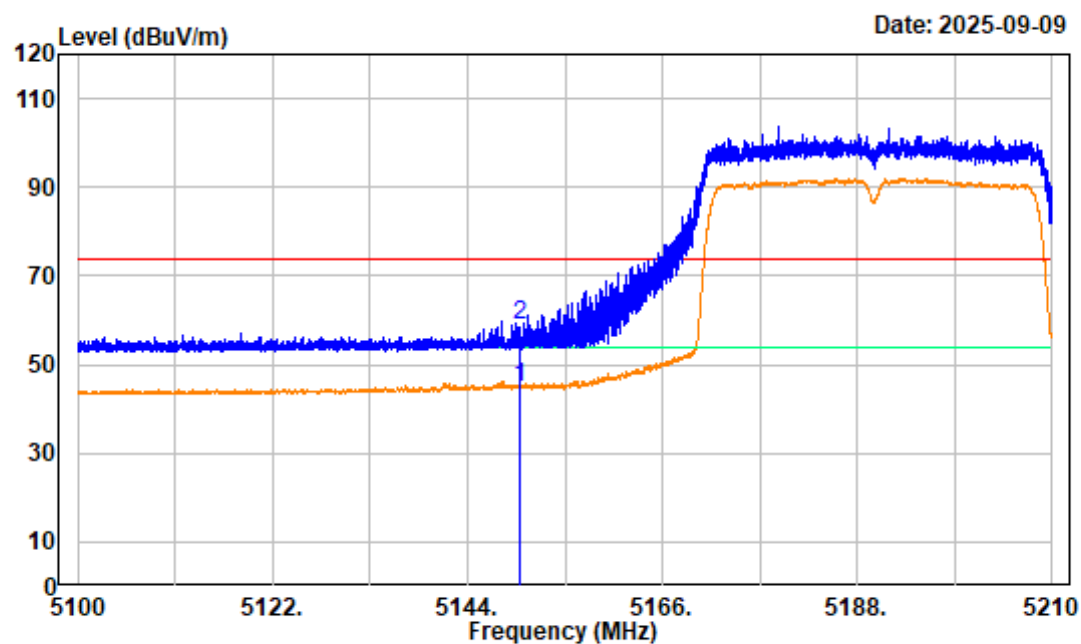

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5190MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-6.04	50.98	44.94	54.00	-9.06	Average
2	5150.000	-6.04	65.00	58.96	74.00	-15.04	peak


802.11AX40 High Channel 1GHz-6.6GHz_HORIZONTAL

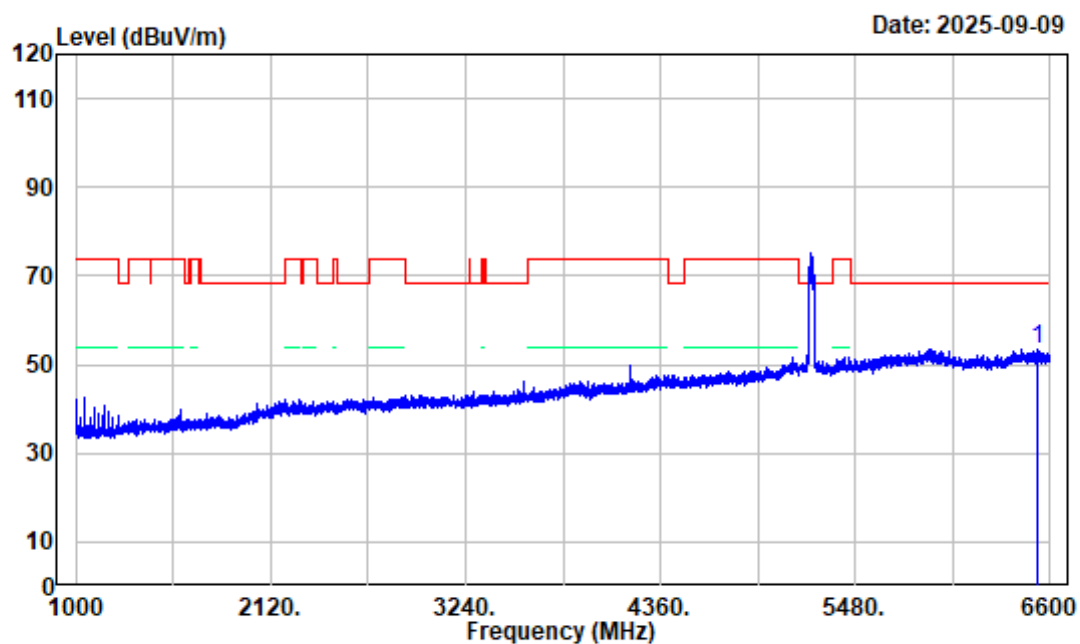

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX40 High Channel 5230MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6530.000	-3.73	57.13	53.40	68.20	-14.80	peak

802.11AX40 High Channel 1GHz-6.6GHz_VERTICAL

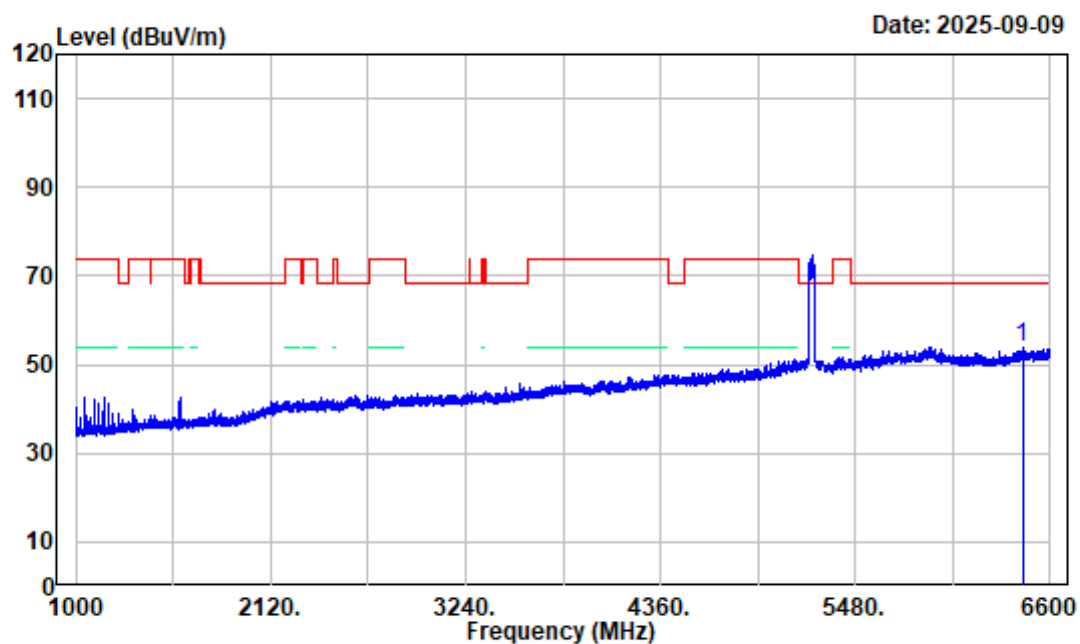

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5230MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6441.100	-3.48	57.40	53.92	68.20	-14.28	peak

802.11AX40 High Channel 6.6GHz-18GHz_HORIZONTAL

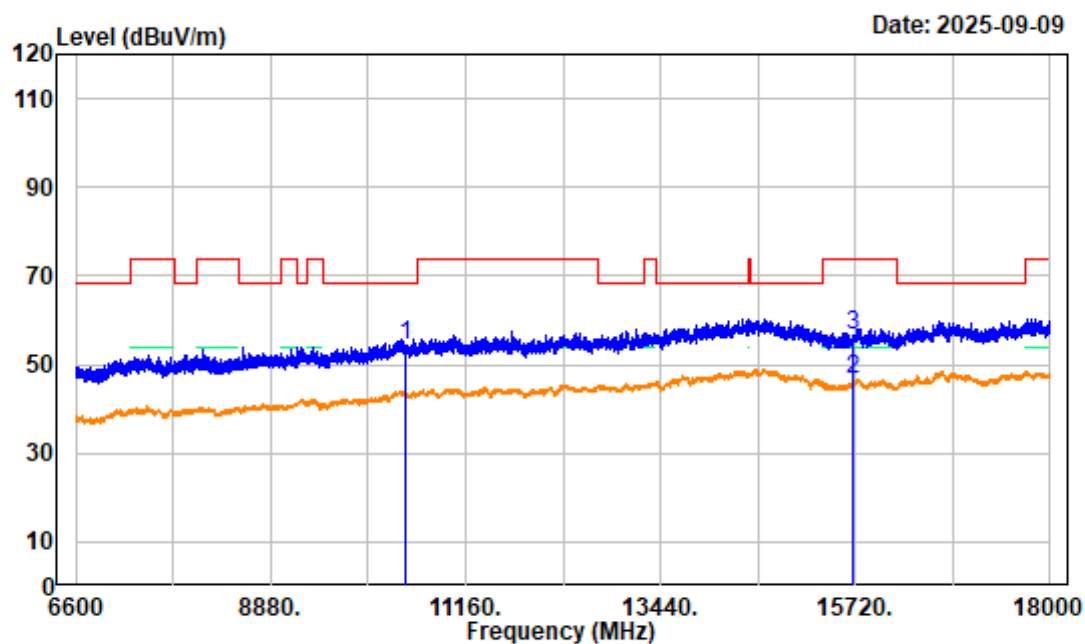

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5230MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

			Read	Limit	Over	
Freq	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10460.000	4.20	50.34	54.54	68.20	-13.66	peak
2 15690.000	4.62	41.82	46.44	54.00	-7.56	average
3 15690.000	4.62	51.80	56.42	74.00	-17.58	peak

802.11AX40 High Channel 6.6GHz-18GHz_VERTICAL

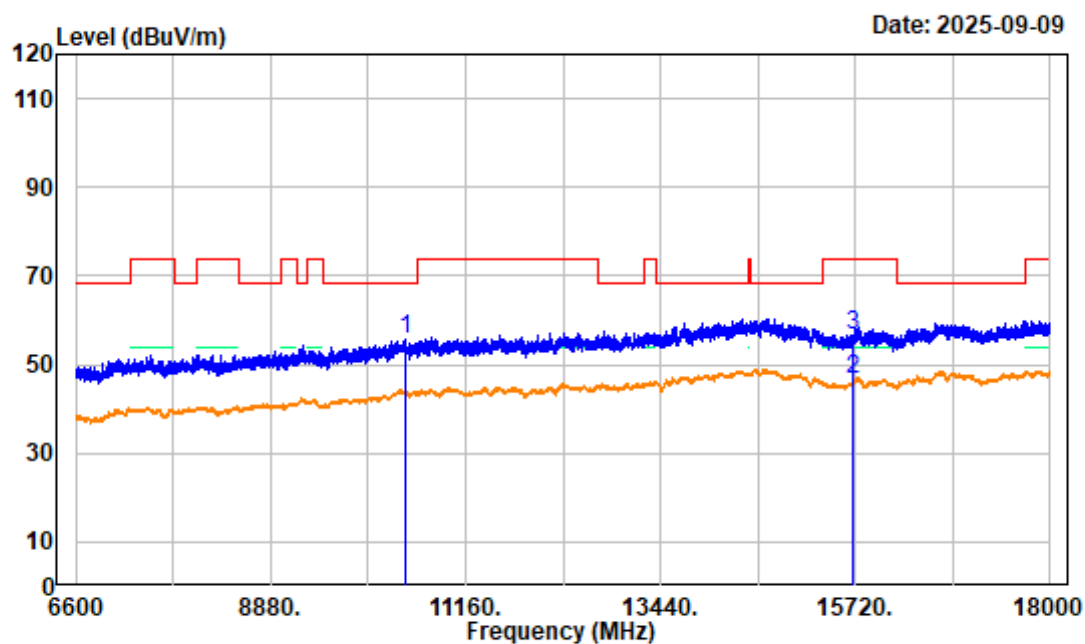

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5230MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10460.000	4.20	51.32	55.52	68.20	-12.68	peak
2	15690.000	4.62	41.98	46.60	54.00	-7.40	average
3	15690.000	4.62	52.05	56.67	74.00	-17.33	peak

802.11AX40 High Channel Bandedge_HORIZONTAL

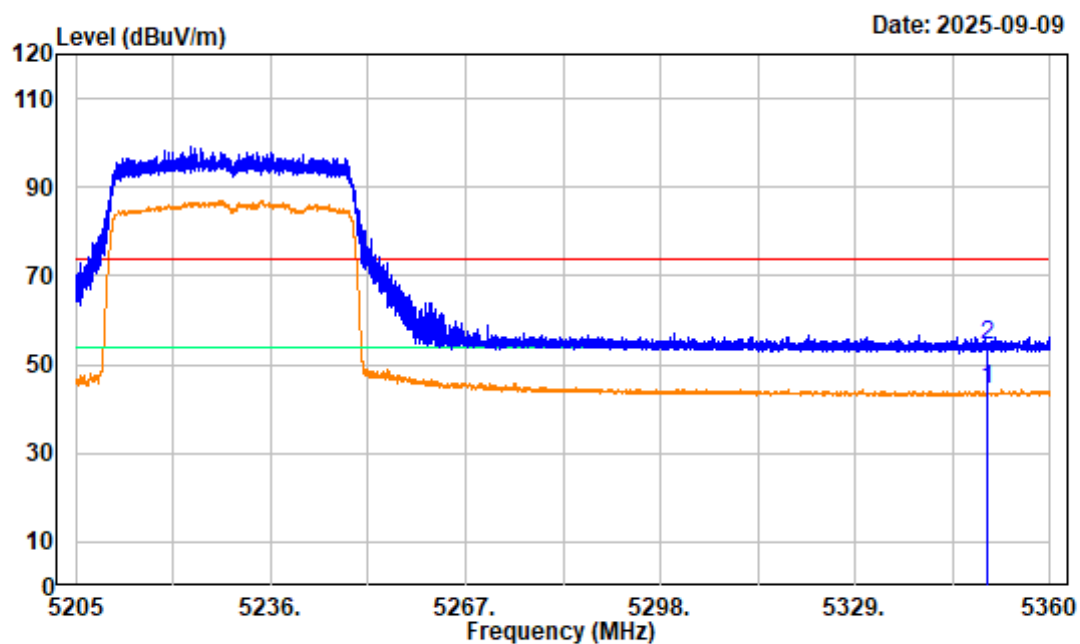

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5230MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	49.94	44.25	54.00	-9.75	average
2	5350.000	-5.69	59.89	54.20	74.00	-19.80	peak

802.11AX40 High Channel Bandedge_VERTICAL

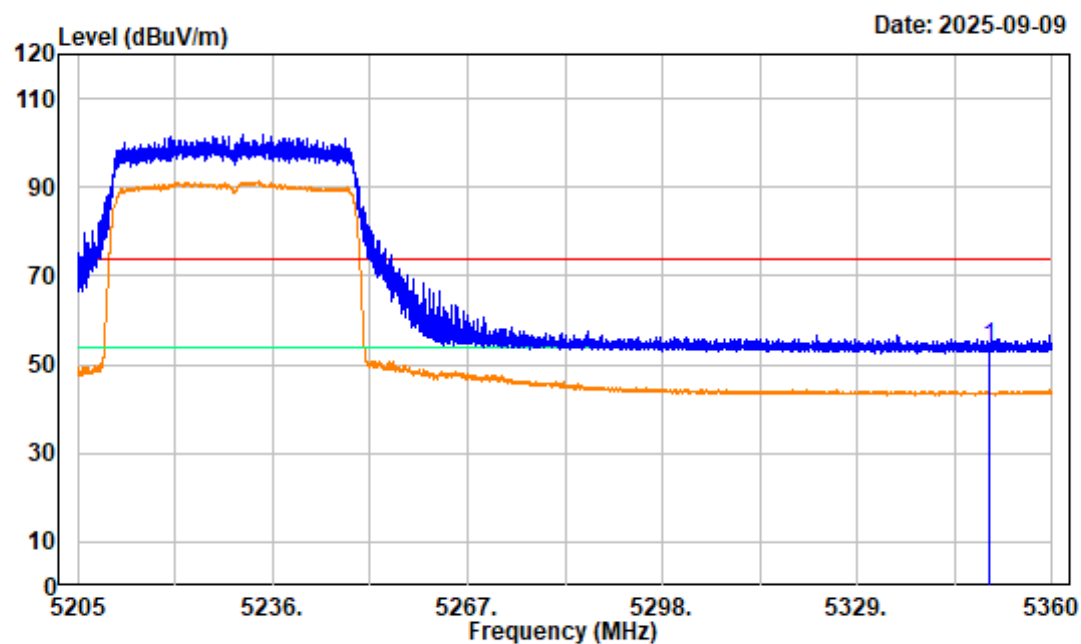

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting

Tester:Kevin Lv


Note : 802.11AX40 High Channel 5230MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	59.59	53.90	74.00	-20.10	peak

For Band2:


802.11A Low Channel 1GHz-6.6GHz_HORIZONTAL

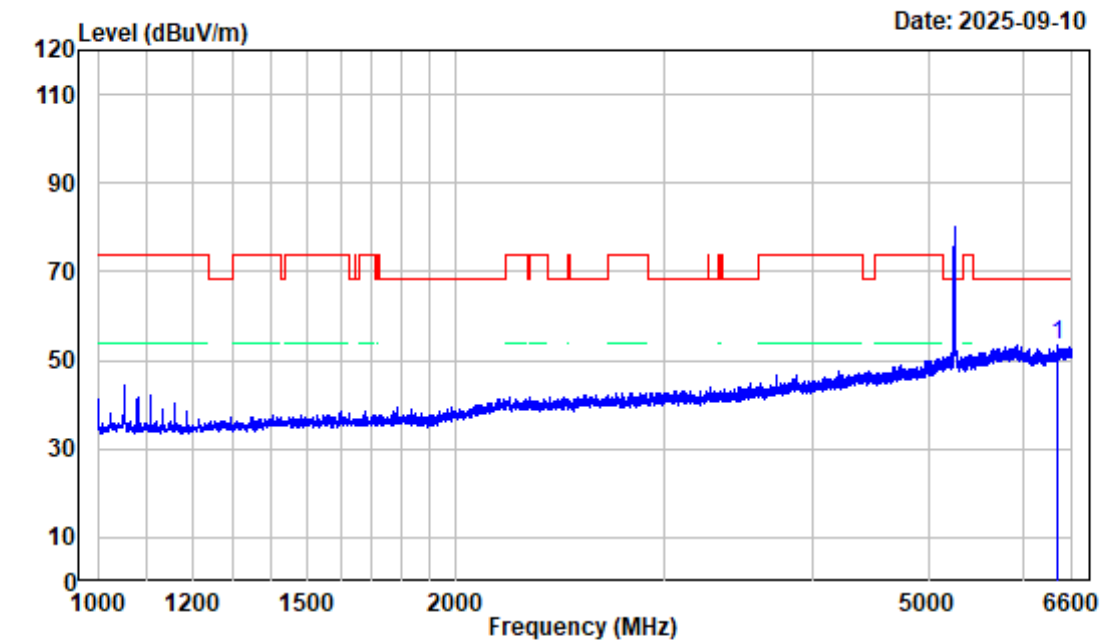

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5260MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6427.100	-3.55	56.99	53.44	68.20	-14.76	peak

802.11A Low Channel 1GHz-6.6GHz_VERTICAL

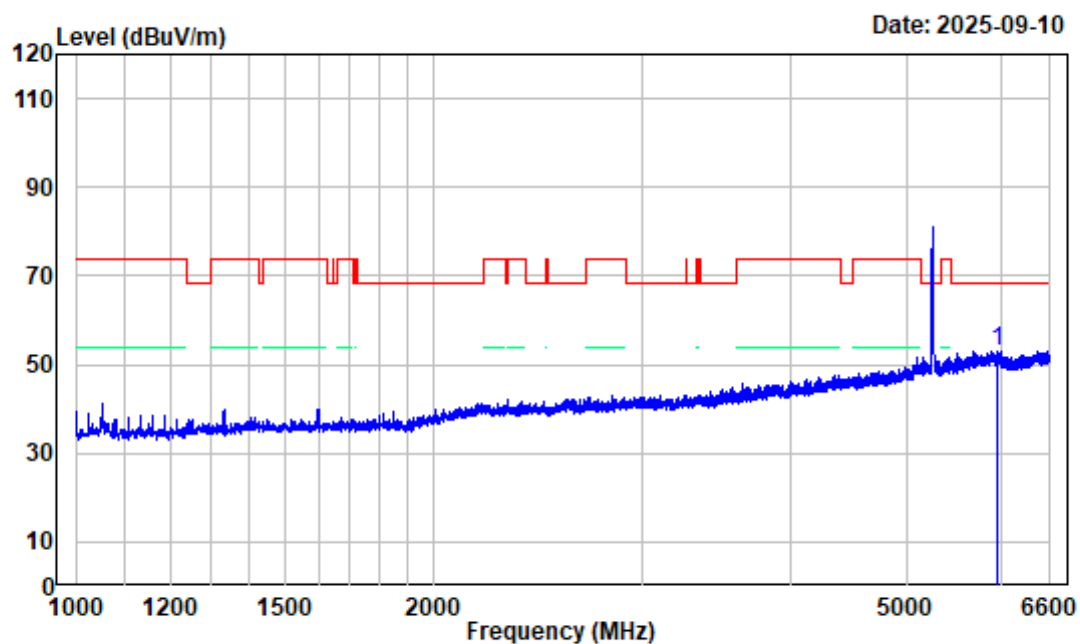

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5260MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5949.700	-4.66	57.84	53.18	68.20	-15.02	peak

802.11A Low Channel 6.6GHz-18GHZ_HORIZONTAL

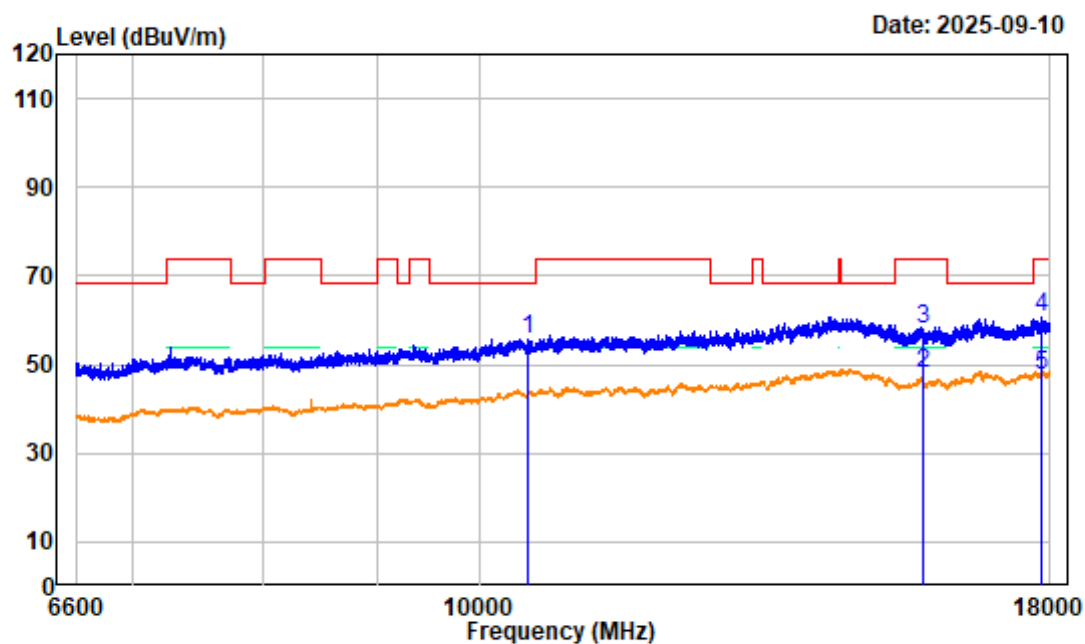

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5260MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10520.000	3.99	51.61	55.60	68.20	-12.60	peak
2	15780.000	5.21	42.69	47.90	54.00	-6.10	average
3	15780.000	5.21	52.64	57.85	74.00	-16.15	peak
4	17850.380	8.33	52.35	60.68	74.00	-13.32	Peak
5	17850.380	8.33	39.30	47.63	54.00	-6.37	Average

802.11A Low Channel 6.6GHz-18GHz_VERTICAL

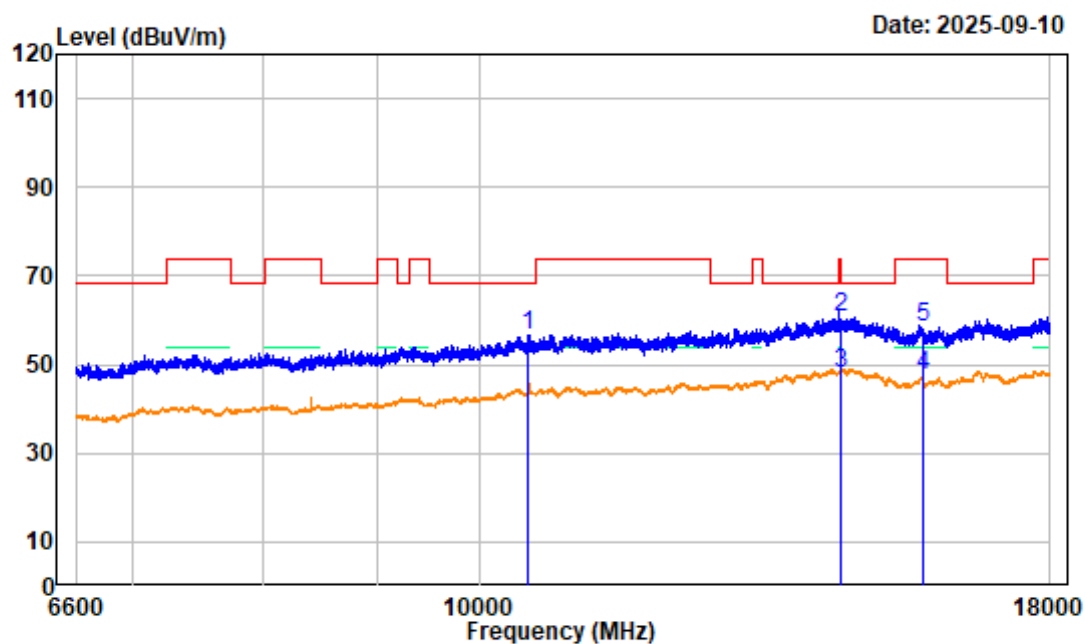

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5260MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10520.000	3.99	52.73	56.72	68.20	-11.48	peak
2	14498.780	8.30	52.60	60.90	74.00	-13.10	Peak
3	14498.780	8.30	39.58	47.88	54.00	-6.12	Average
4	15780.000	5.21	42.35	47.56	54.00	-6.44	average
5	15780.000	5.21	53.37	58.58	74.00	-15.42	peak


802.11A Low Channel Bandedge_HORIZONTAL

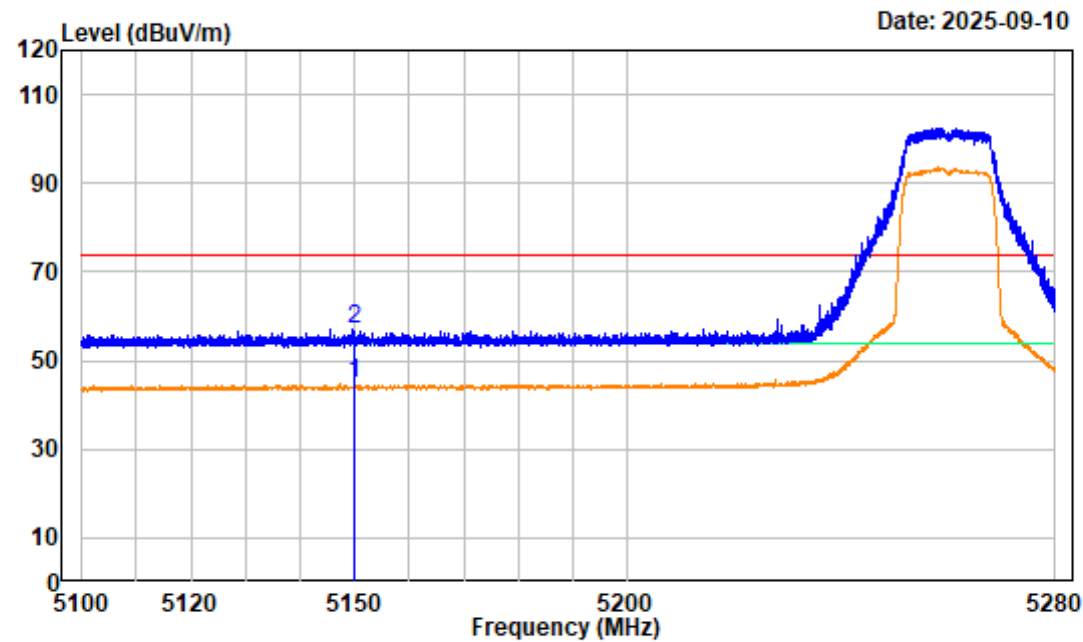

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5260MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-6.04	50.94	44.90	54.00	-9.10	Average
2	5150.000	-6.04	62.99	56.95	74.00	-17.05	peak


802.11A Low Channel Bandedge_VERTICAL

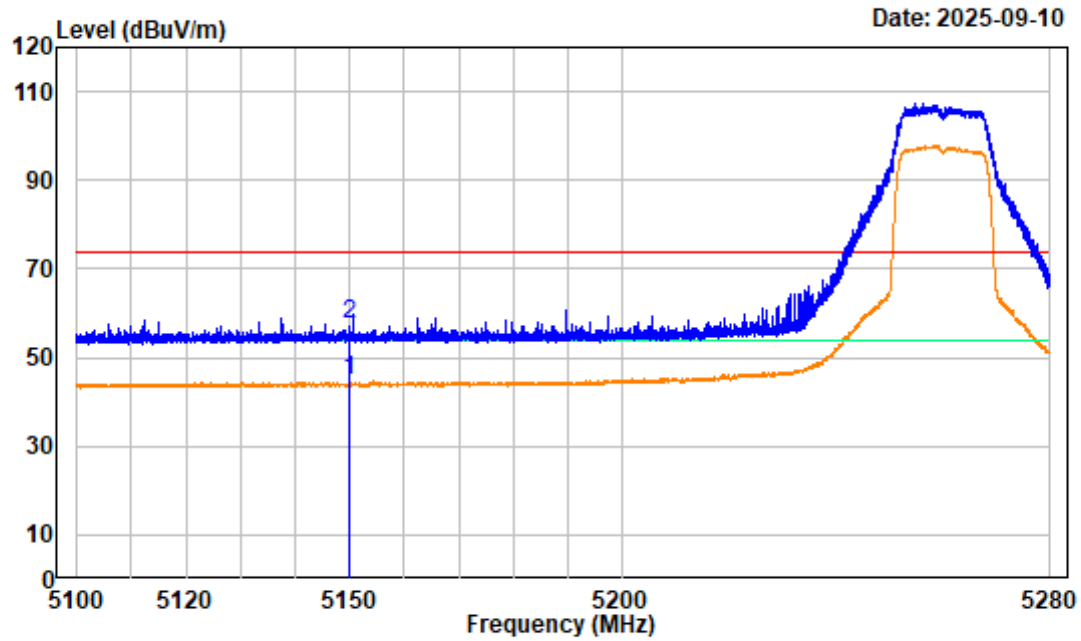

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11A Low Channel 5260MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-6.04	50.73	44.69	54.00	-9.31	Average
2	5150.000	-6.04	63.68	57.64	74.00	-16.36	peak


802.11A Middle Channel 1GHz-6.6GHz_HORIZONTAL

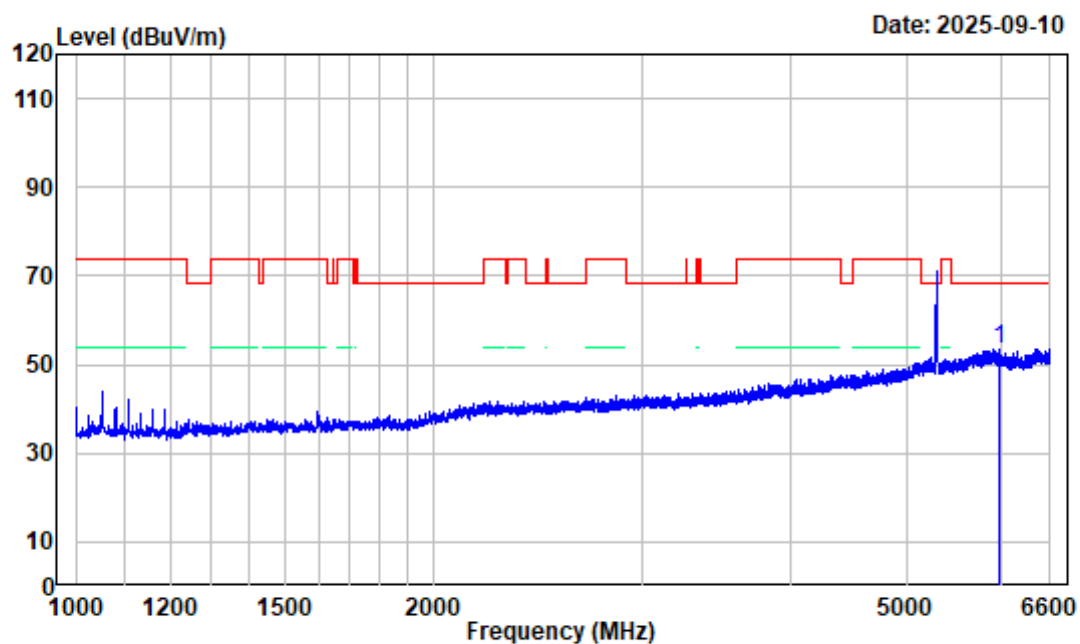

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11A Middle Channel 5300MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5977.000	-4.79	58.42	53.63	68.20	-14.57	peak

802.11A Middle Channel 1GHz-6.6GHz_VERTICAL

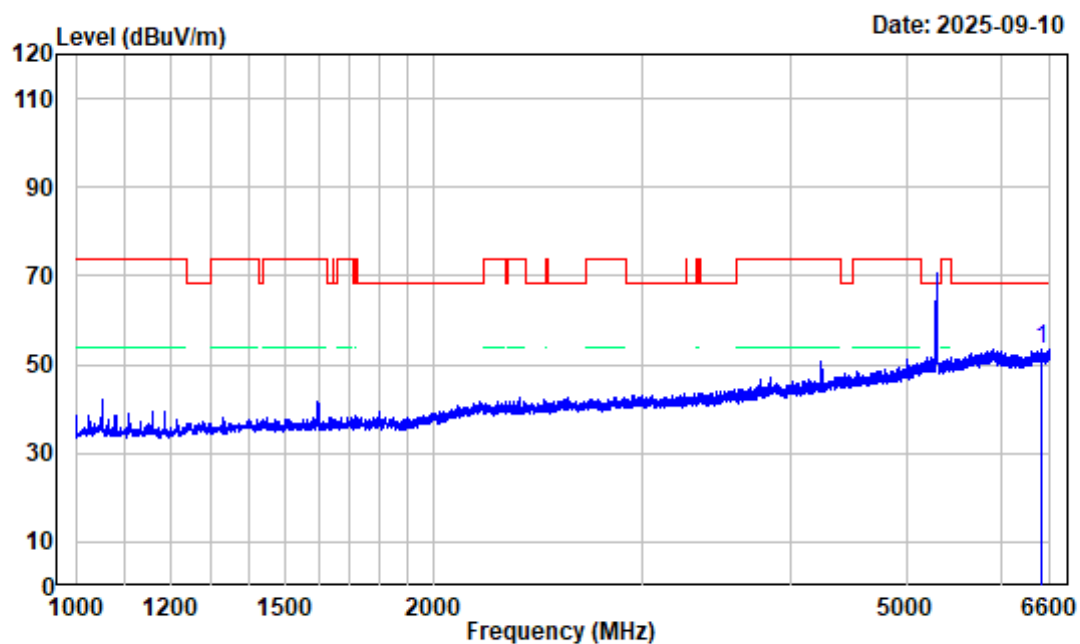

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Middle Channel 5300MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6493.600	-3.79	57.40	53.61	68.20	-14.59	peak

802.11A Middle Channel 6.6GHz-18GHz_HORIZONTAL

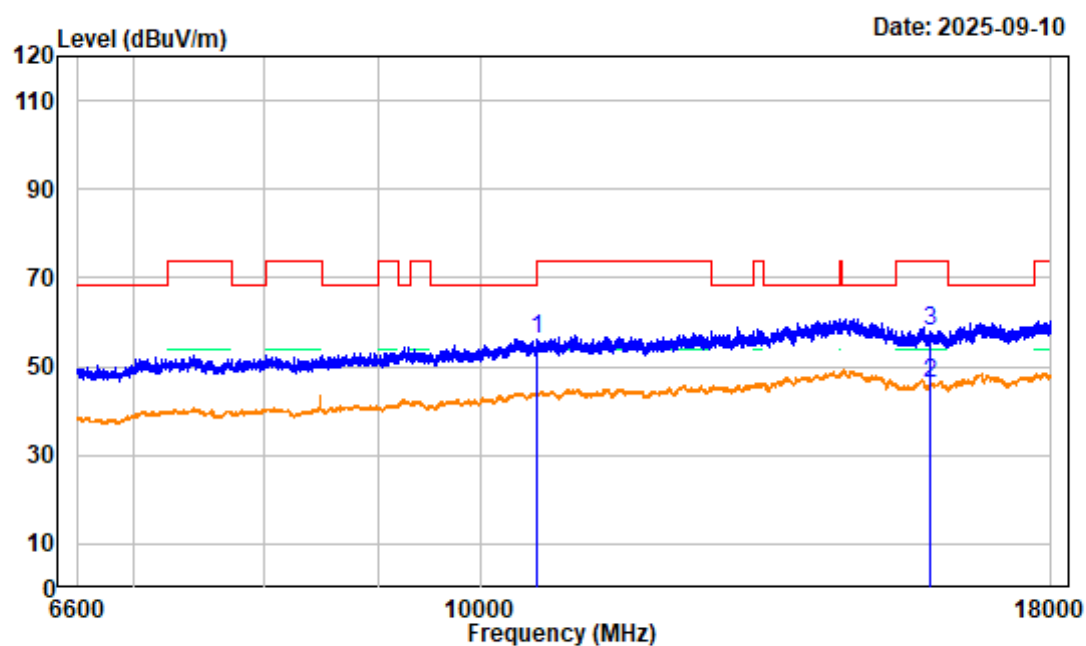

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Middle Channel 5300MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10600.000	3.86	52.14	56.00	68.20	-12.20	peak
2	15900.000	5.22	40.88	46.10	54.00	-7.90	average
3	15900.000	5.22	52.91	58.13	74.00	-15.87	peak

802.11A Middle Channel 6.6GHz-18GHz_VERTICAL

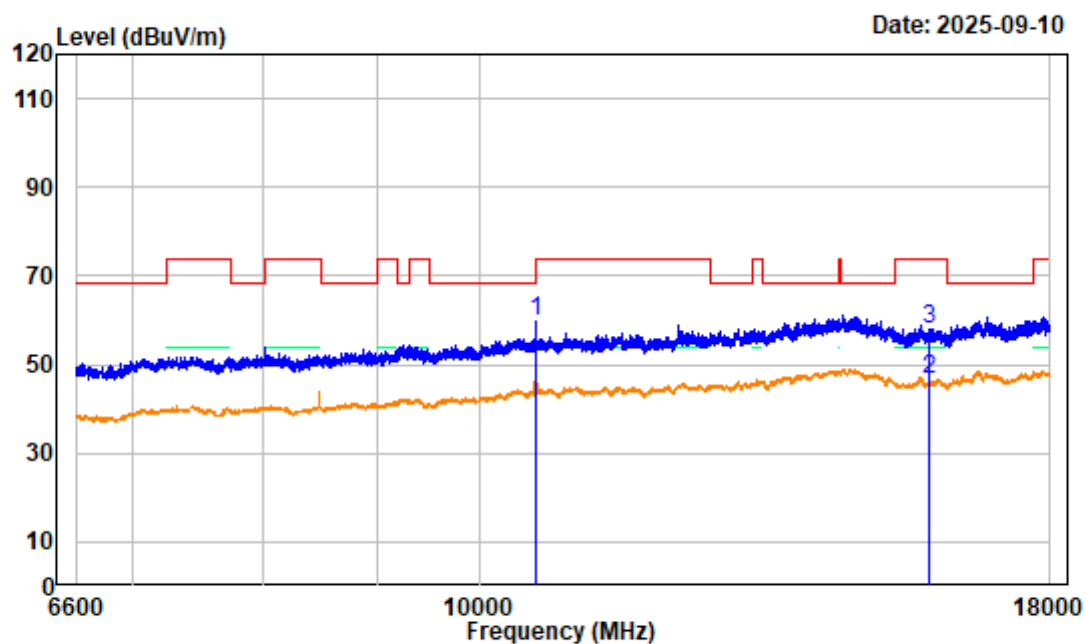

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Middle Channel 5300MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10600.000	3.86	56.07	59.93	68.20	-8.27	peak
2	15900.000	5.22	41.55	46.77	54.00	-7.23	average
3	15900.000	5.22	52.54	57.76	74.00	-16.24	peak


802.11A High Channel 1GHz-6.6GHz_ HORIZONTAL

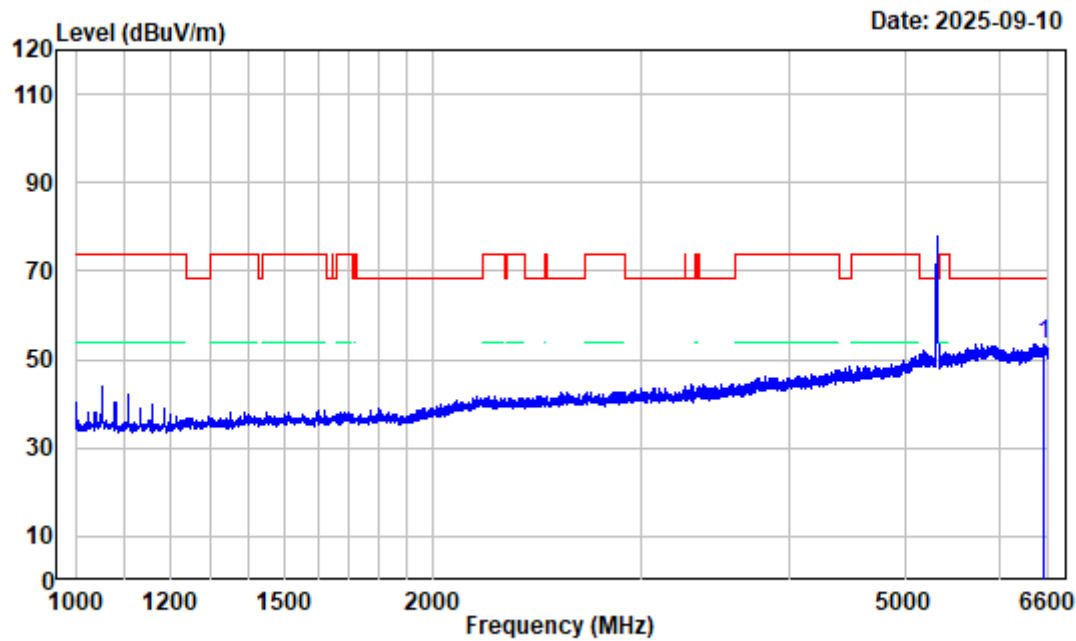

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A High Channel 5320MHz 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6545.400	-3.66	57.10	53.44	68.20	-14.76	peak

802.11A High Channel 1GHz-6.6GHz_VERTICAL

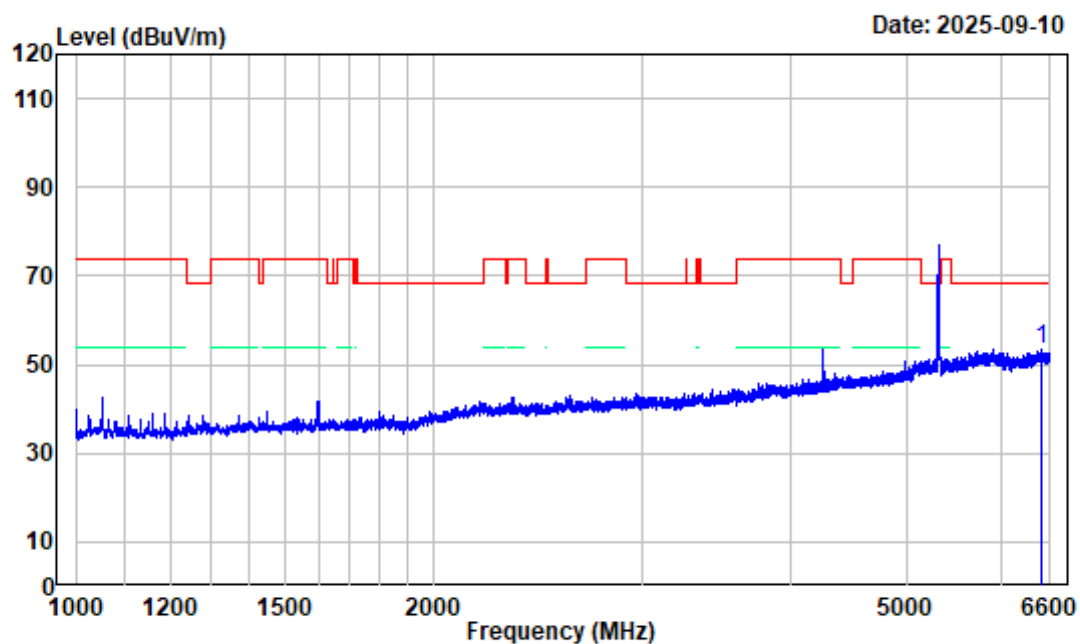

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5320MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6492.200	-3.79	57.21	53.42	68.20	-14.78	peak

802.11A High Channel 6.6GHz-18GHz_HORIZONTAL

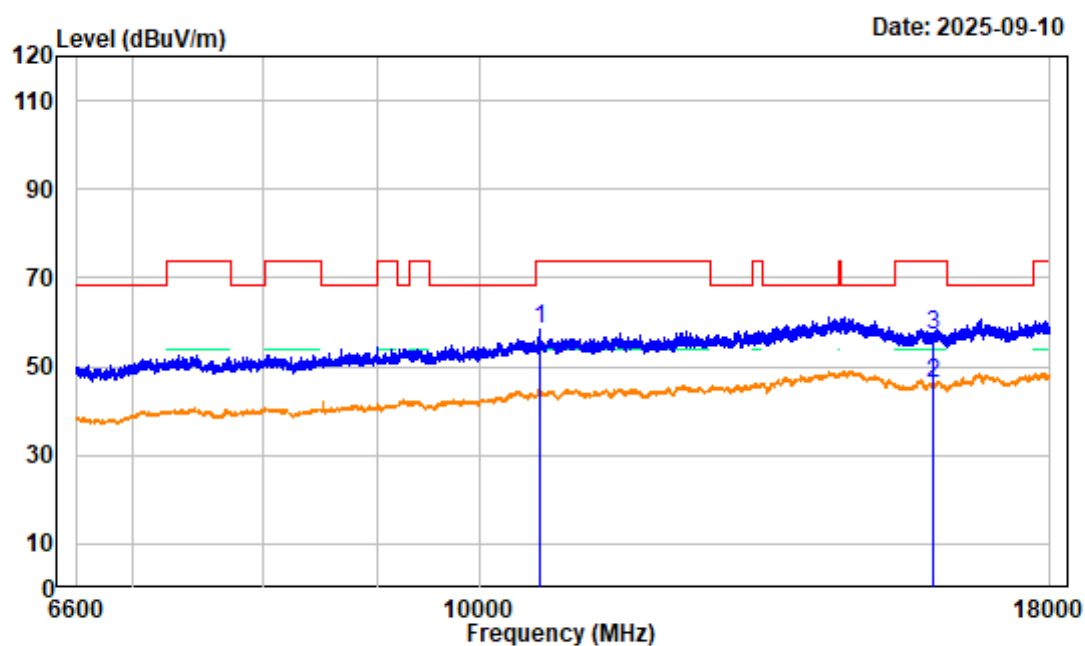

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5320MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	4.40	53.86	58.26	74.00	-15.74	peak
2	15960.000	4.76	41.50	46.26	54.00	-7.74	average
3	15960.000	4.76	52.52	57.28	74.00	-16.72	peak

802.11A High Channel 6.6GHz-18GHz_VERTICAL

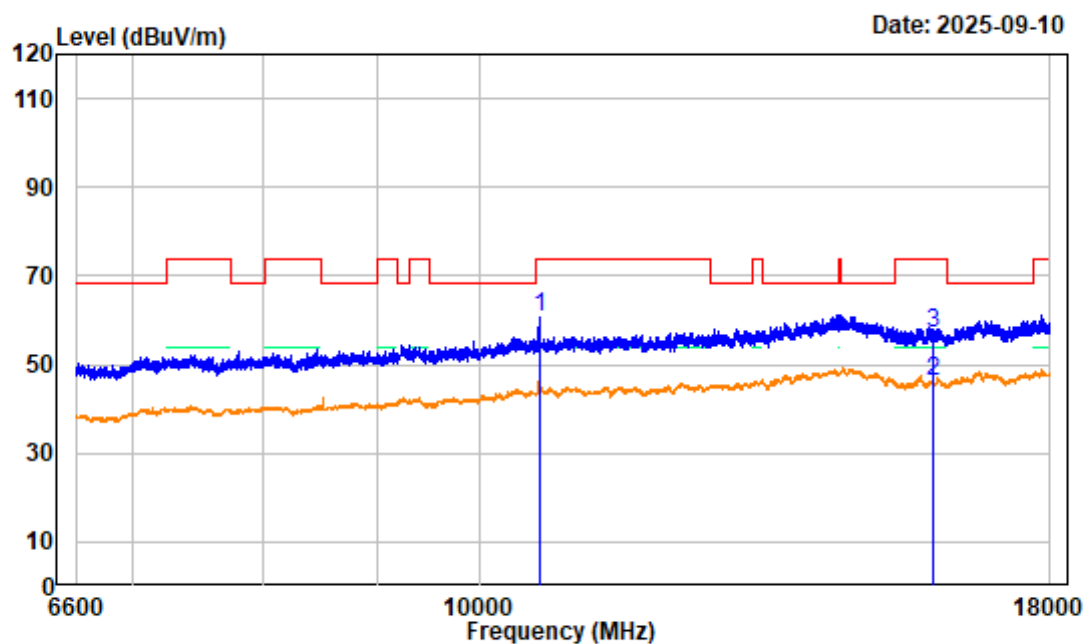

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5320MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	4.40	56.15	60.55	74.00	-13.45	peak
2	15960.000	4.76	41.40	46.16	54.00	-7.84	average
3	15960.000	4.76	52.40	57.16	74.00	-16.84	peak

802.11A High Channel Bandedge_HORIZONTAL

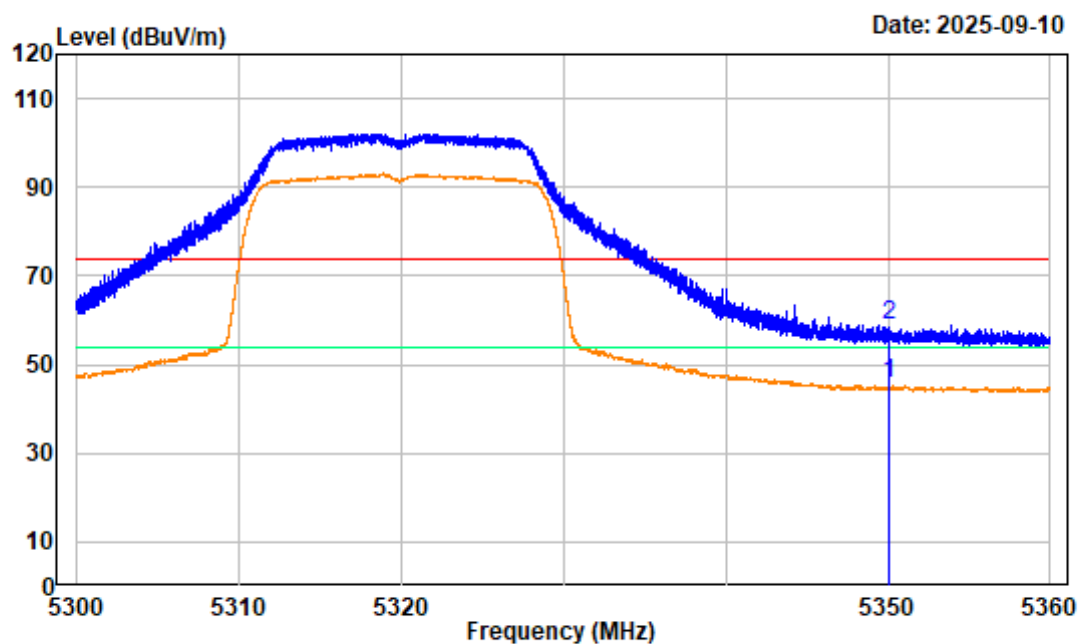

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5320MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	51.34	45.65	54.00	-8.35	Average
2	5350.000	-5.69	64.36	58.67	74.00	-15.33	peak

802.11A High Channel Bandedge_VERTICAL

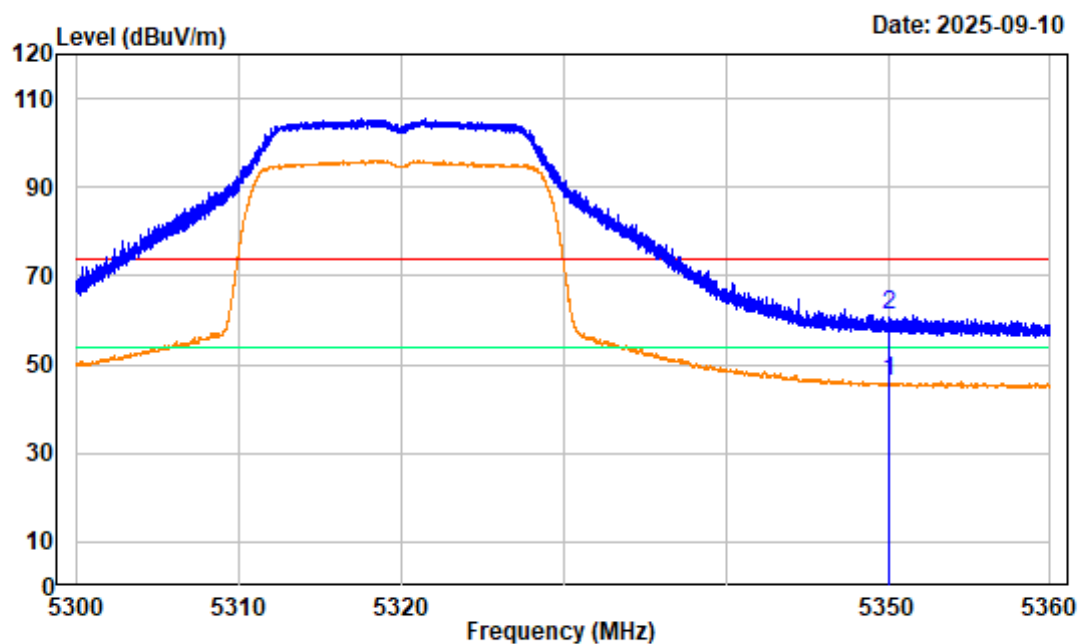

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5320MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	51.92	46.23	54.00	-7.77	Average
2	5350.000	-5.69	66.89	61.20	74.00	-12.80	peak

802.11AC20 Low Channel 1GHz-6.6GHz_HORIZONTAL

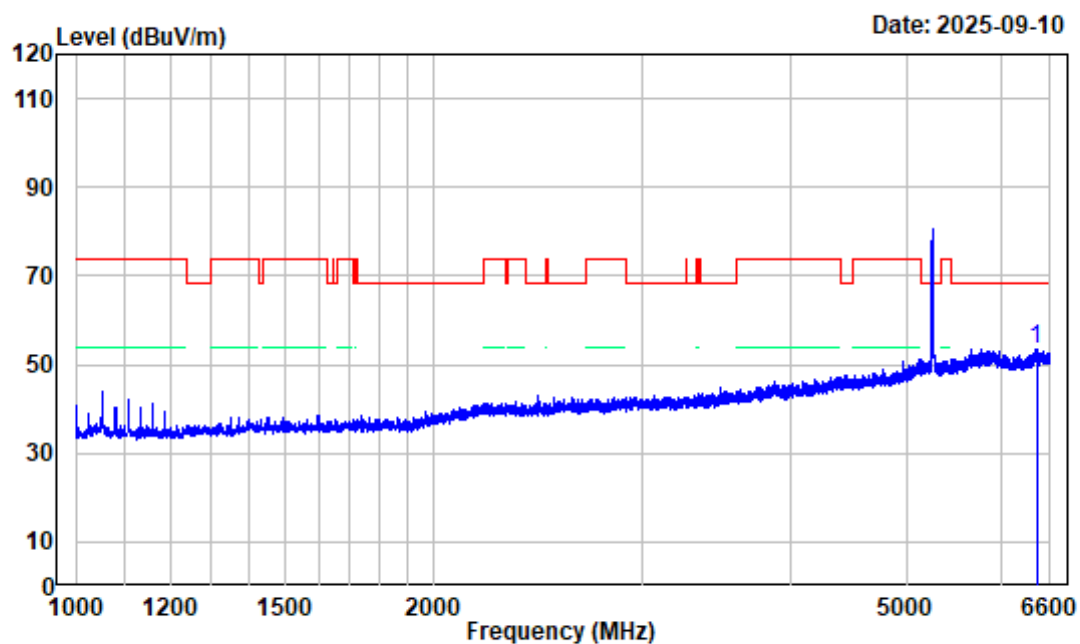

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5260MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6428.500	-3.54	57.00	53.46	68.20	-14.74	peak

802.11AC20 Low Channel 1GHz-6.6GHz_VERTICAL

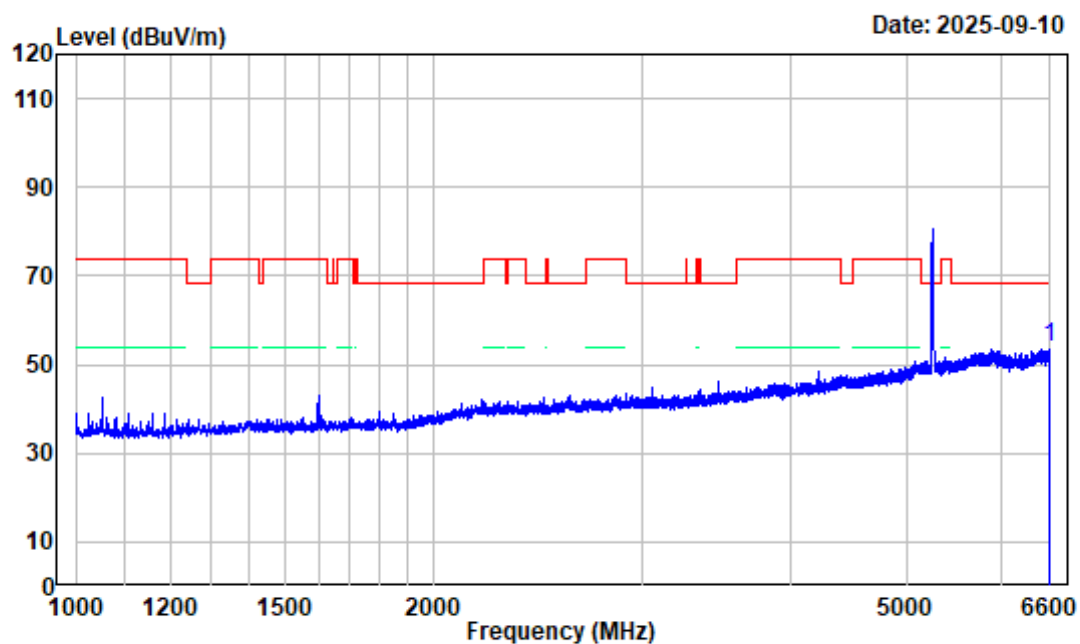

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5260MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6600.000	-3.48	57.17	53.69	68.20	-14.51	peak

802.11AC20 Low Channel 6.6GHz-18GHz_HORIZONTAL

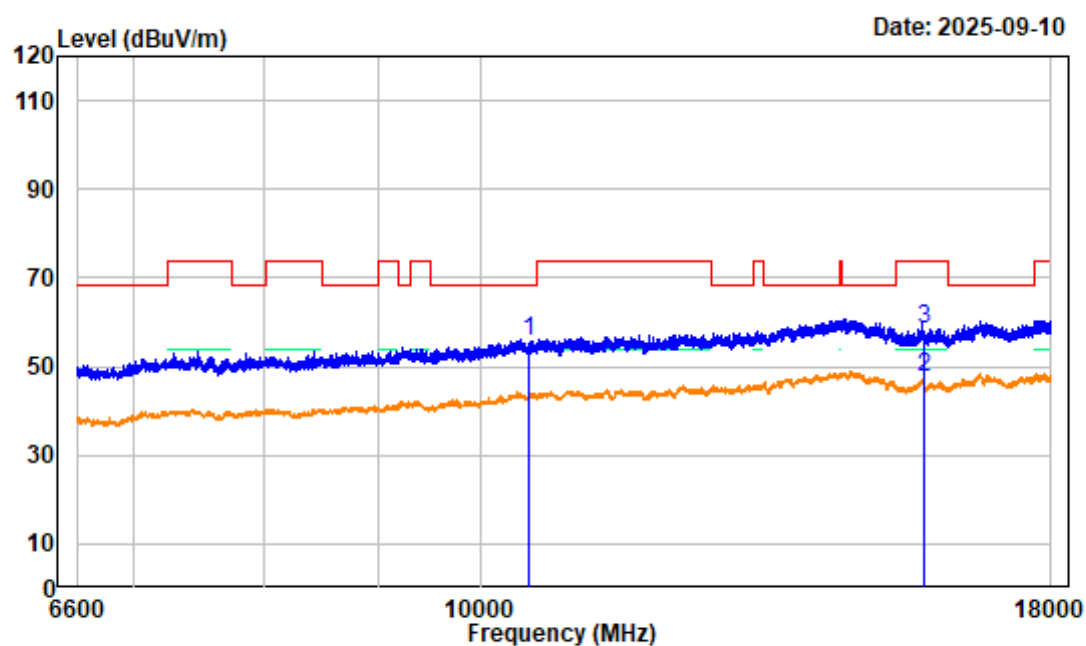

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5260MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10520.000	3.99	51.83	55.82	68.20	-12.38	peak
2	15780.000	5.21	42.35	47.56	54.00	-6.44	average
3	15780.000	5.21	53.37	58.58	74.00	-15.42	peak

802.11AC20 Low Channel 6.6GHz-18GHz_VERTICAL

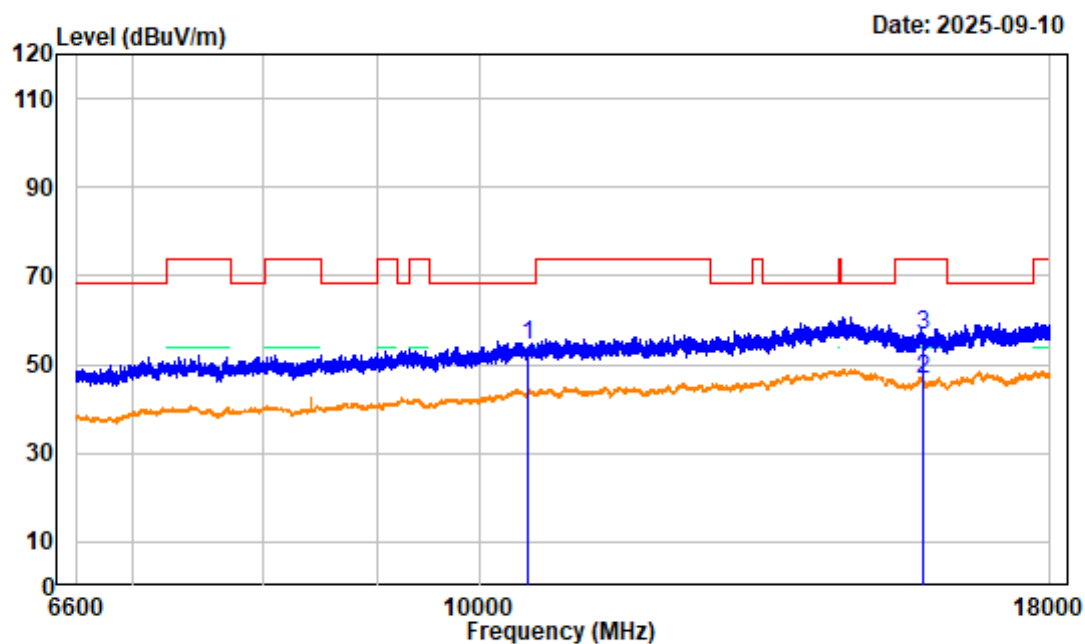

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5260MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10520.000	3.99	50.45	54.44	68.20	-13.76	peak
2	15780.000	5.21	41.54	46.75	54.00	-7.25	average
3	15780.000	5.21	51.51	56.72	74.00	-17.28	peak

802.11AC20 Low Channel Bandedge_HORIZONTAL

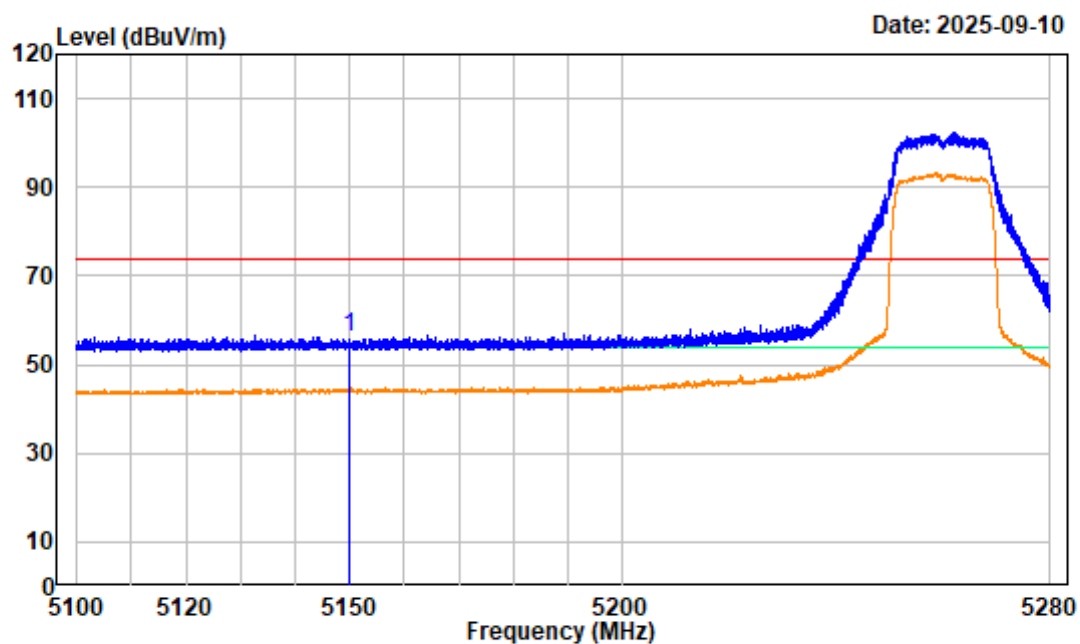

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5260MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-6.04	62.41	56.37	74.00	-17.63	peak


802.11AC20 Low Channel Bandedge_VERTICAL

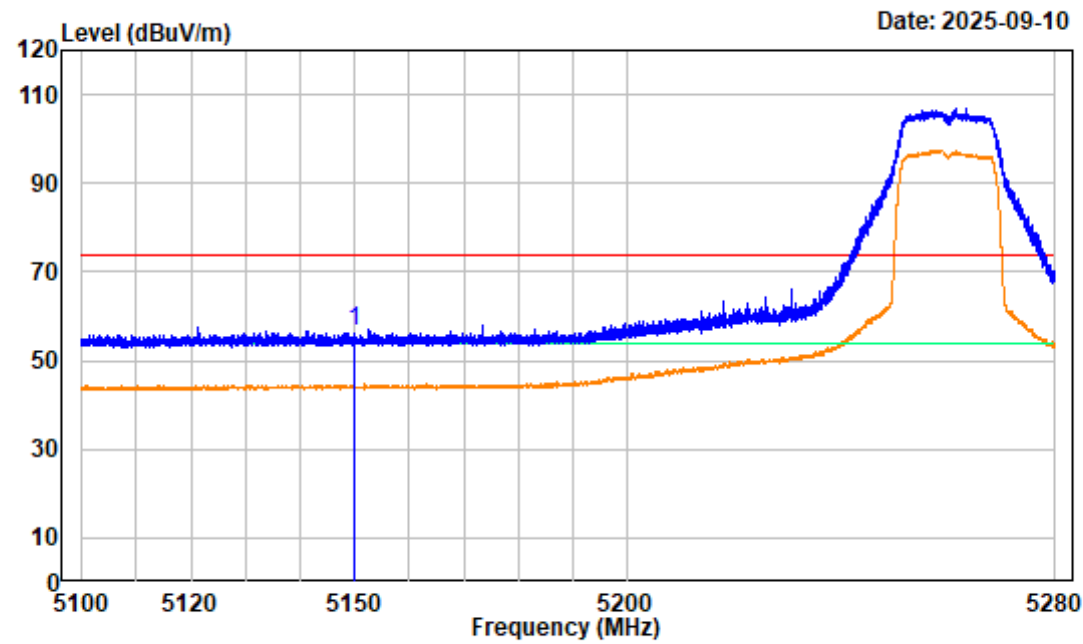

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5260MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5150.000	-6.04	62.55	56.51	74.00	-17.49	peak

802.11AC20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

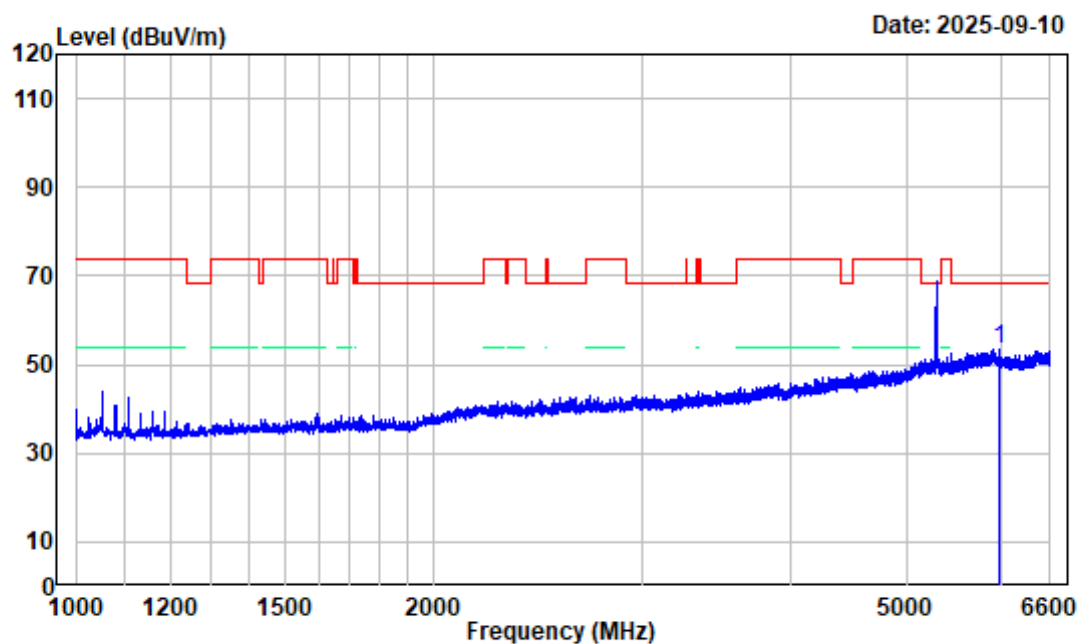

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Middle Channel 5300MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5981.900	-4.81	58.39	53.58	68.20	-14.62	peak

802.11AC20 Middle Channel 1GHz-6.6GHz_VERTICAL

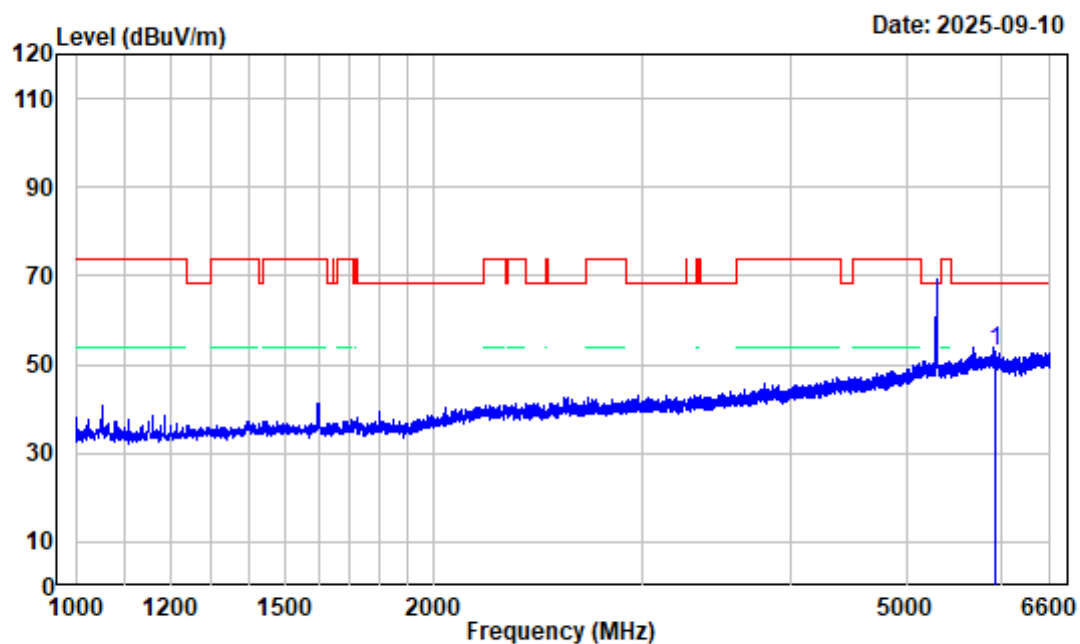

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Middle Channel 5300MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

			Read	Limit	Over	
	Freq	Factor	Level	Level	Line	Limit Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	5931.500	-4.36	57.47	53.11	68.20	-15.09 peak

802.11AC20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

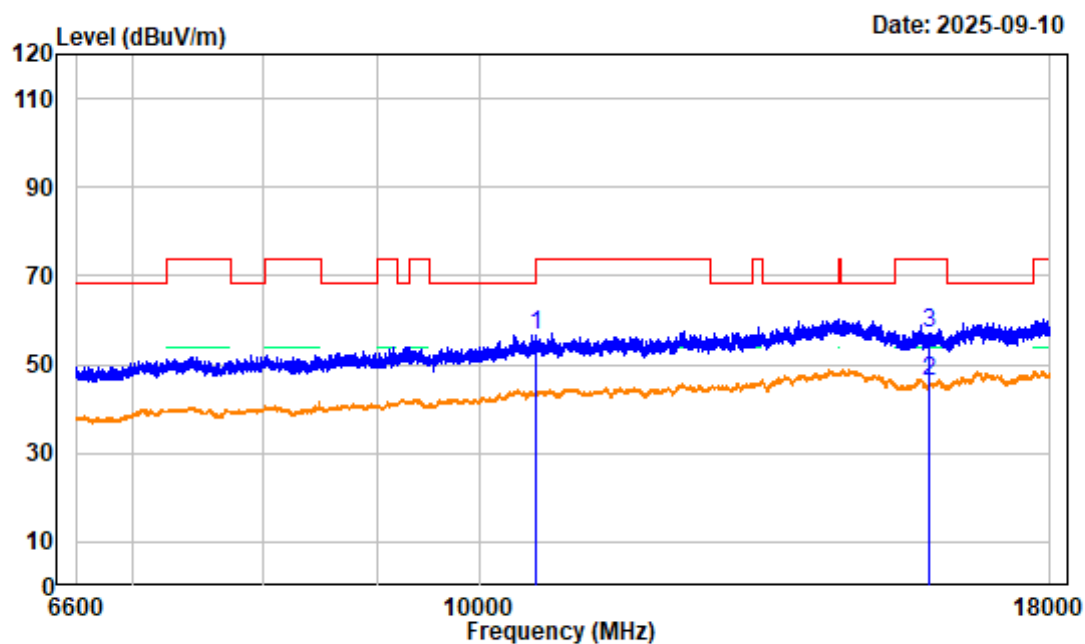

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Middle Channel 5300MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10600.000	3.86	52.83	56.69	68.20	-11.51	peak
2	15900.000	5.22	40.95	46.17	54.00	-7.83	average
3	15900.000	5.22	51.91	57.13	74.00	-16.87	peak


802.11AC20 Middle Channel 6.6GHz-18GHz_VERTICAL

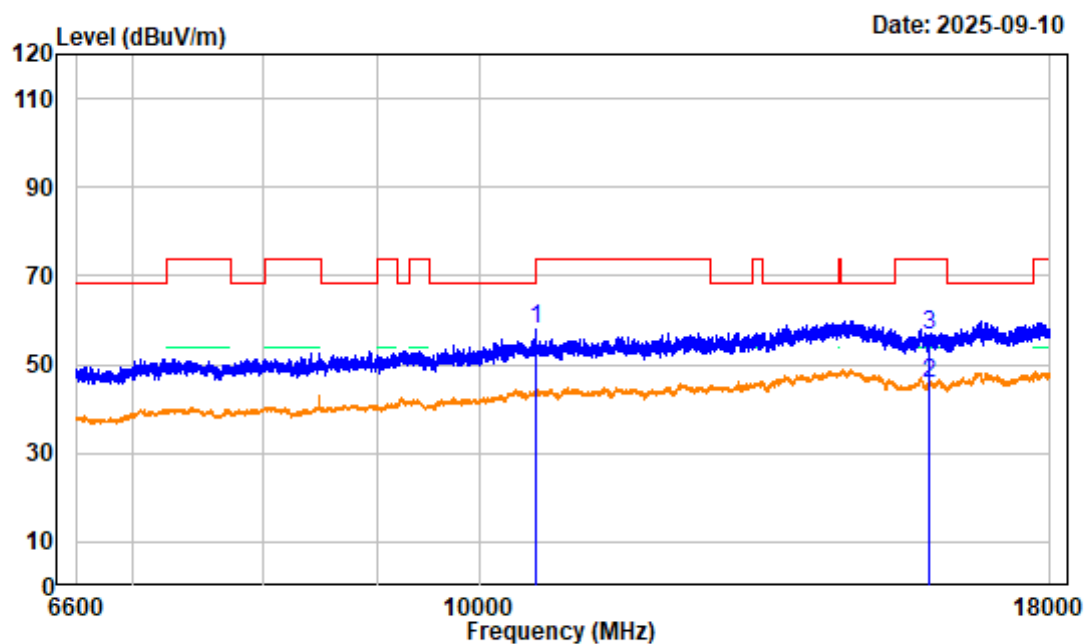

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 Middle Channel 5300MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10600.000	3.86	53.88	57.74	68.20	-10.46	peak
2	15900.000	5.22	40.34	45.56	54.00	-8.44	average
3	15900.000	5.22	51.34	56.56	74.00	-17.44	peak


802.11AC20 High Channel 1GHz-6.6GHz_HORIZONTAL

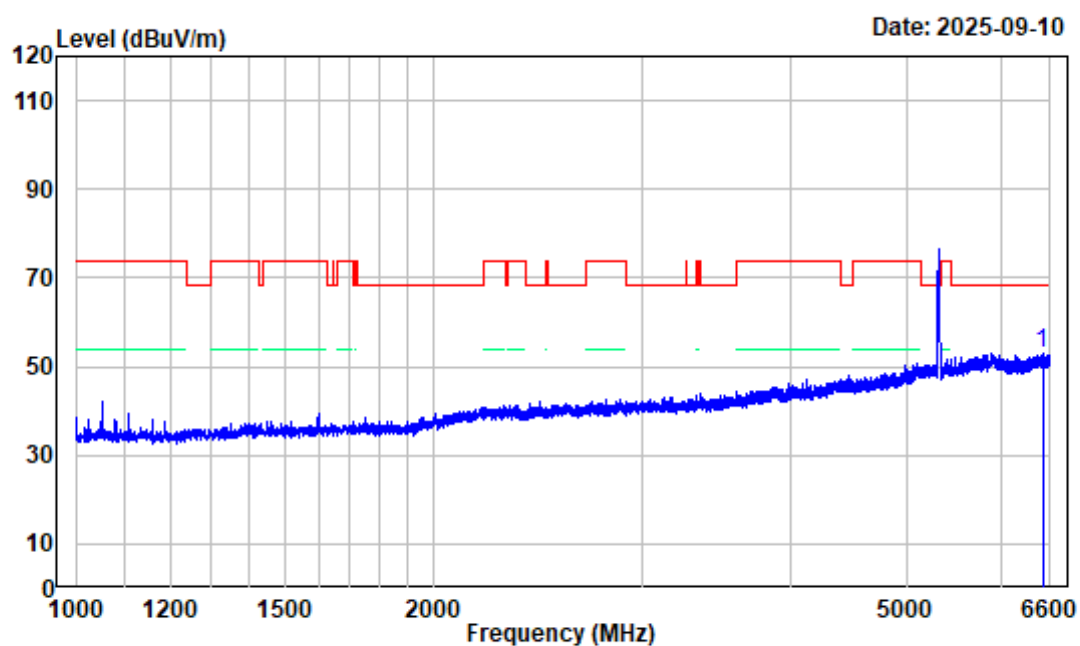

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 High Channel 5320MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6504.100	-3.83	56.66	52.83	68.20	-15.37	peak

802.11AC20 High Channel 1GHz-6.6GHz_VERTICAL

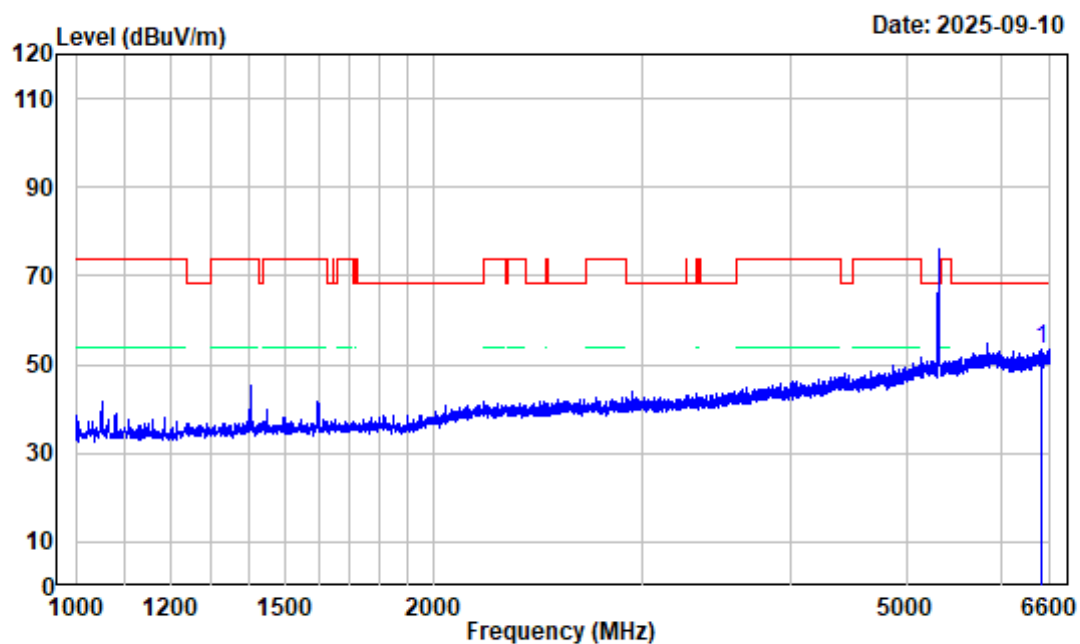

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5320MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6503.400	-3.84	57.30	53.46	68.20	-14.74	peak

802.11AC20 High Channel 6.6GHz-18GHz_HORIZONTAL

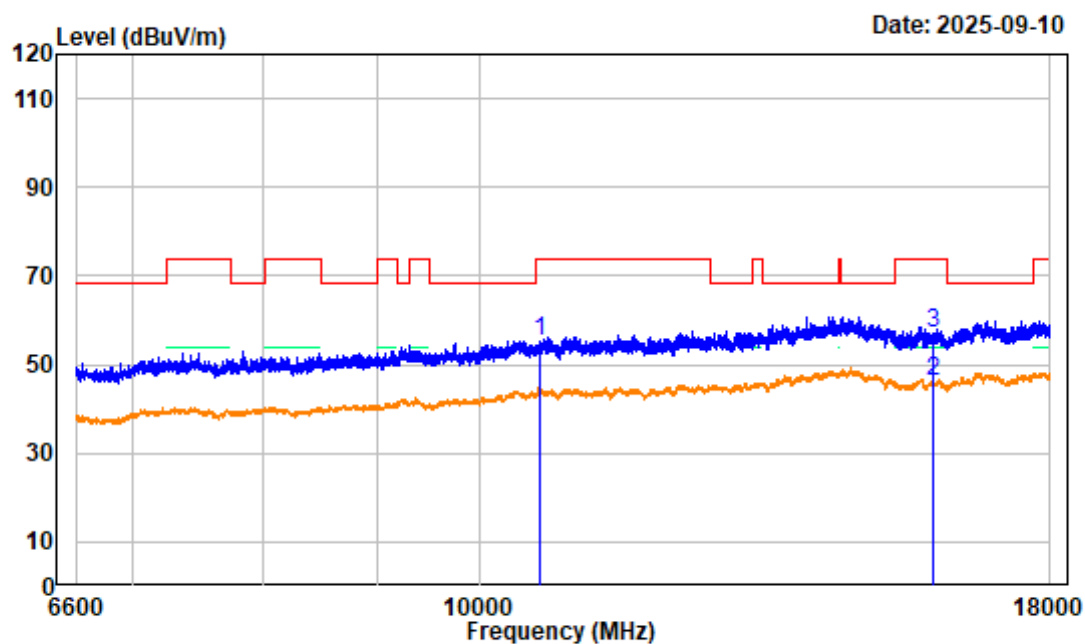

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5320MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	4.40	50.99	55.39	74.00	-18.61	peak
2	15960.000	4.76	41.45	46.21	54.00	-7.79	average
3	15960.000	4.76	52.48	57.24	74.00	-16.76	peak

802.11AC20 High Channel 6.6GHz-18GHz_VERTICAL

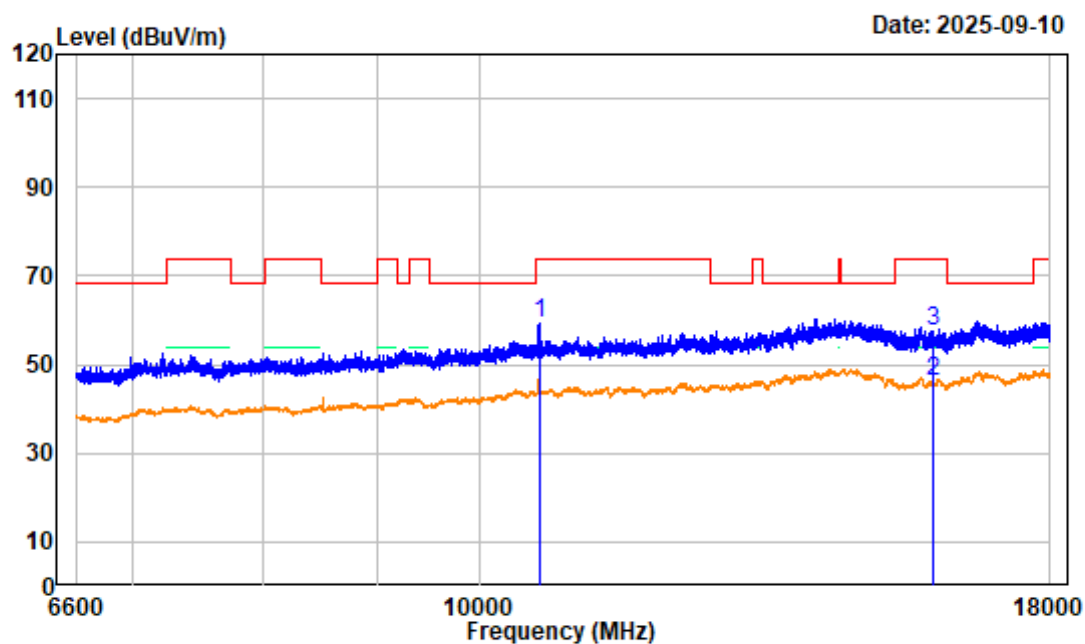

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5320MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	4.40	54.87	59.27	74.00	-14.73	peak
2	15960.000	4.76	41.66	46.42	54.00	-7.58	average
3	15960.000	4.76	52.66	57.42	74.00	-16.58	peak

802.11AC20 High Channel Bandedge_HORIZONTAL

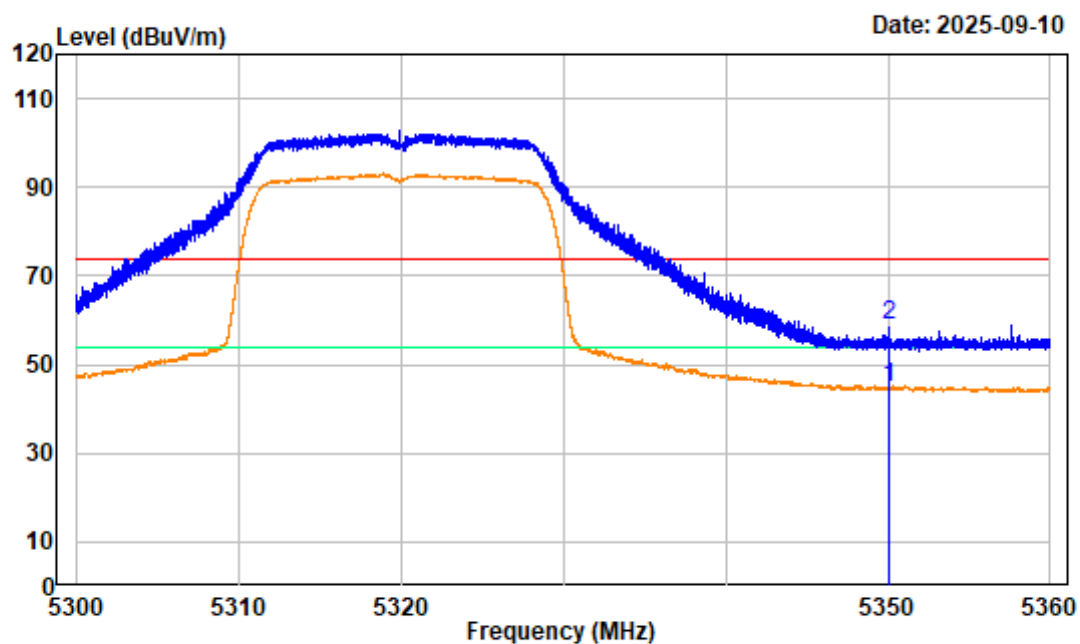

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5320MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	50.61	44.92	54.00	-9.08	Average
2	5350.000	-5.69	64.67	58.98	74.00	-15.02	peak


802.11AC20 High Channel Bandedge_VERTICAL

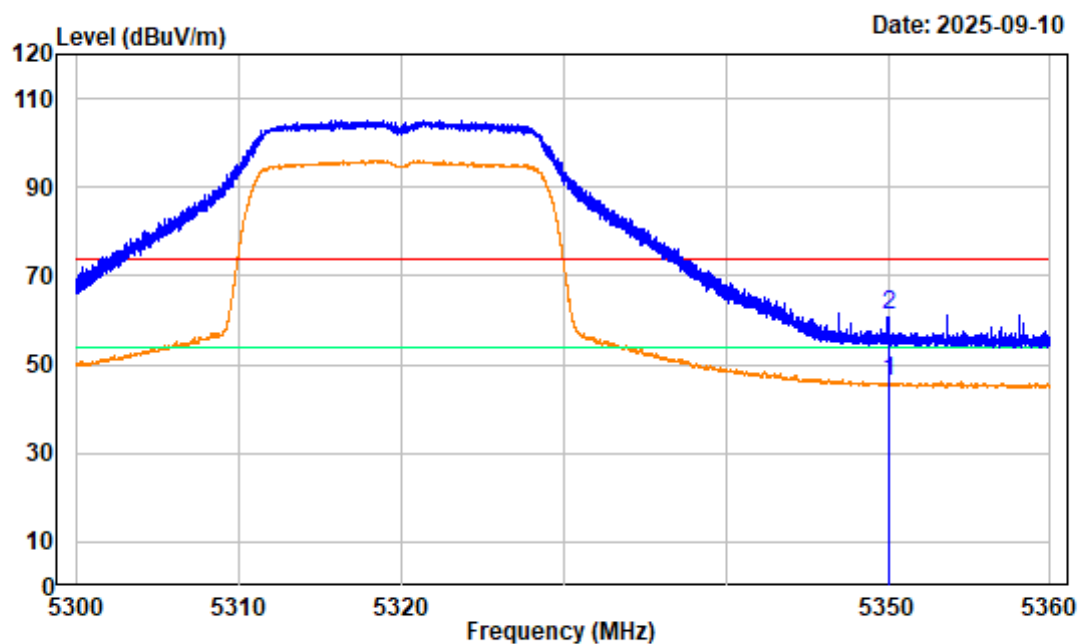

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 High Channel 5320MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	51.87	46.18	54.00	-7.82	Average
2	5350.000	-5.69	66.84	61.15	74.00	-12.85	peak

802.11AC40 Low Channel 1GHz-6.6GHz_HORIZONTAL

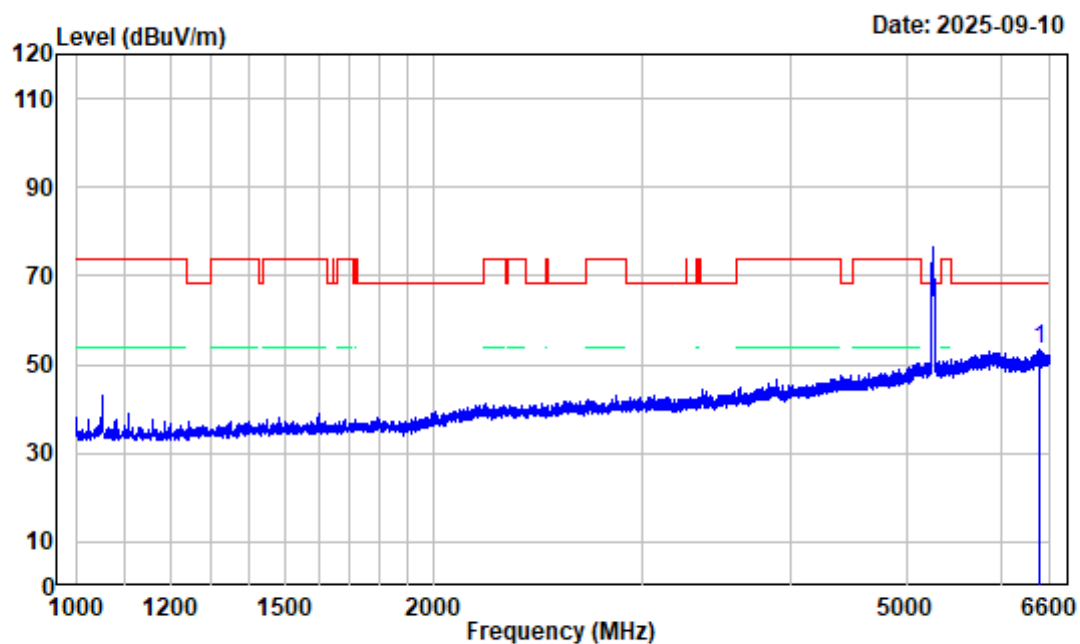

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5270MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6461.400	-3.55	56.85	53.30	68.20	-14.90	peak

802.11AC40 Low Channel 1GHz-6.6GHz_VERTICAL

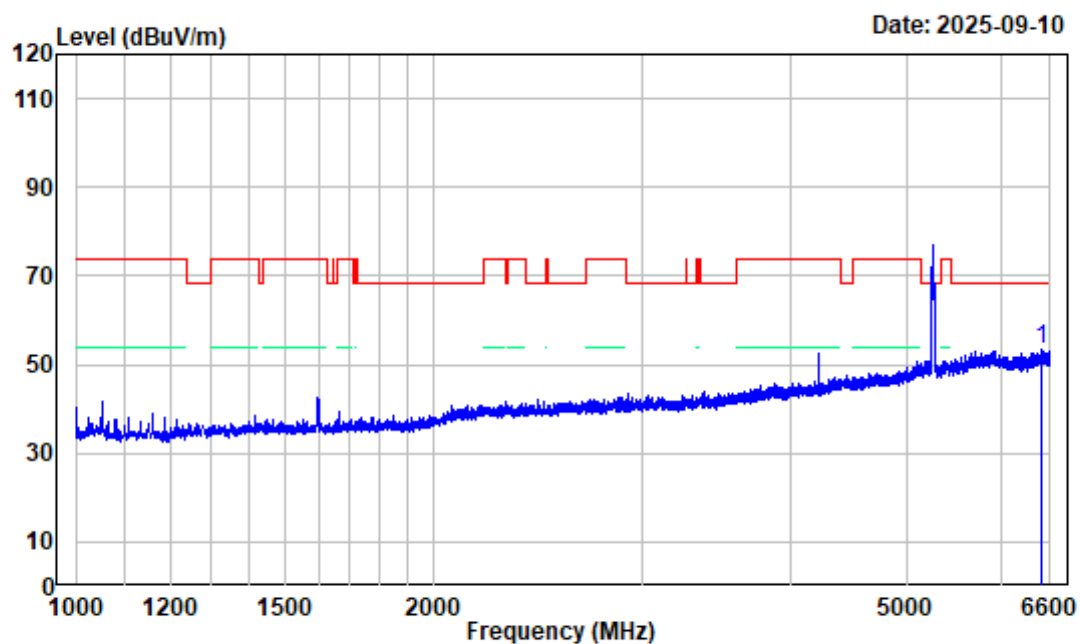

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5270MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6482.400	-3.71	57.02	53.31	68.20	-14.89	peak

802.11AC40 Low Channel 6.6GHz-18GHz_HORIZONTAL

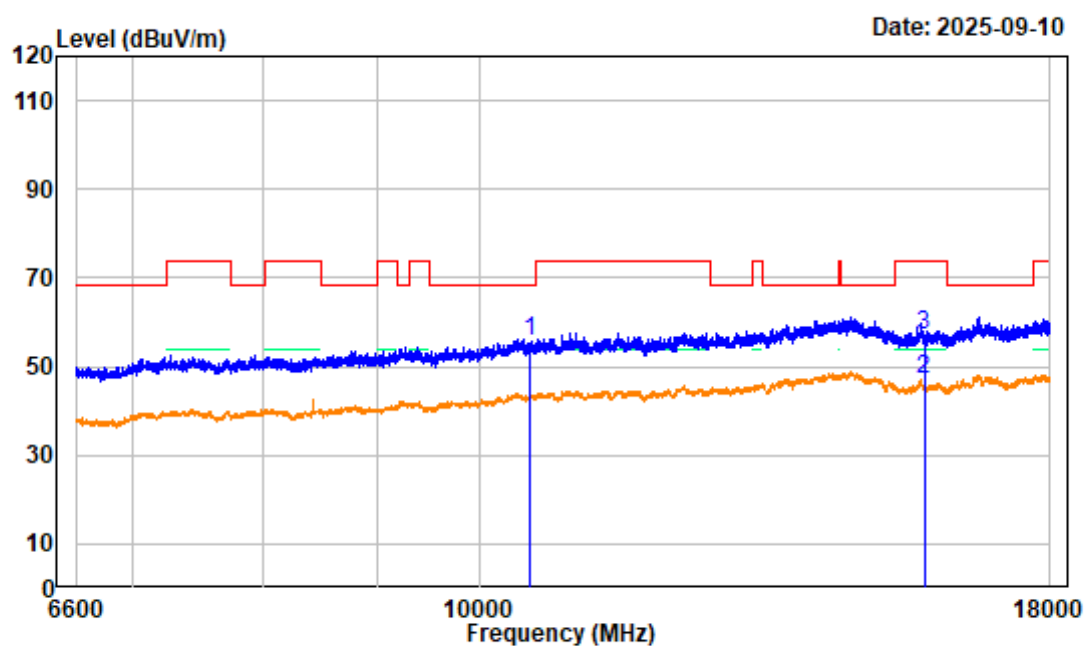

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5270MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10540.000	4.15	51.55	55.70	68.20	-12.50	peak
2	15810.000	5.16	42.02	47.18	54.00	-6.82	average
3	15810.000	5.16	51.95	57.11	74.00	-16.89	peak

802.11AC40 Low Channel 6.6GHz-18GHz_VERTICAL

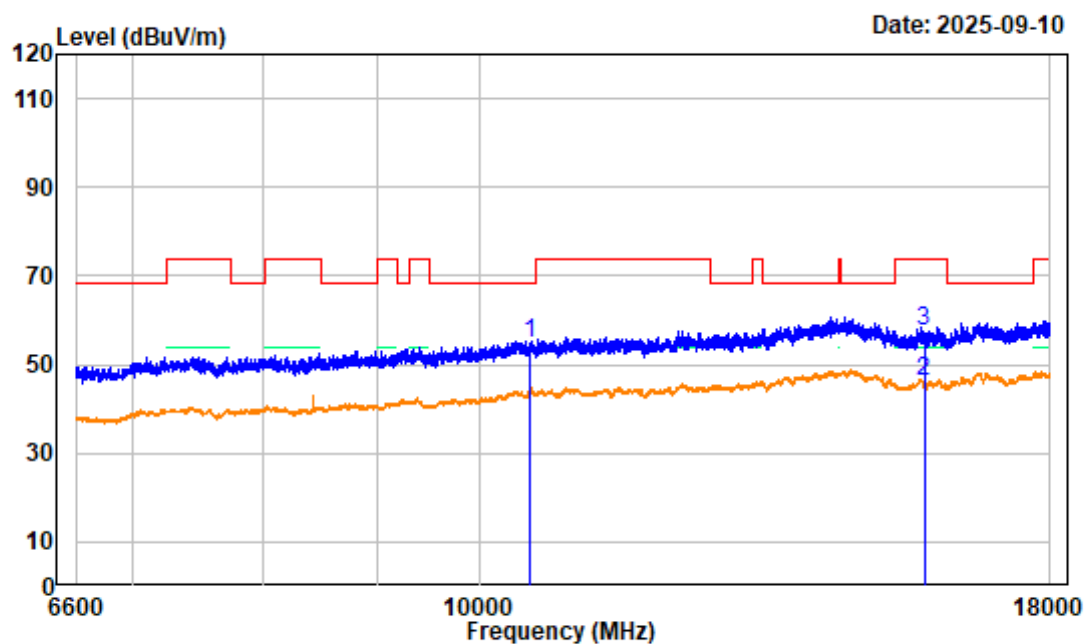

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5270MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10540.000	4.15	50.72	54.87	68.20	-13.33	peak
2	15810.000	5.16	41.10	46.26	54.00	-7.74	average
3	15810.000	5.16	52.13	57.29	74.00	-16.71	peak

802.11AC40 Low Channel Bandedge_HORIZONTAL

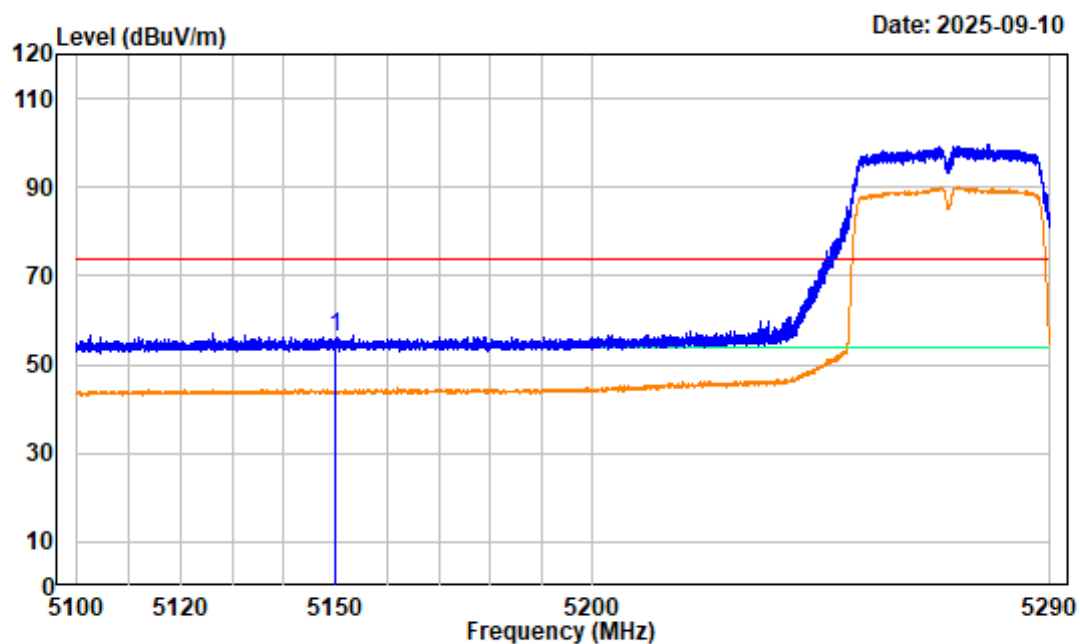

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5270MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-6.04	62.35	56.31	74.00	-17.69	peak


802.11AC40 Low Channel Bandedge_VERTICAL

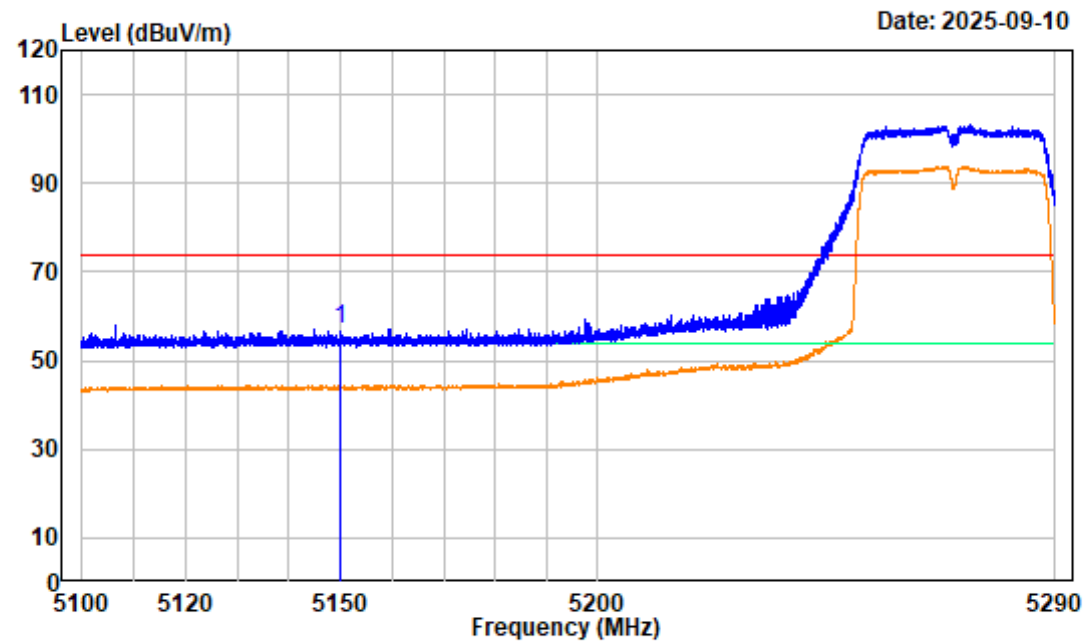

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5270MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5150.000	-6.04	63.13	57.09	74.00	-16.91	peak


802.11AC40 High Channel 1GHz-6.6GHz_HORIZONTAL

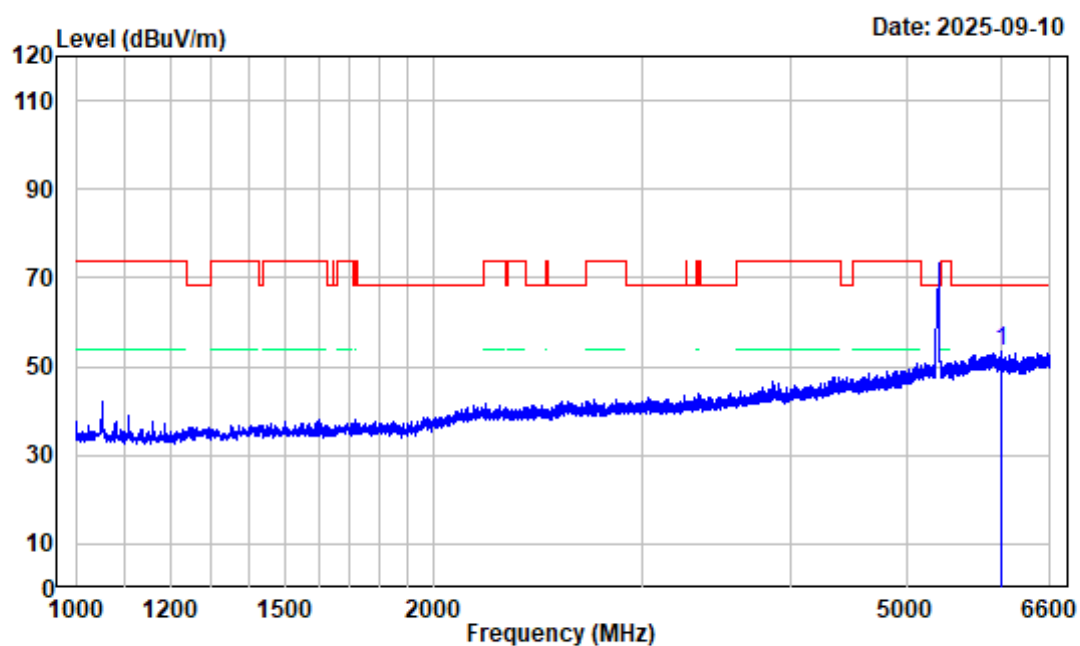

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC40 High Channel 5310MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5999.400	-4.90	58.37	53.47	68.20	-14.73	peak


802.11AC40 High Channel 1GHz-6.6GHz_VERTICAL

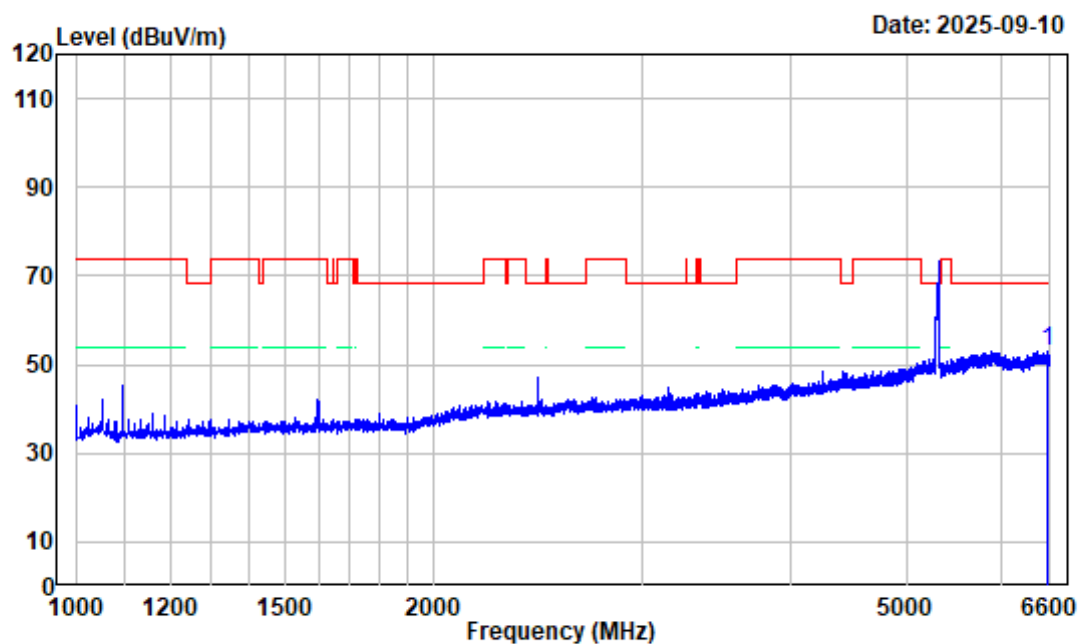

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC40 High Channel 5310MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6559.400	-3.61	56.62	53.01	68.20	-15.19	peak

802.11AC40 High Channel 6.6GHz-18GHz_HORIZONTAL

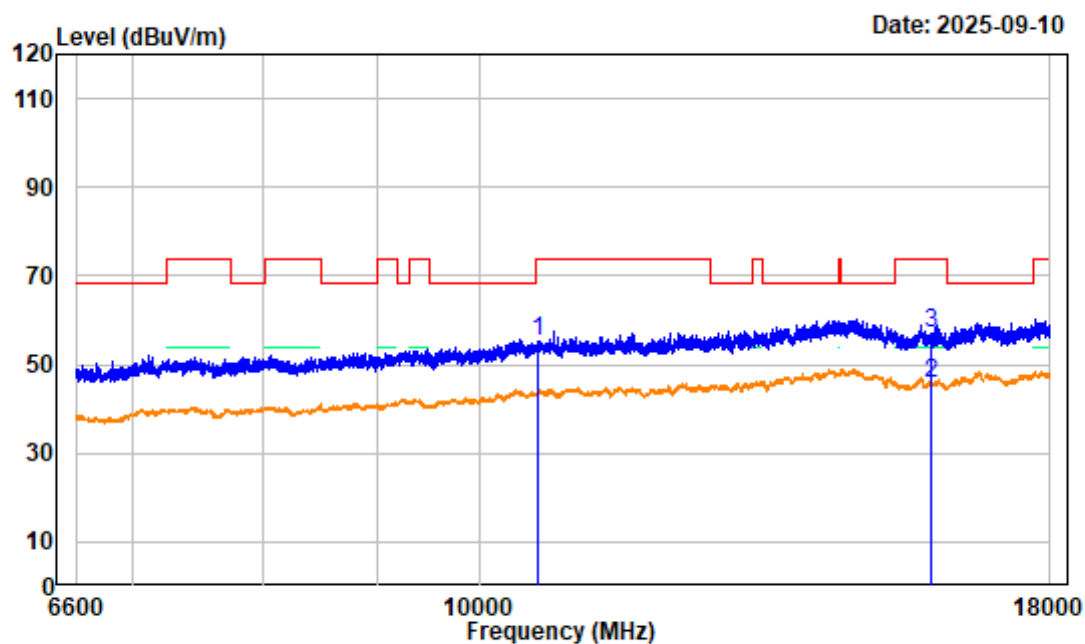

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5310MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	4.14	50.90	55.04	74.00	-18.96	peak
2	15930.000	4.94	40.89	45.83	54.00	-8.17	average
3	15930.000	4.94	51.95	56.89	74.00	-17.11	peak

802.11AC40 High Channel 6.6GHz-18GHz_VERTICAL

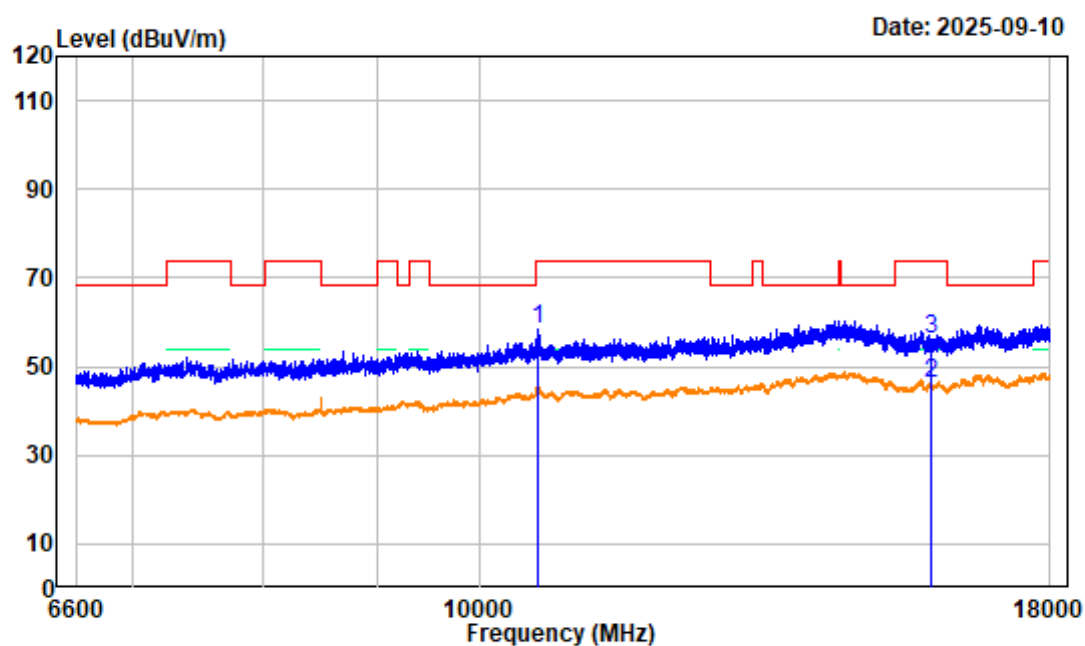

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5310MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	4.14	54.13	58.27	74.00	-15.73	peak
2	15930.000	4.94	41.36	46.30	54.00	-7.70	average
3	15930.000	4.94	51.28	56.22	74.00	-17.78	peak

802.11AC40 High Channel Bandedge_HORIZONTAL

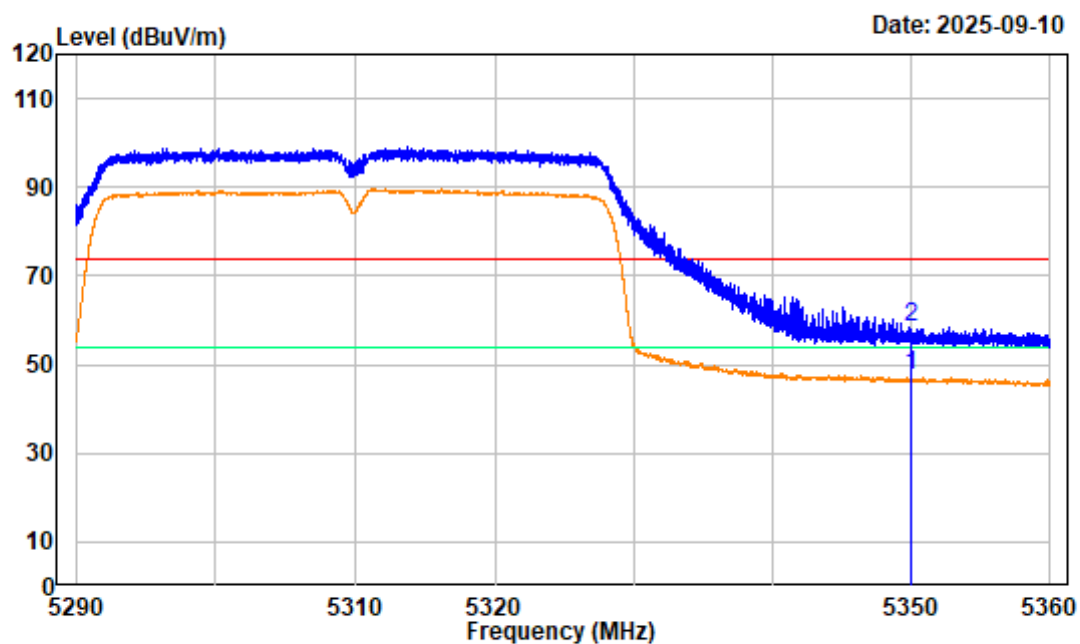

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5310MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	53.11	47.42	54.00	-6.58	Average
2	5350.000	-5.69	64.13	58.44	74.00	-15.56	peak

802.11AC40 High Channel Bandedge_VERTICAL

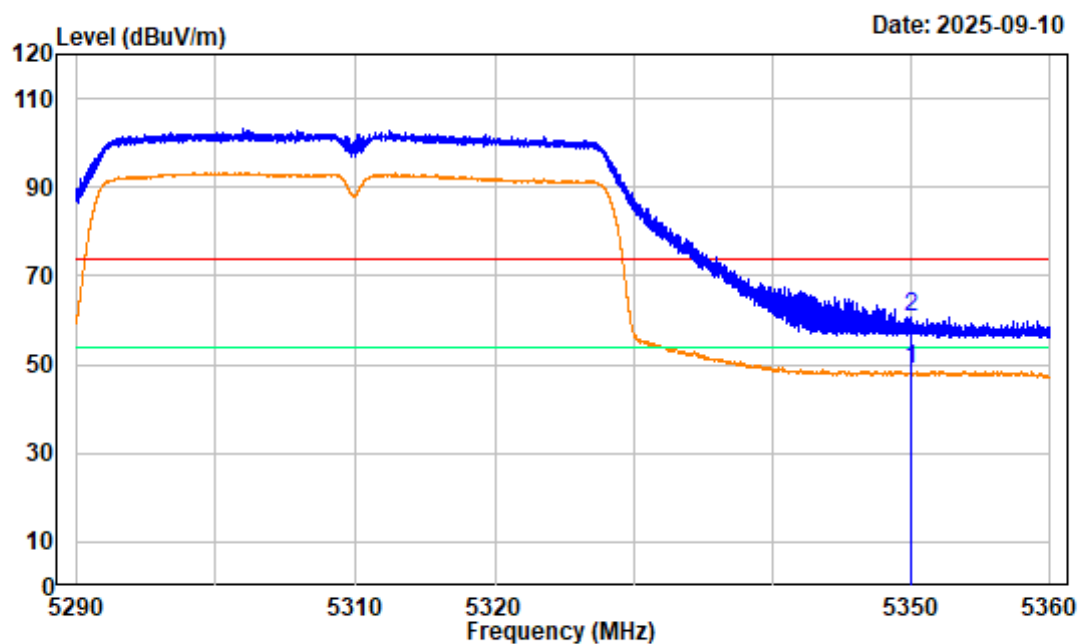

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5310MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	54.56	48.87	54.00	-5.13	Average
2	5350.000	-5.69	66.54	60.85	74.00	-13.15	peak

802.11AX20 Low Channel 1GHz-6.6GHz_HORIZONTAL

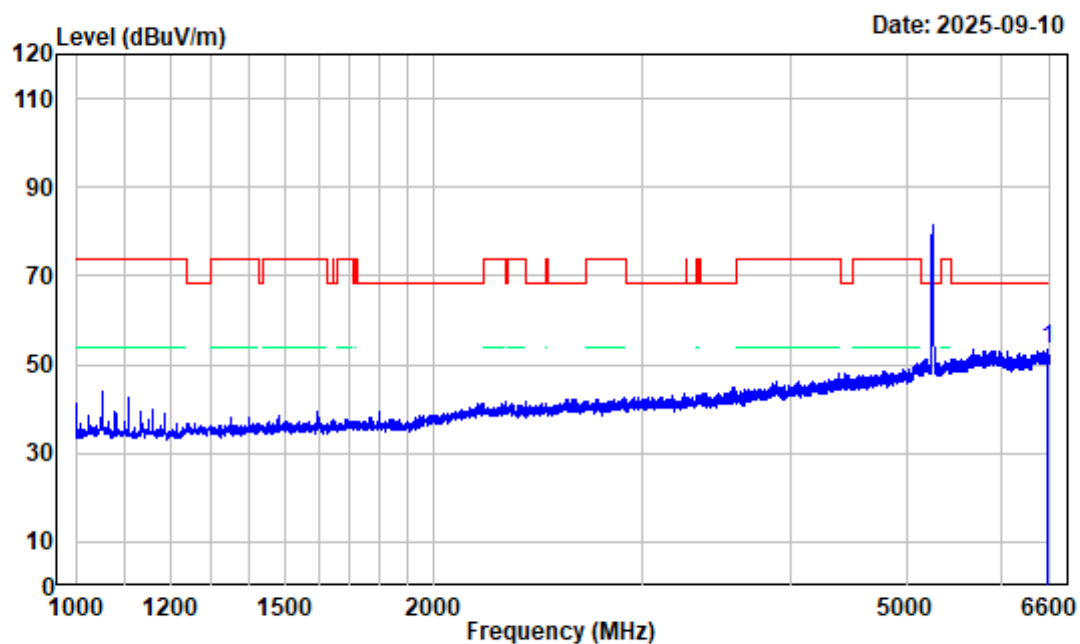

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5260MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6555.900	-3.61	56.84	53.23	68.20	-14.97	peak

802.11AX20 Low Channel 1GHz-6.6GHz_VERTICAL

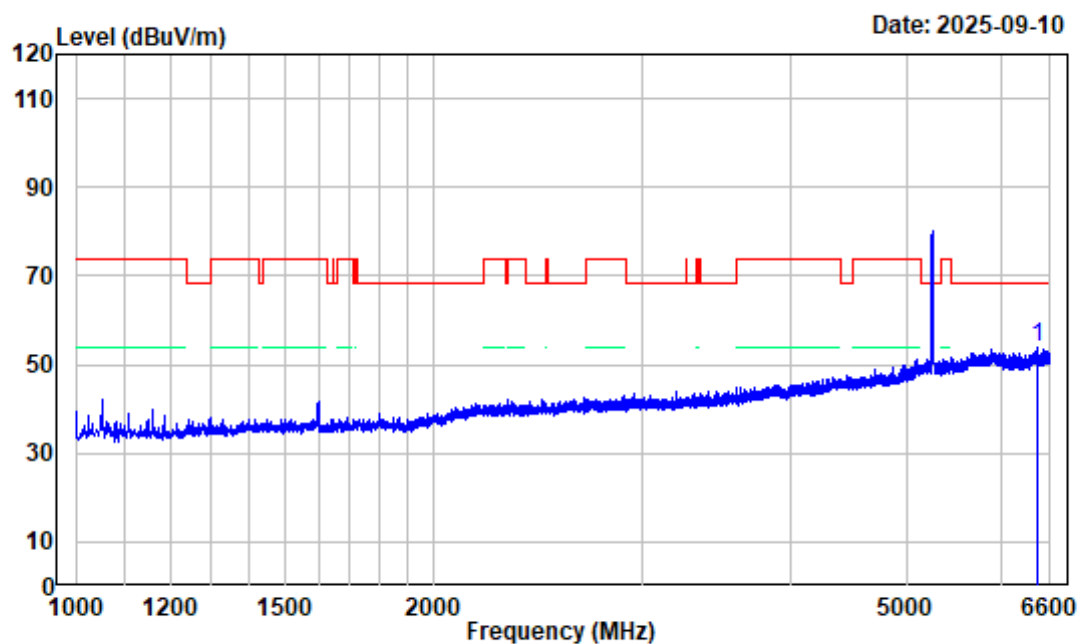

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5260MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

			Read	Limit	Over	
	Freq	Factor	Level	Line	Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	6451.600	-3.46	57.14	53.68	68.20	-14.52 peak

802.11AX20 Low Channel 6.6GHz-18GHz_HORIZONTAL

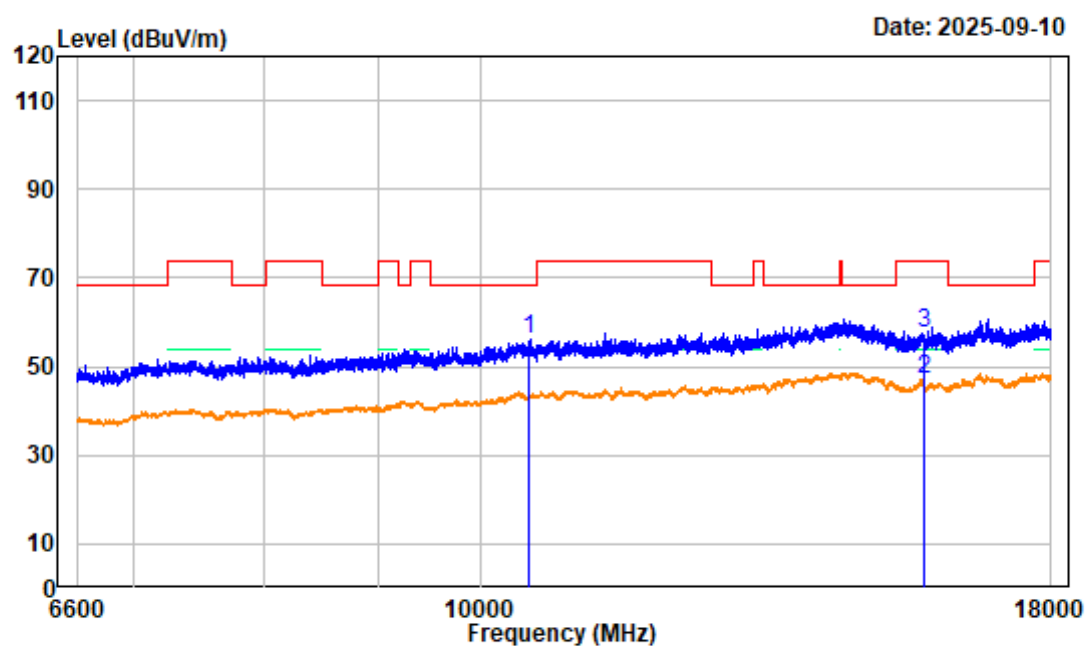

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5260MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10520.000	3.99	52.02	56.01	68.20	-12.19	peak
2	15780.000	5.21	42.10	47.31	54.00	-6.69	average
3	15780.000	5.21	52.10	57.31	74.00	-16.69	peak

802.11AX20 Low Channel 6.6GHz-18GHz_VERTICAL

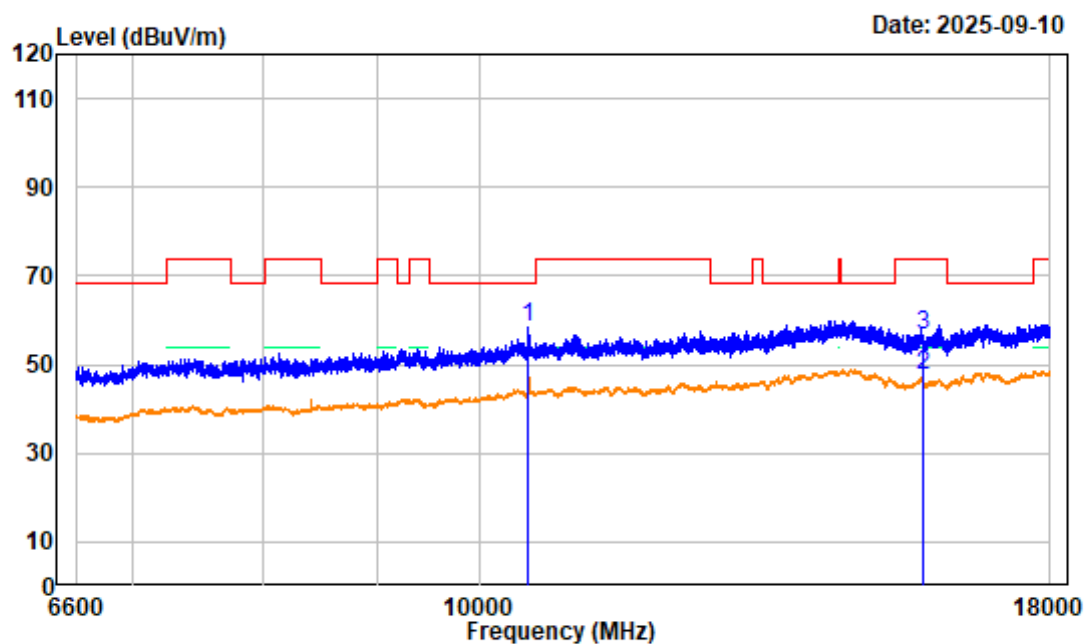

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5260MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10520.000	3.99	54.33	58.32	68.20	-9.88	peak
2	15780.000	5.21	42.44	47.65	54.00	-6.35	average
3	15780.000	5.21	51.46	56.67	74.00	-17.33	peak

802.11AX20 Low Channel Bandedge_HORIZONTAL

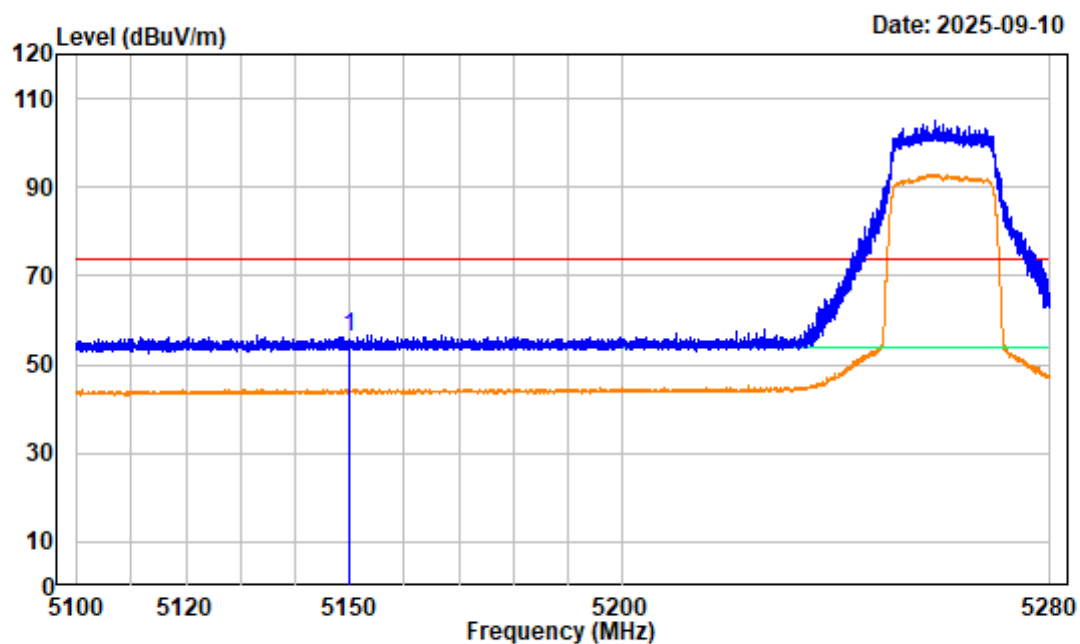

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5260MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-6.04	62.23	56.19	74.00	-17.81	peak

802.11AX20 Low Channel Bandedge_VERTICAL

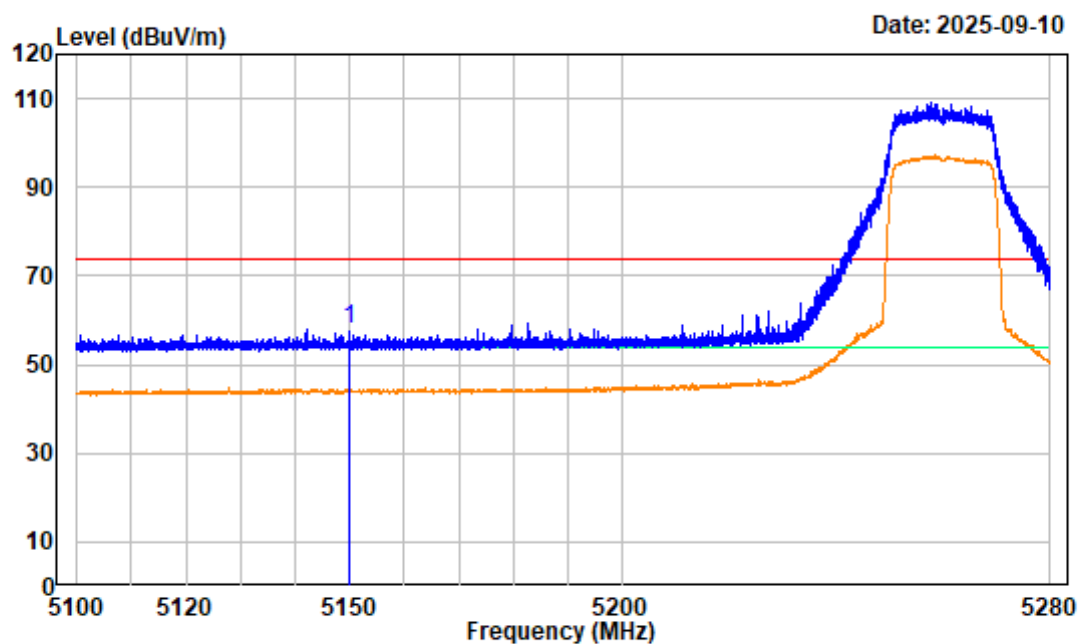

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5260MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-6.04	63.96	57.92	74.00	-16.08	peak

802.11AX20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

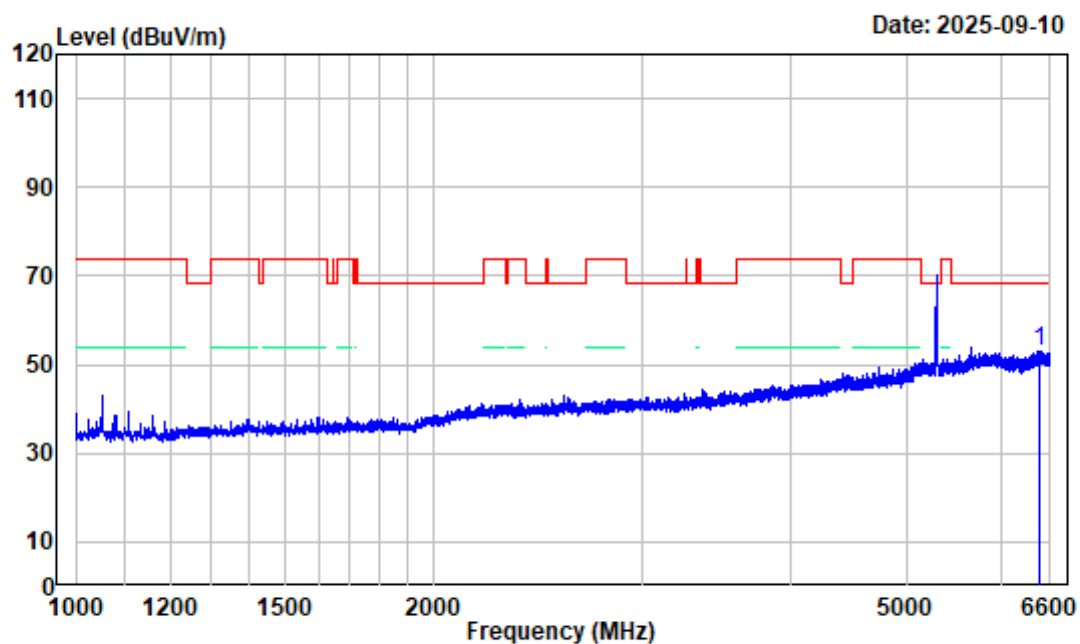

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Middle Channel 5300MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6471.900	-3.63	56.66	53.03	68.20	-15.17	peak

802.11AX20 Middle Channel 1GHz-6.6GHz_VERTICAL

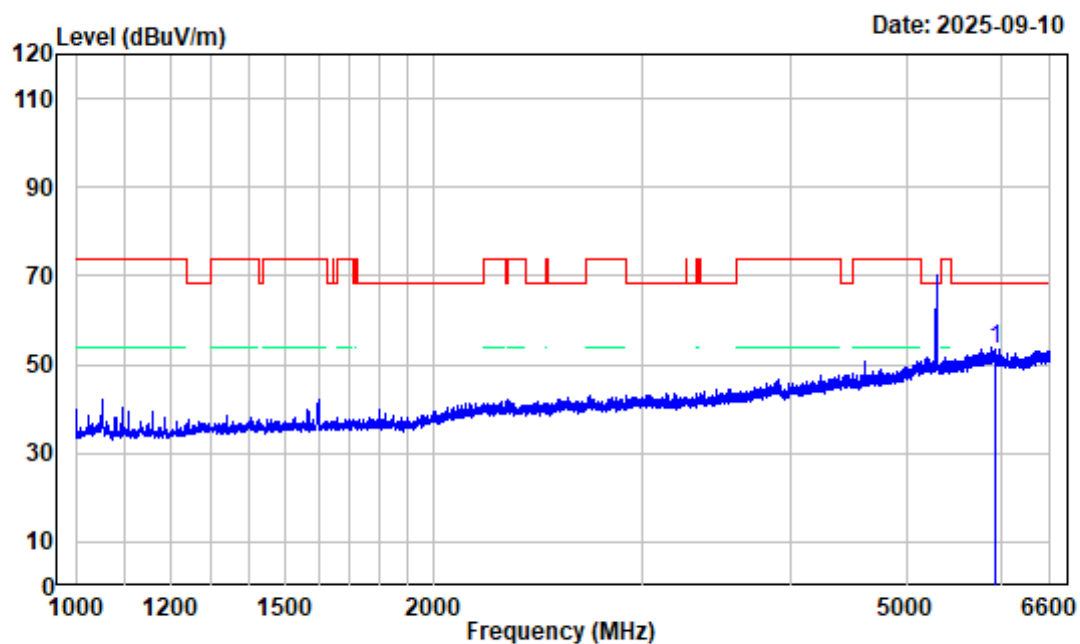

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Middle Channel 5300MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5941.300	-4.52	57.93	53.41	68.20	-14.79	peak

802.11AX20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

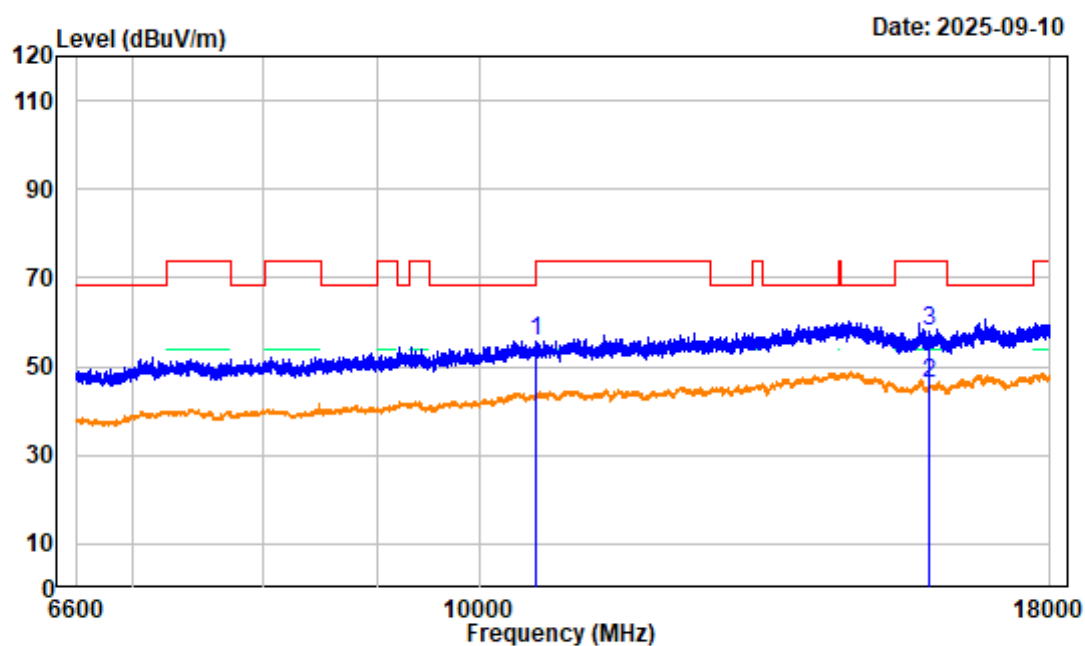

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Middle Channel 5300MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10600.000	3.86	52.06	55.92	68.20	-12.28	peak
2	15900.000	5.22	40.96	46.18	54.00	-7.82	average
3	15900.000	5.22	52.91	58.13	74.00	-15.87	peak


802.11AX20 Middle Channel 6.6GHz-18GHz_VERTICAL

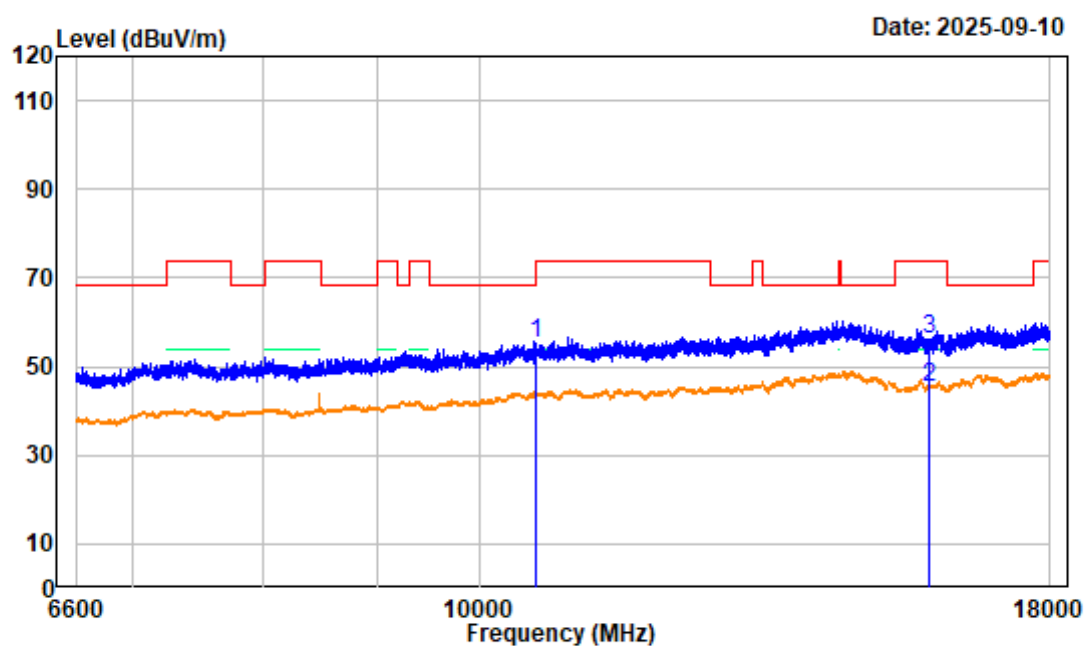

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX20 Middle Channel 5300MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz		dBuV	dBuV/m	dBuV/m	dB	
1	10600.000	3.86	51.56	55.42	68.20	-12.78	peak
2	15900.000	5.22	39.91	45.13	54.00	-8.87	average
3	15900.000	5.22	50.96	56.18	74.00	-17.82	peak

802.11AX20 High Channel 1GHz-6.6GHz_HORIZONTAL

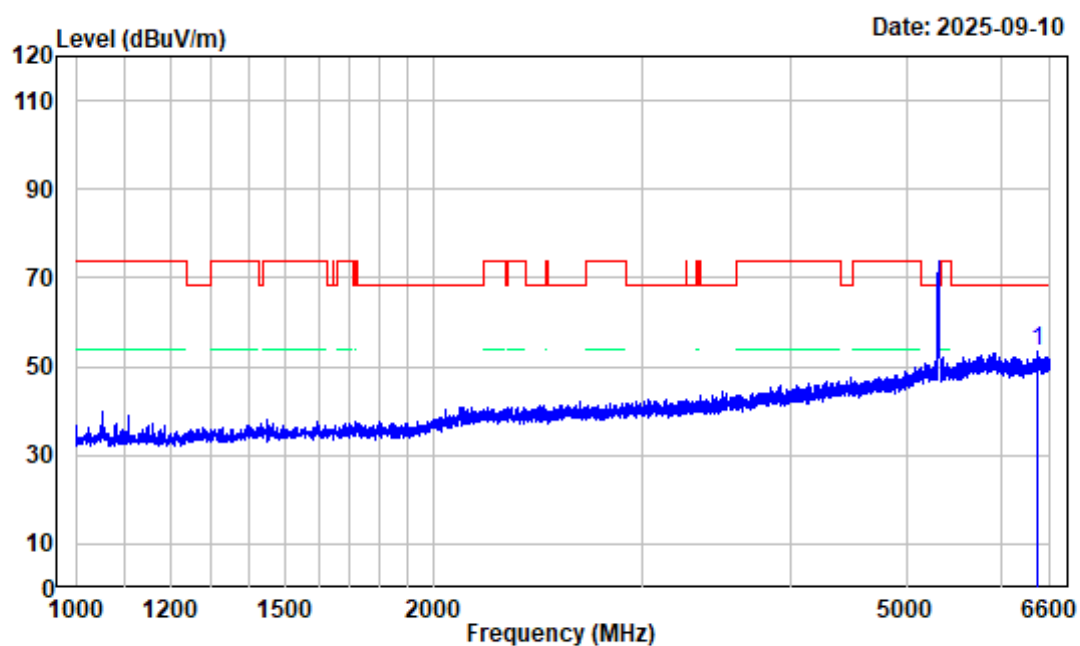

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5320MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6450.900	-3.45	56.69	53.24	68.20	-14.96	peak

802.11AX20 High Channel 1GHz-6.6GHz_VERTICAL

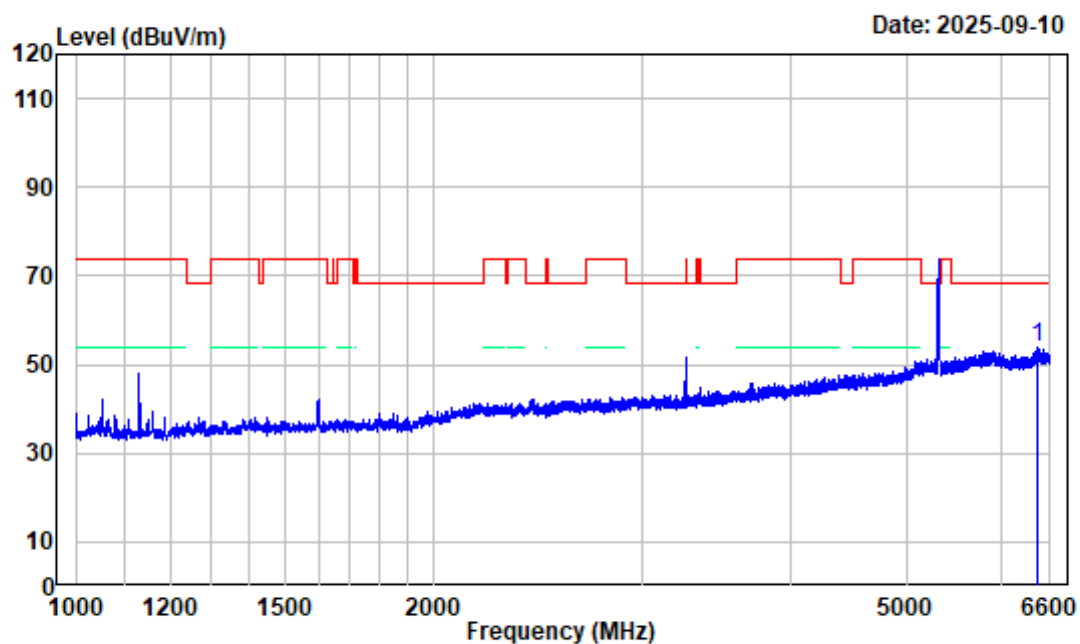

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5320MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6443.900	-3.48	57.23	53.75	68.20	-14.45	peak

802.11AX20 High Channel 6.6GHz-18GHz_HORIZONTAL

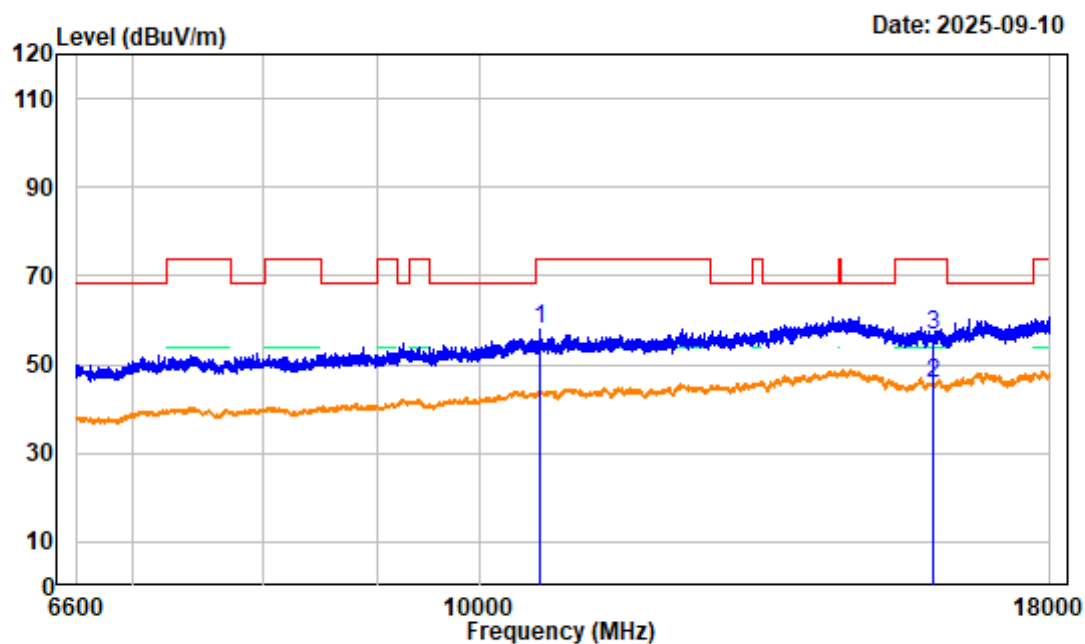

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5320MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

			Read	Limit	Over	
Freq	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 10640.000	4.40	53.34	57.74	74.00	-16.26	peak
2 15960.000	4.76	41.02	45.78	54.00	-8.22	average
3 15960.000	4.76	52.00	56.76	74.00	-17.24	peak

802.11AX20 High Channel 6.6GHz-18GHz_VERTICAL

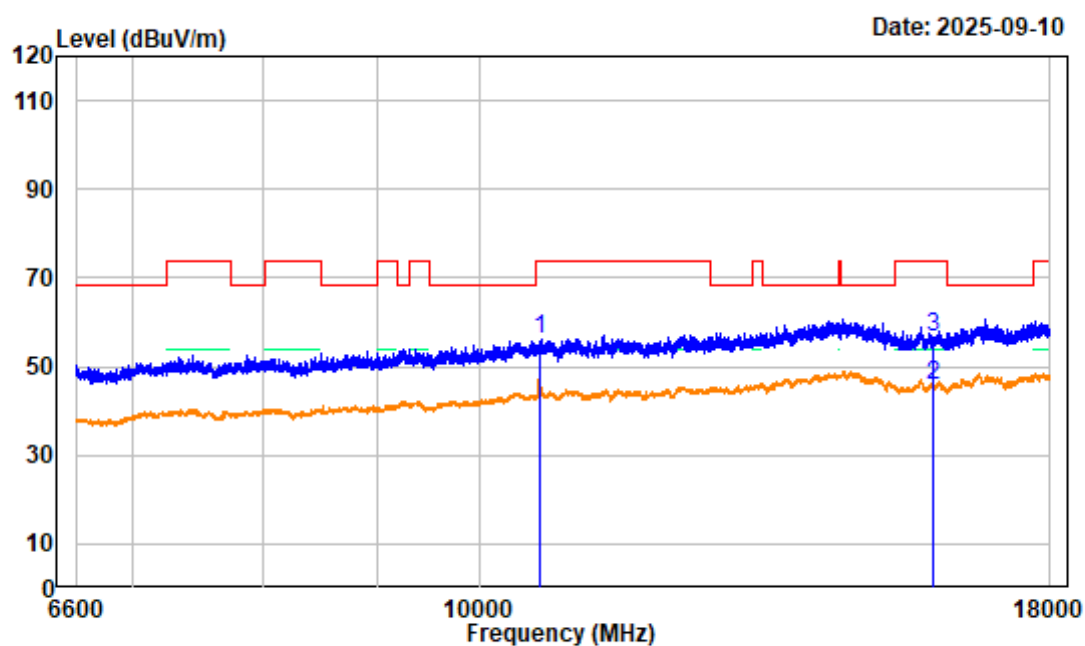

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5320MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10640.000	4.40	51.74	56.14	74.00	-17.86	peak
2	15960.000	4.76	41.00	45.76	54.00	-8.24	average
3	15960.000	4.76	52.02	56.78	74.00	-17.22	peak

802.11AX20 High Channel Bandedge_HORIZONTAL

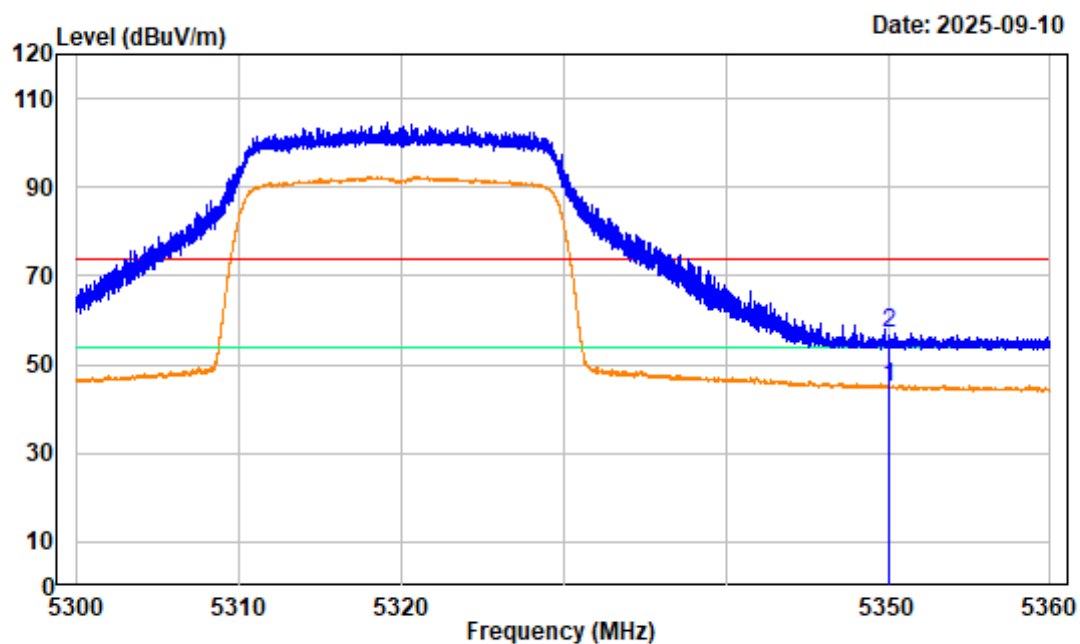

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5320MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	50.70	45.01	54.00	-8.99	Average
2	5350.000	-5.69	62.76	57.07	74.00	-16.93	peak

802.11AX20 High Channel Bandedge_VERTICAL

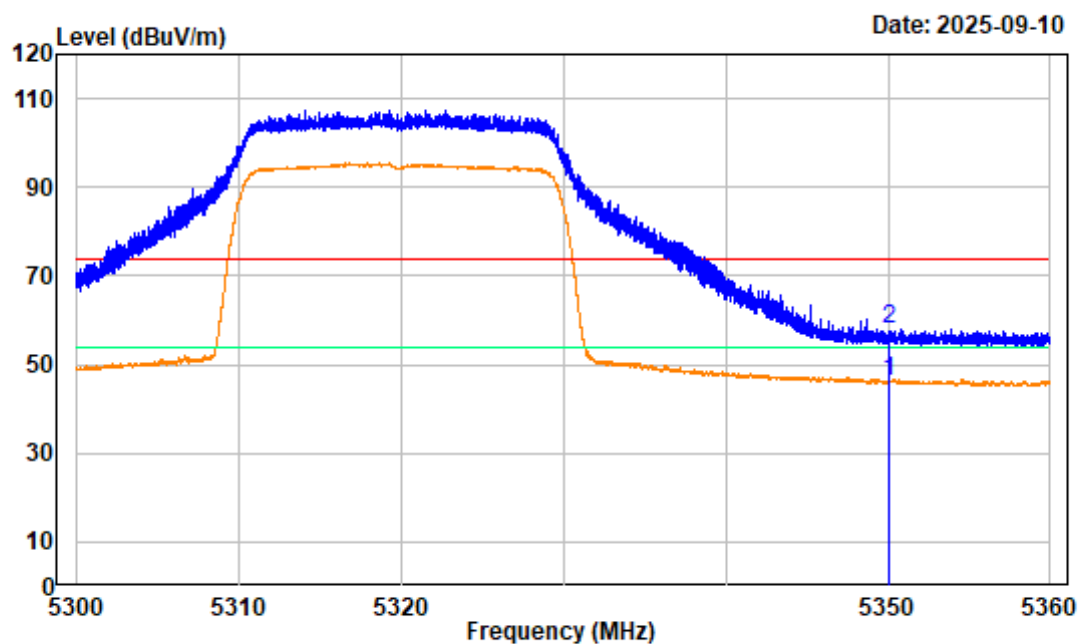

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5320MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	51.66	45.97	54.00	-8.03	Average
2	5350.000	-5.69	63.61	57.92	74.00	-16.08	peak

802.11AX40 Low Channel 1GHz-6.6GHz_HORIZONTAL

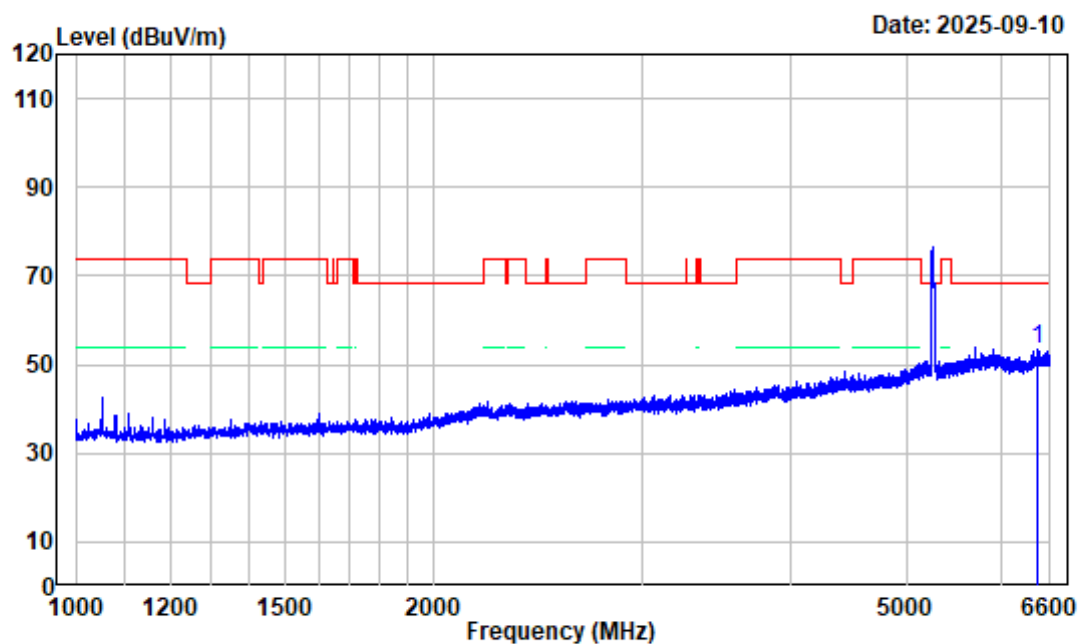

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5270MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6451.600	-3.46	56.94	53.48	68.20	-14.72	peak

802.11AX40 Low Channel 1GHz-6.6GHz_VERTICAL

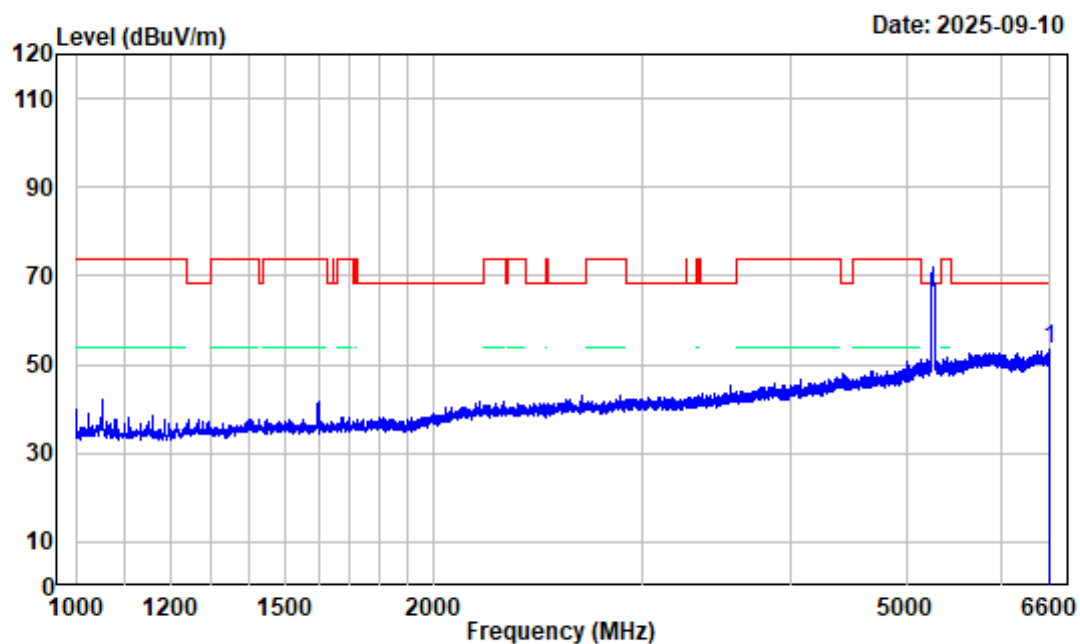

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5270MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6584.600	-3.53	56.90	53.37	68.20	-14.83	peak

802.11AX40 Low Channel 6.6GHz-18GHz_HORIZONTAL

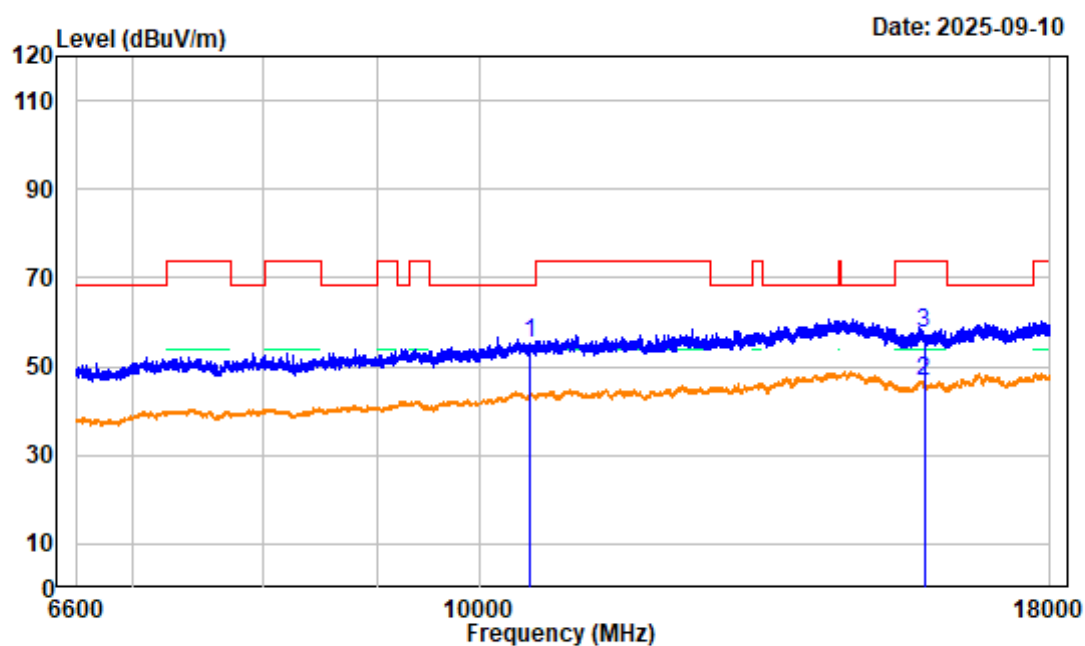

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5270MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10540.000	4.15	51.01	55.16	68.20	-13.04	peak
2	15810.000	5.16	41.49	46.65	54.00	-7.35	average
3	15810.000	5.16	52.46	57.62	74.00	-16.38	peak

802.11AX40 Low Channel 6.6GHz-18GHz_VERTICAL

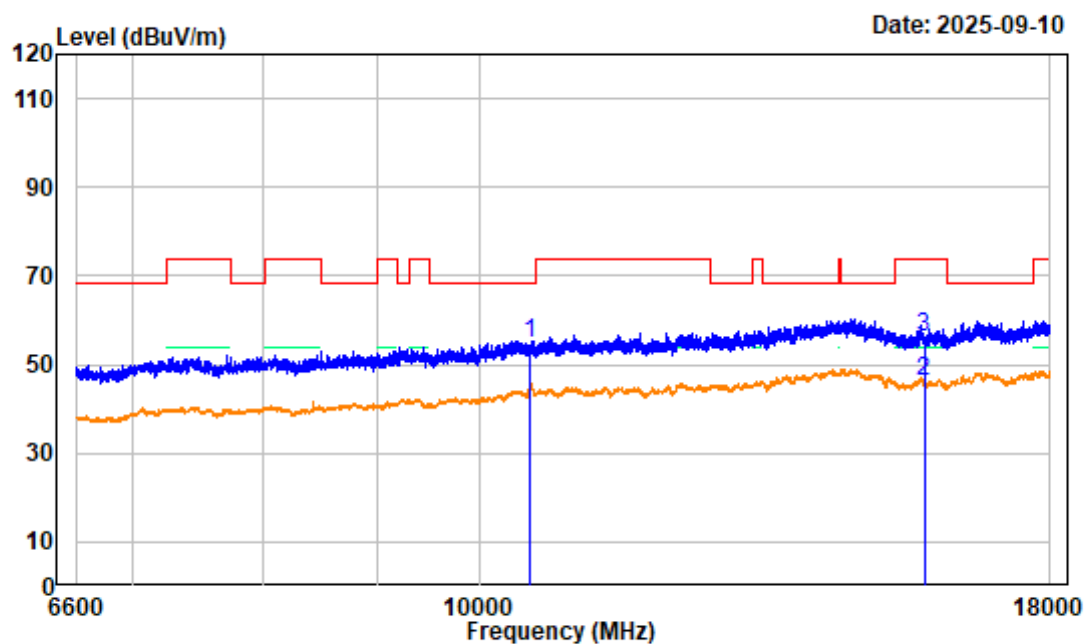

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5270MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10540.000	4.15	50.51	54.66	68.20	-13.54	peak
2	15810.000	5.16	41.18	46.34	54.00	-7.66	average
3	15810.000	5.16	51.15	56.31	74.00	-17.69	peak

802.11AX40 Low Channel Bandedge_HORIZONTAL

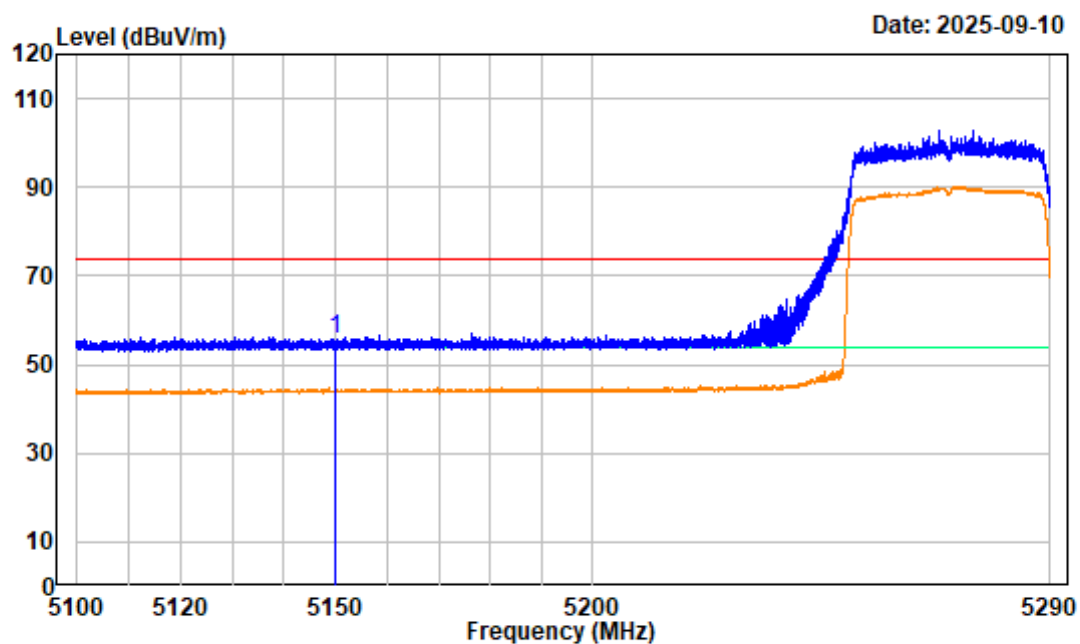

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5270MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-6.04	61.90	55.86	74.00	-18.14	peak

802.11AX40 Low Channel Bandedge_VERTICAL

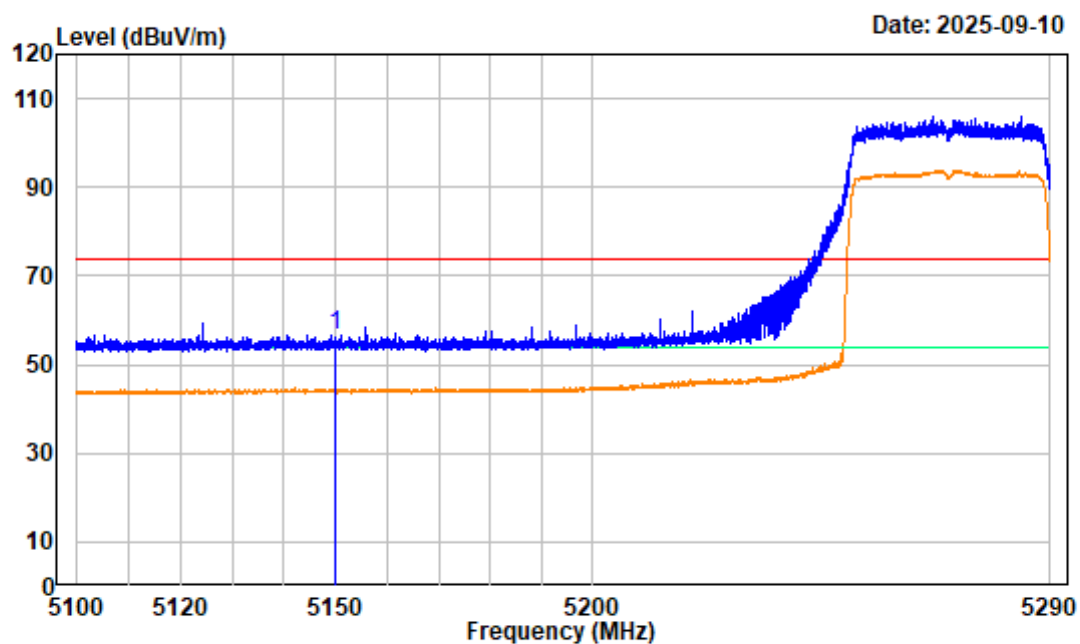

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5270MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5150.000	-6.04	62.67	56.63	74.00	-17.37	peak


802.11AX40 High Channel 1GHz-6.6GHz_HORIZONTAL

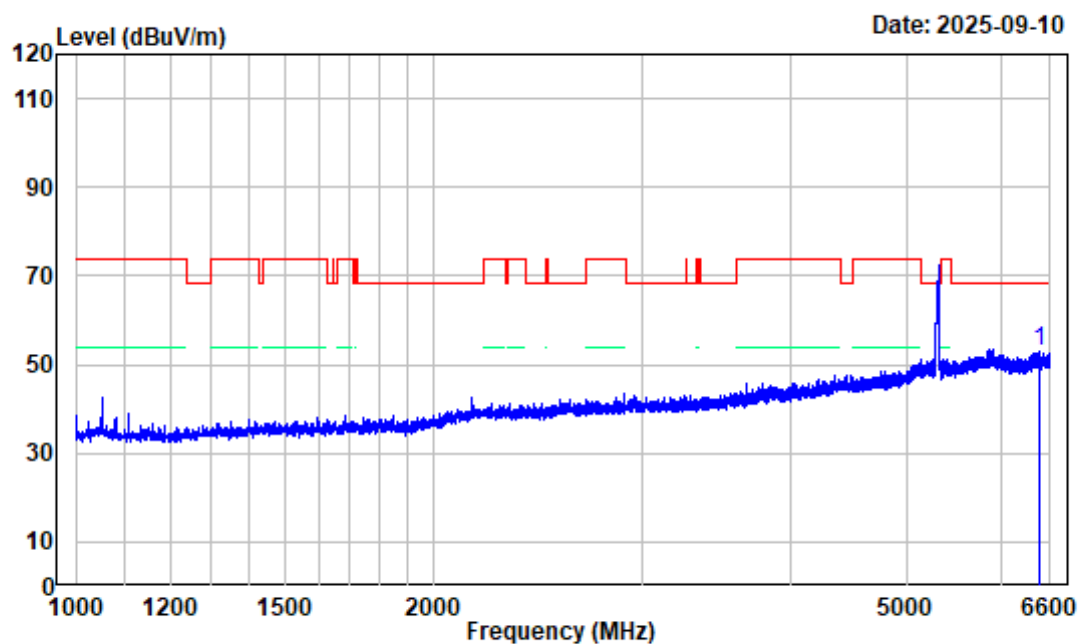

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX40 High Channel 5310MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6455.800	-3.50	56.38	52.88	68.20	-15.32	peak


802.11AX40 High Channel 1GHz-6.6GHz_VERTICAL

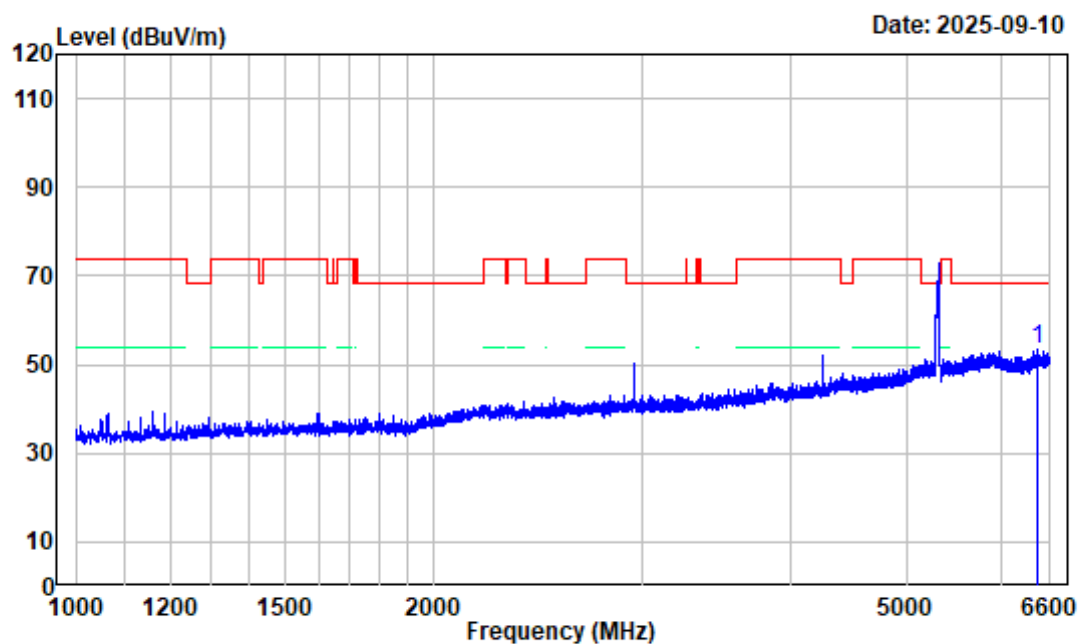

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX40 High Channel 5310MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6437.600	-3.50	56.80	53.30	68.20	-14.90	peak

802.11AX40 High Channel 6.6GHz-18GHz_HORIZONTAL

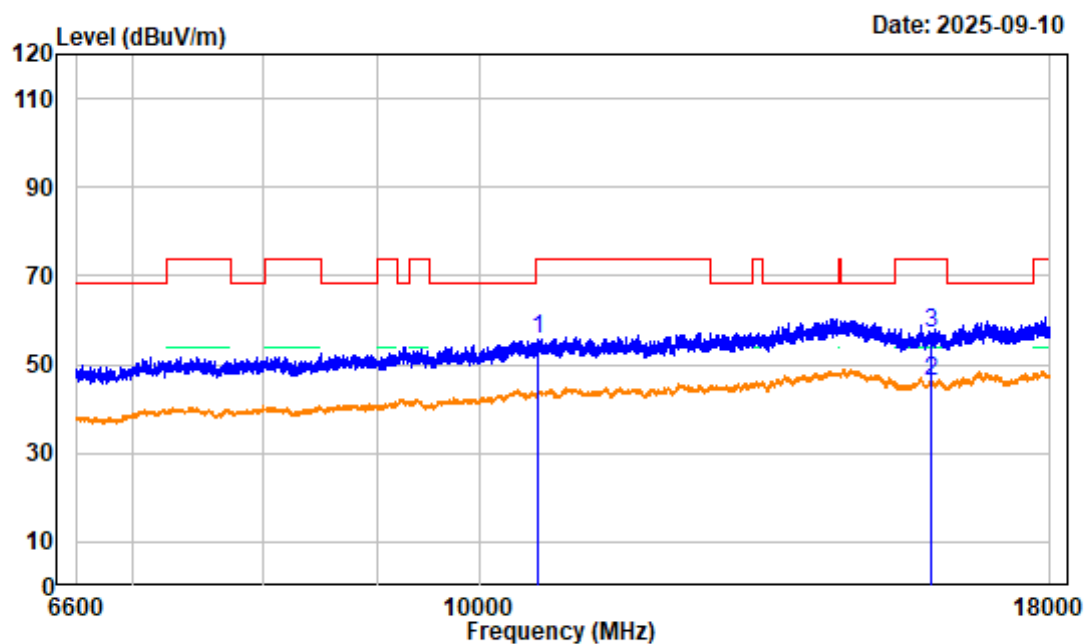

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5310MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	4.14	51.46	55.60	74.00	-18.40	peak
2	15930.000	4.94	41.06	46.00	54.00	-8.00	average
3	15930.000	4.94	51.99	56.93	74.00	-17.07	peak

802.11AX40 High Channel 6.6GHz-18GHz_VERTICAL

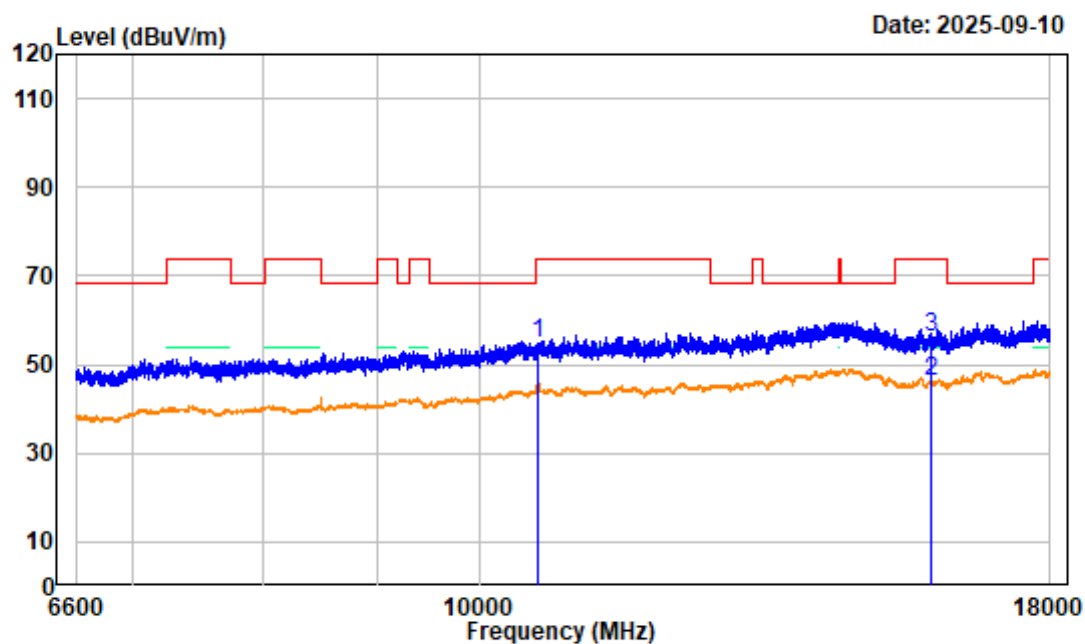

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5310MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	10620.000	4.14	50.57	54.71	74.00	-19.29	peak
2	15930.000	4.94	41.29	46.23	54.00	-7.77	average
3	15930.000	4.94	51.35	56.29	74.00	-17.71	peak

802.11AX40 High Channel Bandedge_HORIZONTAL

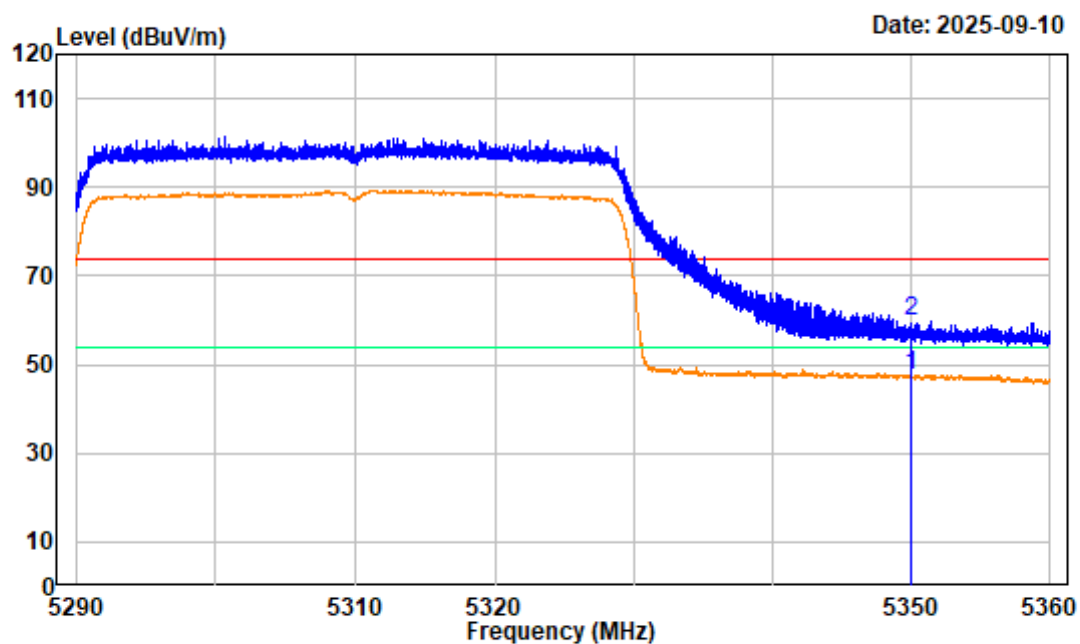

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5310MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	53.30	47.61	54.00	-6.39	Average
2	5350.000	-5.69	65.29	59.60	74.00	-14.40	peak

802.11AX40 High Channel Bandedge_VERTICAL

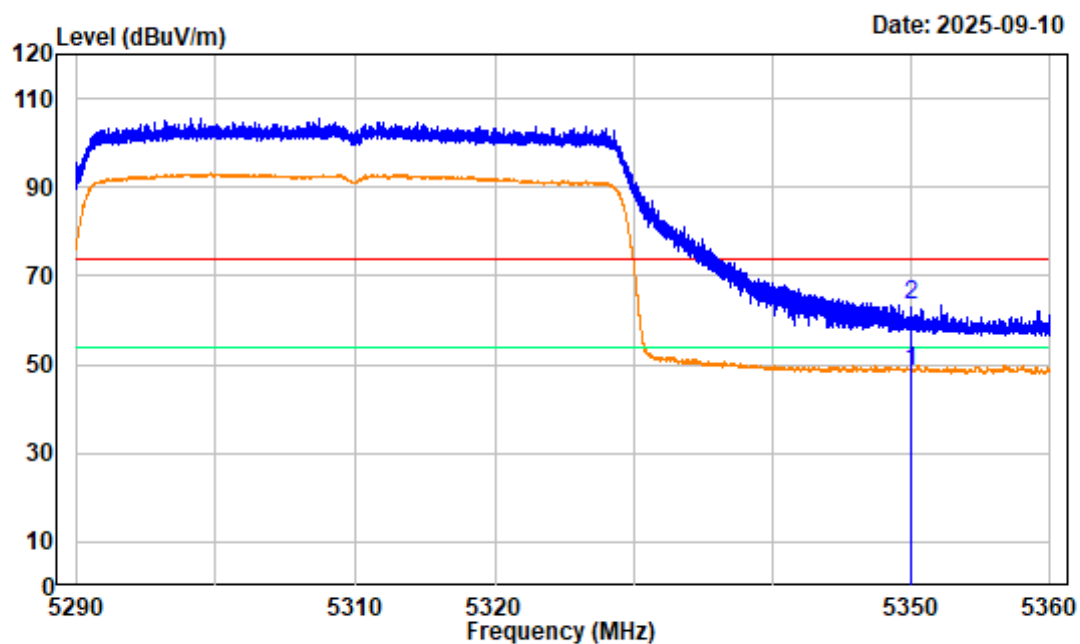

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting

Tester:Kevin Lv


Note : 802.11AX40 High Channel 5310MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5350.000	-5.69	54.20	48.51	54.00	-5.49	Average
2	5350.000	-5.69	69.23	63.54	74.00	-10.46	peak

For band3:

802.11A Low Channel 1GHz-6.6GHz_HORIZONTAL

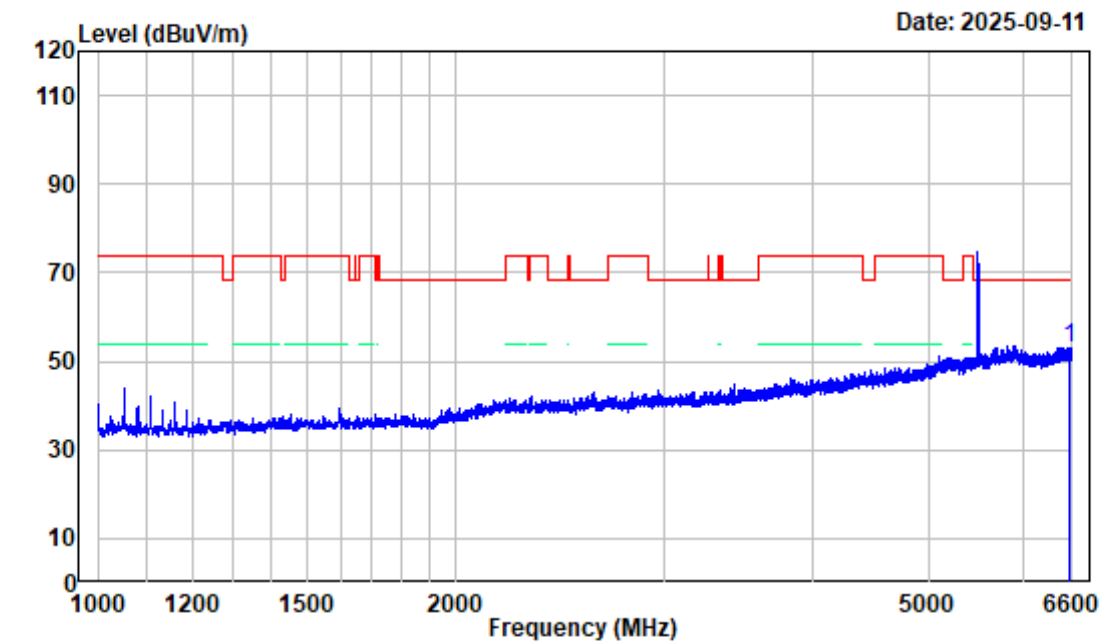

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11A Low Channel 5500MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6560.800	-3.61	56.64	53.03	68.20	-15.17	peak

802.11A Low Channel 1GHz-6.6GHz_VERTICAL

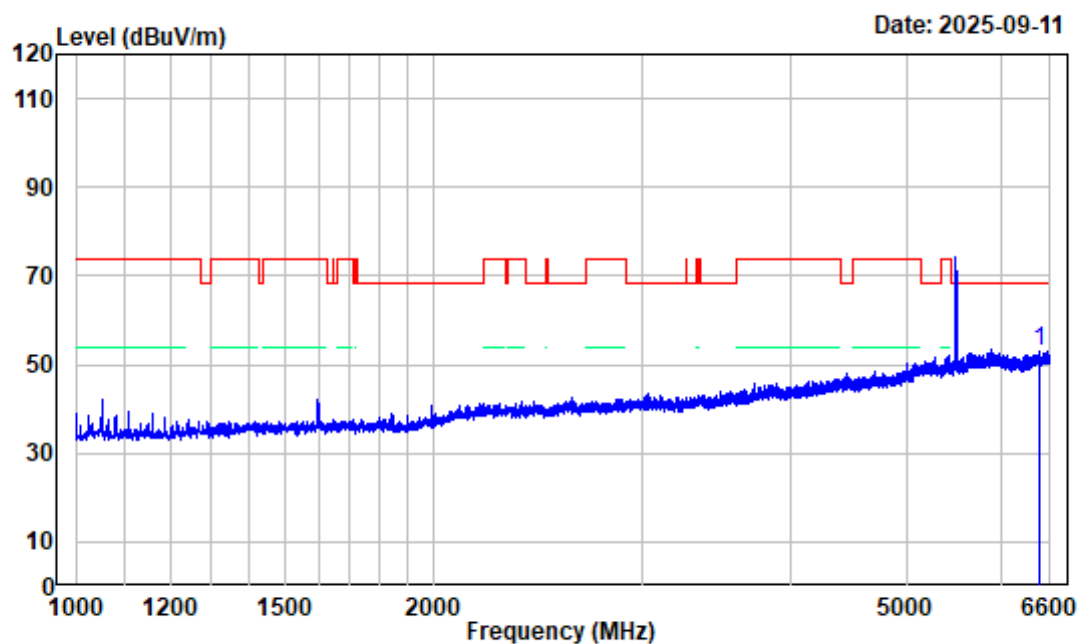

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5500MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6471.200	-3.62	56.48	52.86	68.20	-15.34	peak

802.11A Low Channel 6.6GHz-18GHZ_HORIZONTAL

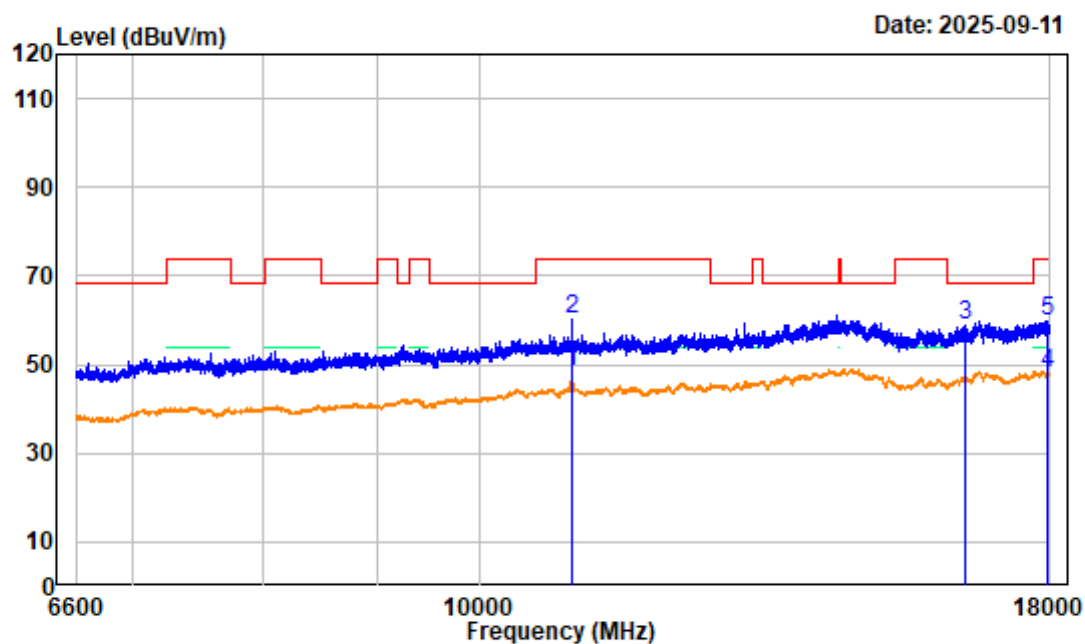

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5500MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	5.40	42.94	48.34	54.00	-5.66	average
2	11000.000	5.40	54.92	60.32	74.00	-13.68	peak
3	16500.000	5.97	52.85	58.82	68.20	-9.38	peak
4	17935.880	8.19	39.75	47.94	54.00	-6.06	average
5	17935.880	8.19	51.77	59.96	74.00	-14.04	peak

802.11A Low Channel 6.6GHz-18GHz_VERTICAL

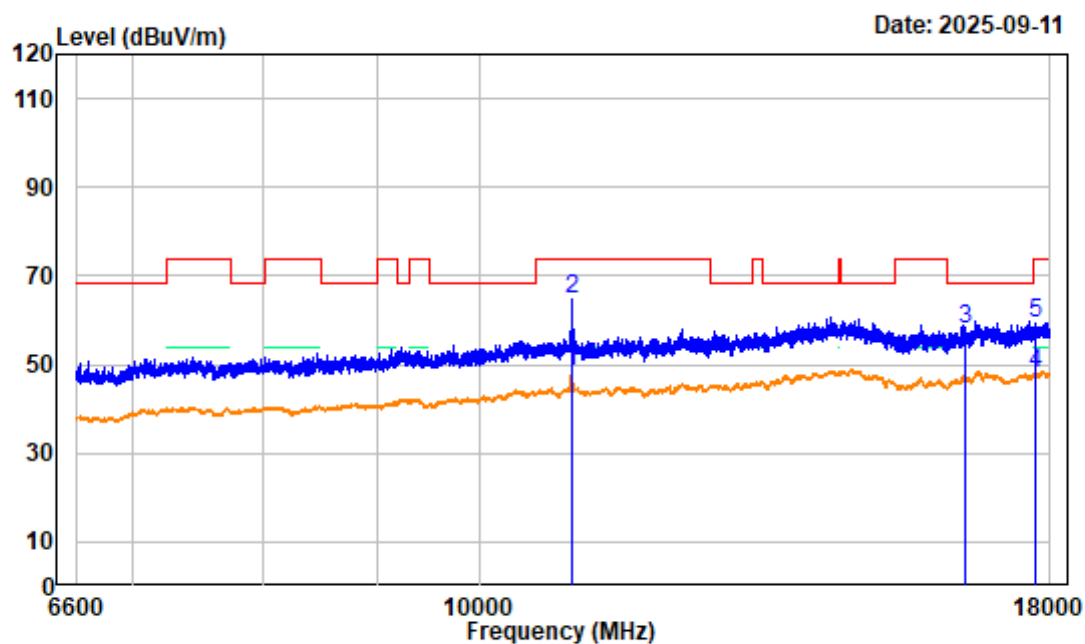

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5500MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	5.40	43.27	48.67	54.00	-5.33	average
2	11000.000	5.40	59.25	64.65	74.00	-9.35	peak
3	16500.000	5.97	51.86	57.83	68.20	-10.37	peak
4	17742.070	7.74	40.04	47.78	54.00	-6.22	average
5	17742.070	7.74	51.70	59.44	74.00	-14.56	peak

802.11A Low Channel Bandedge_HORIZONTAL

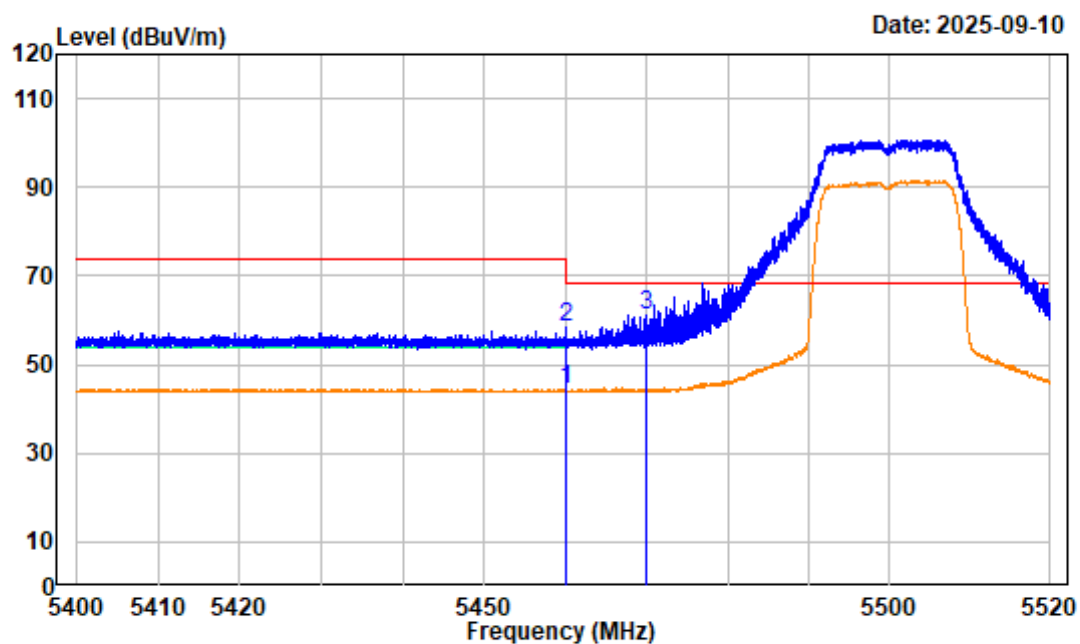

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5500MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.60	50.08	44.48	54.00	-9.52	average
2	5460.000	-5.60	64.02	58.42	74.00	-15.58	peak
3	5470.000	-5.60	66.95	61.35	68.20	-6.85	peak


802.11A Low Channel Bandedge_VERTICAL

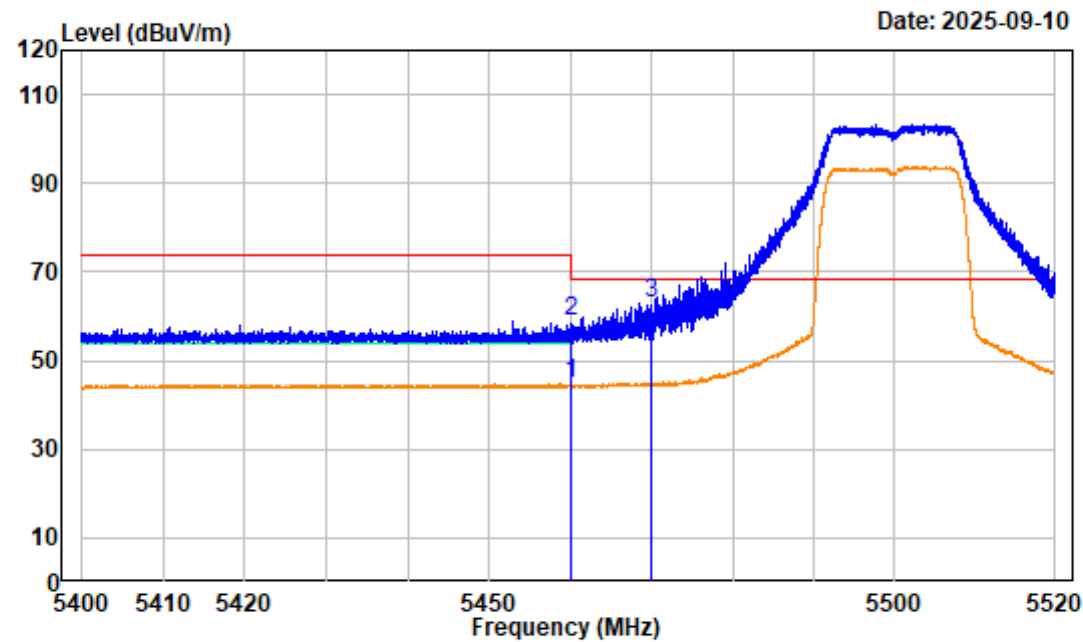

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Low Channel 5500MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.60	50.64	45.04	54.00	-8.96	average
2	5460.000	-5.60	64.68	59.08	74.00	-14.92	peak
3	5470.000	-5.60	68.58	62.98	68.20	-5.22	peak


802.11A Middle Channel 1GHz-6.6GHz_HORIZONTAL

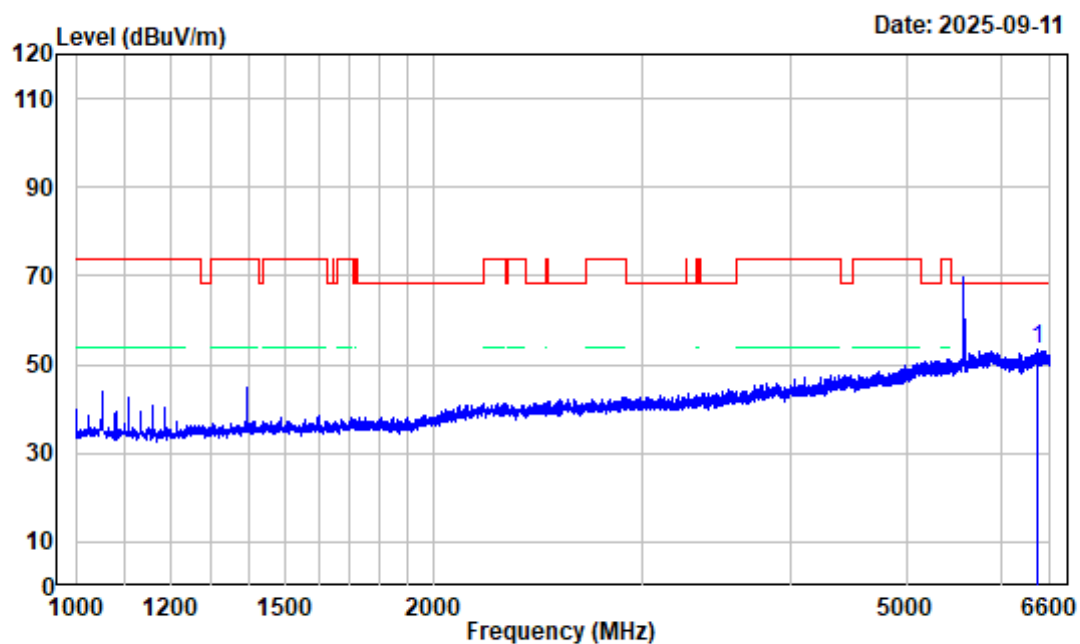

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11A Middle Channel 5580MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6443.900	-3.48	56.80	53.32	68.20	-14.88	peak

802.11A Middle Channel 1GHz-6.6GHz_VERTICAL

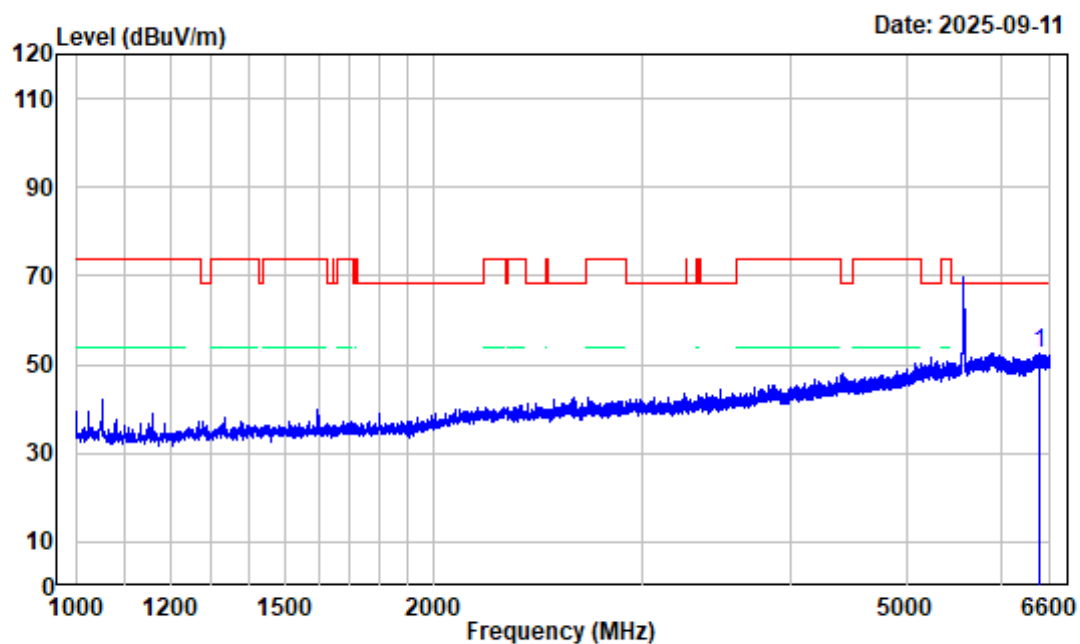

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Middle Channel 5580MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6464.900	-3.57	56.05	52.48	68.20	-15.72	peak

802.11A Middle Channel 6.6GHz-18GHz_HORIZONTAL

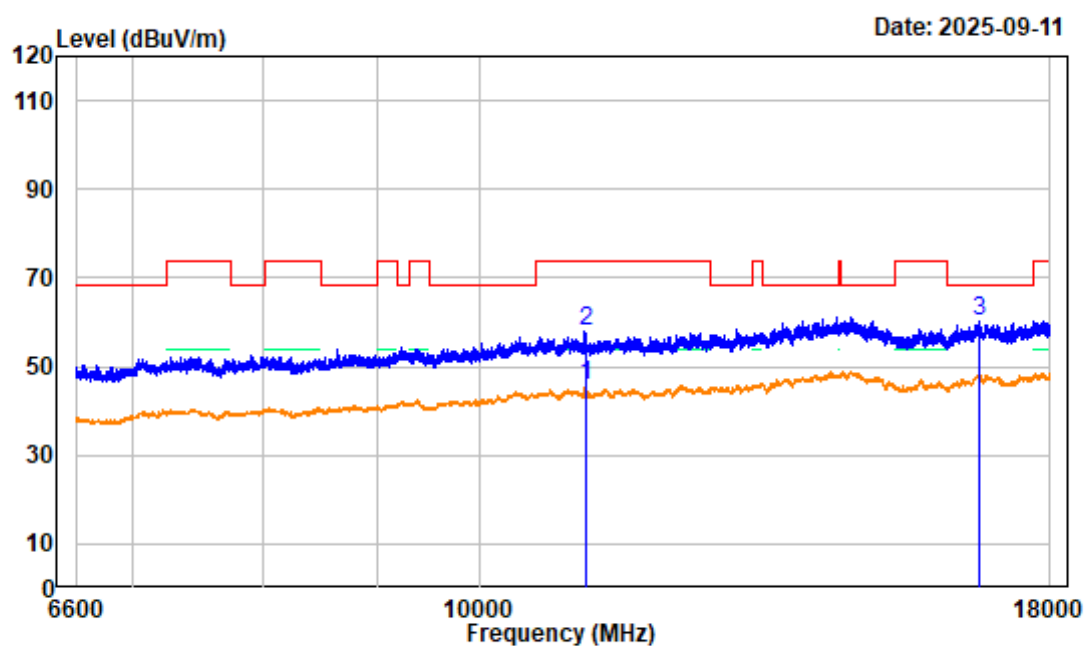

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Middle Channel 5580MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11160.000	4.36	41.59	45.95	54.00	-8.05	average
2	11160.000	4.36	53.56	57.92	74.00	-16.08	peak
3	16740.000	7.66	52.47	60.13	68.20	-8.07	peak

802.11A Middle Channel 6.6GHz-18GHz_VERTICAL

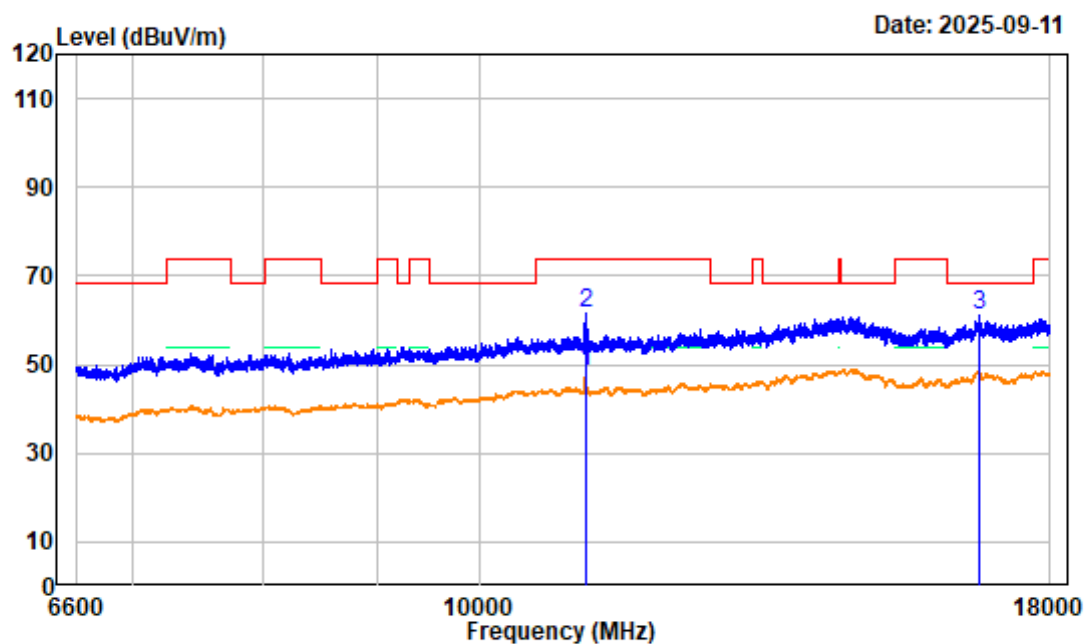

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Middle Channel 5580MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11160.000	4.36	44.10	48.46	54.00	-5.54	average
2	11160.000	4.36	57.06	61.42	74.00	-12.58	peak
3	16740.000	7.66	53.61	61.27	68.20	-6.93	peak

802.11A High Channel 1GHz-6.6GHz_HORIZONTAL

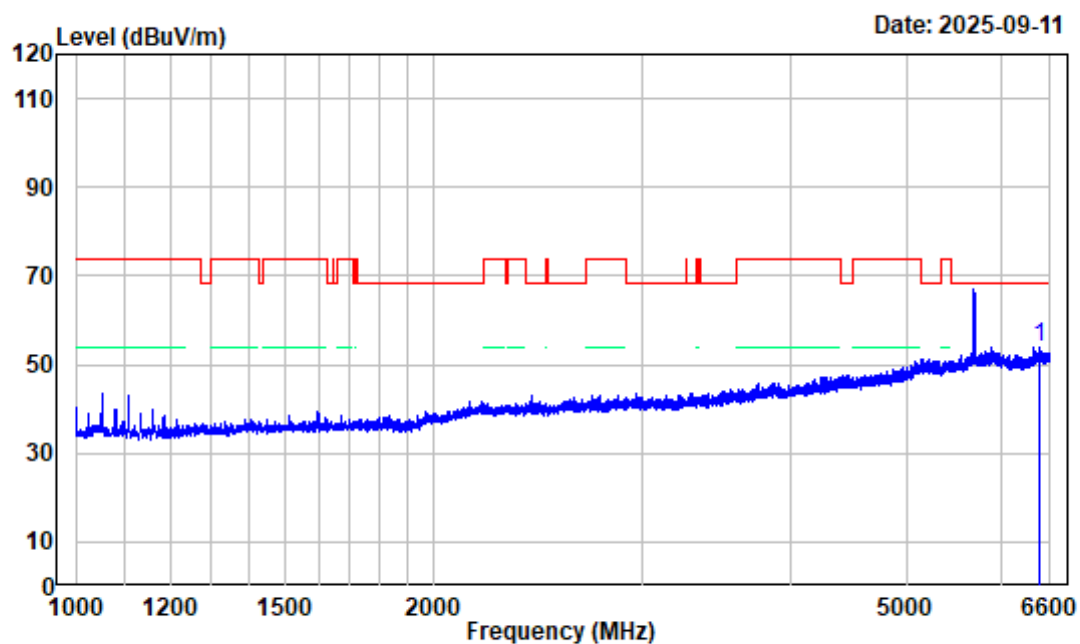

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5700MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6462.800	-3.55	57.22	53.67	68.20	-14.53	peak

802.11A High Channel 1GHz-6.6GHz_VERTICAL

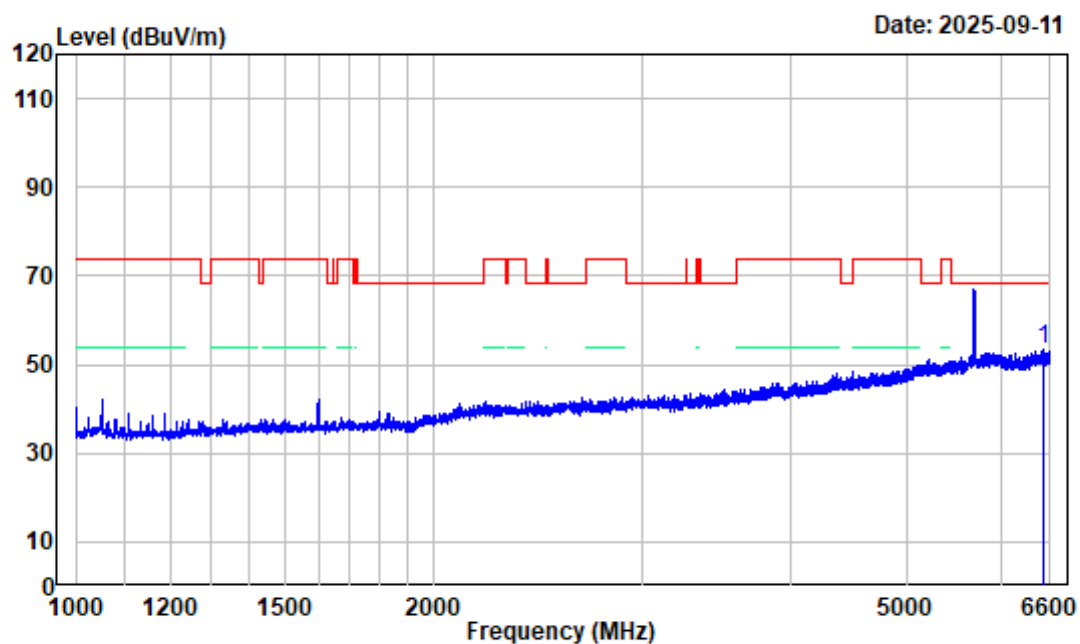

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5700MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6527.900	-3.72	57.02	53.30	68.20	-14.90	peak

802.11A High Channel 6.6GHz-18GHz_HORIZONTAL

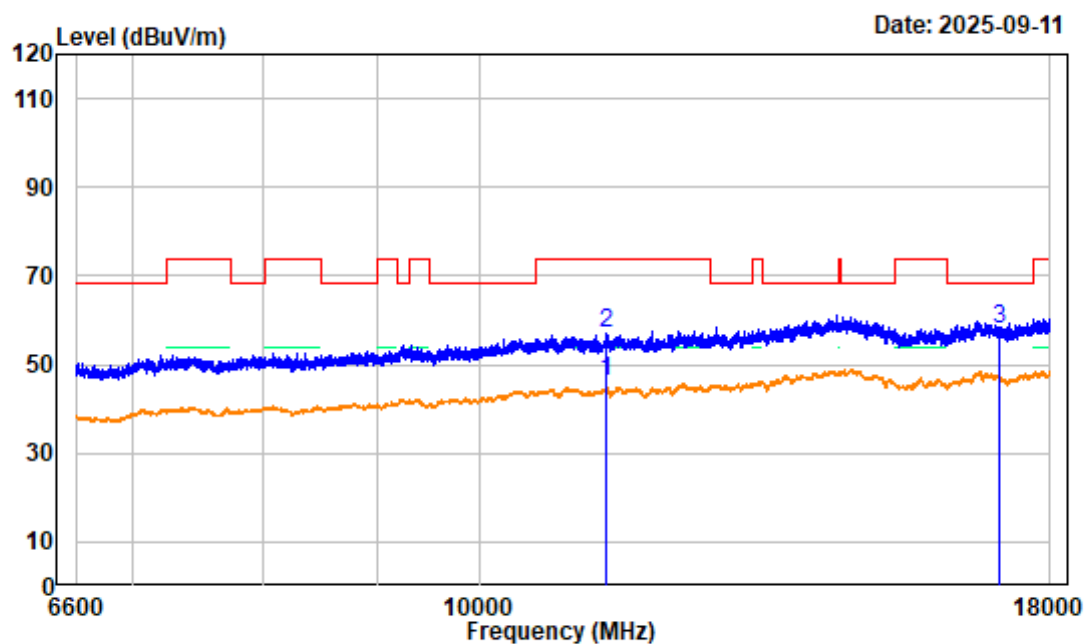

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5700MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	5.85	40.32	46.17	54.00	-7.83	average
2	11400.000	5.85	51.33	57.18	74.00	-16.82	peak
3	17100.000	6.94	51.14	58.08	68.20	-10.12	peak

802.11A High Channel 6.6GHz-18GHz_VERTICAL

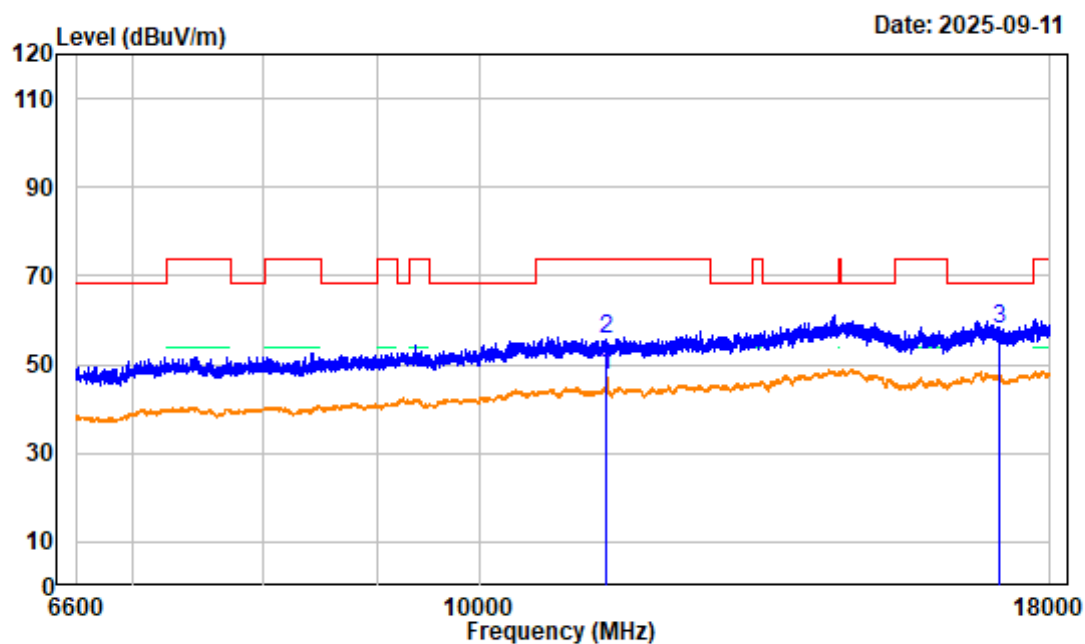

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5700MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	5.85	41.70	47.55	54.00	-6.45	average
2	11400.000	5.85	49.73	55.58	74.00	-18.42	peak
3	17100.000	6.94	50.83	57.77	68.20	-10.43	peak


802.11A High Channel Bandedge_HORIZONTAL

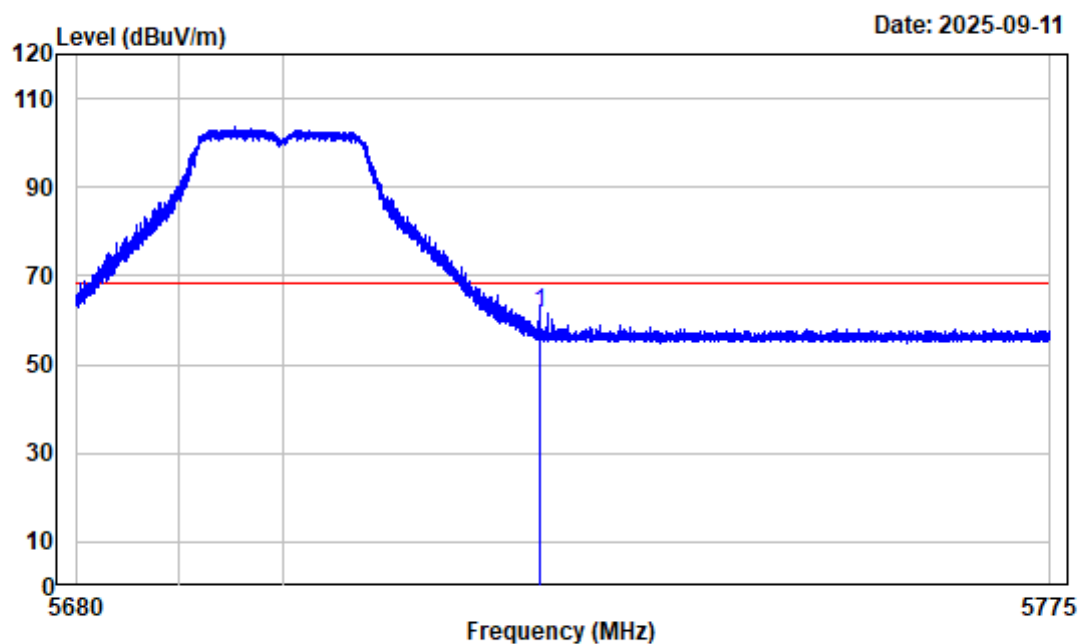

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11A High Channel 5700MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.45	65.90	61.45	68.20	-6.75	peak


802.11A High Channel Bandedge_VERTICAL

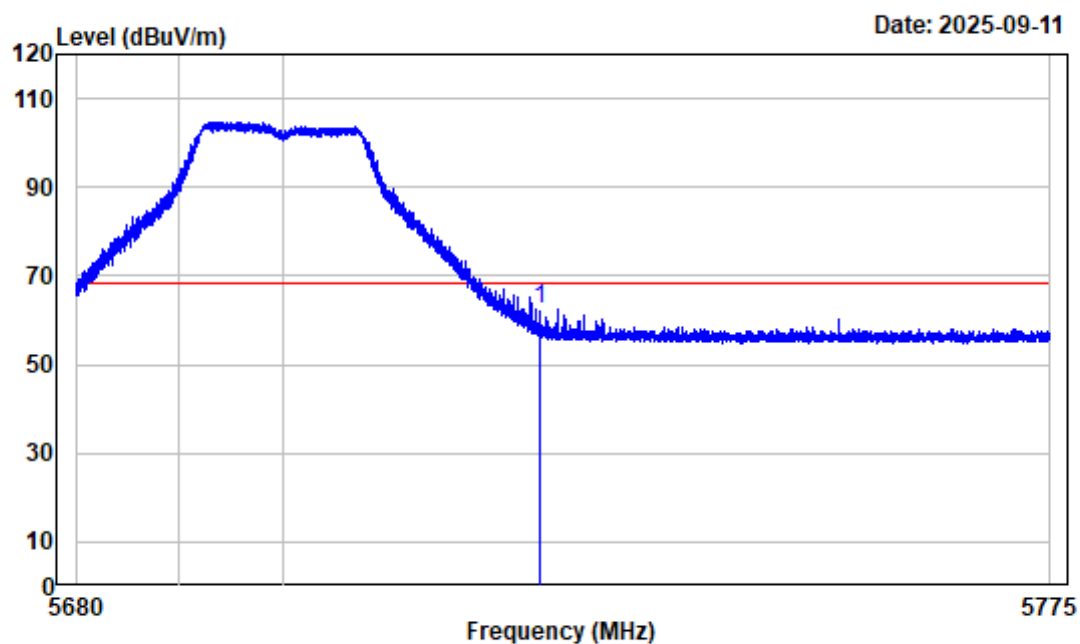

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11A High Channel 5700MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.45	66.93	62.48	68.20	-5.72	peak

802.11AC20 Low Channel 1GHz-6.6GHz_HORIZONTAL

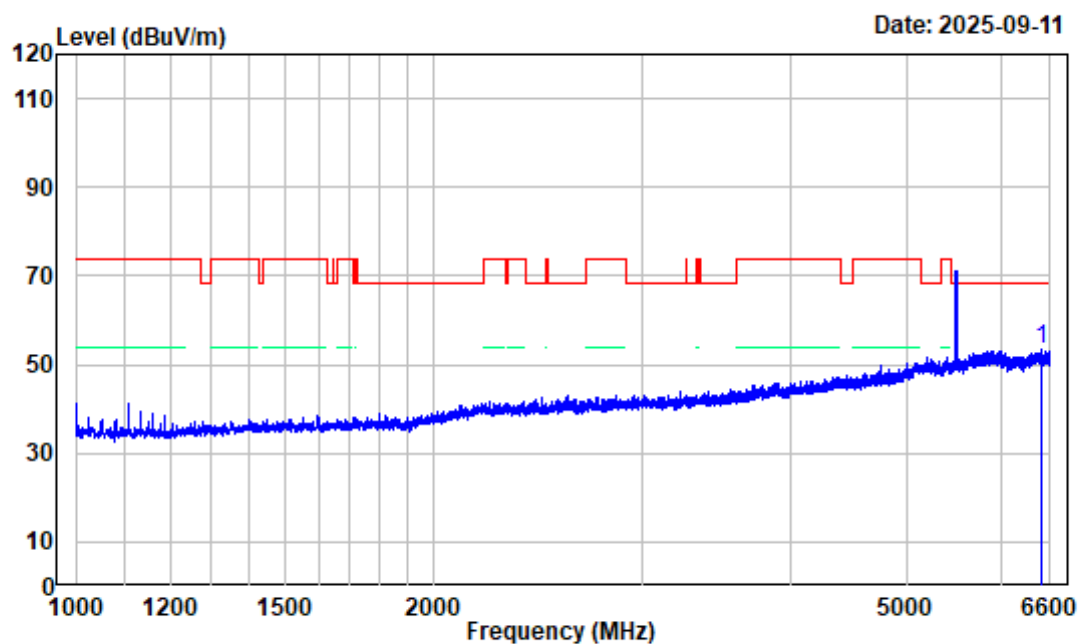

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5500MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6486.600	-3.75	57.22	53.47	68.20	-14.73	peak

802.11AC20 Low Channel 1GHz-6.6GHz_VERTICAL

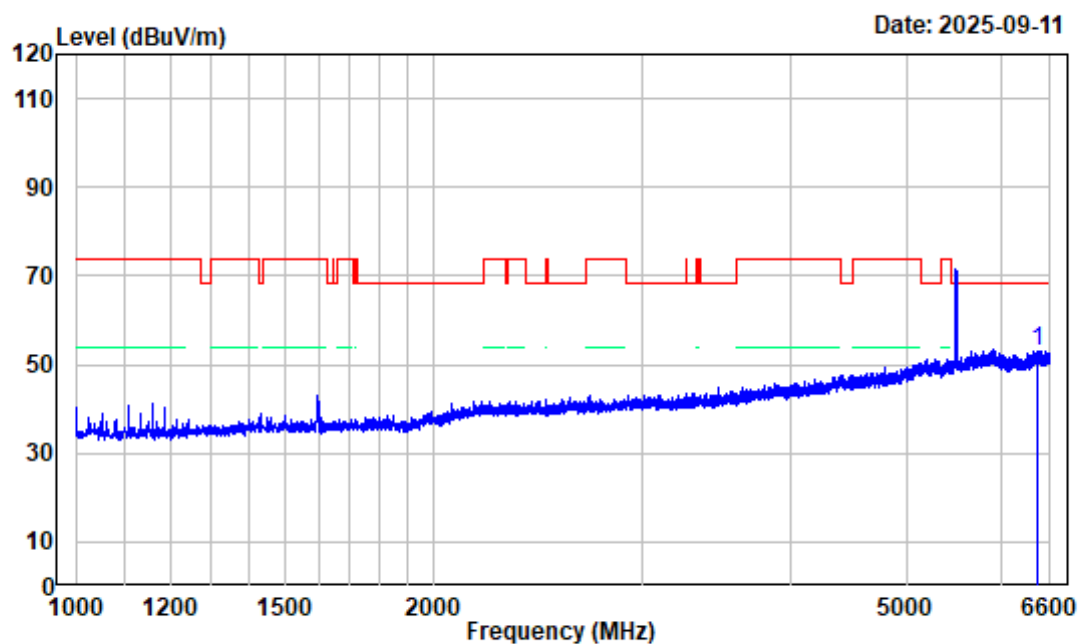

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5500MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6447.400	-3.46	56.54	53.08	68.20	-15.12	peak

802.11AC20 Low Channel 6.6GHz-18GHz_HORIZONTAL

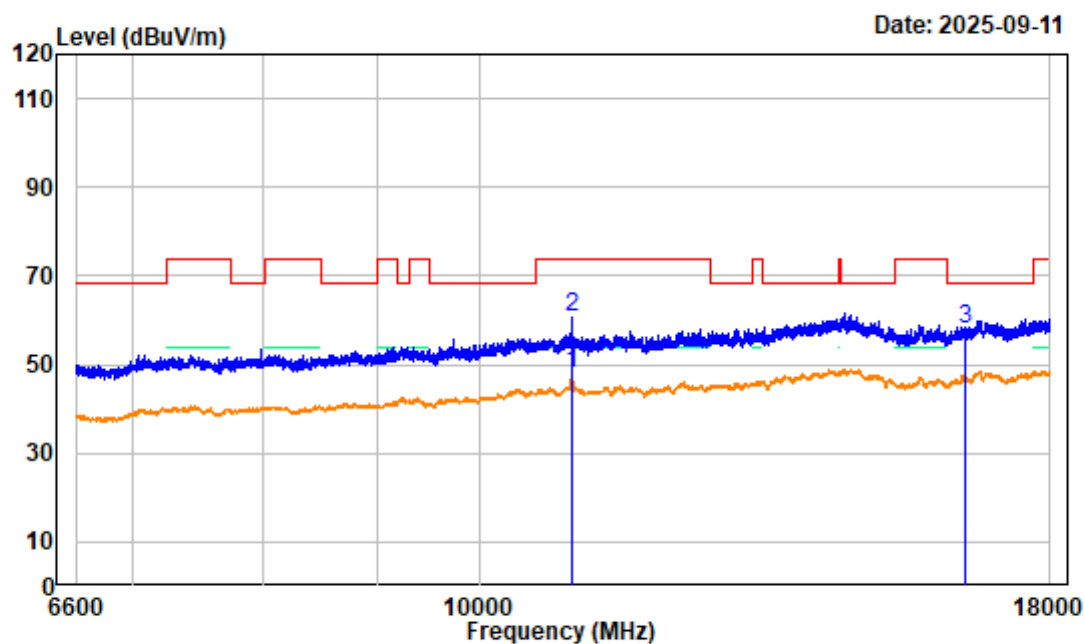

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5500MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	5.40	42.46	47.86	54.00	-6.14	average
2	11000.000	5.40	55.48	60.88	74.00	-13.12	peak
3	16500.000	5.97	51.86	57.83	68.20	-10.37	peak

802.11AC20 Low Channel 6.6GHz-18GHz_VERTICAL

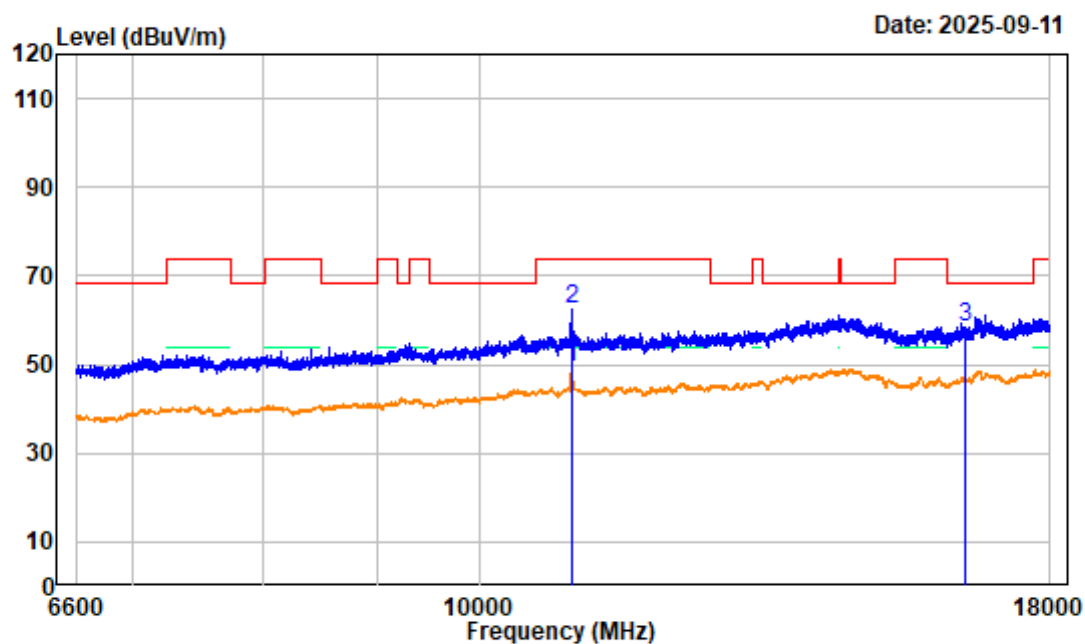

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5500MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	5.40	44.02	49.42	54.00	-4.58	average
2	11000.000	5.40	57.00	62.40	74.00	-11.60	peak
3	16500.000	5.97	52.53	58.50	68.20	-9.70	peak


802.11AC20 Low Channel Bandedge_HORIZONTAL

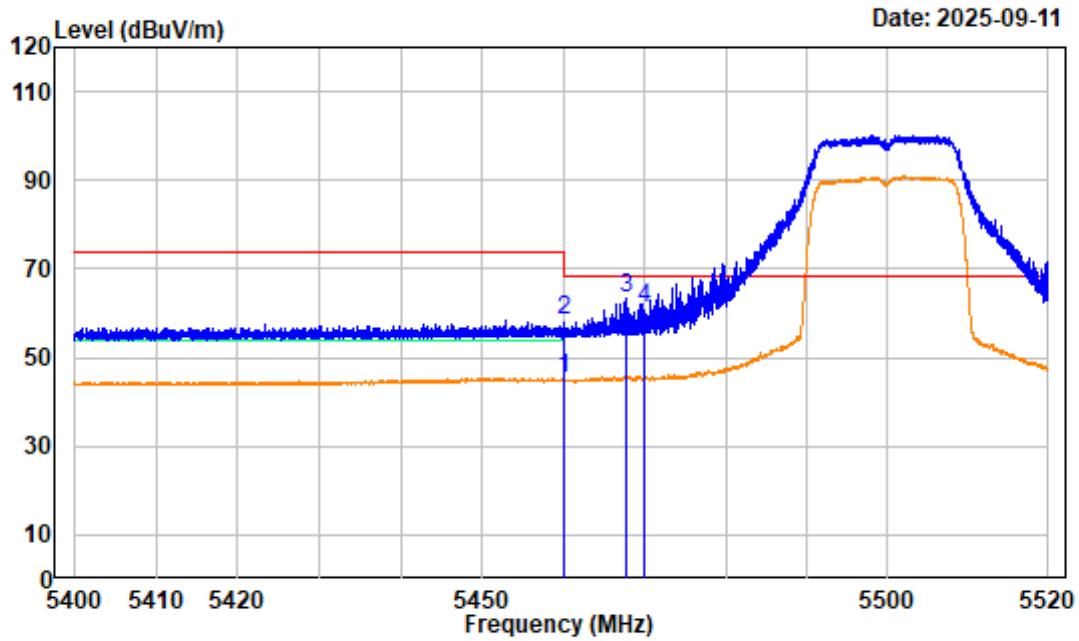

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 Low Channel 5500MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.60	50.94	45.34	54.00	-8.66	average
2	5460.000	-5.60	63.91	58.31	74.00	-15.69	peak
3	5467.770	-5.60	68.94	63.34	68.20	-4.86	Peak
4	5470.000	-5.60	66.84	61.24	68.20	-6.96	peak


802.11AC20 Low Channel Bandedge_VERTICAL

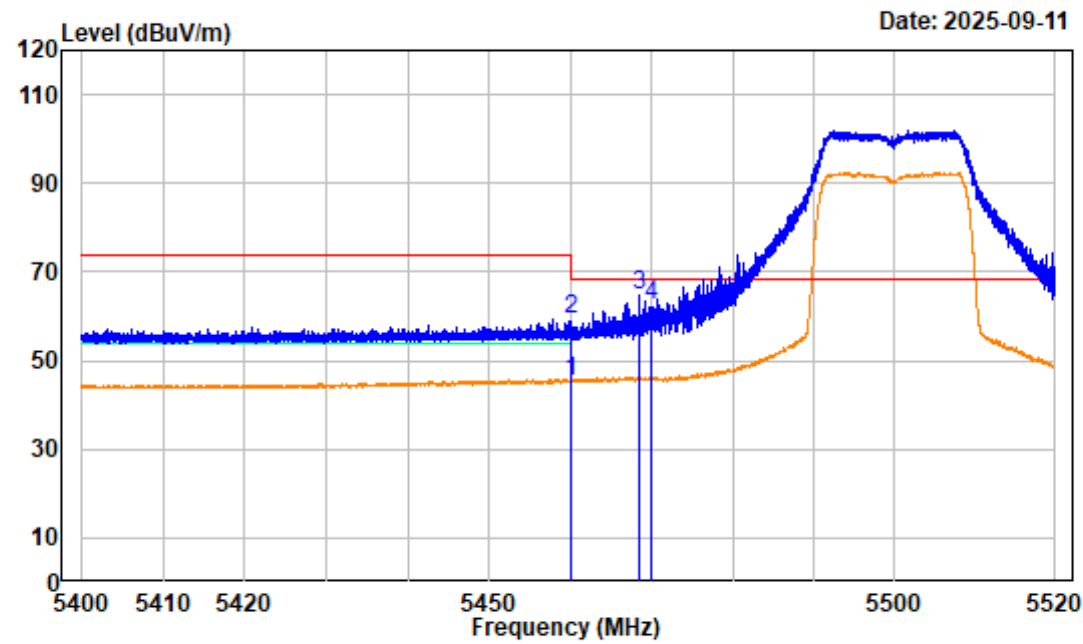

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5500MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.60	51.05	45.45	54.00	-8.55	average
2	5460.000	-5.60	65.03	59.43	74.00	-14.57	peak
3	5468.505	-5.60	70.15	64.55	68.20	-3.65	Peak
4	5470.000	-5.60	68.16	62.56	68.20	-5.64	peak

802.11AC20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

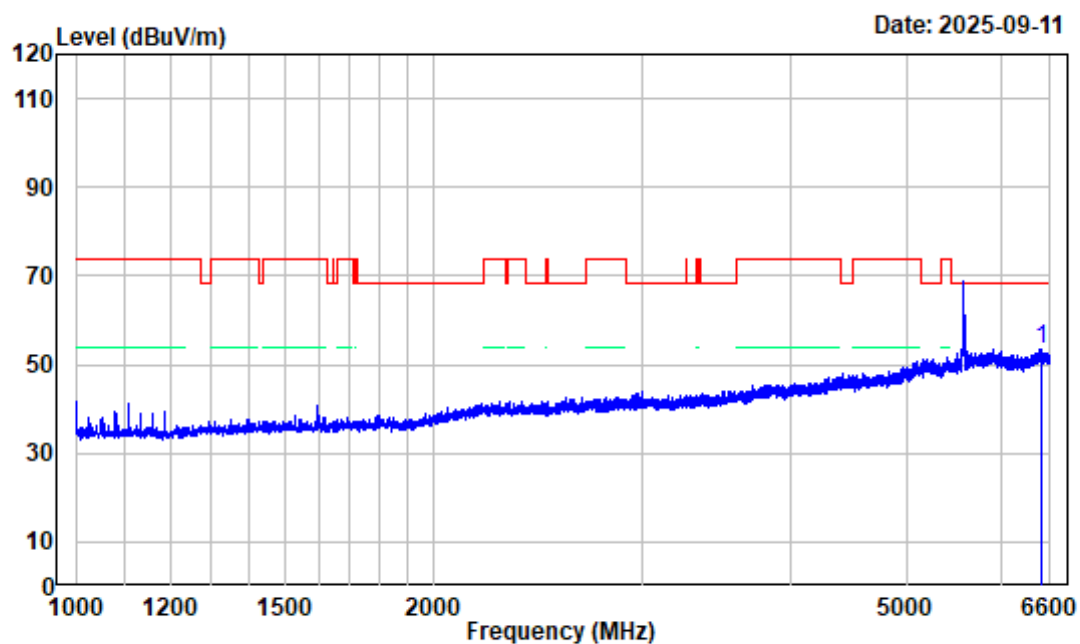

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Middle Channel 5580MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6497.800	-3.83	57.39	53.56	68.20	-14.64	peak

802.11AC20 Middle Channel 1GHz-6.6GHz_VERTICAL

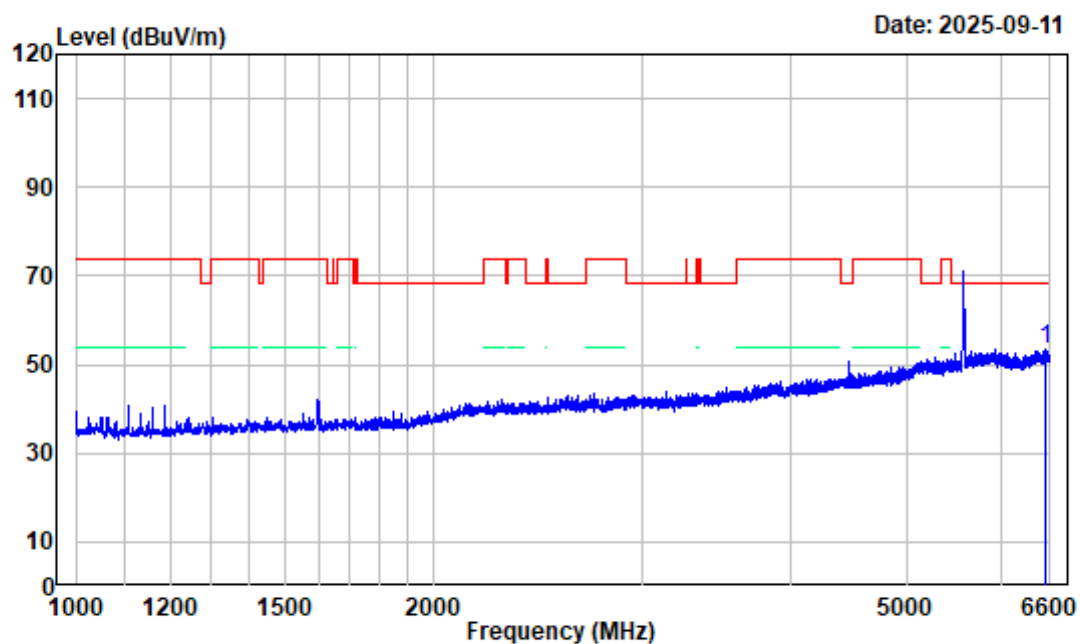

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Middle Channel 5580MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6531.400	-3.72	56.93	53.21	68.20	-14.99	peak

802.11AC20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

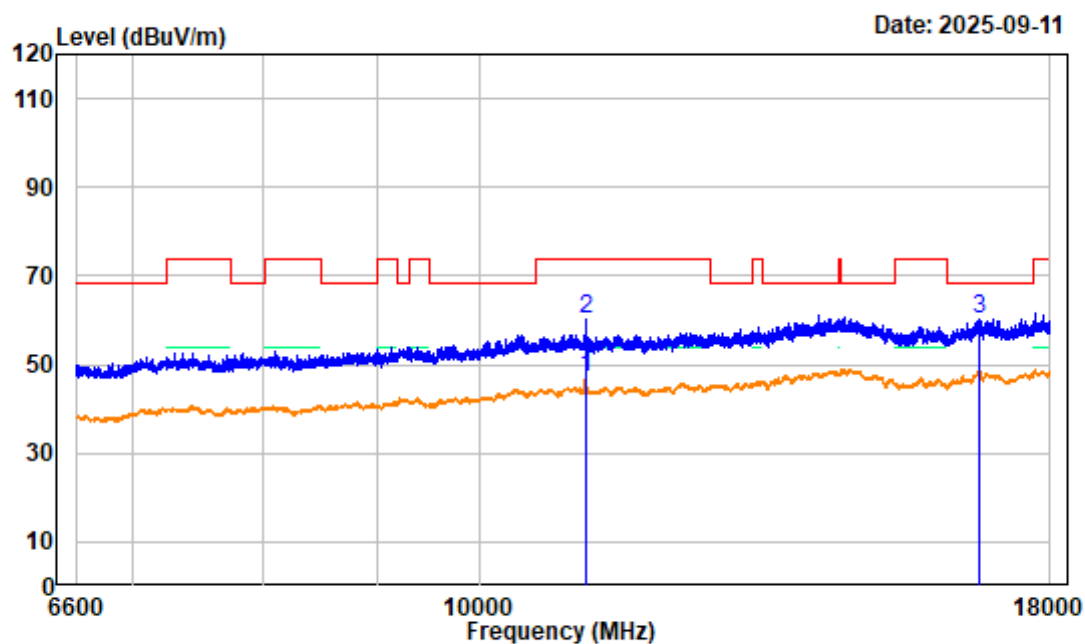

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Middle Channel 5580MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11160.000	4.36	42.74	47.10	54.00	-6.90	average
2	11160.000	4.36	55.77	60.13	74.00	-13.87	peak
3	16740.000	7.66	52.60	60.26	68.20	-7.94	peak

802.11AC20 Middle Channel 6.6GHz-18GHz_VERTICAL

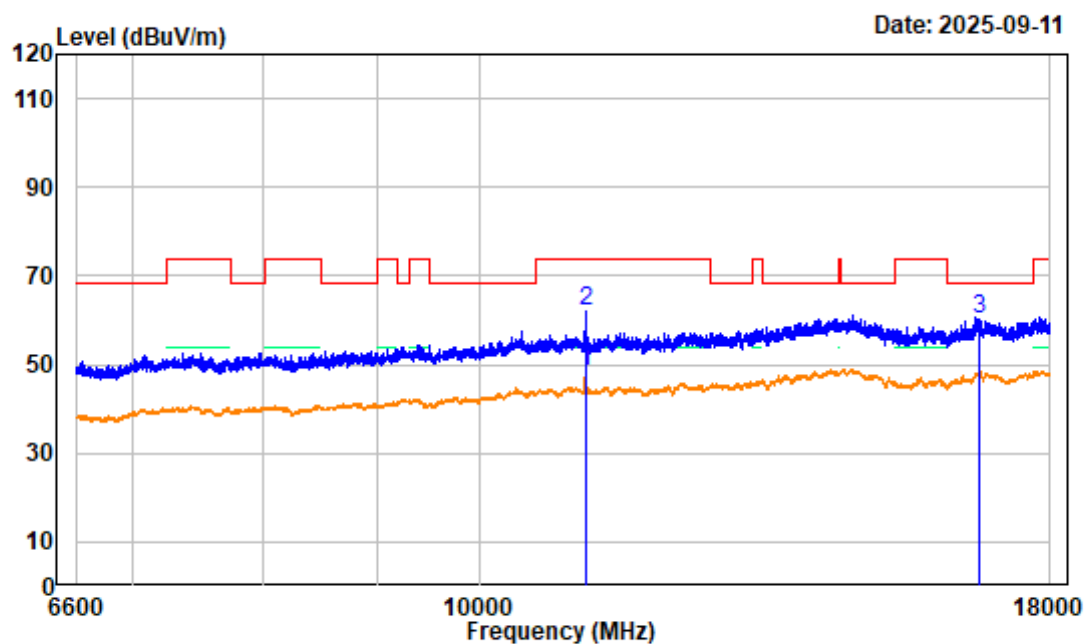

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Middle Channel 5580MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11160.000	4.36	43.89	48.25	54.00	-5.75	average
2	11160.000	4.36	57.87	62.23	74.00	-11.77	peak
3	16740.000	7.66	52.55	60.21	68.20	-7.99	peak


802.11AC20 High Channel 1GHz-6.6GHz_HORIZONTAL

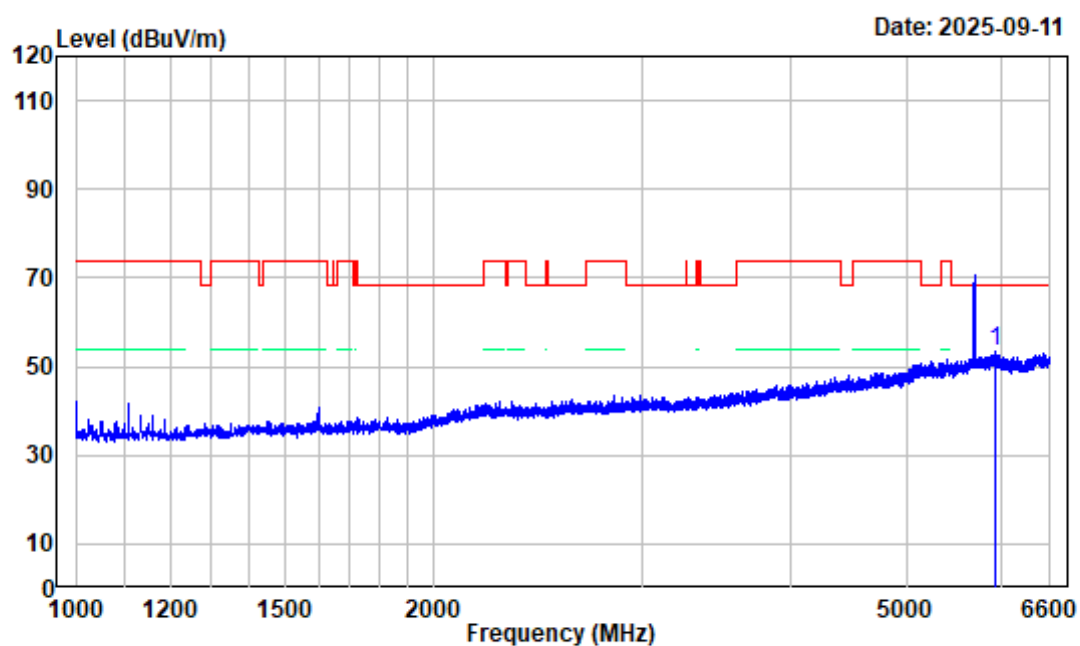

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 High Channel 5700MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5934.300	-4.41	57.96	53.55	68.20	-14.65	peak


802.11AC20 High Channel 1GHz-6.6GHz_VERTICAL

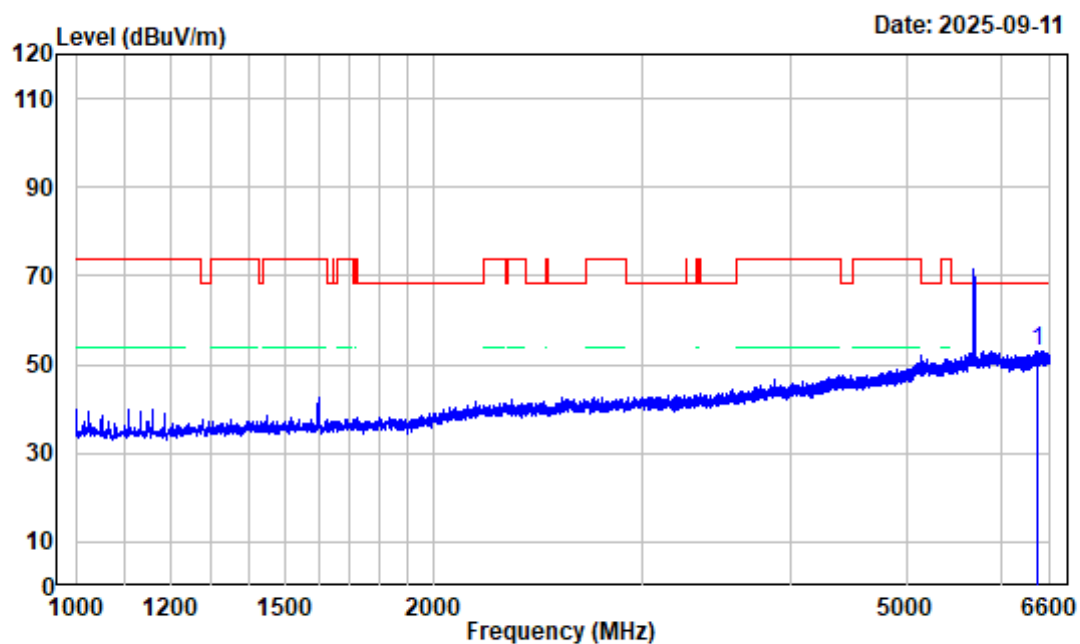

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 High Channel 5700MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6432.700	-3.53	56.73	53.20	68.20	-15.00	peak

802.11AC20 High Channel 6.6GHz-18GHz_HORIZONTAL

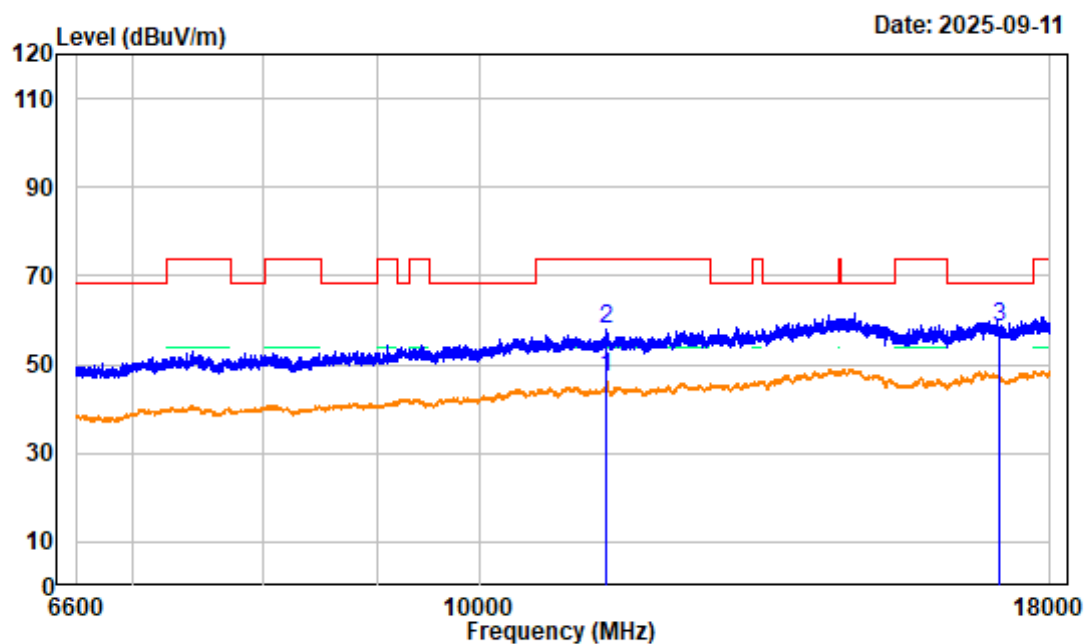

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5700MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	5.85	41.22	47.07	54.00	-6.93	average
2	11400.000	5.85	52.23	58.08	74.00	-15.92	peak
3	17100.000	6.94	51.31	58.25	68.20	-9.95	peak

802.11AC20 High Channel 6.6GHz-18GHz_VERTICAL

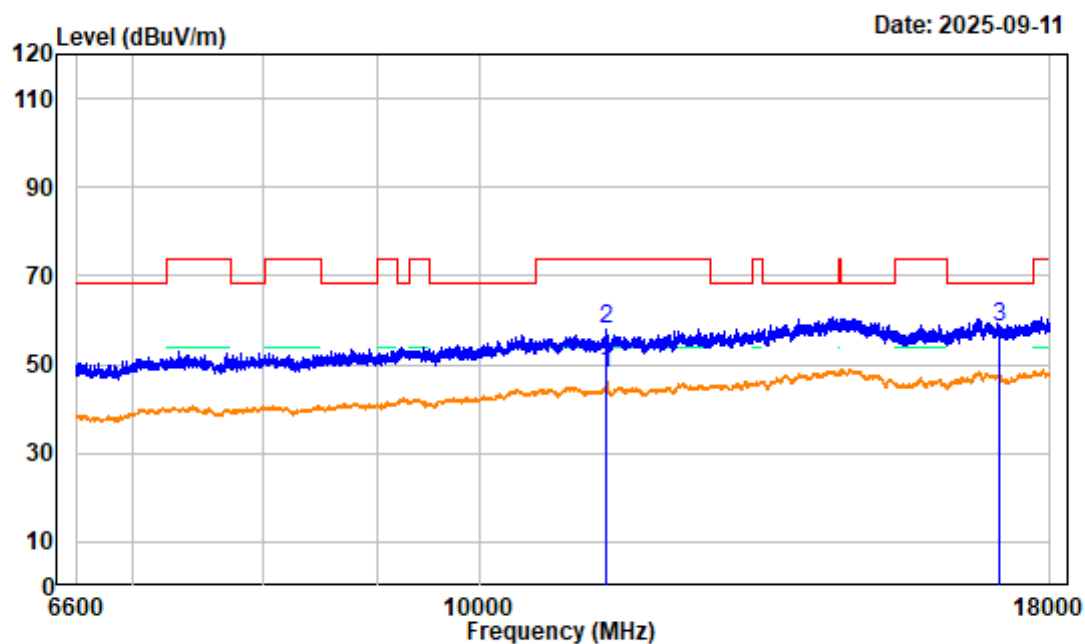

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5700MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	5.85	41.97	47.82	54.00	-6.18	average
2	11400.000	5.85	51.96	57.81	74.00	-16.19	peak
3	17100.000	6.94	51.47	58.41	68.20	-9.79	peak

802.11AC20 High Channel Bandedge_HORIZONTAL

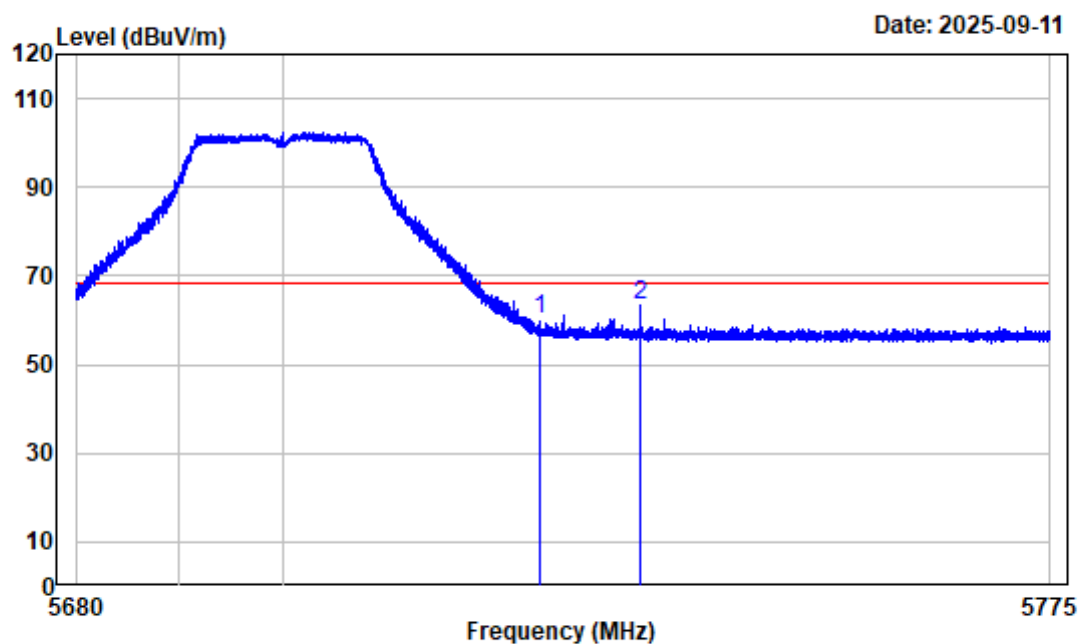

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5700MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.45	64.77	60.32	68.20	-7.88	peak
2	5734.862	-4.49	67.82	63.33	68.20	-4.87	Peak

802.11AC20 High Channel Bandedge_VERTICAL

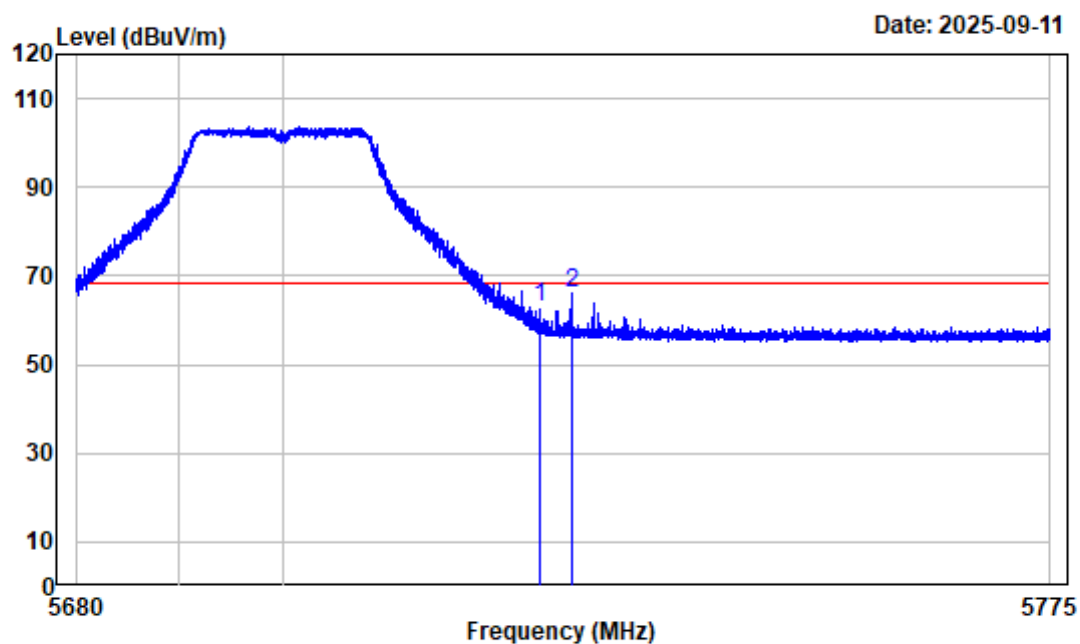

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5700MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.45	67.28	62.83	68.20	-5.37	peak
2	5728.201	-4.46	70.35	65.89	68.20	-2.31	Peak

802.11AC40 Low Channel 1GHz-6.6GHz_HORIZONTAL

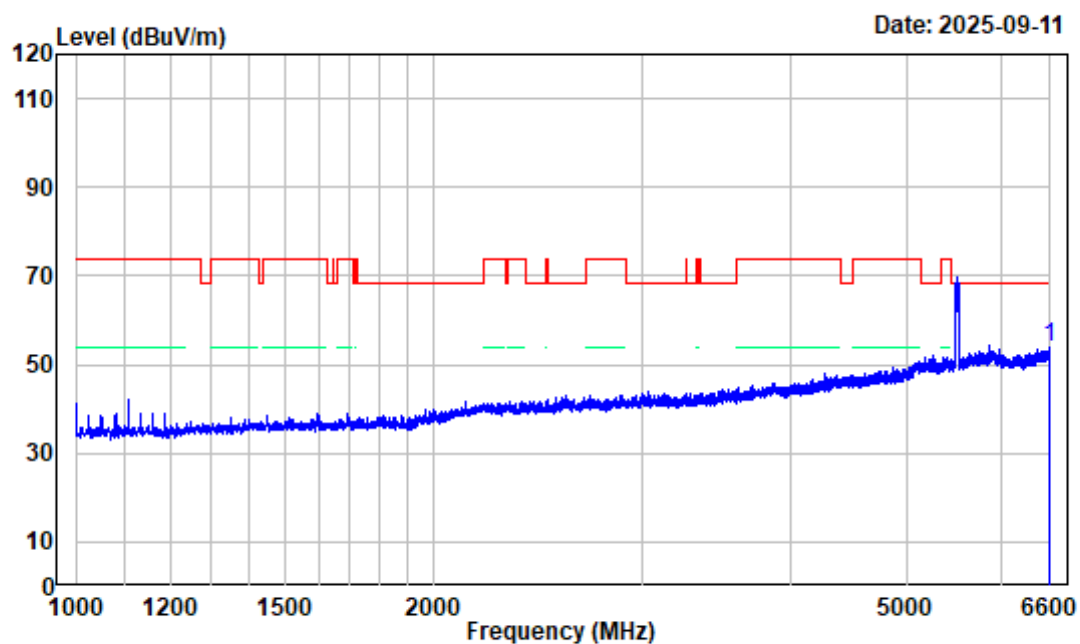

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5510MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6588.800	-3.52	57.22	53.70	68.20	-14.50	peak

802.11AC40 Low Channel 1GHz-6.6GHz_VERTICAL

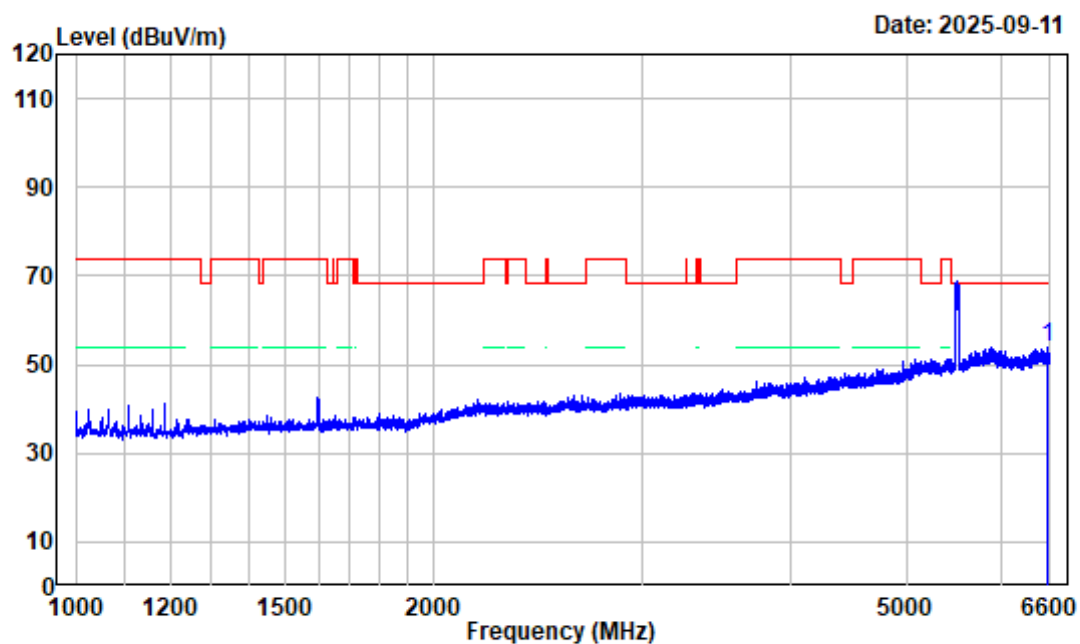

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5510MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6569.200	-3.58	57.27	53.69	68.20	-14.51	peak

802.11AC40 Low Channel 6.6GHz-18GHz_HORIZONTAL

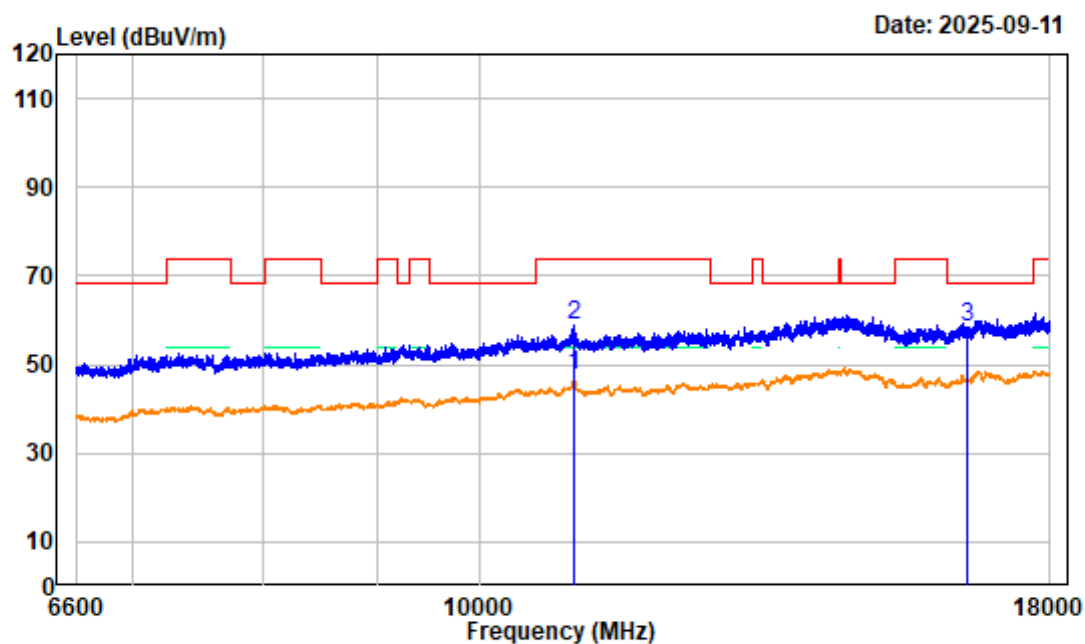

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5510MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11020.000	5.34	42.42	47.76	54.00	-6.24	average
2	11020.000	5.34	53.43	58.77	74.00	-15.23	peak
3	16530.000	6.10	52.42	58.52	68.20	-9.68	peak

802.11AC40 Low Channel 6.6GHz-18GHz_VERTICAL

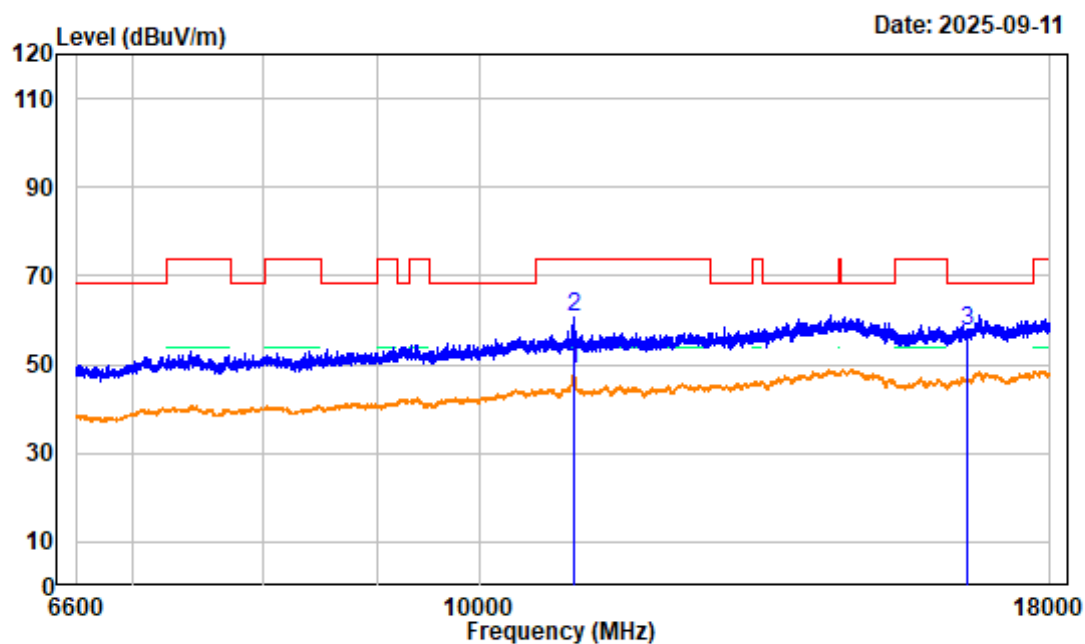

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5510MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11020.000	5.34	43.36	48.70	54.00	-5.30	average
2	11020.000	5.34	55.29	60.63	74.00	-13.37	peak
3	16530.000	6.10	51.47	57.57	68.20	-10.63	peak


802.11AC40 Low Channel Bandedge_HORIZONTAL

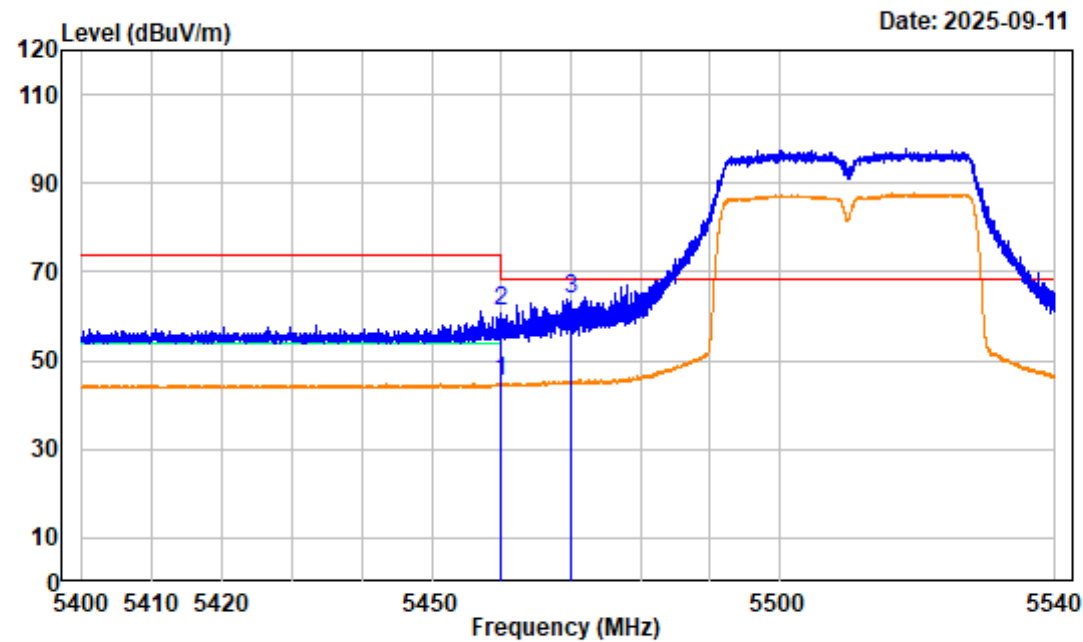

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 Low Channel 5510MHz Bandedge
SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.60	50.90	45.30	54.00	-8.70	average
2	5460.000	-5.60	66.81	61.21	74.00	-12.79	peak
3	5470.000	-5.60	69.48	63.88	68.20	-4.32	peak


802.11AC40 Low Channel Bandedge_VERTICAL

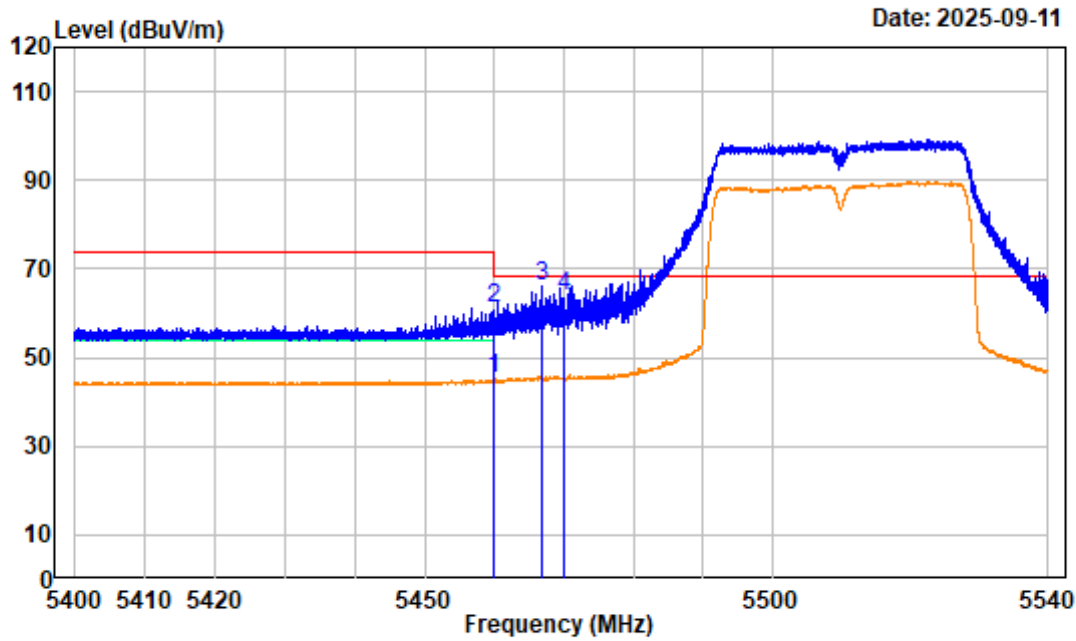

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC40 Low Channel 5510MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.60	50.74	45.14	54.00	-8.86	average
2	5460.000	-5.60	66.76	61.16	74.00	-12.84	peak
3	5466.797	-5.60	71.62	66.02	68.20	-2.18	Peak
4	5470.000	-5.60	69.66	64.06	68.20	-4.14	peak

802.11AC40 Middle Channel 1GHz-6.6GHz_HORIZONTAL

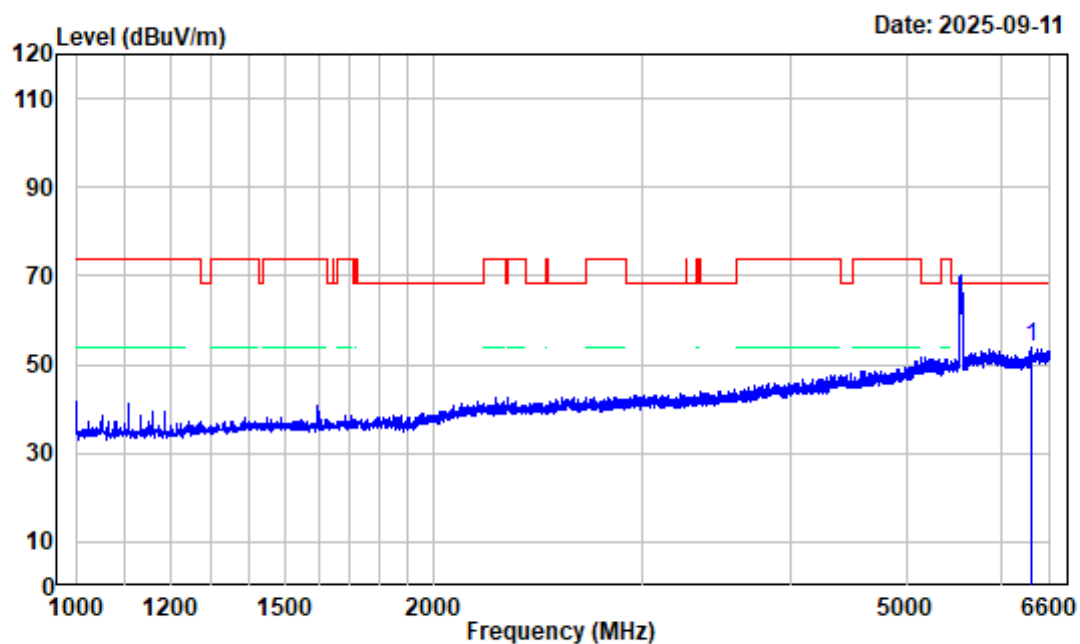

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Middle Channel 5550MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6362.000	-4.29	58.13	53.84	68.20	-14.36	peak

802.11AC40 Middle Channel 1GHz-6.6GHz_VERTICAL

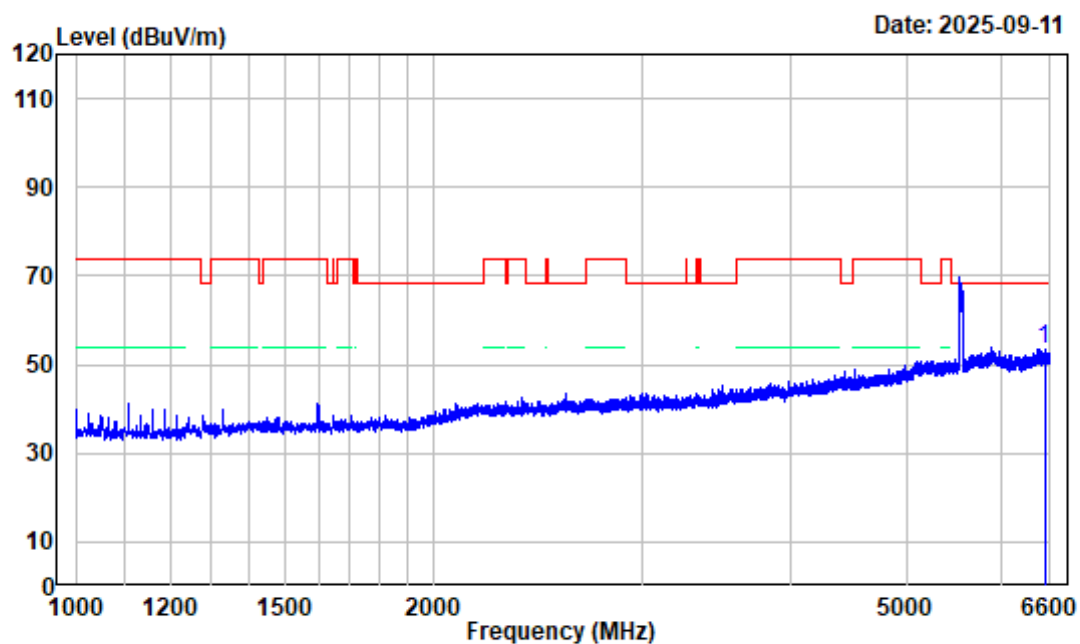

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Middle Channel 5550MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6529.300	-3.73	57.38	53.65	68.20	-14.55	peak

802.11AC40 Middle Channel 6.6GHz-18GHz_HORIZONTAL

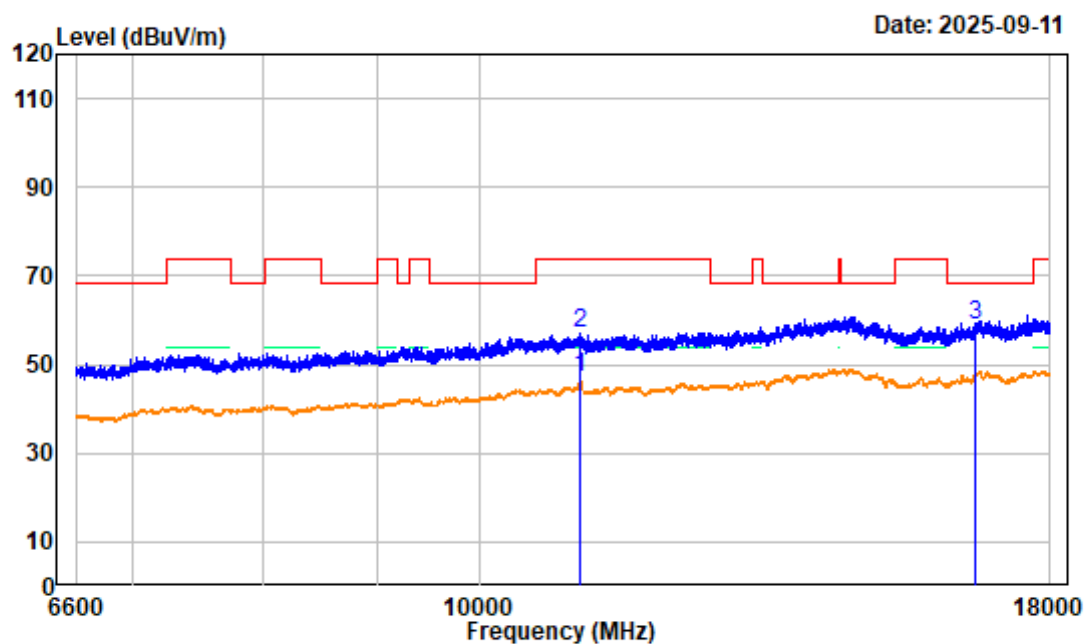

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Middle Channel 5550MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11100.000	4.77	42.32	47.09	54.00	-6.91	average
2	11100.000	4.77	52.25	57.02	74.00	-16.98	peak
3	16650.000	6.65	52.12	58.77	68.20	-9.43	peak

802.11AC40 Middle Channel 6.6GHz-18GHz_VERTICAL

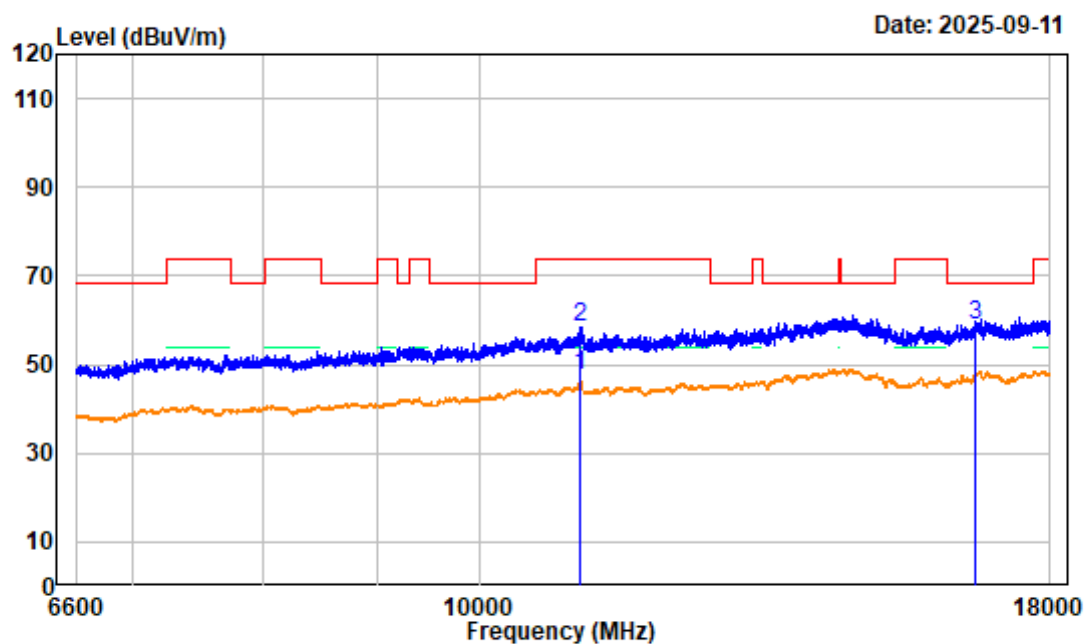

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Middle Channel 5550MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11100.000	4.77	42.65	47.42	54.00	-6.58	average
2	11100.000	4.77	53.67	58.44	74.00	-15.56	peak
3	16650.000	6.65	52.27	58.92	68.20	-9.28	peak


802.11AC40 High Channel 1GHz-6.6GHz_HORIZONTAL

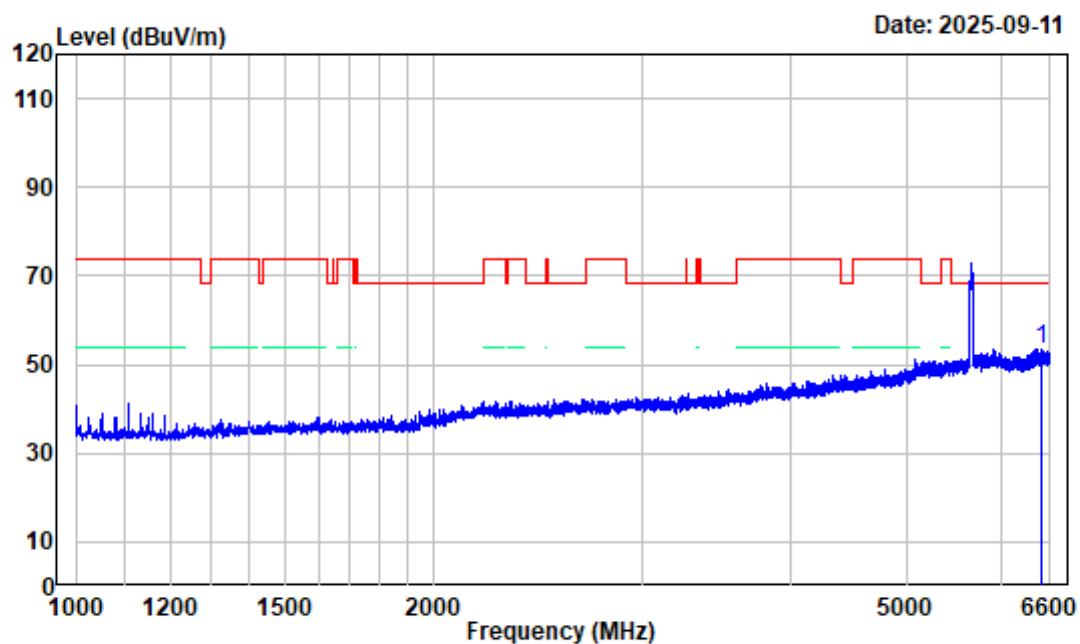

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC40 High Channel 5670MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6494.300	-3.81	57.31	53.50	68.20	-14.70	peak


802.11AC40 High Channel 1GHz-6.6GHz_VERTICAL

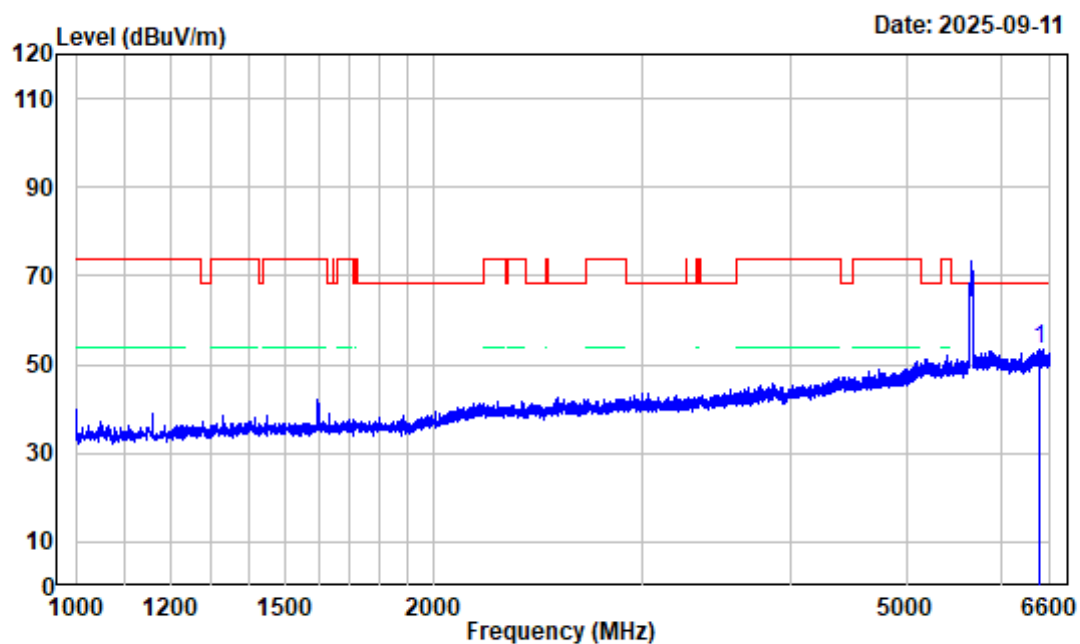

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC40 High Channel 5670MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6463.500	-3.56	57.19	53.63	68.20	-14.57	peak

802.11AC40 High Channel 6.6GHz-18GHz_HORIZONTAL

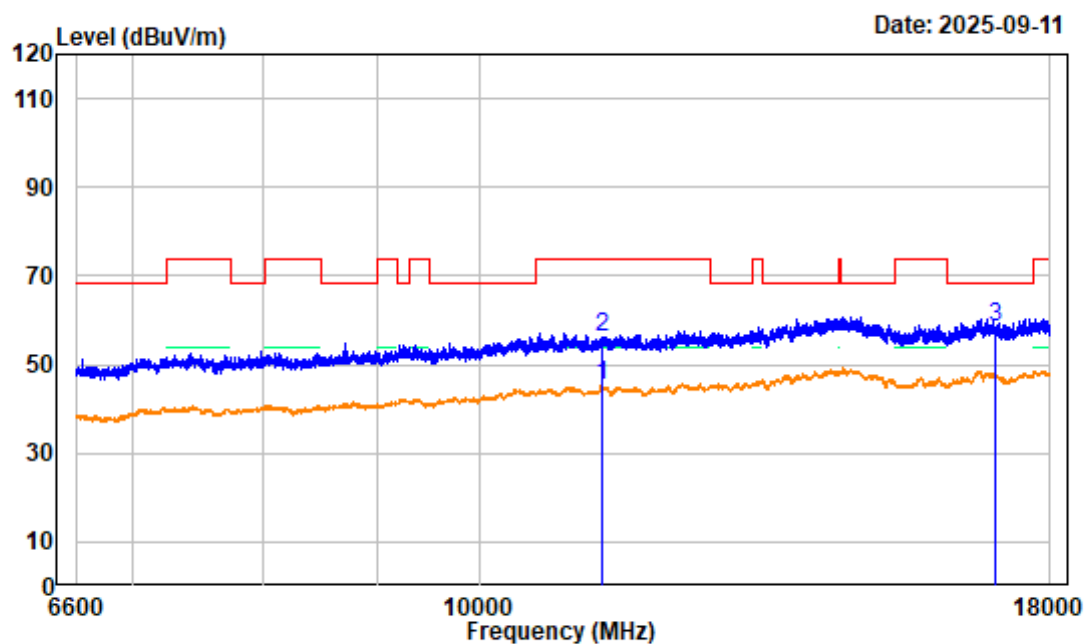

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5670MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	4.97	40.28	45.25	54.00	-8.75	average
2	11340.000	4.97	51.30	56.27	74.00	-17.73	peak
3	17010.000	7.60	50.71	58.31	68.20	-9.89	peak

802.11AC40 High Channel 6.6GHz-18GHz_VERTICAL

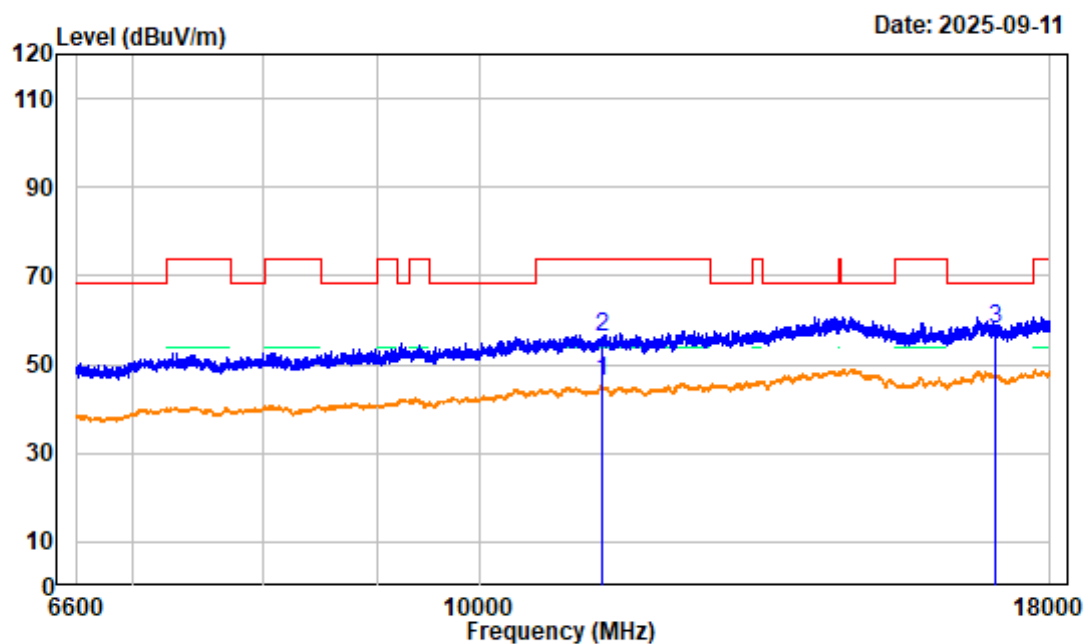

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5670MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	4.97	41.33	46.30	54.00	-7.70	average
2	11340.000	4.97	51.26	56.23	74.00	-17.77	peak
3	17010.000	7.60	50.53	58.13	68.20	-10.07	peak


802.11AC40 High Channel Bandedge_HORIZONTAL

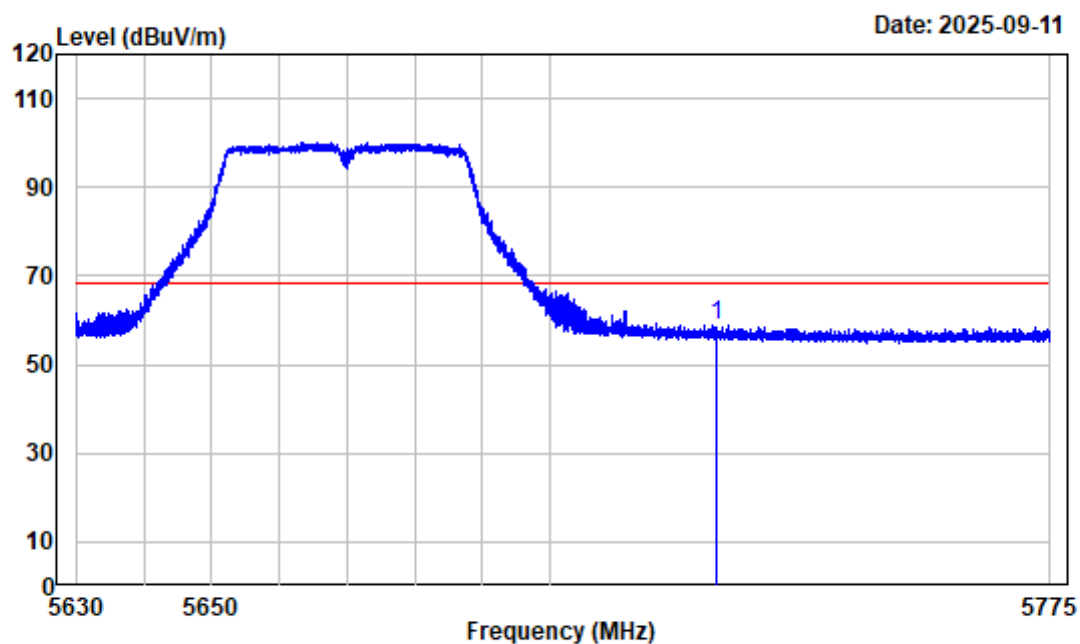

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC40 High Channel 5670MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.45	63.23	58.78	68.20	-9.42	peak


802.11AC40 High Channel Bandedge_VERTICAL

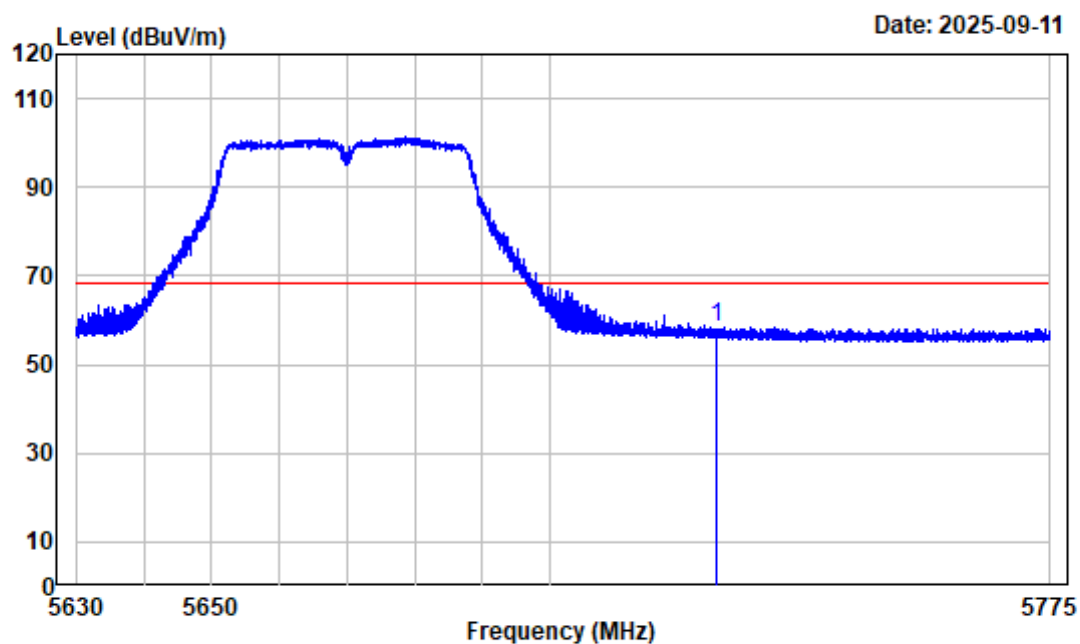

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC40 High Channel 5670MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.45	62.96	58.51	68.20	-9.69	peak

802.11AX20 Low Channel 1GHz-6.6GHz_HORIZONTAL

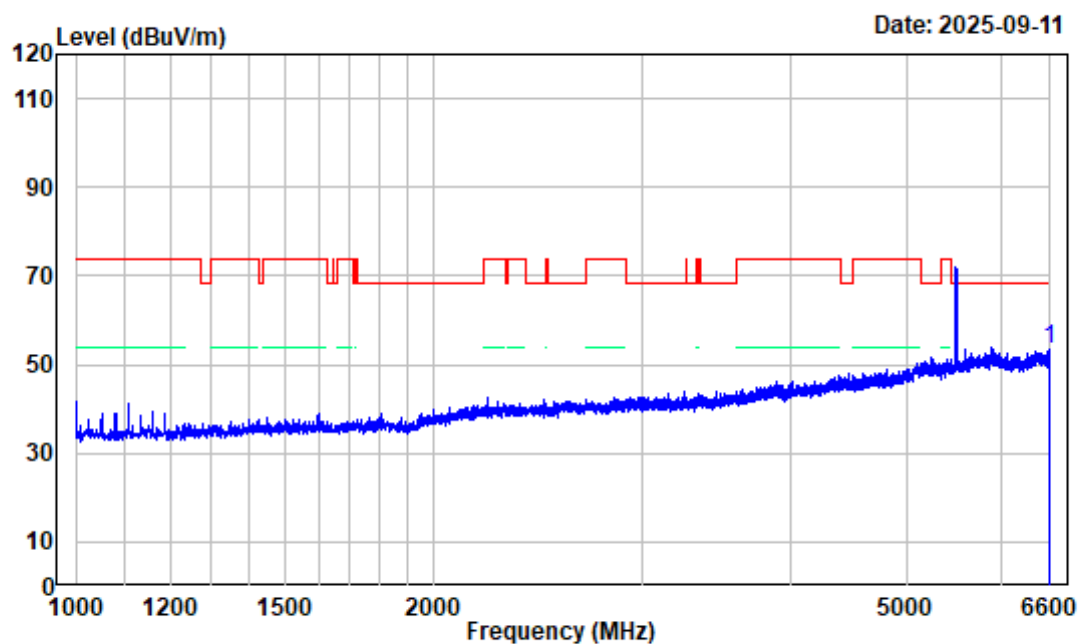

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5500MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6598.600	-3.49	56.87	53.38	68.20	-14.82	peak

802.11AX20 Low Channel 1GHz-6.6GHz_VERTICAL

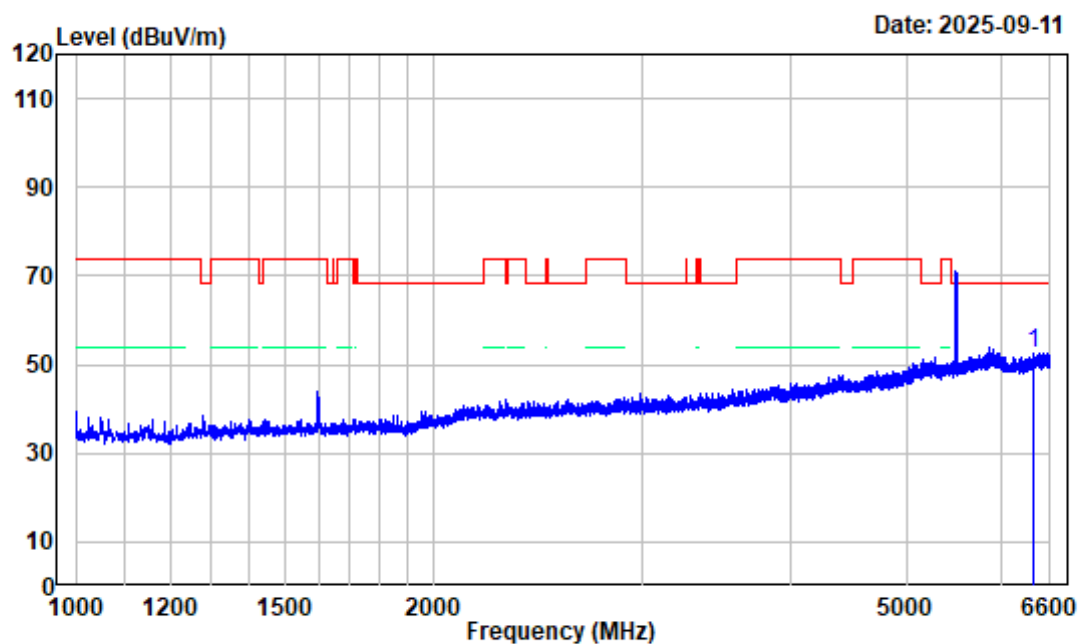

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5500MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6399.100	-3.68	56.26	52.58	68.20	-15.62	peak

802.11AX20 Low Channel 6.6GHz-18GHz_HORIZONTAL

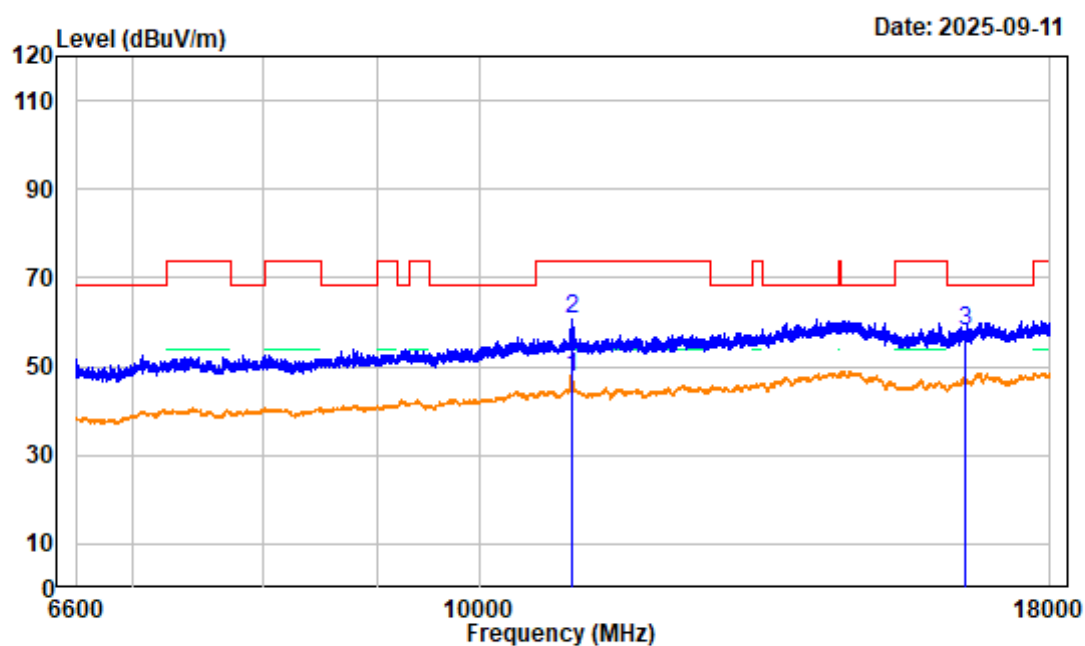

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5500MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	5.40	42.36	47.76	54.00	-6.24	average
2	11000.000	5.40	55.35	60.75	74.00	-13.25	peak
3	16500.000	5.97	52.10	58.07	68.20	-10.13	peak

802.11AX20 Low Channel 6.6GHz-18GHz_VERTICAL

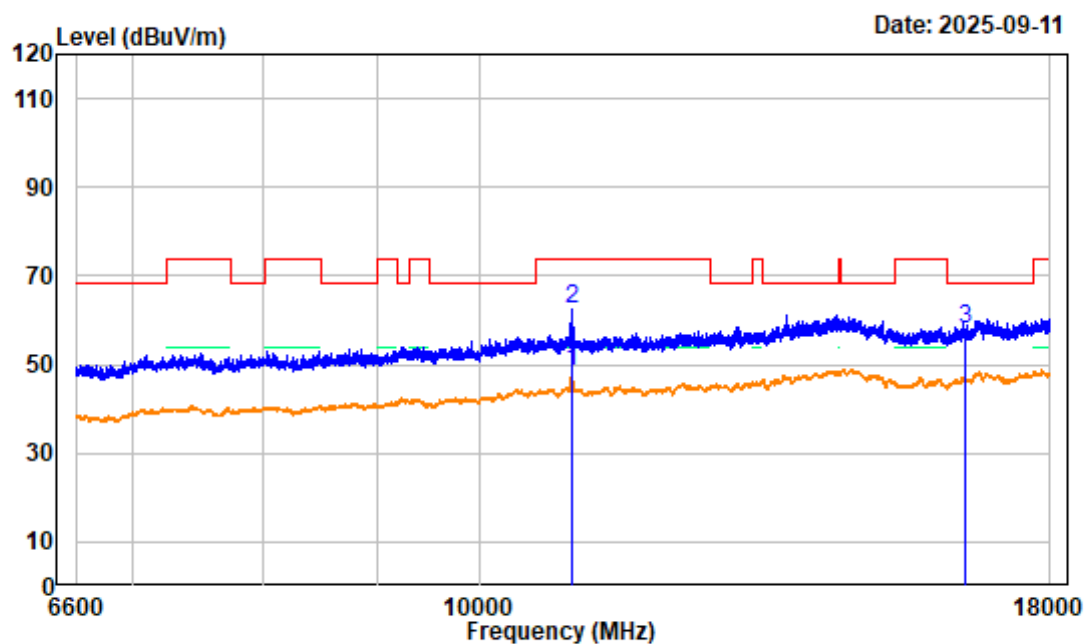

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5500MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11000.000	5.40	43.08	48.48	54.00	-5.52	average
2	11000.000	5.40	57.03	62.43	74.00	-11.57	peak
3	16500.000	5.97	52.08	58.05	68.20	-10.15	peak

802.11AX20 Low Channel Bandedge_HORIZONTAL

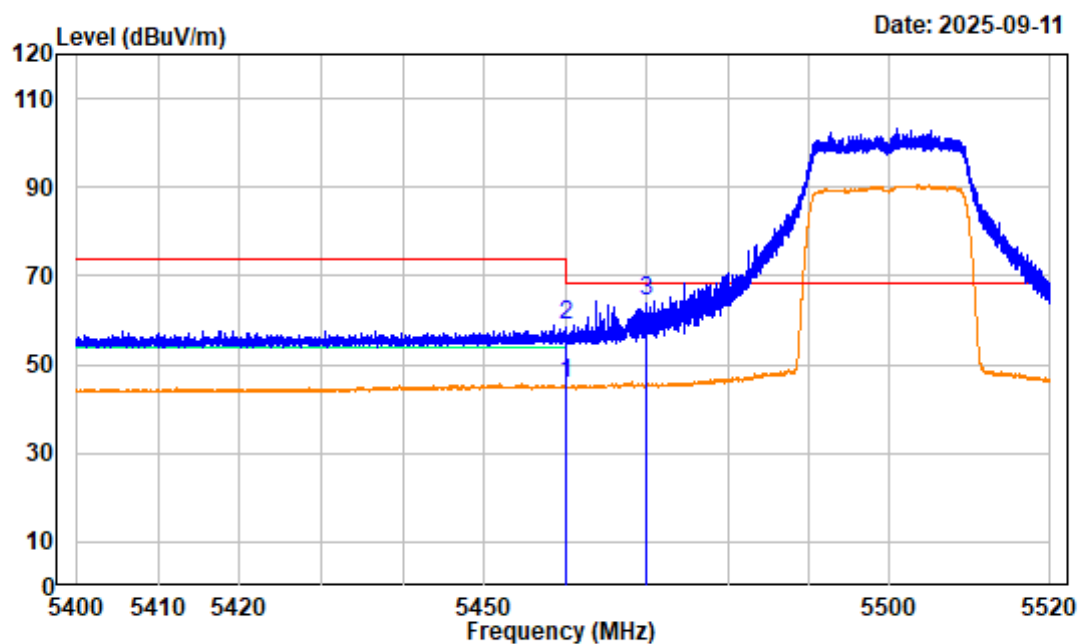

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5500MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.60	51.44	45.84	54.00	-8.16	average
2	5460.000	-5.60	64.46	58.86	74.00	-15.14	peak
3	5470.000	-5.60	69.68	64.08	68.20	-4.12	peak

802.11AX20 Low Channel Bandedge_VERTICAL

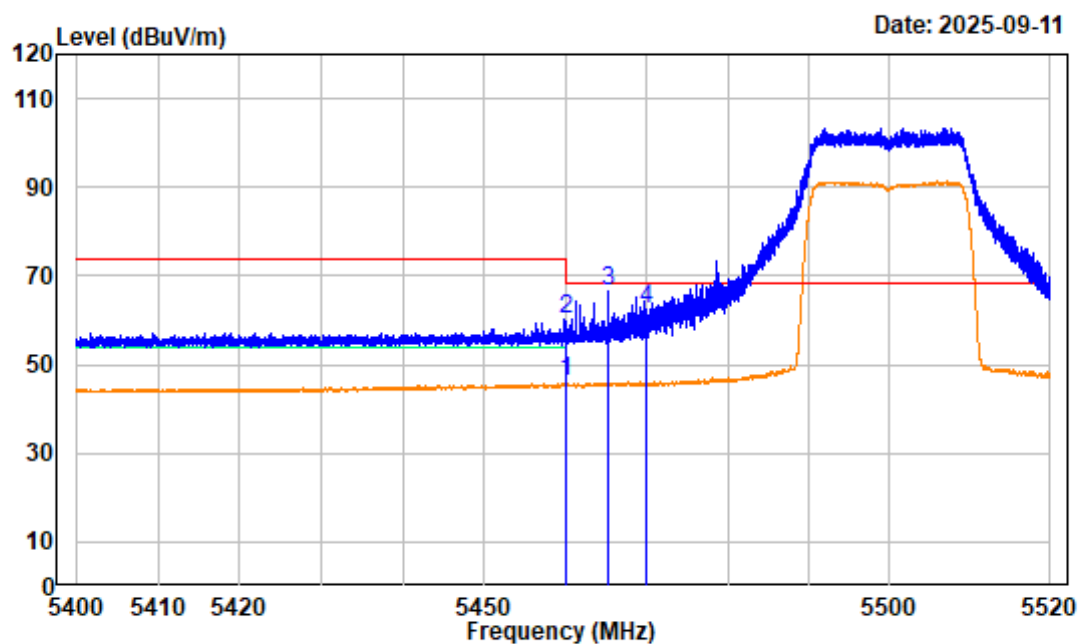

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5500MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.60	51.61	46.01	54.00	-7.99	average
2	5460.000	-5.60	65.64	60.04	74.00	-13.96	peak
3	5465.280	-5.60	72.14	66.54	68.20	-1.66	Peak
4	5470.000	-5.60	68.17	62.57	68.20	-5.63	peak

802.11AX20 Middle Channel 1GHz-6.6GHz_HORIZONTAL

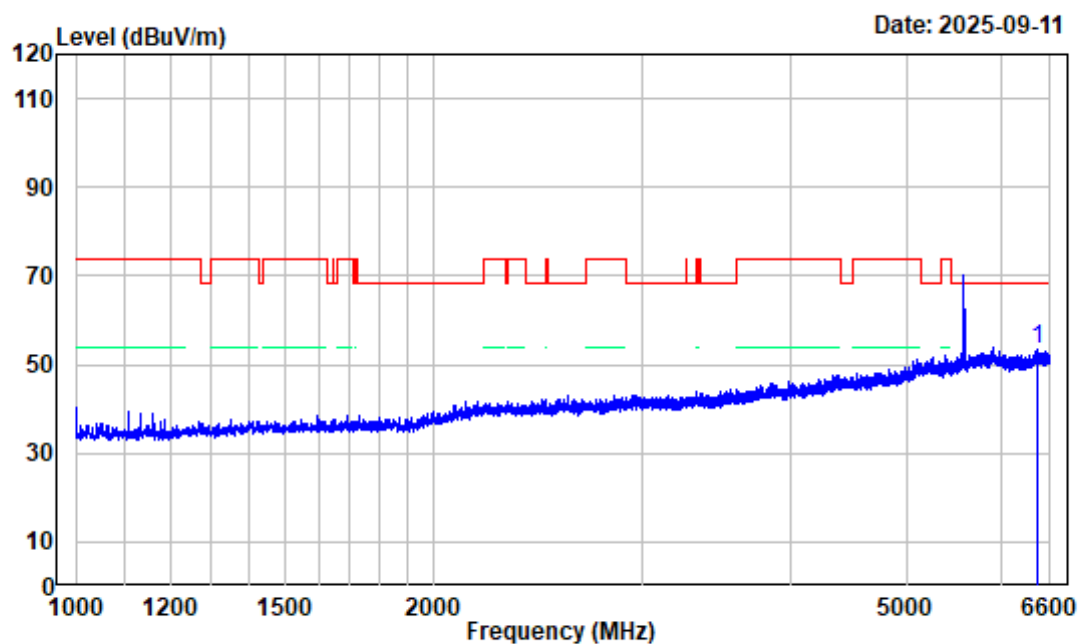

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Middle Channel 5580MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6447.400	-3.46	56.76	53.30	68.20	-14.90	peak

802.11AX20 Middle Channel 1GHz-6.6GHz_VERTICAL

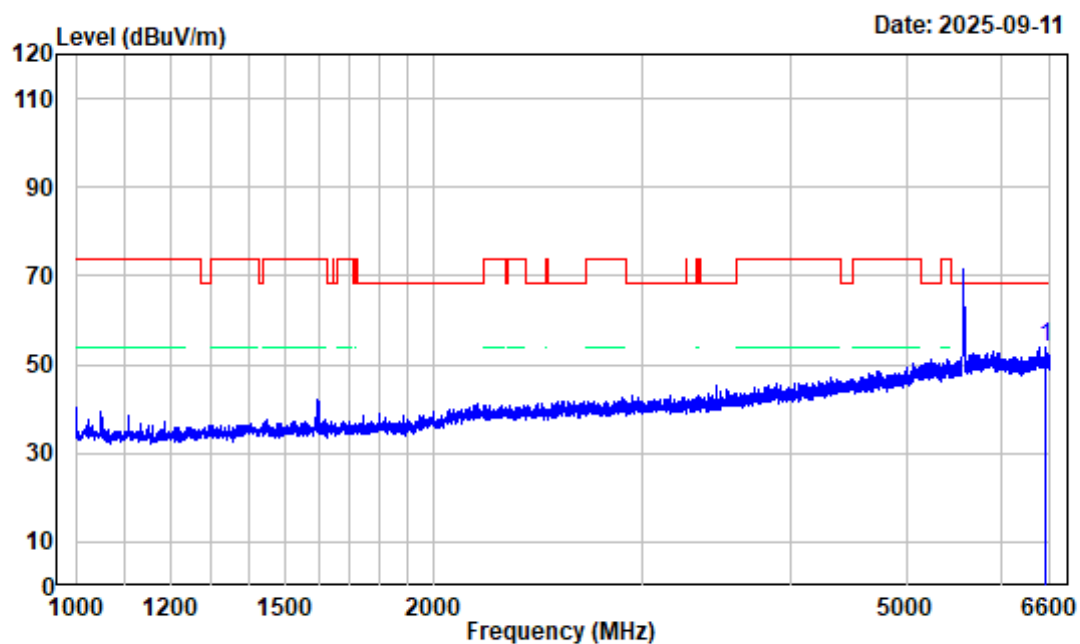

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Middle Channel 5580MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6533.500	-3.70	57.70	54.00	68.20	-14.20	peak

802.11AX20 Middle Channel 6.6GHz-18GHz_HORIZONTAL

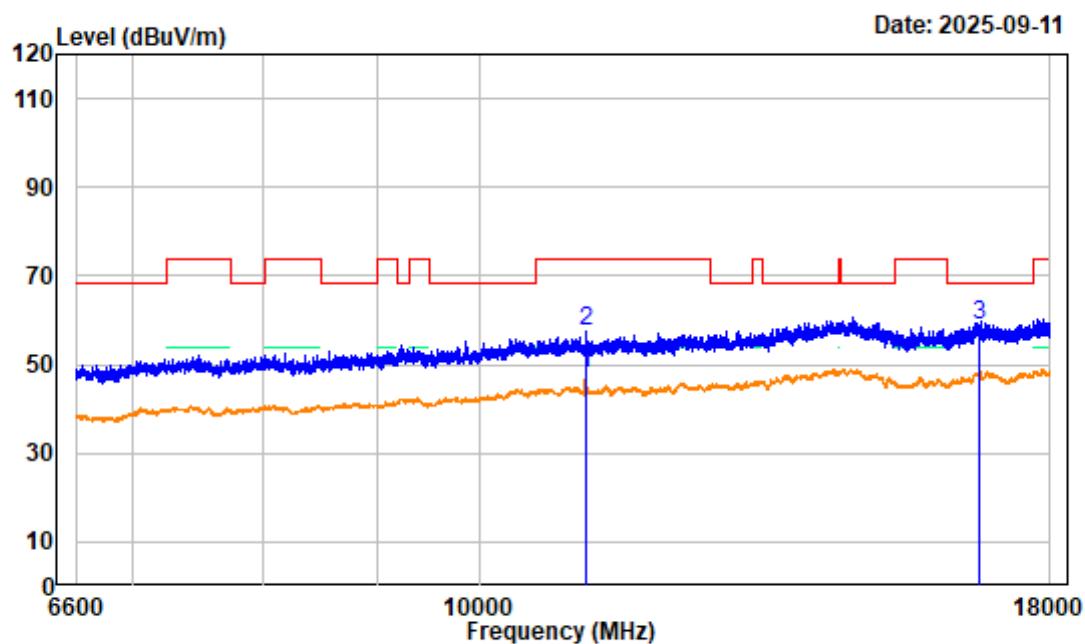

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Middle Channel 5580MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11160.000	4.36	43.42	47.78	54.00	-6.22	average
2	11160.000	4.36	53.37	57.73	74.00	-16.27	peak
3	16740.000	7.66	51.24	58.90	68.20	-9.30	peak

802.11AX20 Middle Channel 6.6GHz-18GHz_VERTICAL

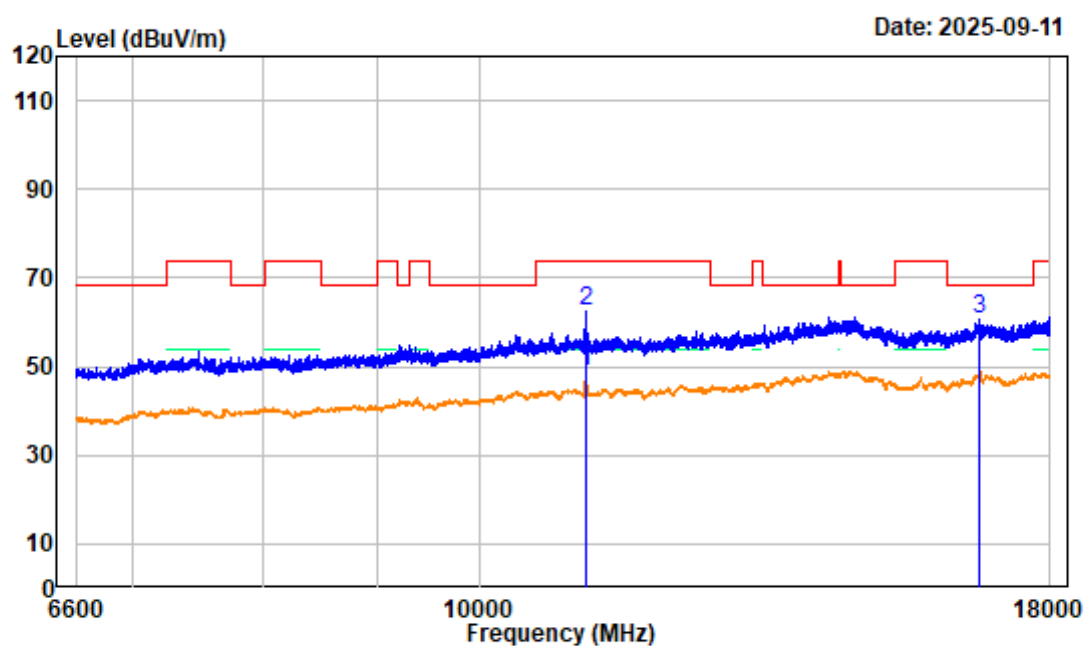

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Middle Channel 5580MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11160.000	4.36	44.36	48.72	54.00	-5.28	average
2	11160.000	4.36	58.34	62.70	74.00	-11.30	peak
3	16740.000	7.66	52.80	60.46	68.20	-7.74	peak


802.11AX20 High Channel 1GHz-6.6GHz_HORIZONTAL

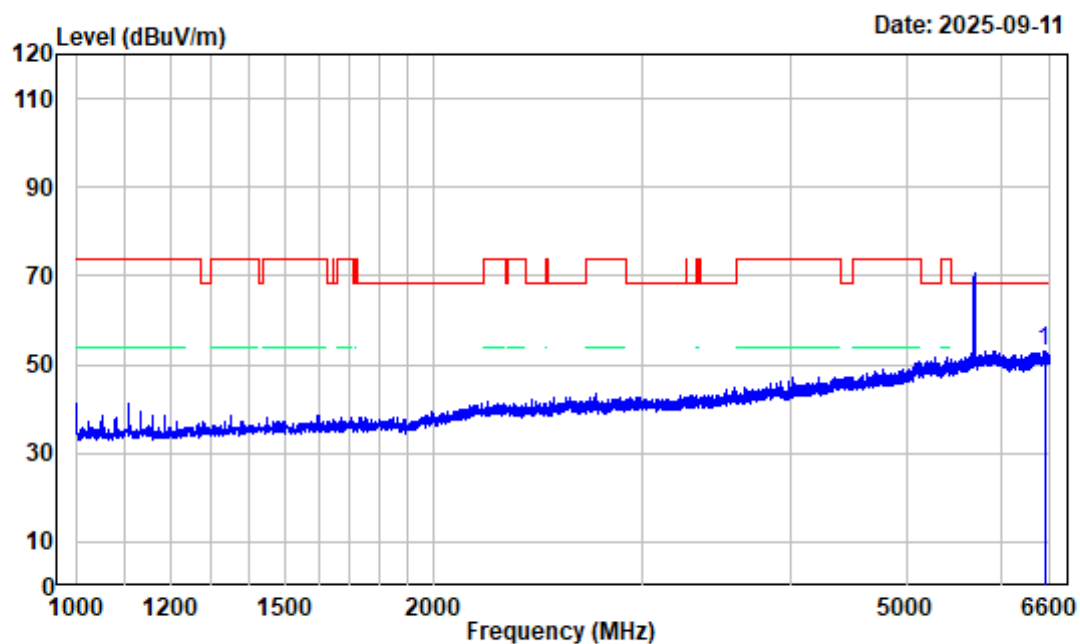

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX20 High Channel 5700MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6529.300	-3.73	56.93	53.20	68.20	-15.00	peak


802.11AX20 High Channel 1GHz-6.6GHz_VERTICAL

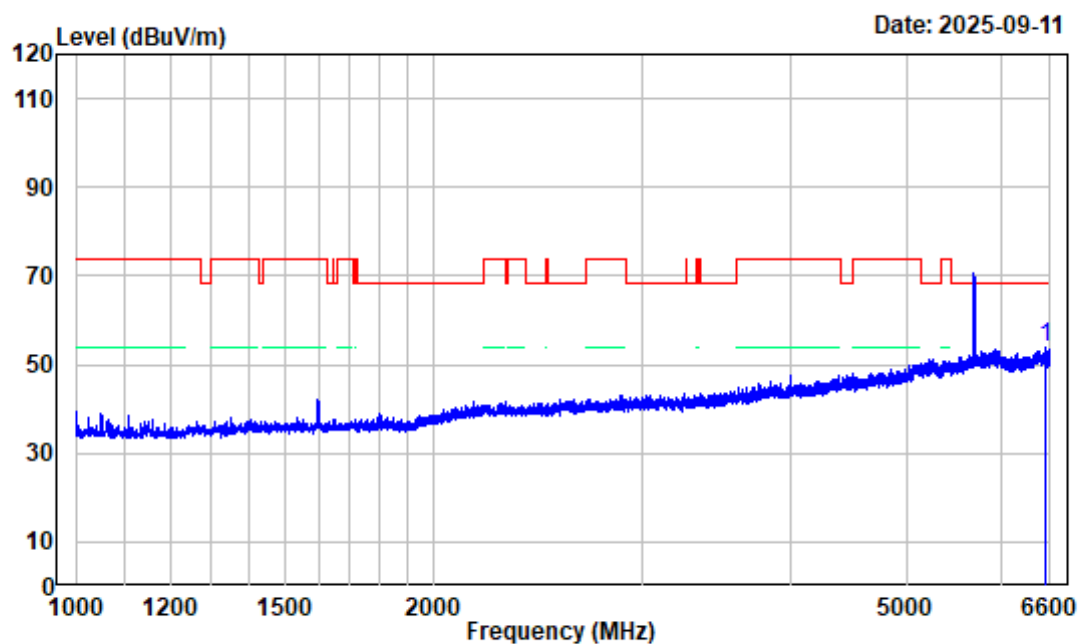

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX20 High Channel 5700MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6533.500	-3.70	57.62	53.92	68.20	-14.28	peak

802.11AX20 High Channel 6.6GHz-18GHz_HORIZONTAL

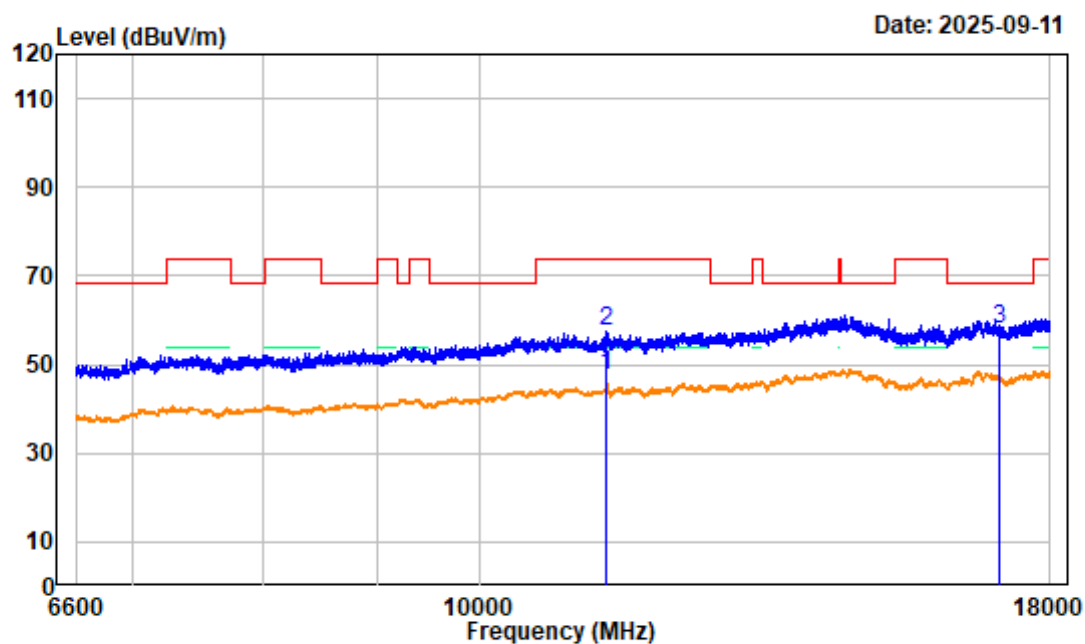

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5700MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	5.85	41.82	47.67	54.00	-6.33	average
2	11400.000	5.85	51.85	57.70	74.00	-16.30	peak
3	17100.000	6.94	51.12	58.06	68.20	-10.14	peak


802.11AX20 High Channel 6.6GHz-18GHz_VERTICAL

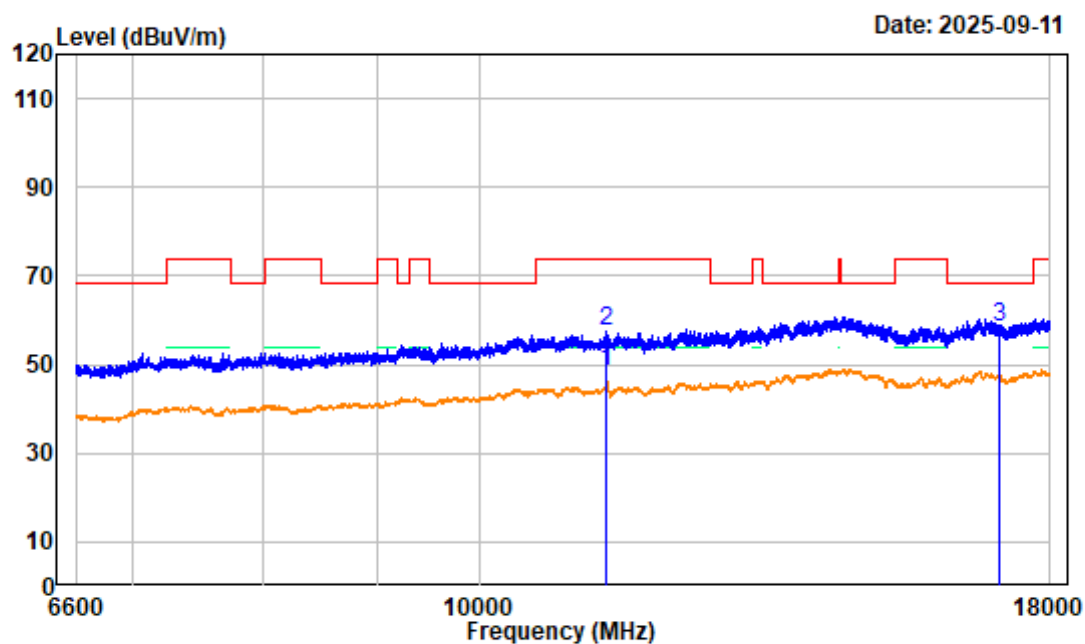

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX20 High Channel 5700MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11400.000	5.85	42.60	48.45	54.00	-5.55	average
2	11400.000	5.85	51.65	57.50	74.00	-16.50	peak
3	17100.000	6.94	51.66	58.60	68.20	-9.60	peak


802.11AX20 High Channel Bandedge_HORIZONTAL

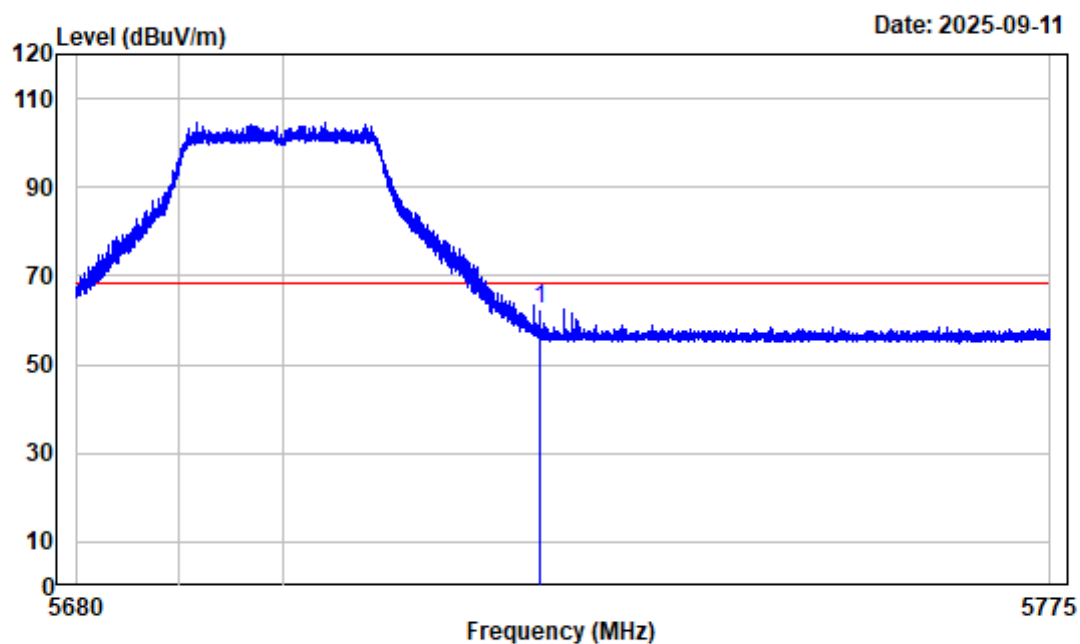

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX20 High Channel 5700MHz Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.45	66.71	62.26	68.20	-5.94	peak

802.11AX20 High Channel Bandedge_VERTICAL

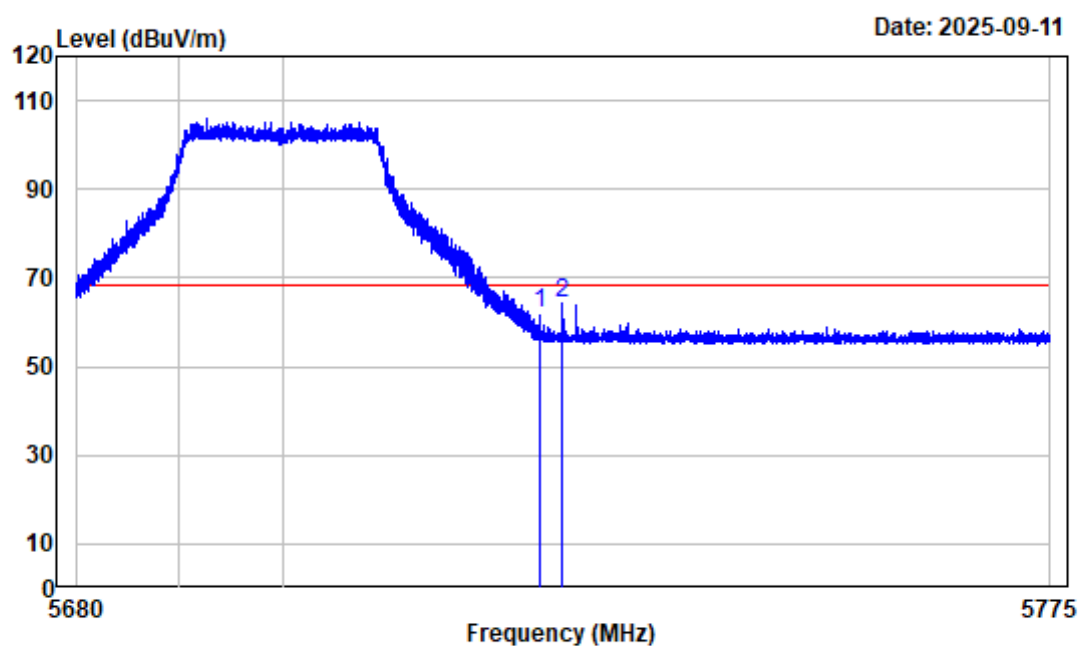

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5700MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.45	66.67	62.22	68.20	-5.98	peak
2	5727.239	-4.46	68.72	64.26	68.20	-3.94	Peak


802.11AX40 Low Channel 1GHz-6.6GHz_HORIZONTAL

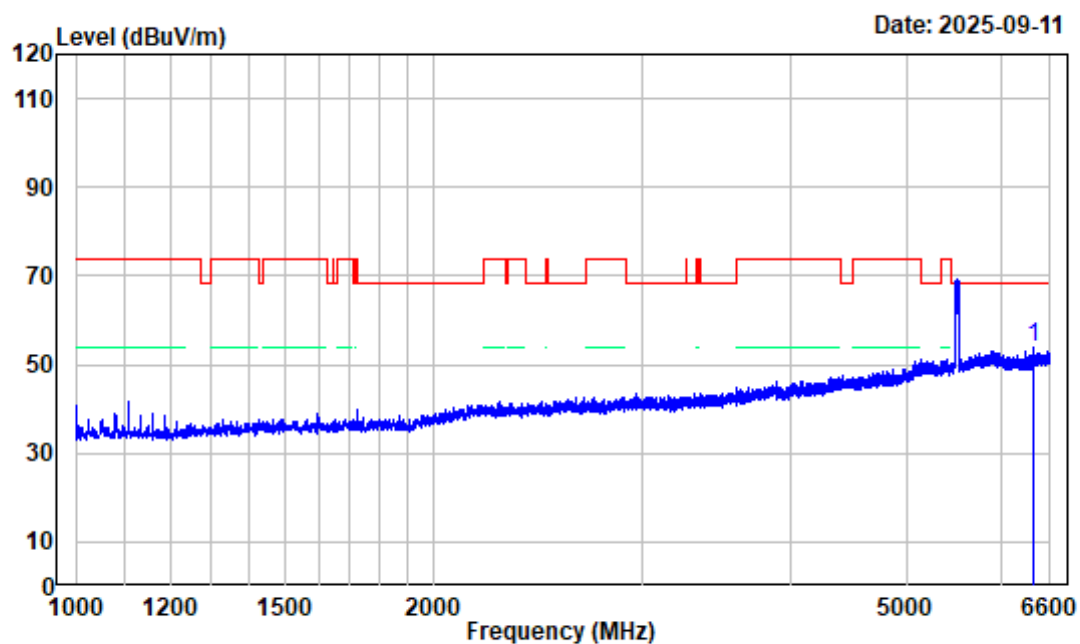

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX40 Low Channel 5510MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6390.700	-3.82	57.87	54.05	68.20	-14.15	peak

802.11AX40 Low Channel 1GHz-6.6GHz_VERTICAL

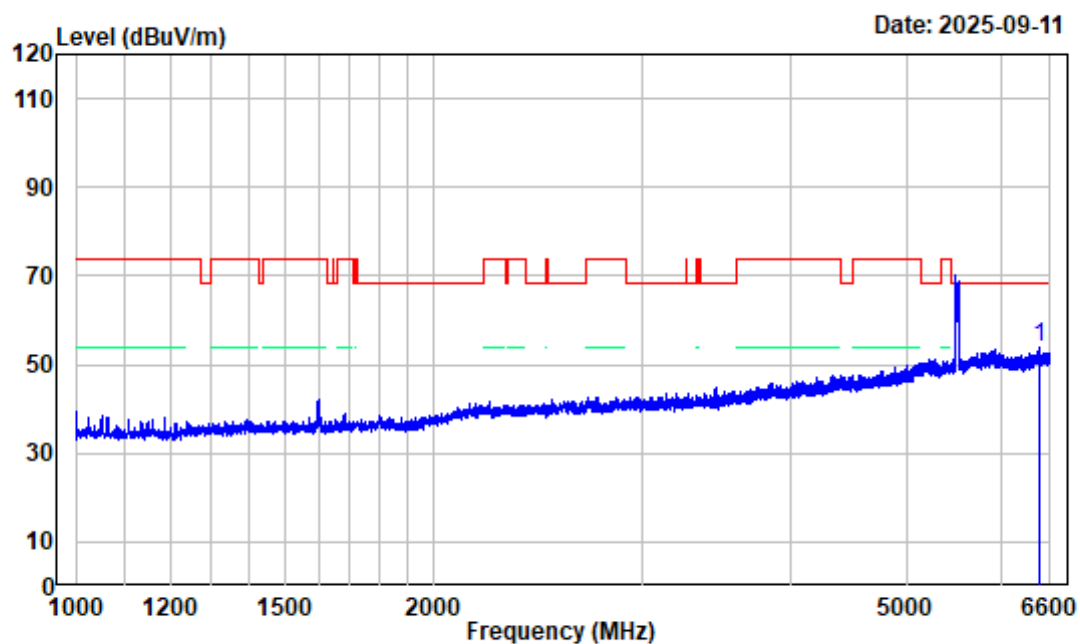

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5510MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6474.000	-3.64	57.32	53.68	68.20	-14.52	peak


802.11AX40 Low Channel 6.6GHz-18GHz_HORIZONTAL

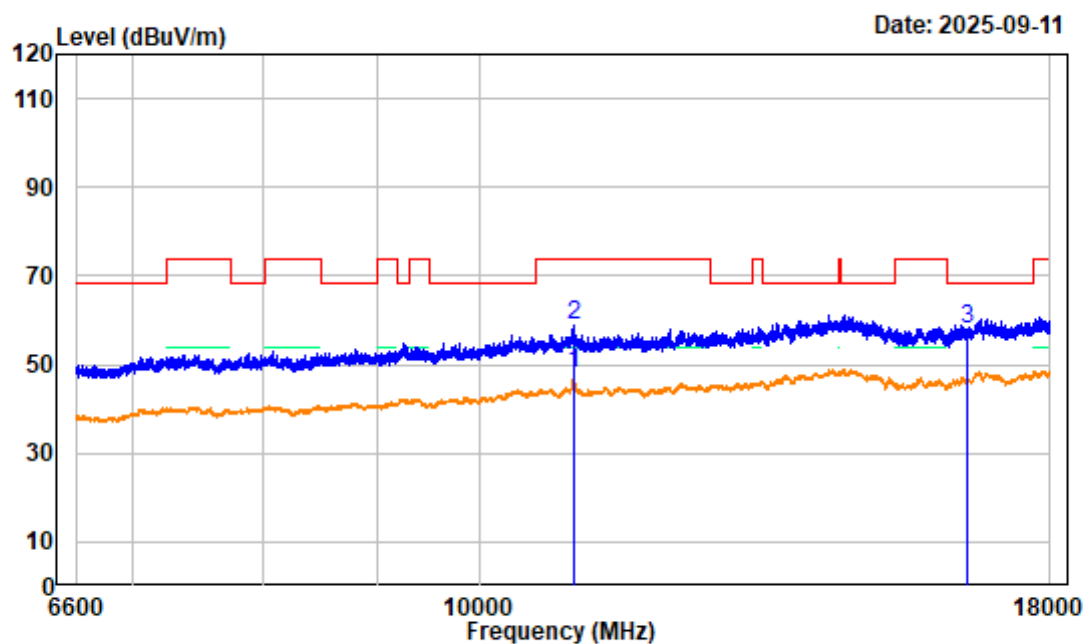

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX40 Low Channel 5510MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11020.000	5.34	42.50	47.84	54.00	-6.16	average
2	11020.000	5.34	53.48	58.82	74.00	-15.18	peak
3	16530.000	6.10	52.03	58.13	68.20	-10.07	peak

802.11AX40 Low Channel 6.6GHz-18GHz_VERTICAL

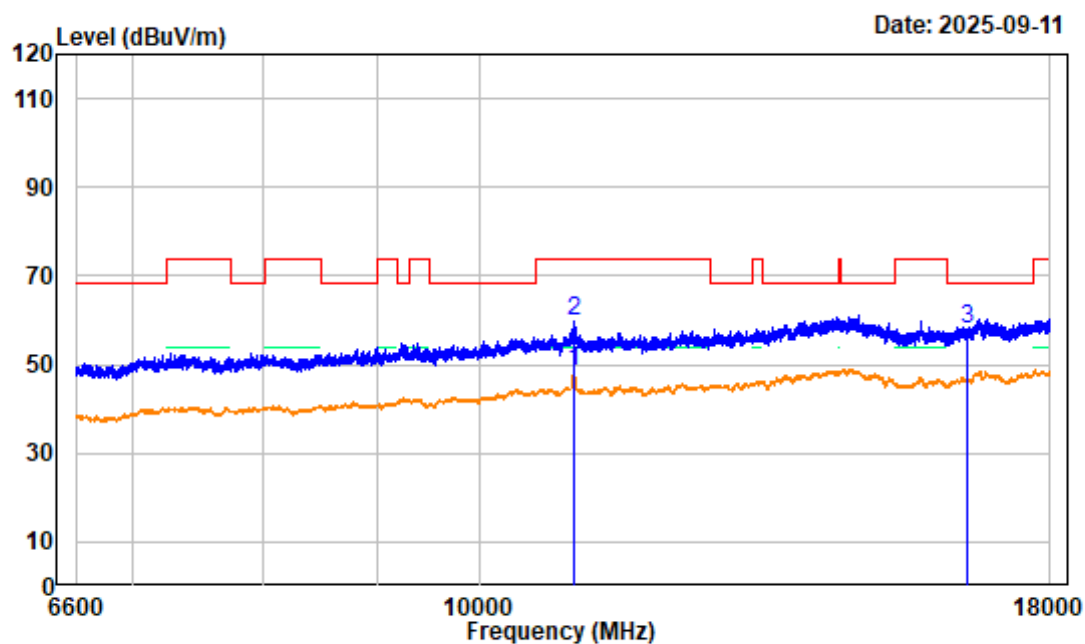

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5510MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11020.000	5.34	43.30	48.64	54.00	-5.36	average
2	11020.000	5.34	54.27	59.61	74.00	-14.39	peak
3	16530.000	6.10	51.79	57.89	68.20	-10.31	peak

802.11AX40 Low Channel Bandedge_HORIZONTAL

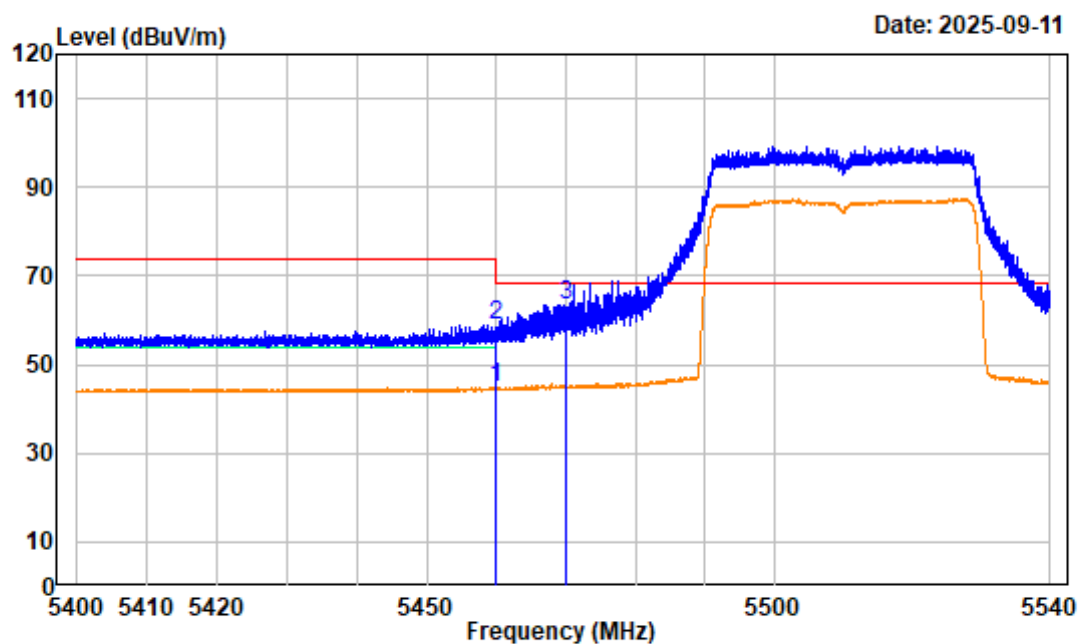

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5510MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.60	50.57	44.97	54.00	-9.03	average
2	5460.000	-5.60	64.59	58.99	74.00	-15.01	peak
3	5470.000	-5.60	69.15	63.55	68.20	-4.65	peak

802.11AX40 Low Channel Bandedge_VERTICAL

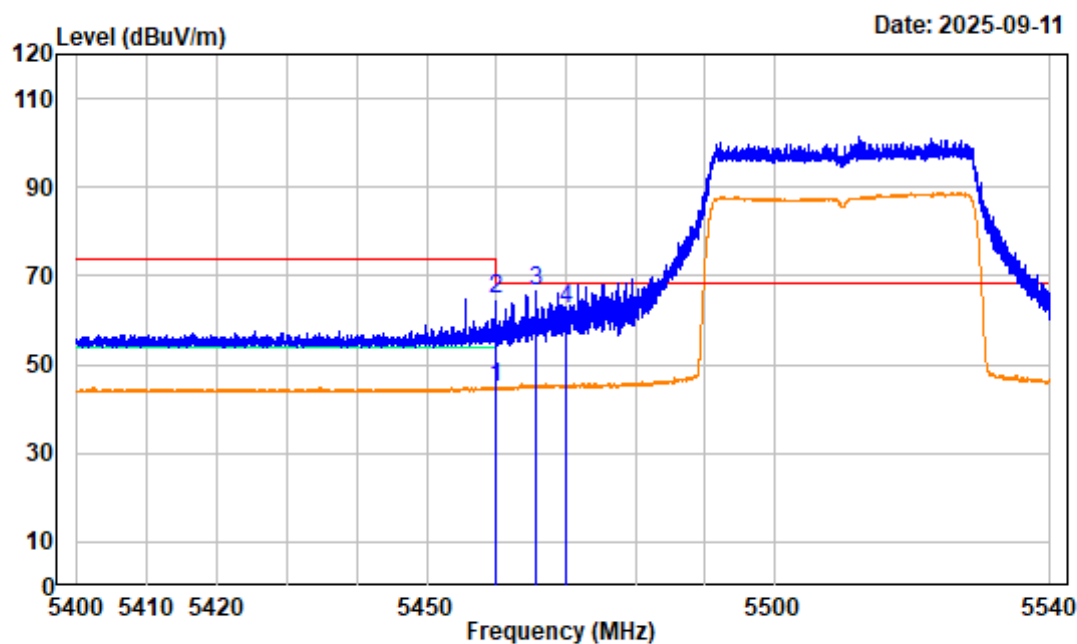

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5510MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5460.000	-5.60	50.33	44.73	54.00	-9.27	average
2	5460.000	-5.60	70.36	64.76	74.00	-9.24	peak
3	5465.660	-5.60	72.12	66.52	68.20	-1.68	Peak
4	5470.000	-5.60	68.11	62.51	68.20	-5.69	peak


802.11AX40 Middle Channel 1GHz-6.6GHz_HORIZONTAL

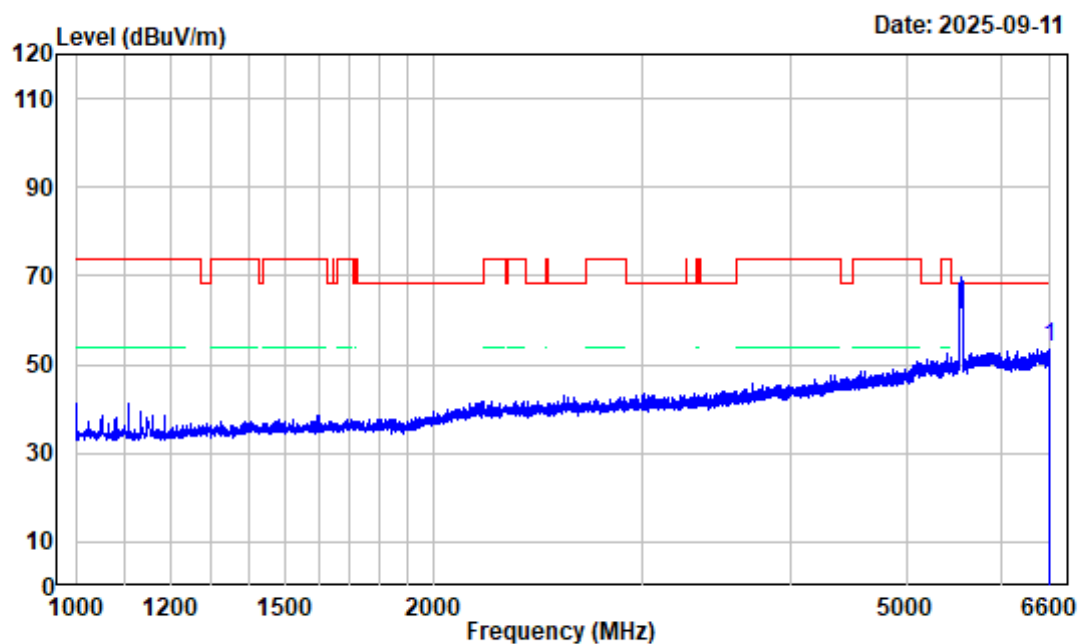

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX40 Middle Channel 5550MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6600.000	-3.48	57.51	54.03	68.20	-14.17	peak

802.11AX40 Middle Channel 1GHz-6.6GHz_VERTICAL

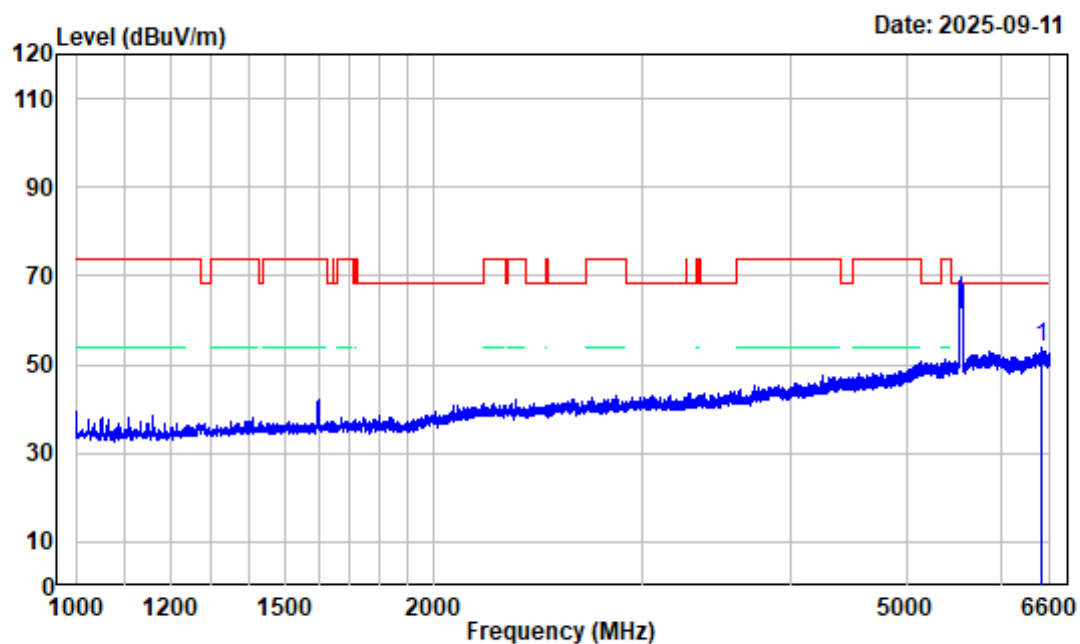

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Middle Channel 5550MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6496.400	-3.82	57.72	53.90	68.20	-14.30	peak

802.11AX40 Middle Channel 6.6GHz-18GHz_HORIZONTAL

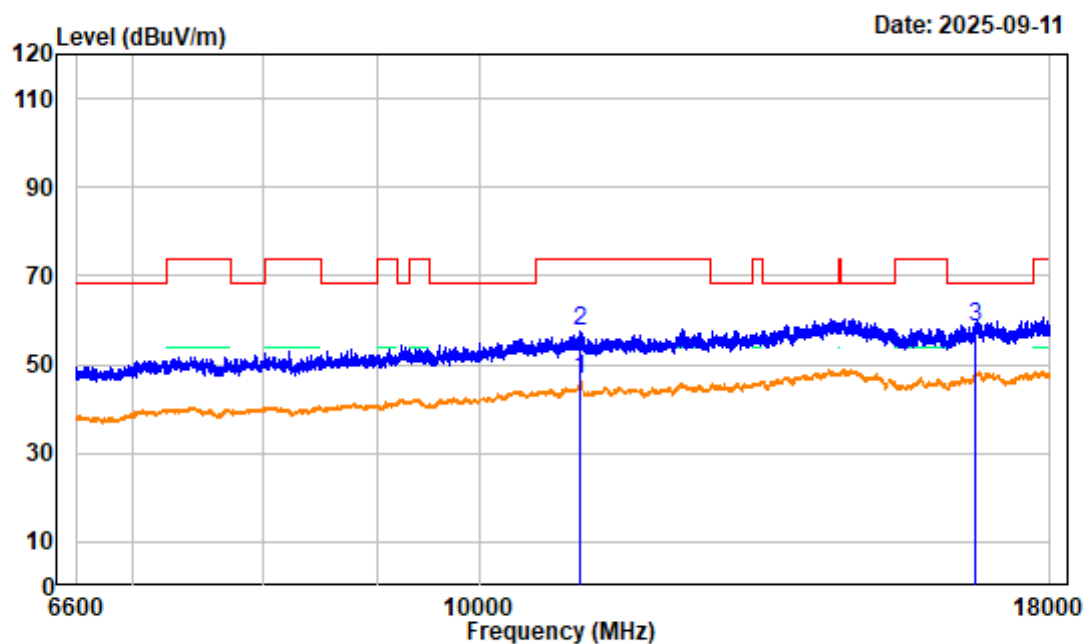

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Middle Channel 5550MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level			
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11100.000	4.77	41.76	46.53	54.00	-7.47	average
2	11100.000	4.77	52.83	57.60	74.00	-16.40	peak
3	16650.000	6.65	51.82	58.47	68.20	-9.73	peak


802.11AX40 Middle Channel 6.6GHz-18GHz_VERTICAL

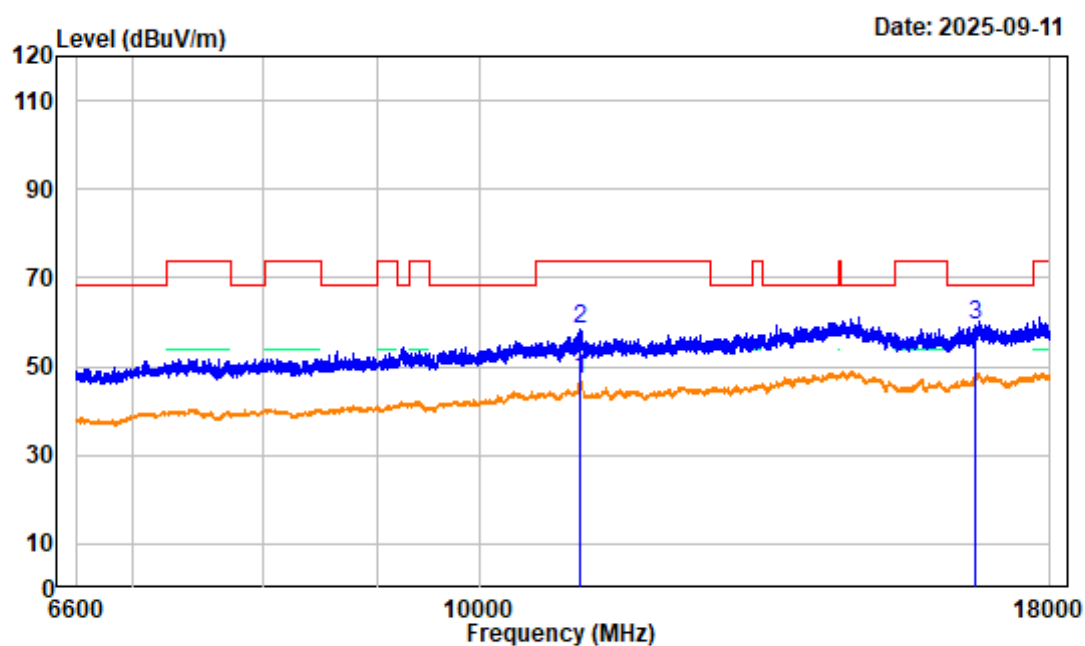

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX40 Middle Channel 5550MHz 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11100.000	4.77	42.46	47.23	54.00	-6.77	average
2	11100.000	4.77	53.49	58.26	74.00	-15.74	peak
3	16650.000	6.65	52.60	59.25	68.20	-8.95	peak


802.11AX40 High Channel 1GHz-6.6GHz_HORIZONTAL

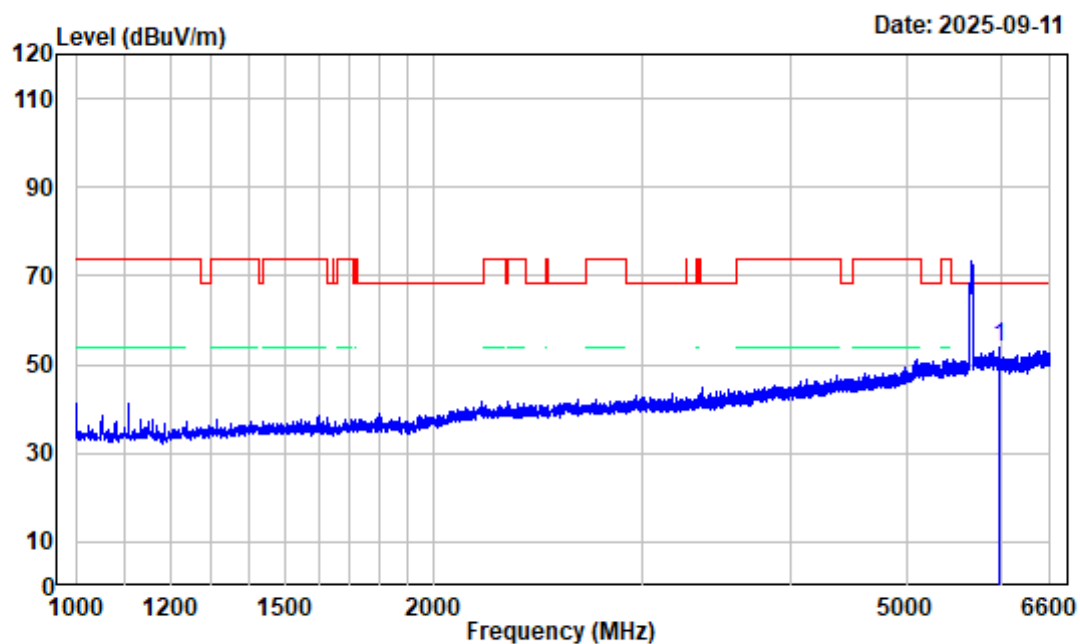

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX40 High Channel 5670MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5983.300	-4.82	58.53	53.71	68.20	-14.49	peak

802.11AX40 High Channel 1GHz-6.6GHz_VERTICAL

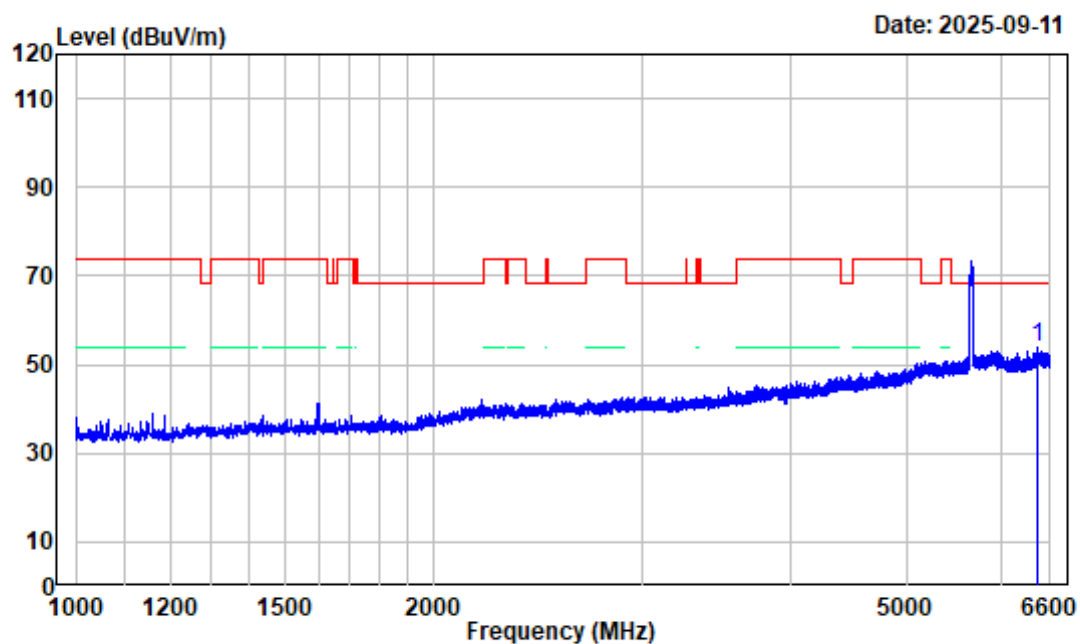

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5670MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6446.000	-3.47	57.21	53.74	68.20	-14.46	peak

802.11AX40 High Channel 6.6GHz-18GHz_HORIZONTAL

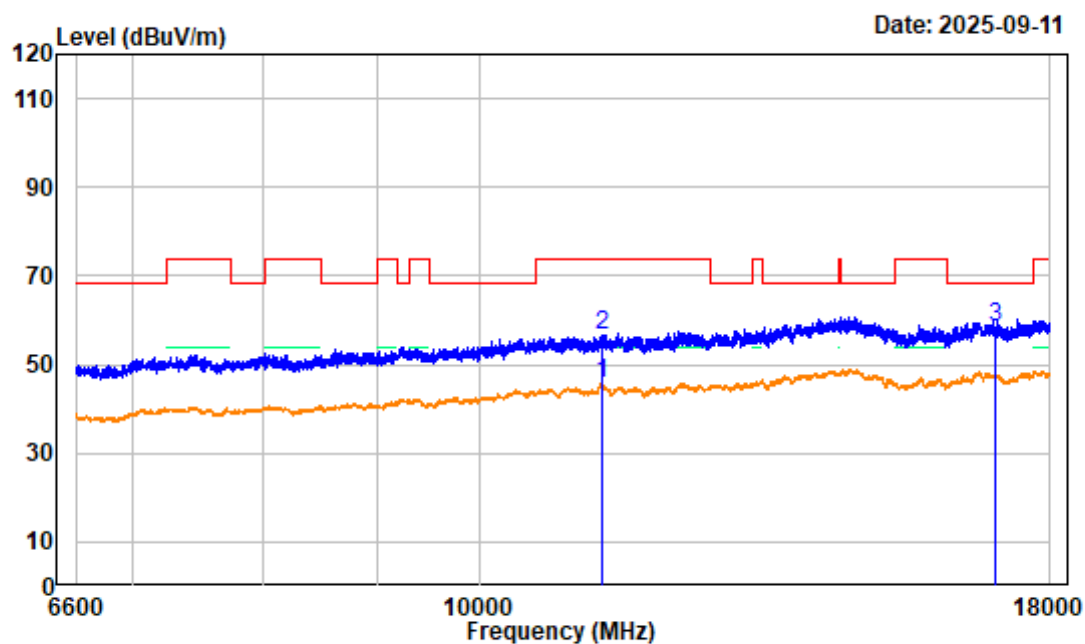

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5670MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	4.97	40.77	45.74	54.00	-8.26	average
2	11340.000	4.97	51.81	56.78	74.00	-17.22	peak
3	17010.000	7.60	50.79	58.39	68.20	-9.81	peak

802.11AX40 High Channel 6.6GHz-18GHz_VERTICAL

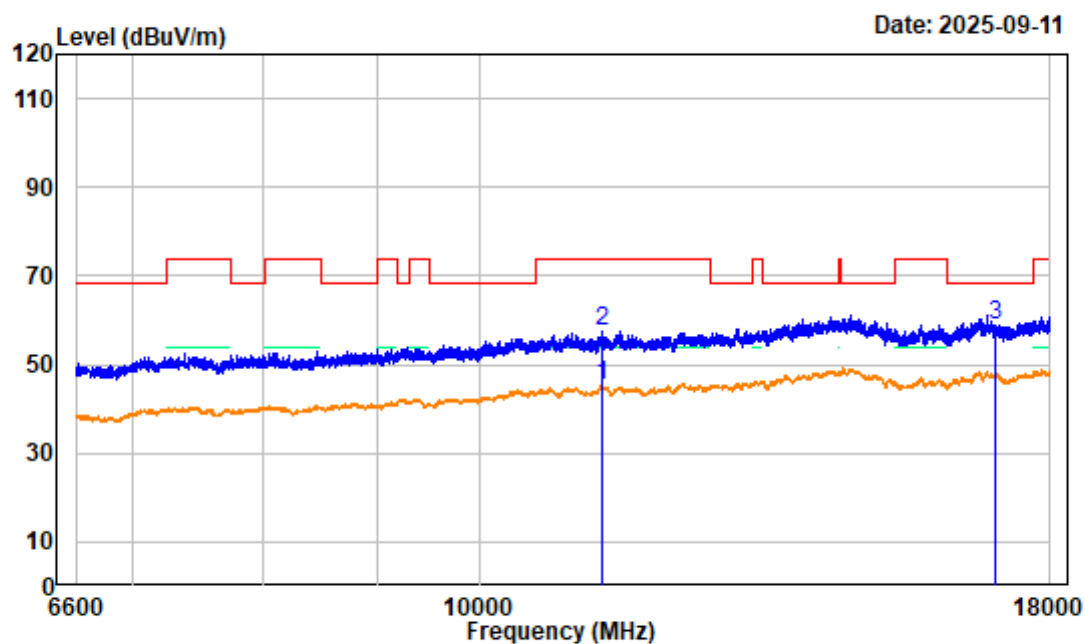

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5670MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11340.000	4.97	40.29	45.26	54.00	-8.74	average
2	11340.000	4.97	52.33	57.30	74.00	-16.70	peak
3	17010.000	7.60	51.18	58.78	68.20	-9.42	peak

802.11AX40 High Channel Bandedge_HORIZONTAL

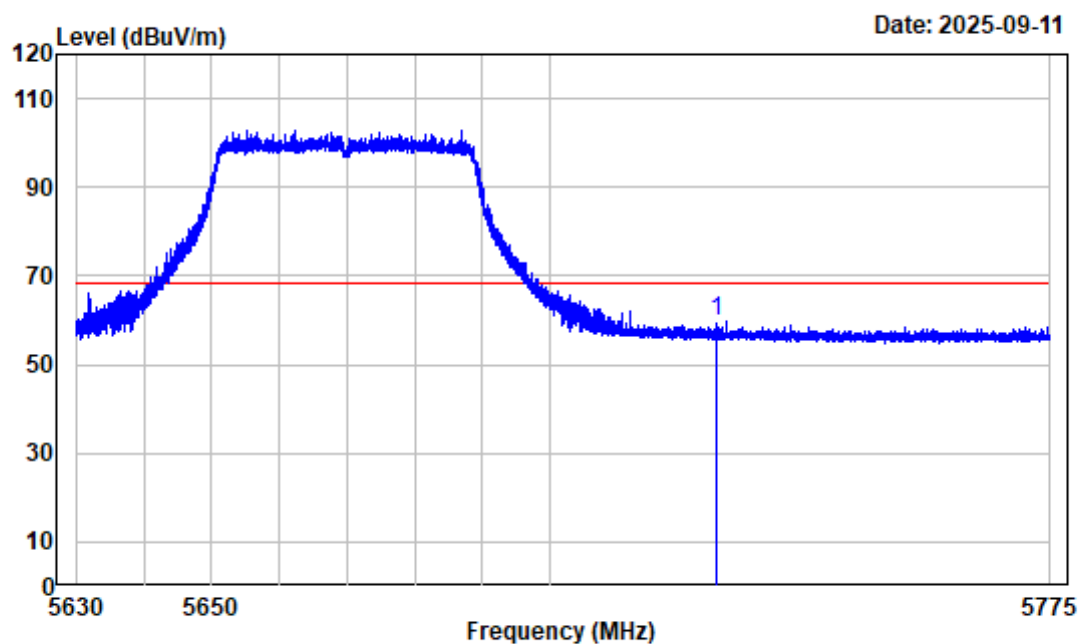

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5670MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.45	64.30	59.85	68.20	-8.35	peak

802.11AX40 High Channel Bandedge_VERTICAL

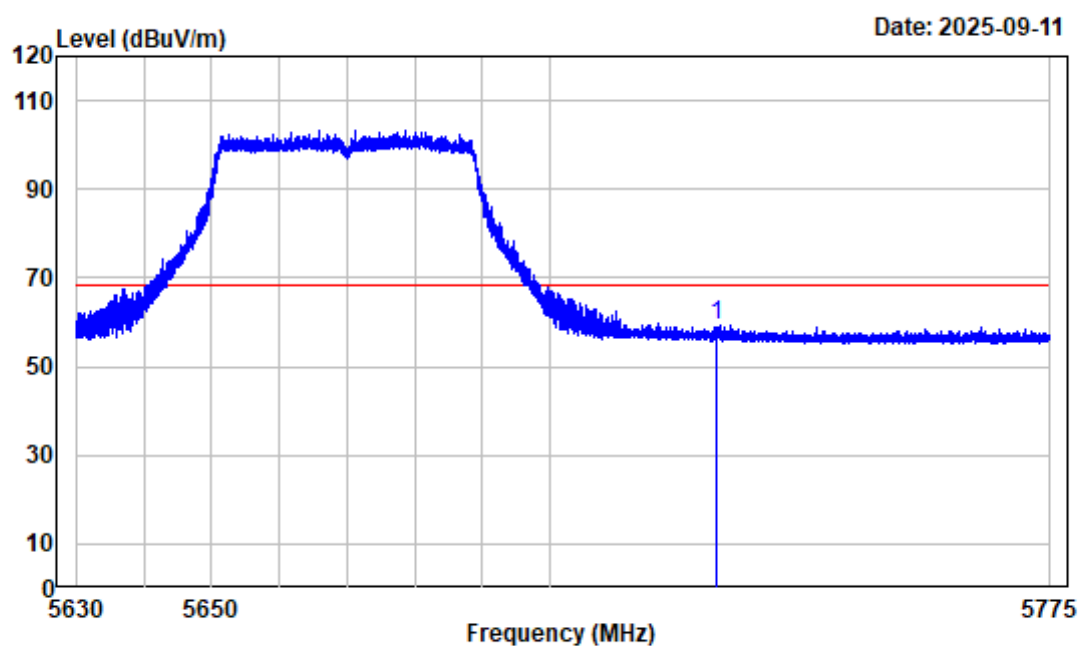

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting

Tester:Kevin Lv


Note : 802.11AX40 High Channel 5670MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5725.000	-4.45	63.61	59.16	68.20	-9.04	peak

For band4:

802.11A Low Channel 1GHz-6.6GHz_HORIZONTAL

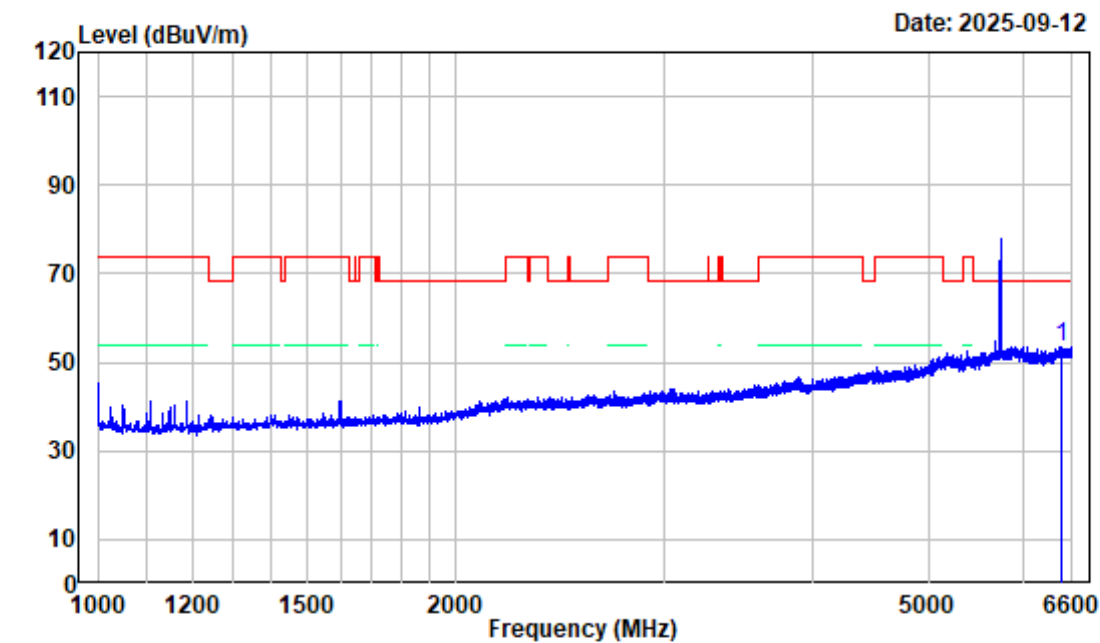

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF


Test Mode : TransmittingTester:Kevin Lv

Note : 802.11A Low Channel 5745MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6470.500	-3.61	57.19	53.58	68.20	-14.62	peak

802.11A Low Channel 1GHz-6.6GHz_VERTICAL

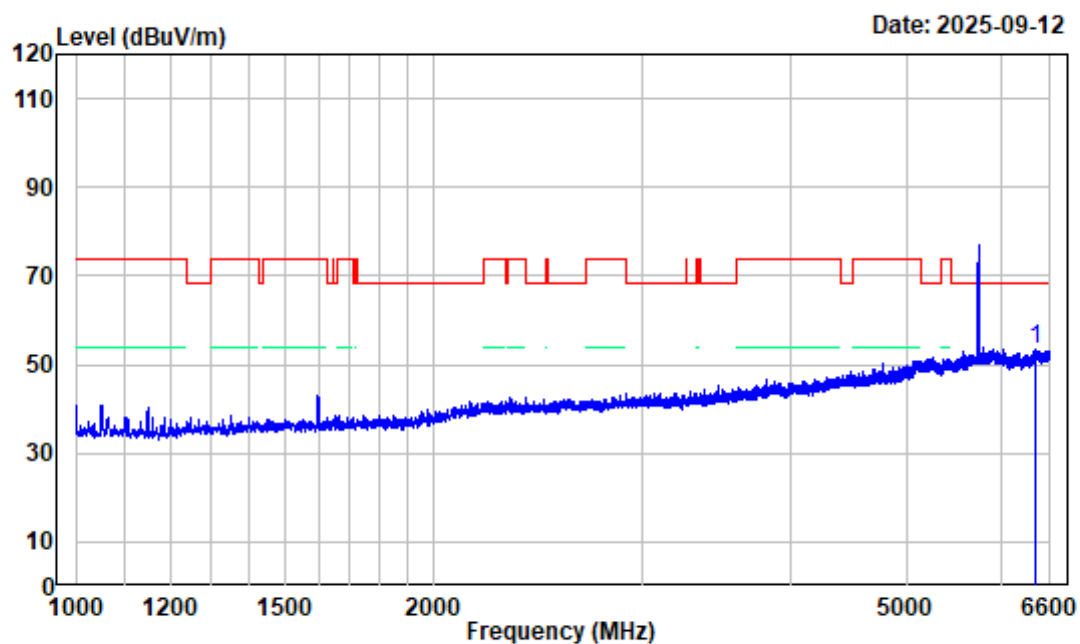

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5745MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6419.400	-3.59	57.04	53.45	68.20	-14.75	peak

802.11A Low Channel 6.6GHz-18GHz_HORIZONTAL

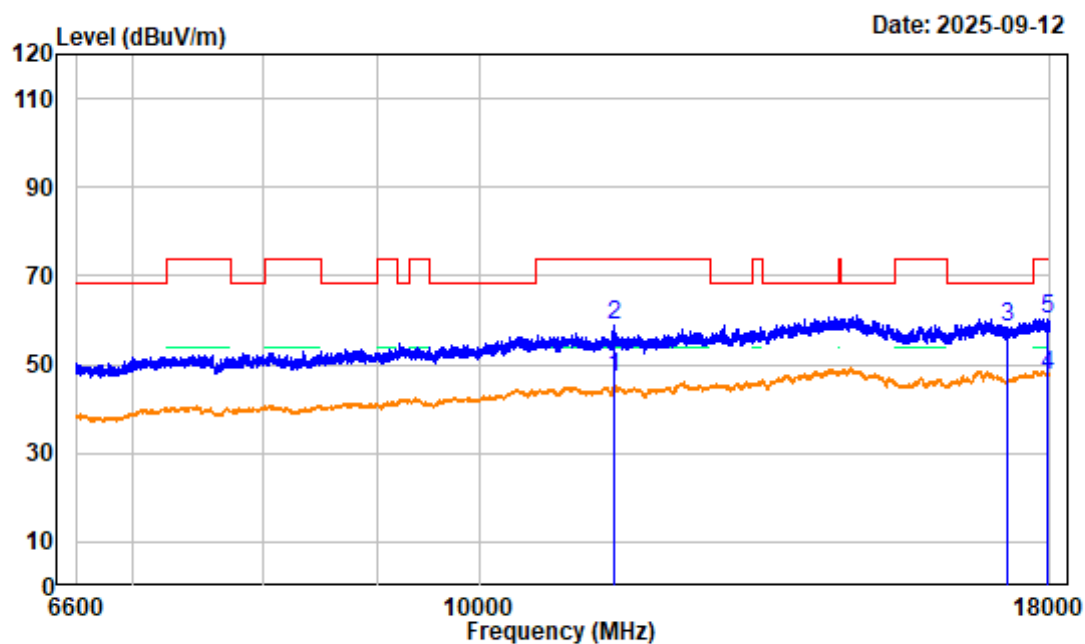

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5745MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.24	40.84	47.08	54.00	-6.92	average
2	11490.000	6.24	52.80	59.04	74.00	-14.96	peak
3	17235.000	6.82	51.78	58.60	68.20	-9.60	peak
4	17948.700	8.16	39.47	47.63	54.00	-6.37	average
5	17948.700	8.16	52.23	60.39	74.00	-13.61	peak

802.11A Low Channel 6.6GHz-18GHz_VERTICAL

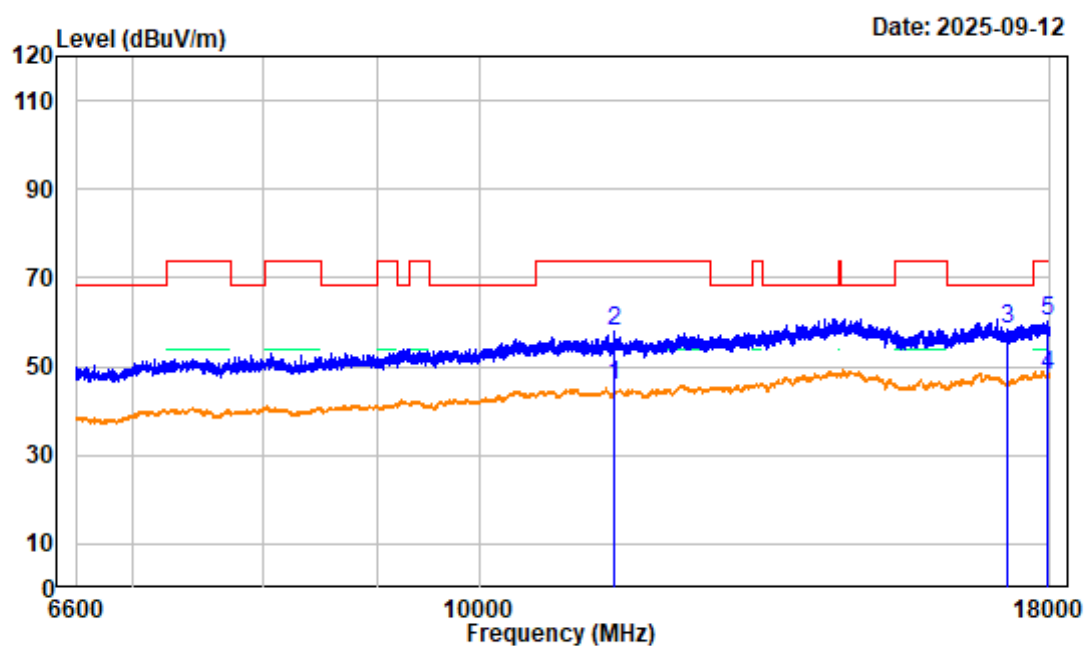

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5745MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.24	39.65	45.89	54.00	-8.11	average
2	11490.000	6.24	51.58	57.82	74.00	-16.18	peak
3	17235.000	6.82	51.46	58.28	68.20	-9.92	peak
4	17955.820	8.19	39.67	47.86	54.00	-6.14	average
5	17955.820	8.19	51.90	60.09	74.00	-13.91	peak

802.11A Low Channel Bandedge_HORIZONTAL

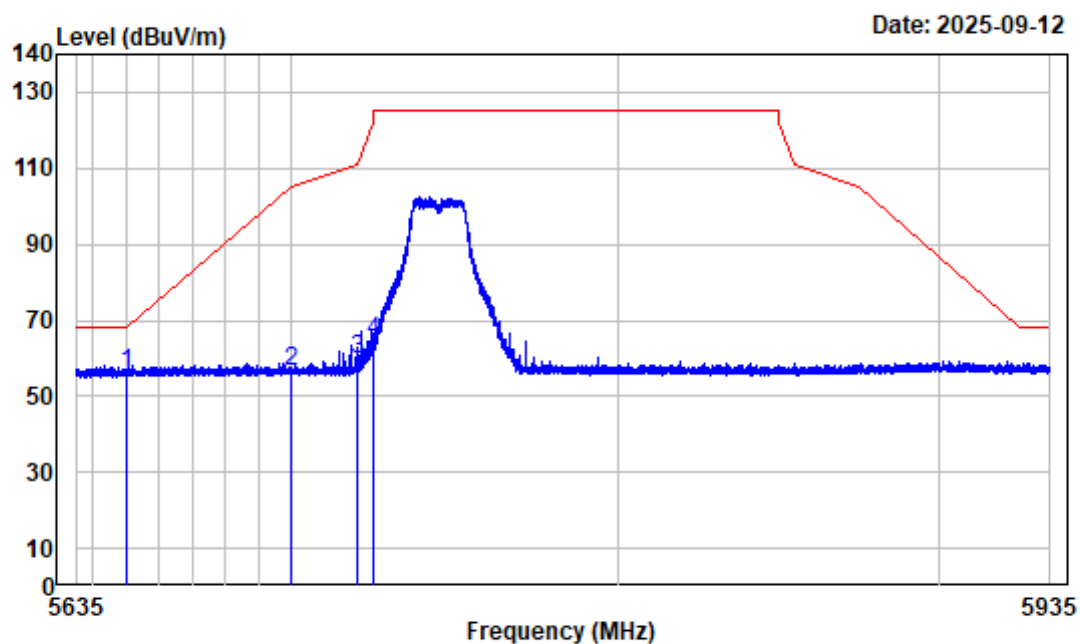

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5745MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	60.75	56.03	68.20	-12.17	peak
2	5700.000	-4.35	60.71	56.36	105.20	-48.84	peak
3	5720.000	-4.43	64.28	59.85	110.80	-50.95	peak
4	5725.000	-4.45	68.67	64.22	122.20	-57.98	peak

802.11A Low Channel Bandedge_VERTICAL

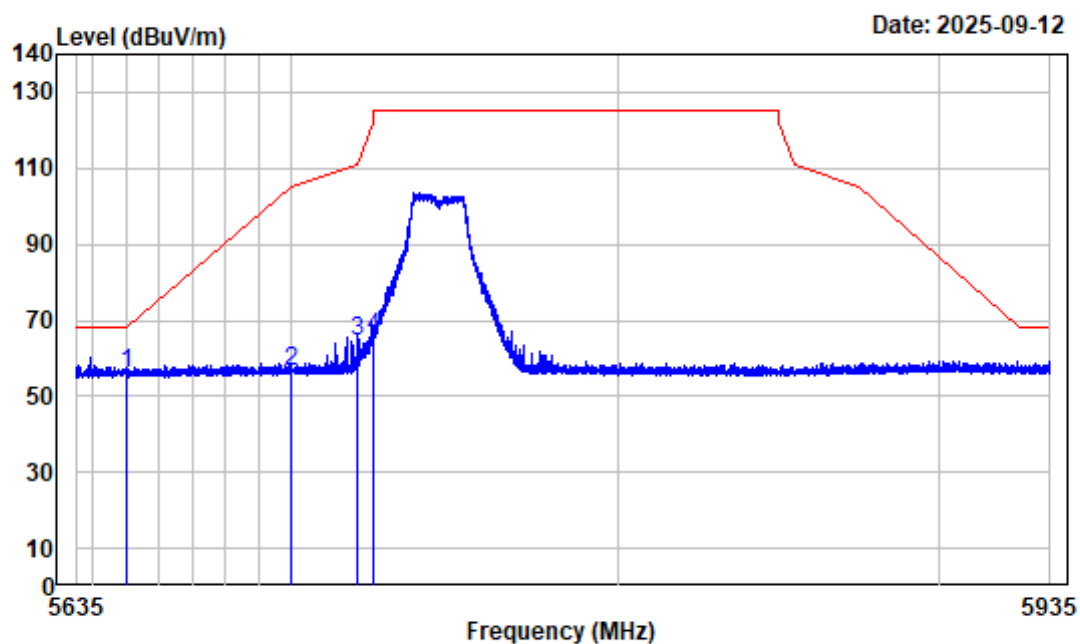

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Low Channel 5745MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	60.74	56.02	68.20	-12.18	peak
2	5700.000	-4.35	60.65	56.30	105.20	-48.90	peak
3	5720.000	-4.43	68.94	64.51	110.80	-46.29	peak
4	5725.000	-4.45	70.15	65.70	122.20	-56.50	peak


802.11A Middle Channel 5785 1GHz-6.6GHz_HORIZONTAL

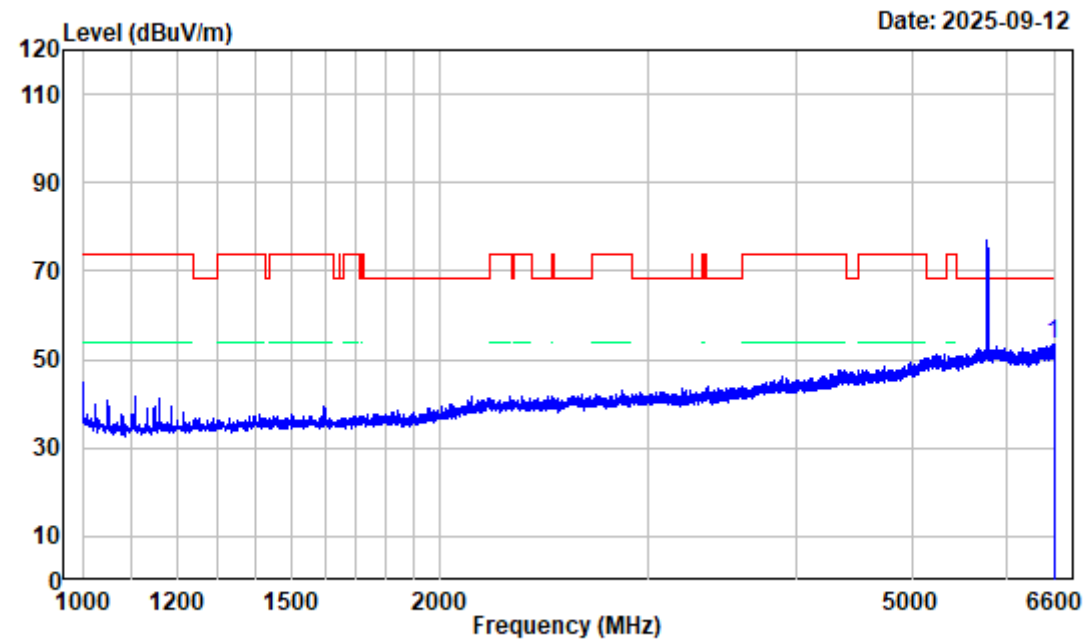

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5785 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6580.400	-3.54	57.12	53.58	68.20	-14.62	peak


802.11A Middle Channel 5785 1GHz-6.6GHz_VERTICAL

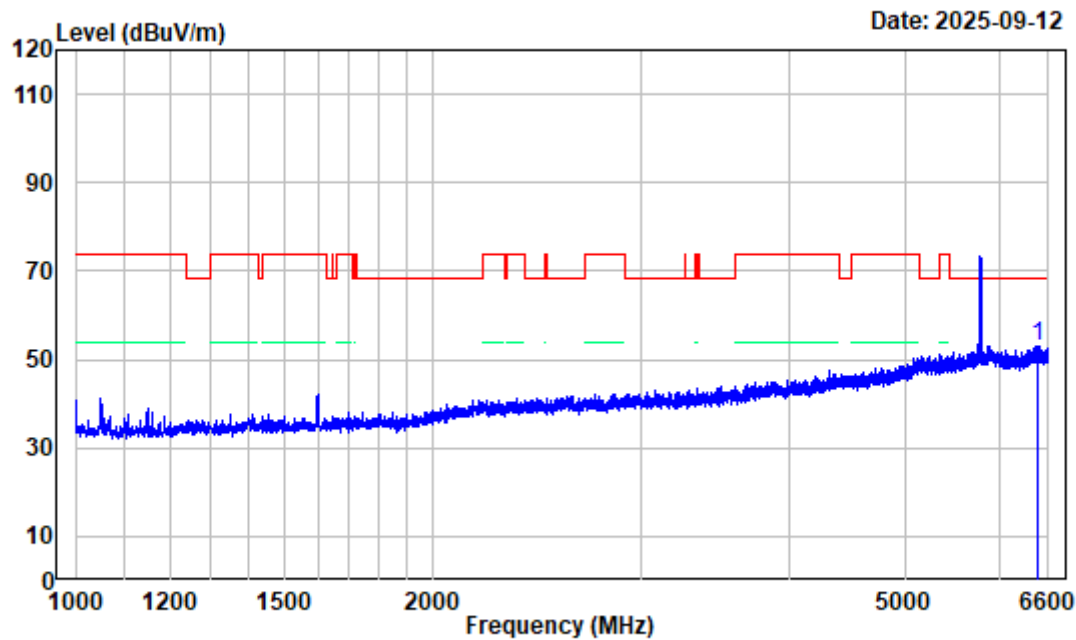

Site : chamber
Condition : 3m VERTICAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11A Middle Channel 5785 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6471.200	-3.62	56.66	53.04	68.20	-15.16	peak

802.11A Middle Channel 5785 6.6GHz-18GHz_HORIZONTAL

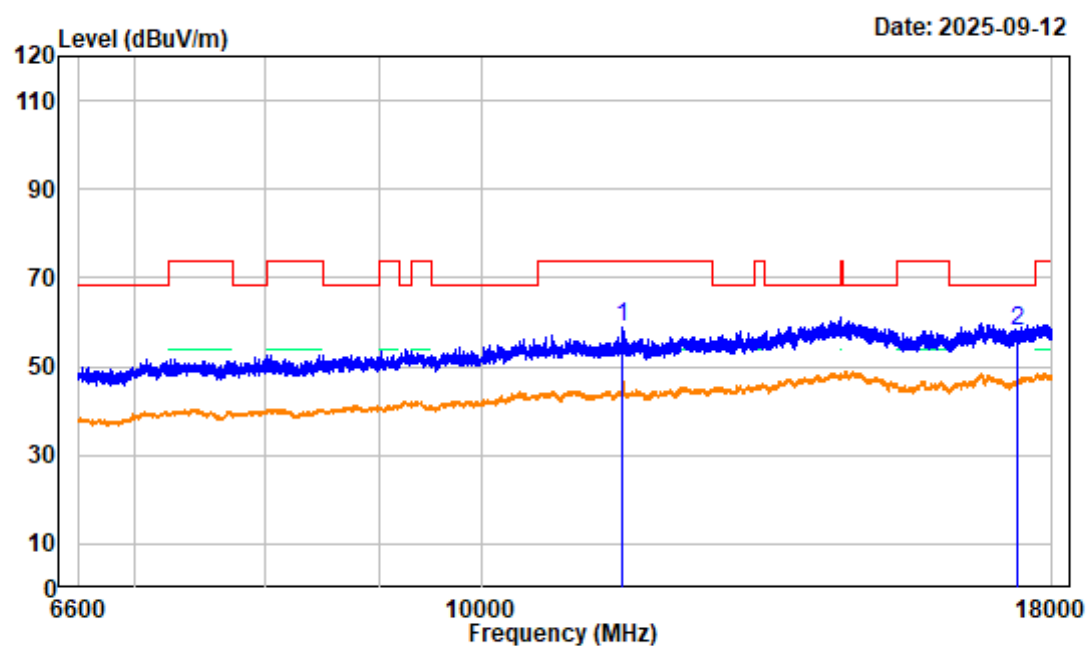

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Middle Channel 5785 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	6.02	53.05	59.07	74.00	-14.93	peak
2	17355.000	6.60	51.39	57.99	68.20	-10.21	peak

802.11A Middle Channel 5785 6.6GHz-18GHz_VERTICAL

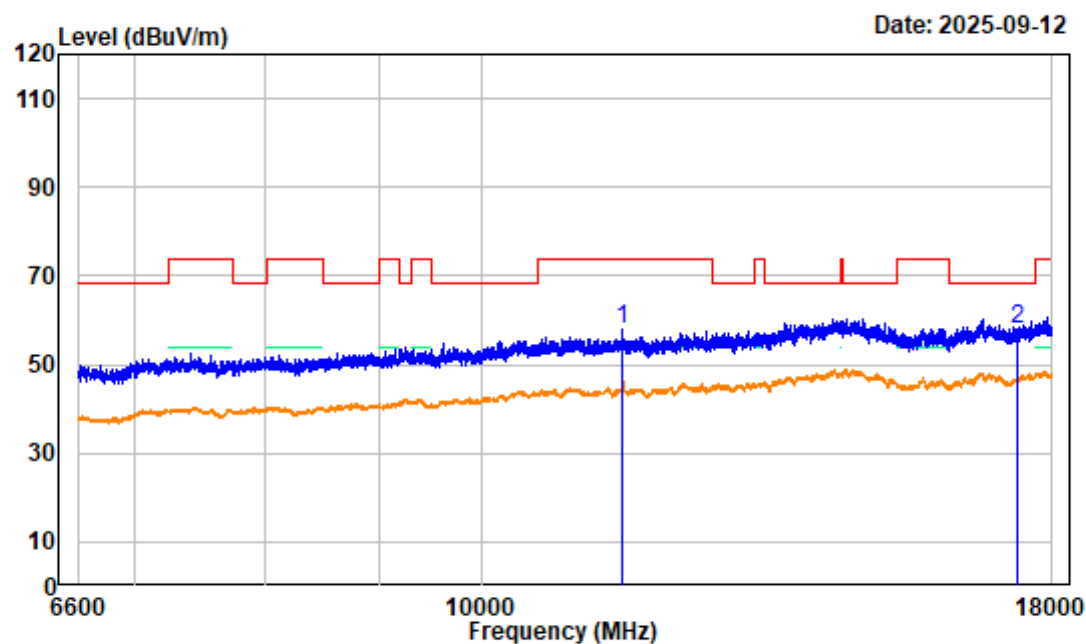

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A Middle Channel 5785 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	6.02	51.83	57.85	74.00	-16.15	peak
2	17355.000	6.60	51.24	57.84	68.20	-10.36	peak


802.11A High Channel 1GHz-6.6GHz_HORIZONTAL

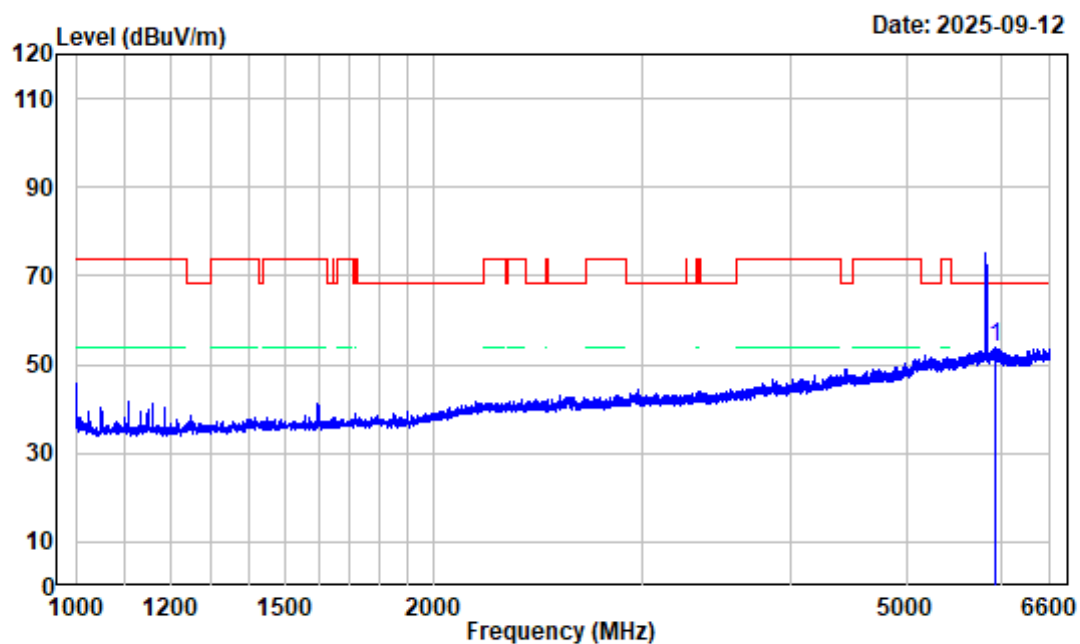

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11A High Channel 5825MHz 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5933.600	-4.40	58.45	54.05	68.20	-14.15	peak

802.11A High Channel 1GHz-6.6GHz_VERTICAL

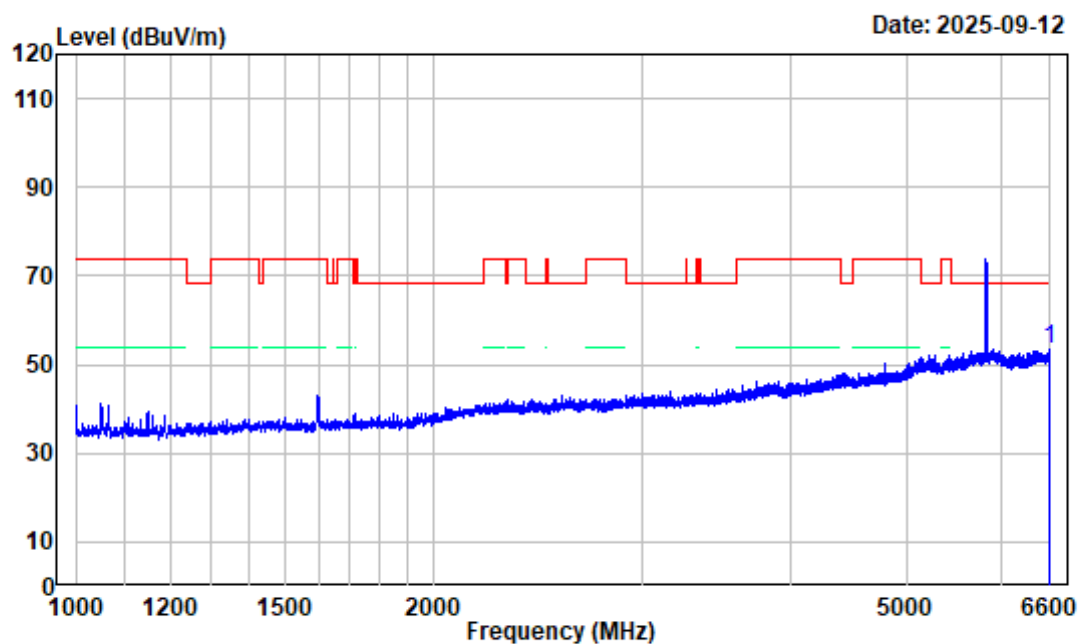

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5825MHz 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6594.400	-3.50	56.78	53.28	68.20	-14.92	peak

802.11A High Channel 6.6GHz-18GHz_HORIZONTAL

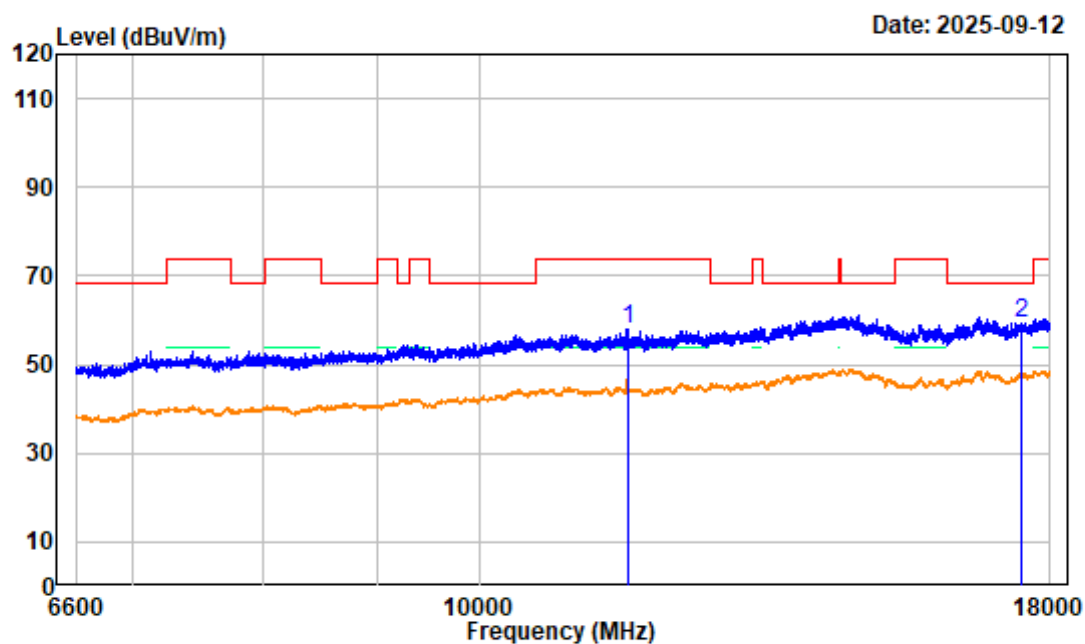

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5825MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.36	52.74	58.10	74.00	-15.90	peak
2	17475.000	7.21	51.98	59.19	68.20	-9.01	peak

802.11A High Channel 6.6GHz-18GHz_VERTICAL

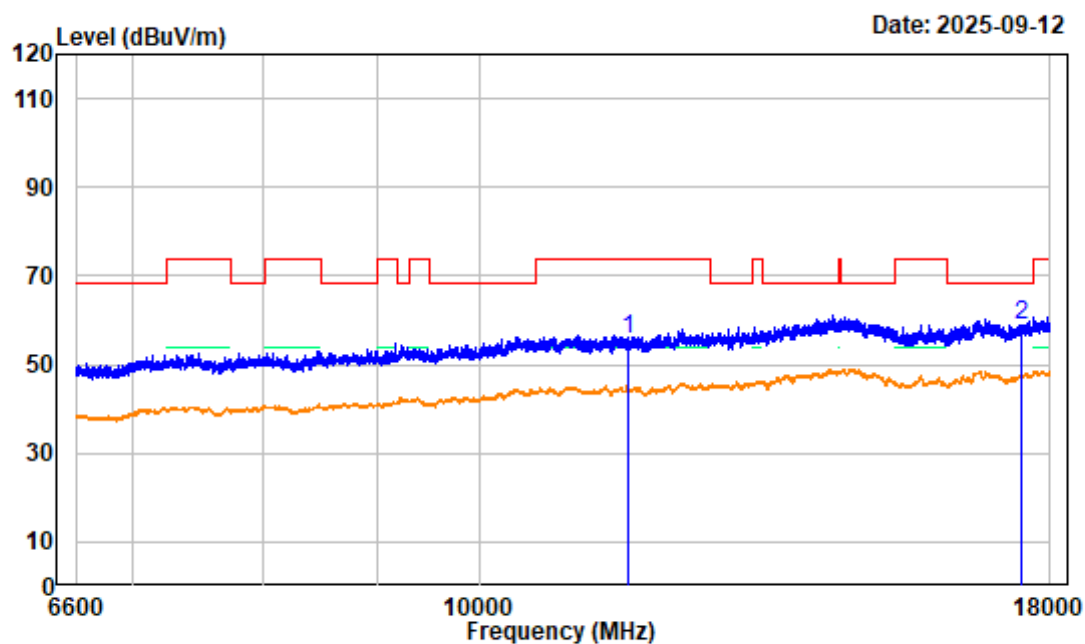

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5825MHz 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.36	50.31	55.67	74.00	-18.33	peak
2	17475.000	7.21	51.69	58.90	68.20	-9.30	peak

802.11A High Channel Bandedge_HORIZONTAL

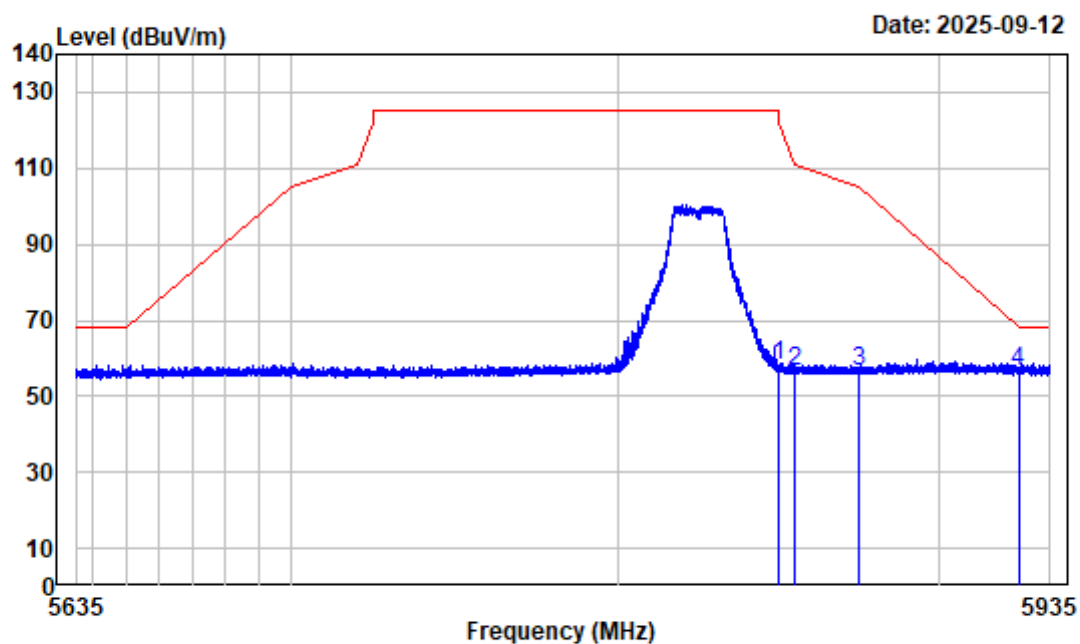

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5825MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	62.46	57.92	122.20	-64.28	peak
2	5855.000	-4.48	60.93	56.45	110.80	-54.35	peak
3	5875.000	-4.20	60.81	56.61	105.20	-48.59	peak
4	5925.000	-4.27	60.87	56.60	68.20	-11.60	peak

802.11A High Channel Bandedge_VERTICAL

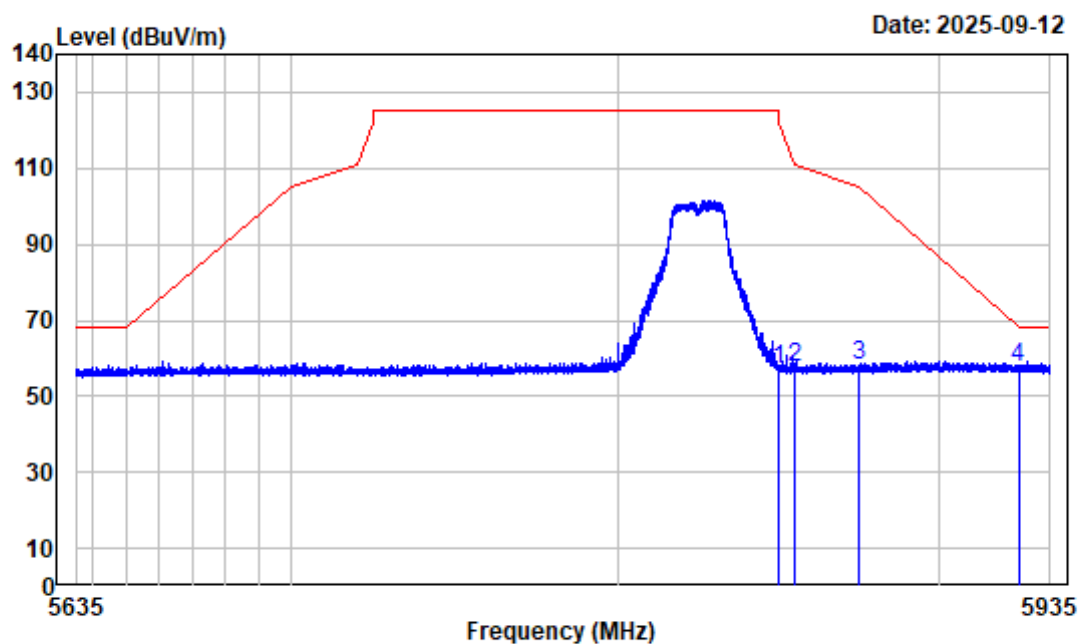

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11A High Channel 5825MHz Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	61.81	57.27	122.20	-64.93	peak
2	5855.000	-4.48	61.96	57.48	110.80	-53.32	peak
3	5875.000	-4.20	62.10	57.90	105.20	-47.30	peak
4	5925.000	-4.27	61.81	57.54	68.20	-10.66	peak


802.11AC20 Low Channel 5745 1GHz-6.6GHz_HORIZONTAL

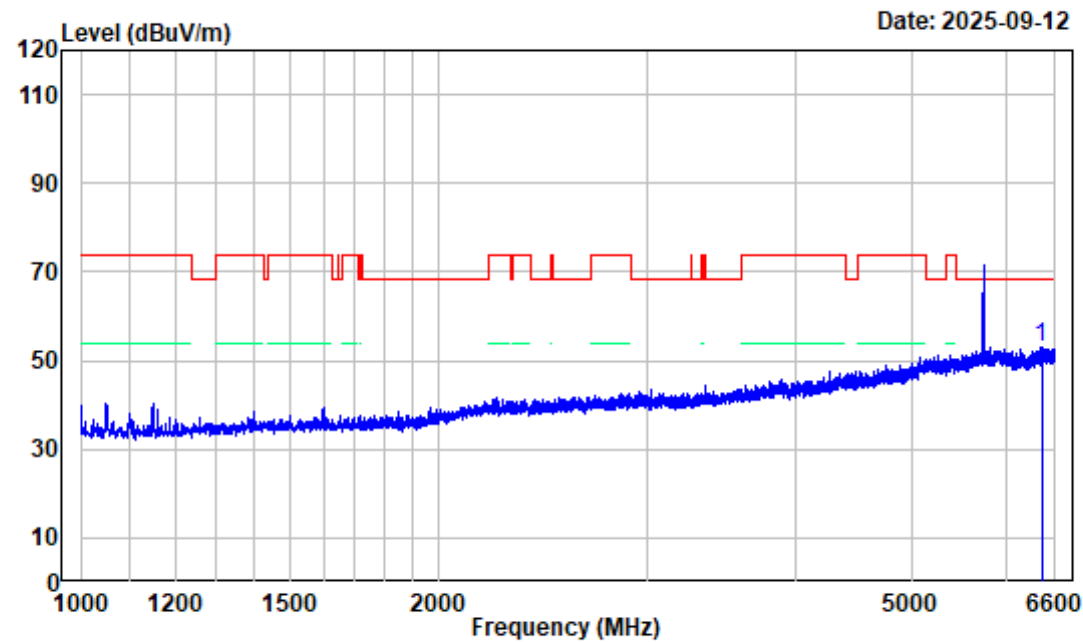

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC20 Low Channel 5745 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6429.200	-3.54	56.44	52.90	68.20	-15.30	peak

802.11AC20 Low Channel 5745 1GHz-6.6GHz_VERTICAL

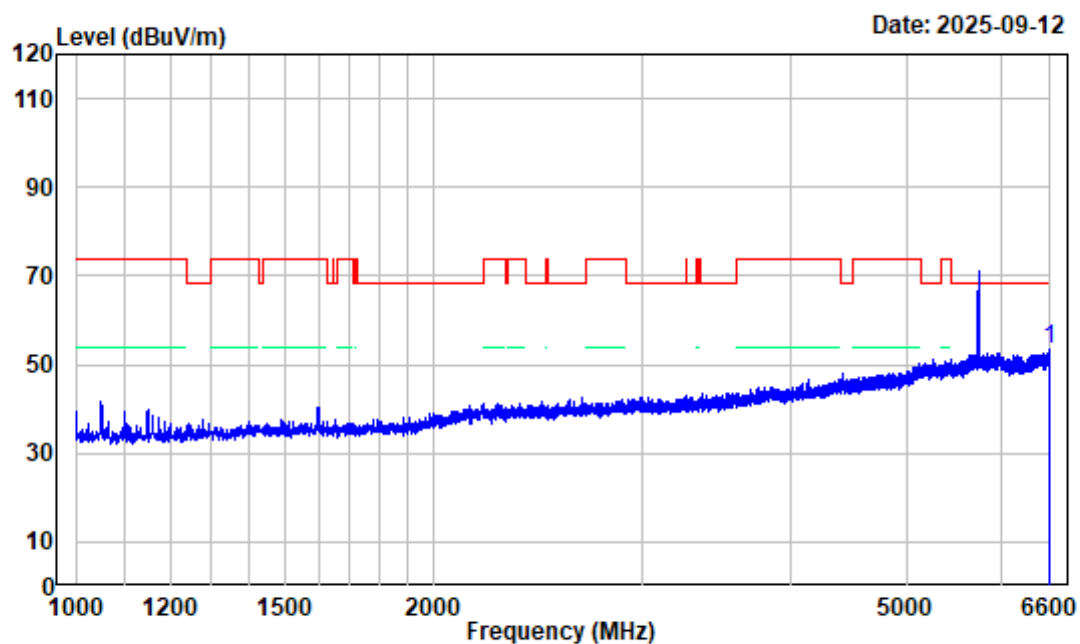

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5745 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6597.900	-3.49	56.88	53.39	68.20	-14.81	peak

802.11AC20 Low Channel 5745 6.6GHz-18GHz_HORIZONTAL

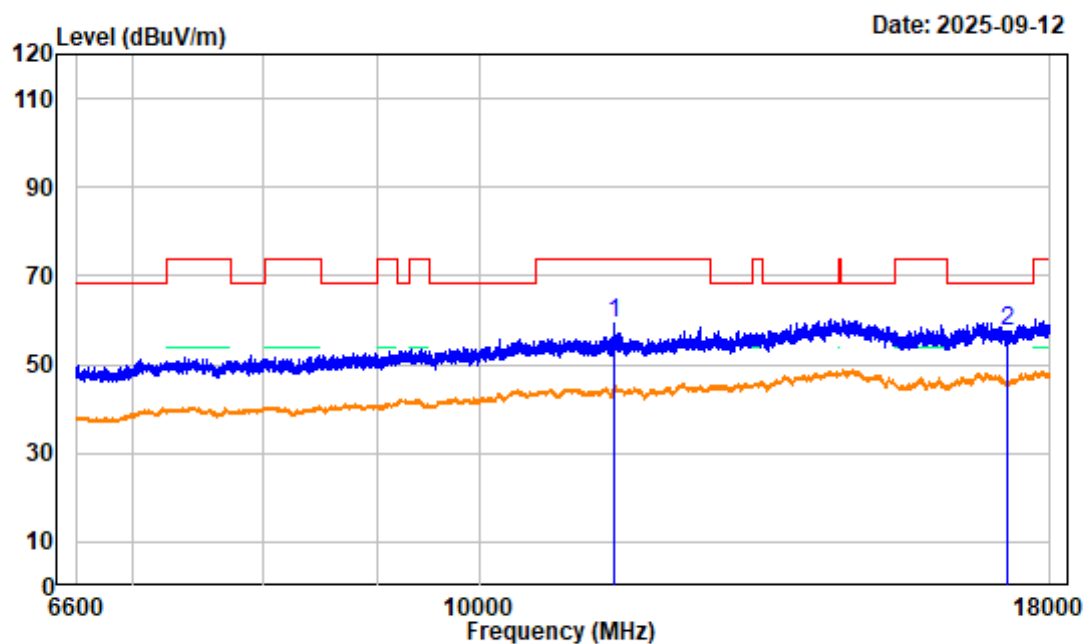

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5745 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.24	52.95	59.19	74.00	-14.81	peak
2	17235.000	6.82	50.66	57.48	68.20	-10.72	peak

802.11AC20 Low Channel 5745 6.6GHz-18GHz_VERTICAL

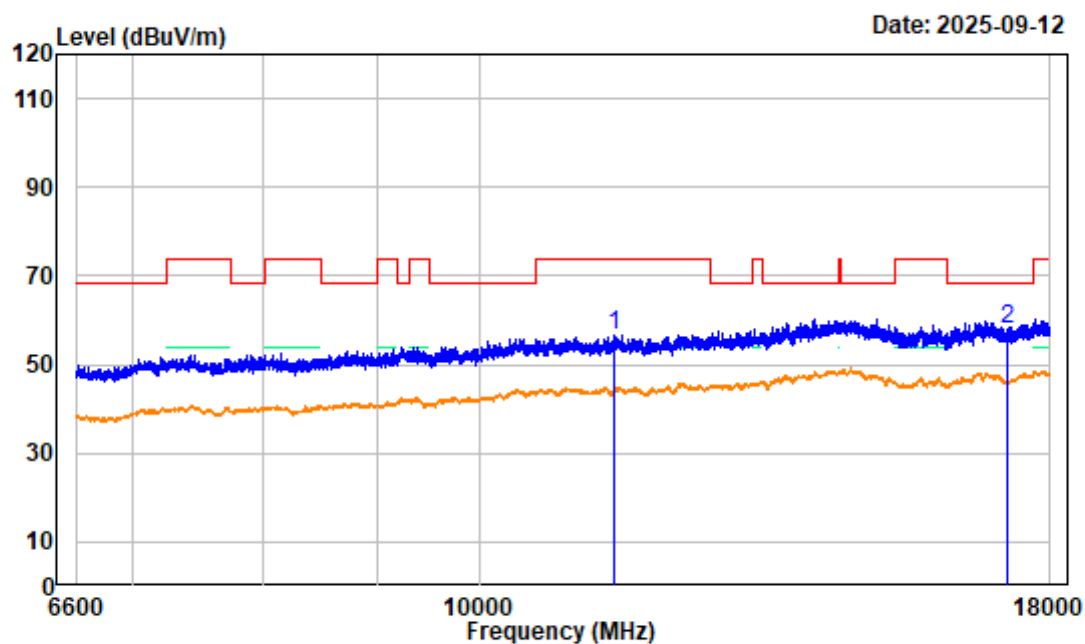

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5745 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.24	50.49	56.73	74.00	-17.27	peak
2	17235.000	6.82	51.32	58.14	68.20	-10.06	peak

802.11AC20 Low Channel 5745 Bandedge_HORIZONTAL

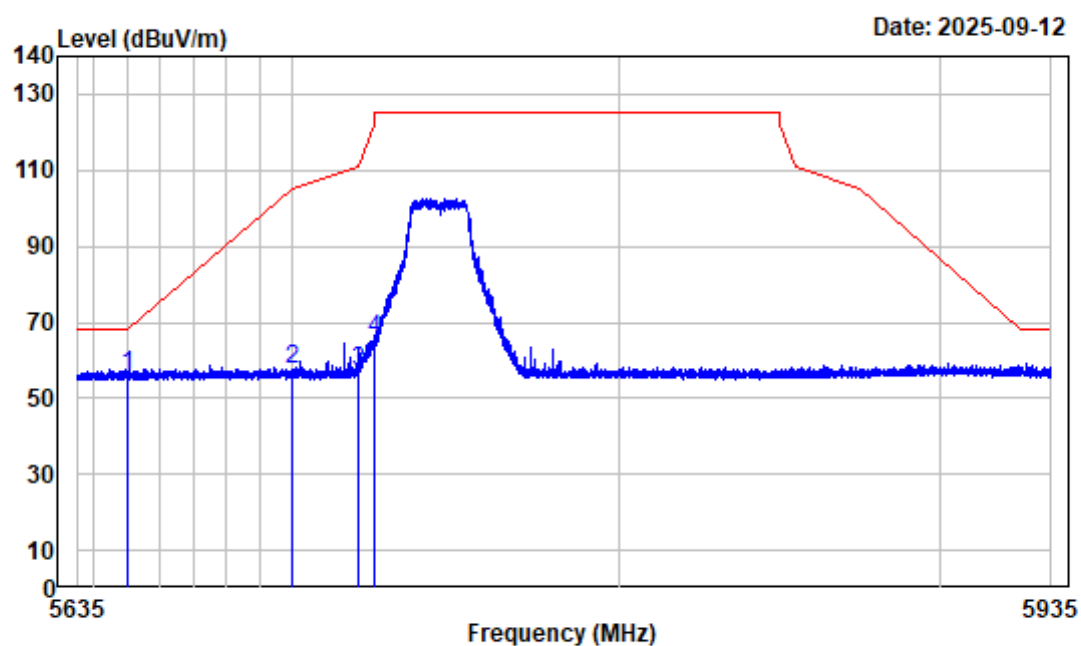

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5745 Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	60.84	56.12	68.20	-12.08	peak
2	5700.000	-4.35	62.16	57.81	105.20	-47.39	peak
3	5720.000	-4.43	61.51	57.08	110.80	-53.72	peak
4	5725.000	-4.45	69.76	65.31	122.20	-56.89	peak

802.11AC20 Low Channel 5745 Bandedge_VERTICAL

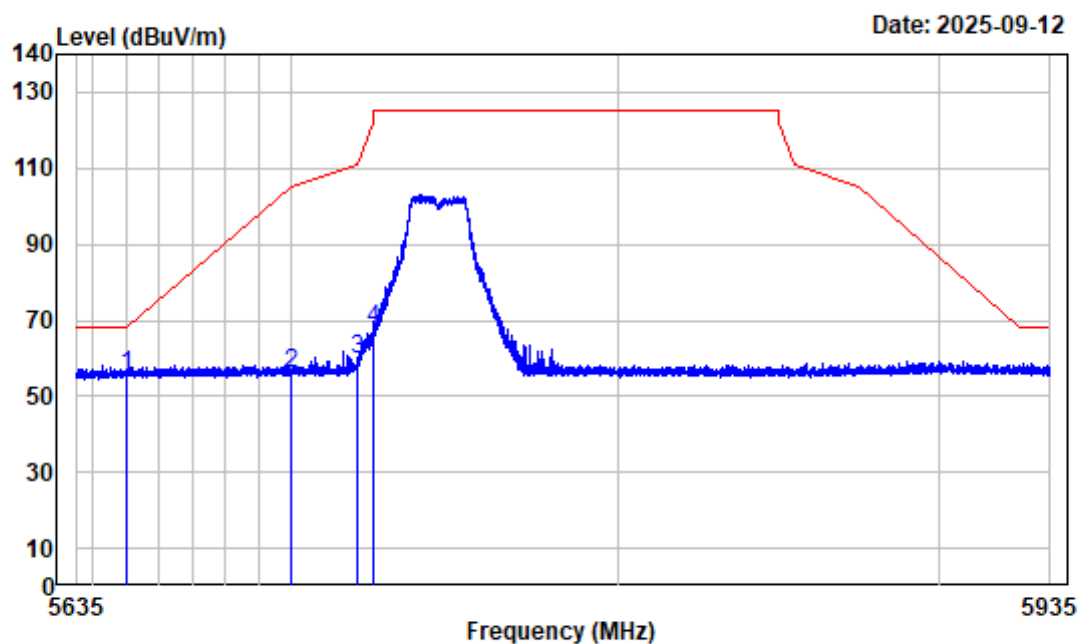

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Low Channel 5745 Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	60.09	55.37	68.20	-12.83	peak
2	5700.000	-4.35	60.33	55.98	105.20	-49.22	peak
3	5720.000	-4.43	63.95	59.52	110.80	-51.28	peak
4	5725.000	-4.45	72.00	67.55	122.20	-54.65	peak


802.11AC20 Middle Channel 5785 1GHz-6.6GHz_HORIZONTAL

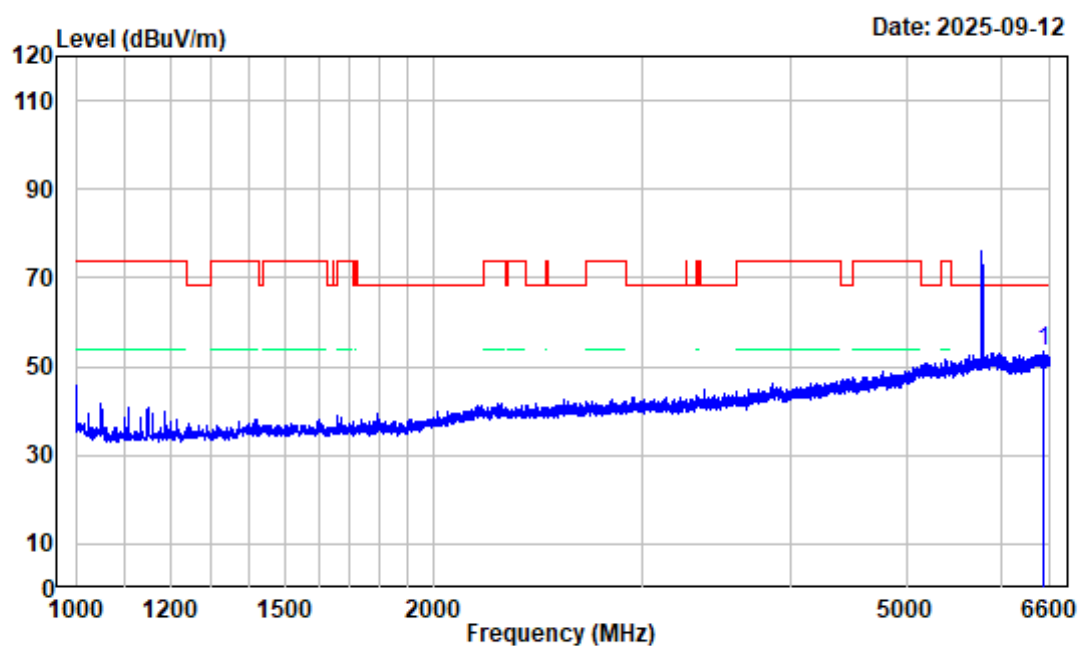

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 Middle Channel 5785 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6504.800	-3.83	57.26	53.43	68.20	-14.77	peak


802.11AC20 Middle Channel 5785 1GHz-6.6GHz_VERTICAL

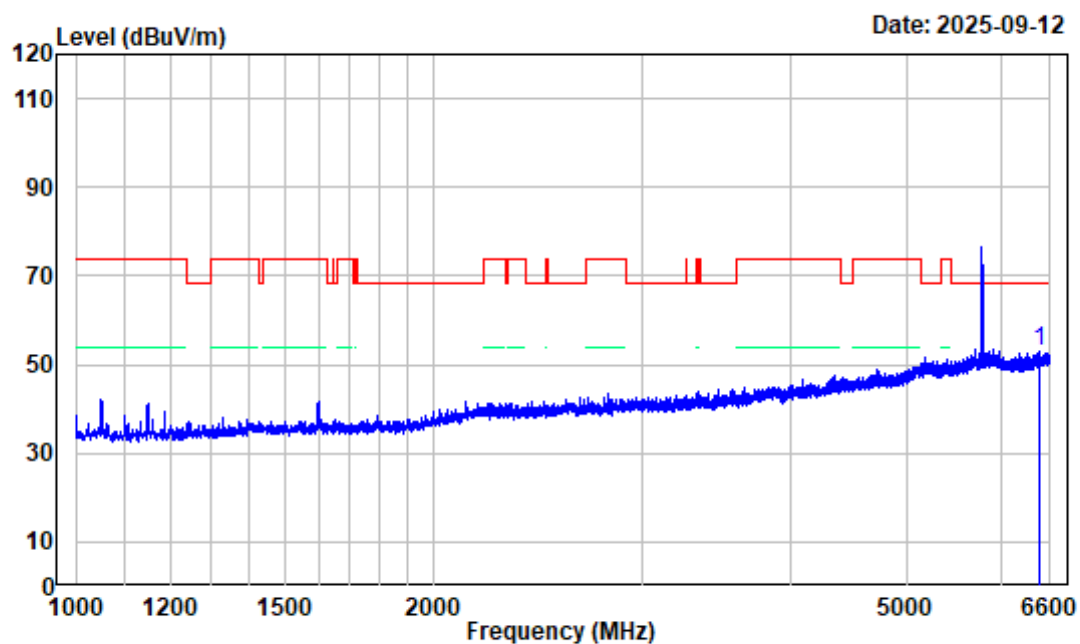

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 Middle Channel 5785 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6470.500	-3.61	56.67	53.06	68.20	-15.14	peak

802.11AC20 Middle Channel 5785 6.6GHz-18GHz_HORIZONTAL

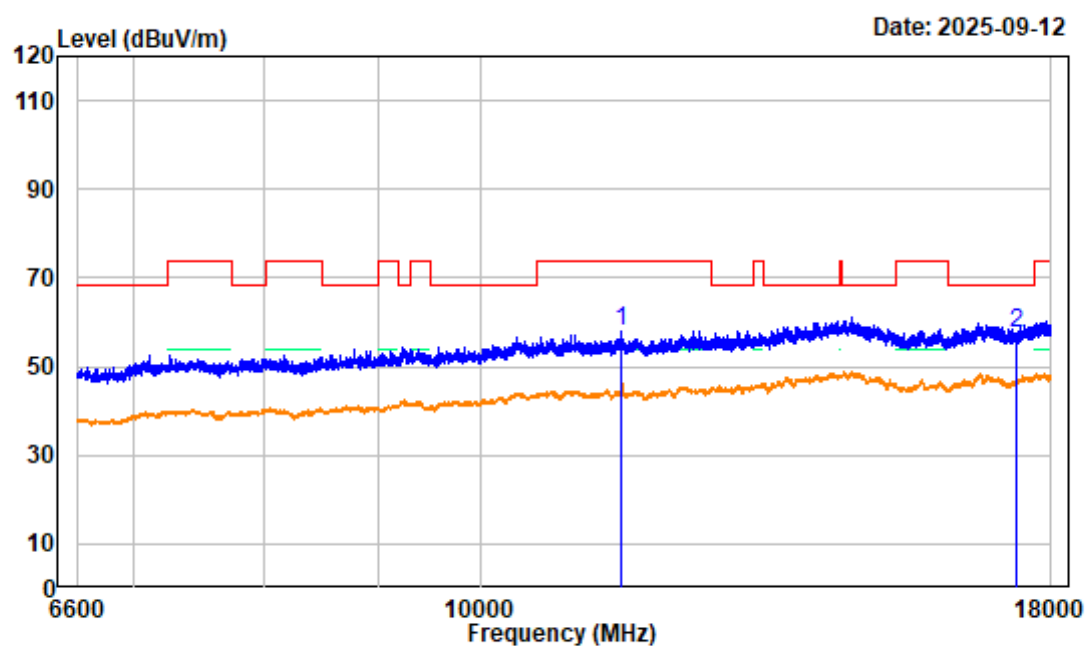

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Middle Channel 5785 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	6.02	52.11	58.13	74.00	-15.87	peak
2	17355.000	6.60	50.81	57.41	68.20	-10.79	peak

802.11AC20 Middle Channel 5785 6.6GHz-18GHz_VERTICAL

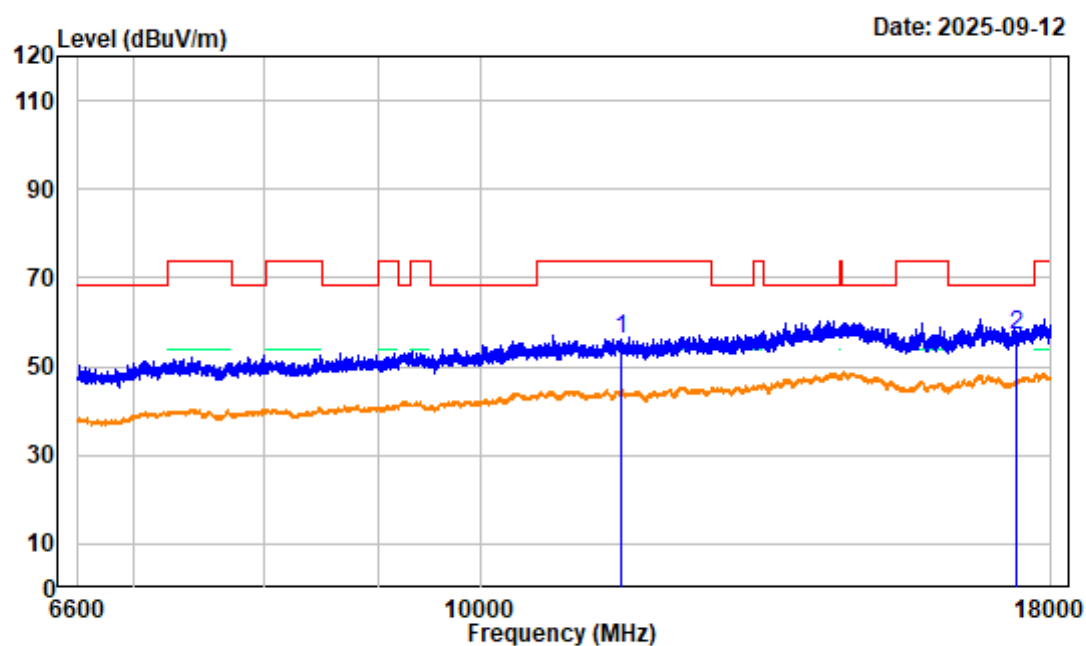

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 Middle Channel 5785 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	6.02	50.01	56.03	74.00	-17.97	peak
2	17355.000	6.60	50.35	56.95	68.20	-11.25	peak


802.11AC20 High Channel 5825 1GHz-6.6GHz_HORIZONTAL

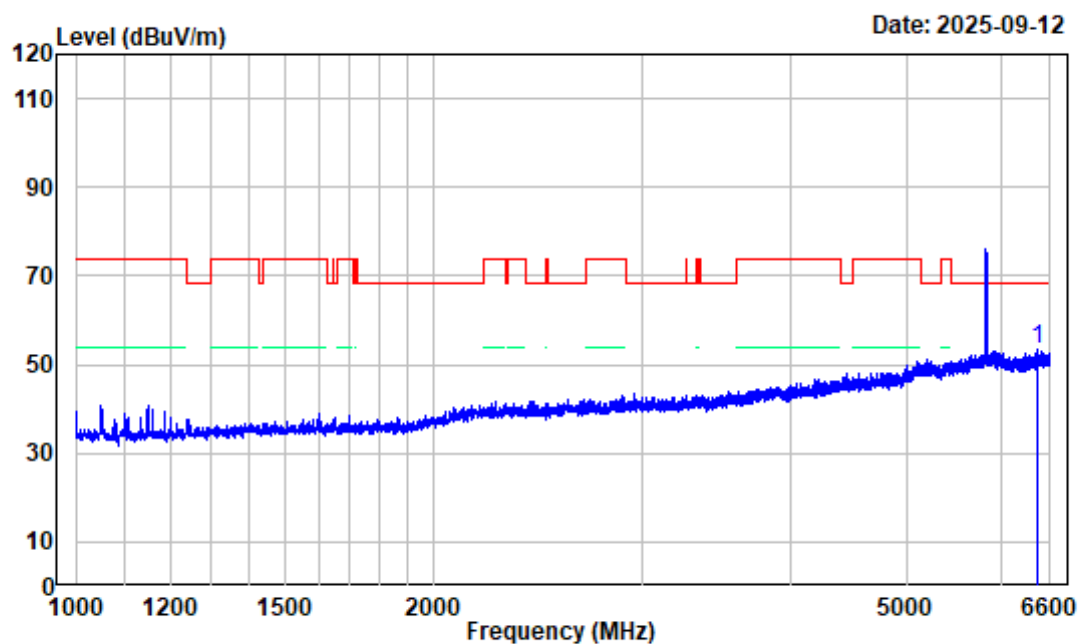

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 High Channel 5825 1GHz-6.6GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6436.900	-3.51	56.84	53.33	68.20	-14.87	peak

802.11AC20 High Channel 5825 1GHz-6.6GHz_VERTICAL

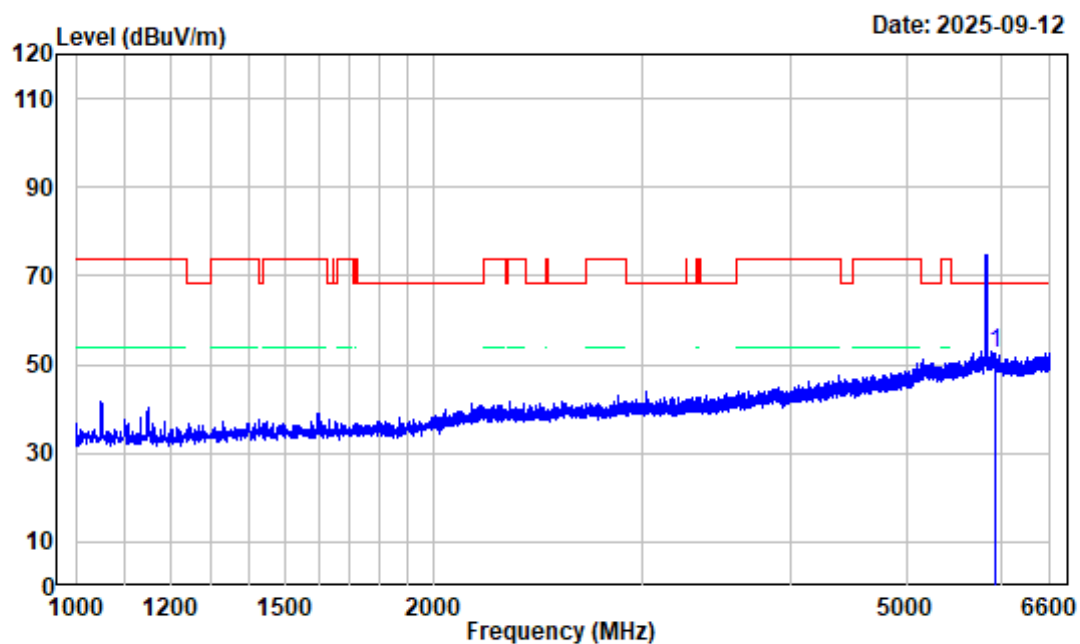

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5825 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5937.800	-4.47	57.04	52.57	68.20	-15.63	peak

802.11AC20 High Channel 5825 6.6GHz-18GHz_HORIZONTAL

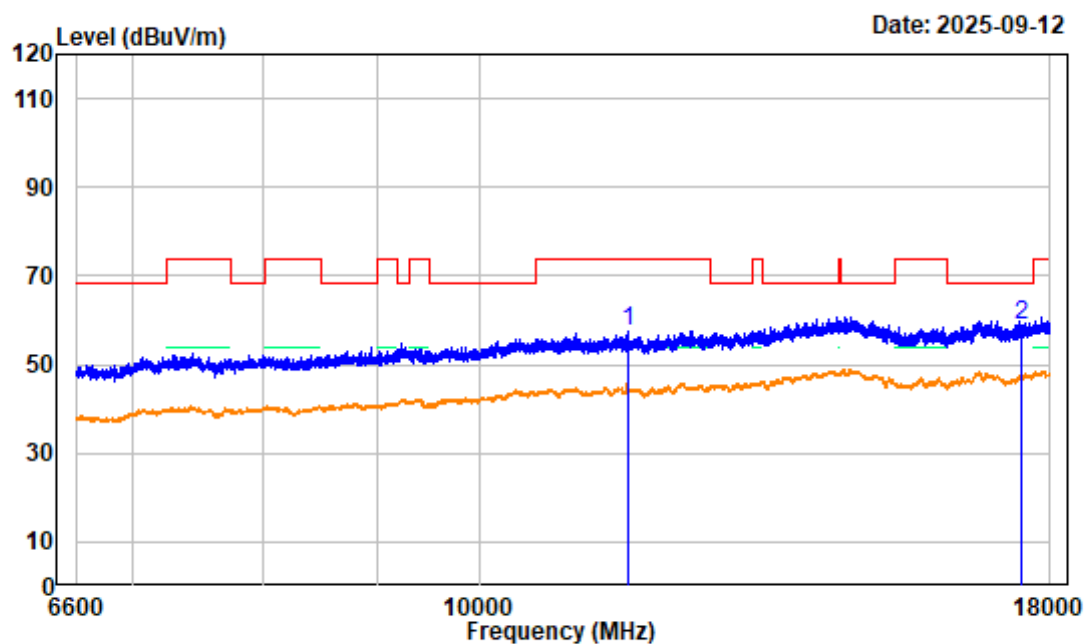

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5825 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.36	52.35	57.71	74.00	-16.29	peak
2	17475.000	7.21	51.76	58.97	68.20	-9.23	peak

802.11AC20 High Channel 5825 6.6GHz-18GHz_VERTICAL

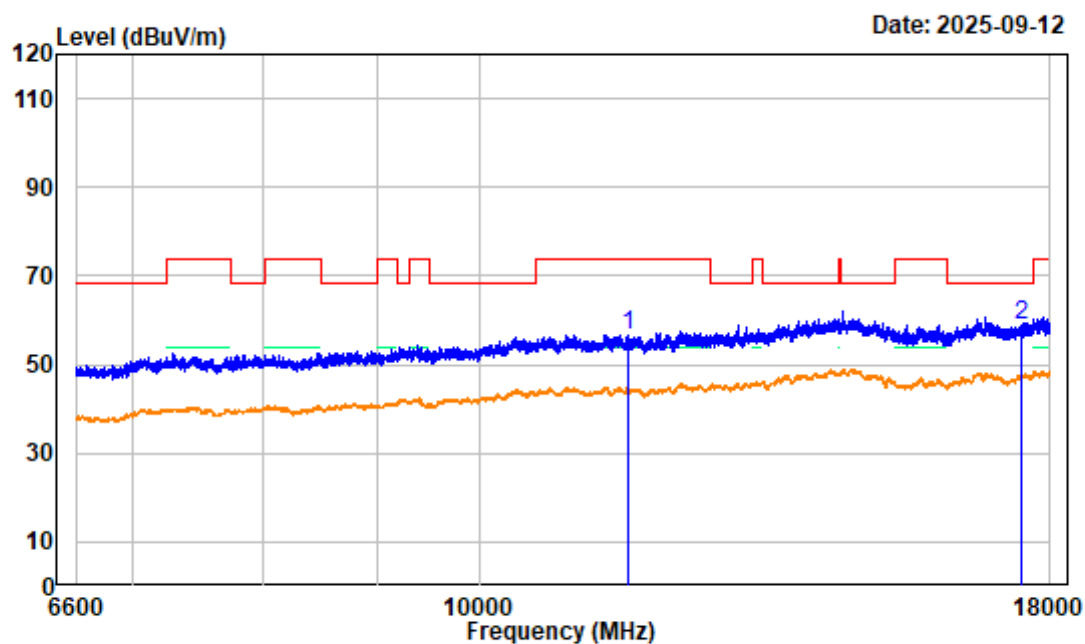

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5825 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.36	51.37	56.73	74.00	-17.27	peak
2	17475.000	7.21	51.52	58.73	68.20	-9.47	peak


802.11AC20 High Channel 5825 Bandedge_HORIZONTAL

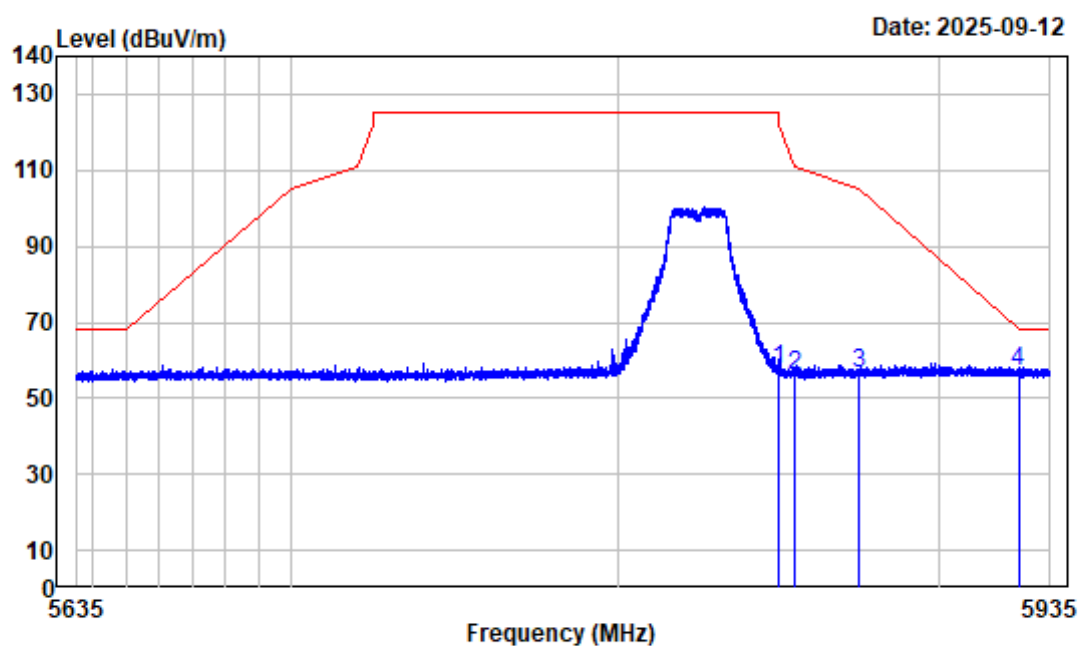

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AC20 High Channel 5825 Bandedge
 SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	62.27	57.73	122.20	-64.47	peak
2	5855.000	-4.48	60.23	55.75	110.80	-55.05	peak
3	5875.000	-4.20	60.50	56.30	105.20	-48.90	peak
4	5925.000	-4.27	61.20	56.93	68.20	-11.27	peak

802.11AC20 High Channel 5825 Bandedge_VERTICAL

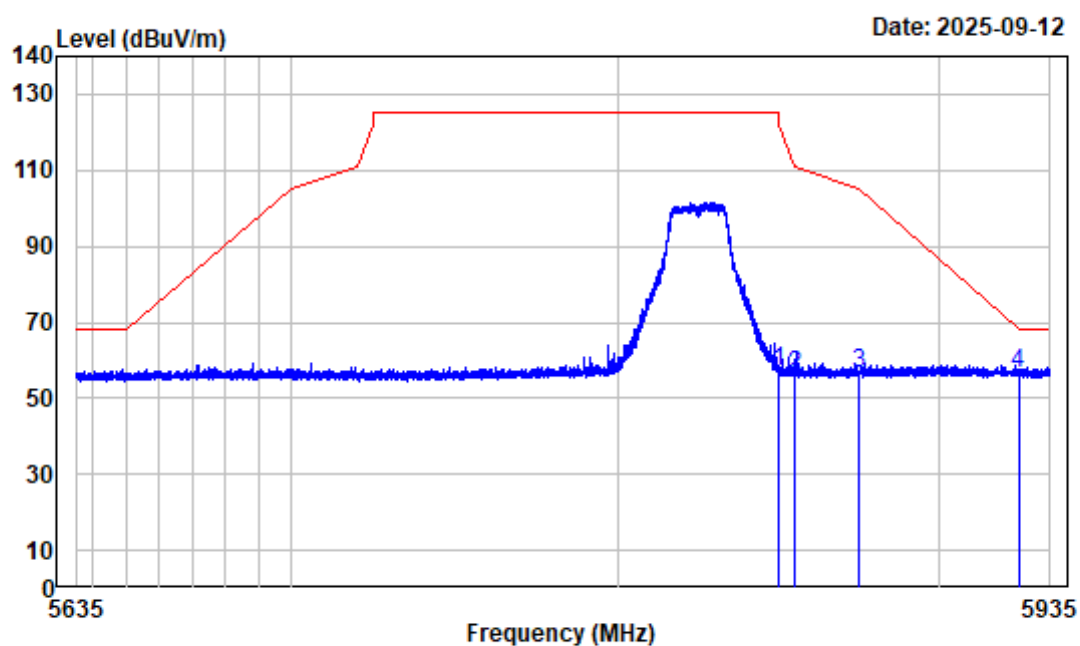

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC20 High Channel 5825 Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	61.46	56.92	122.20	-65.28	peak
2	5855.000	-4.48	60.45	55.97	110.80	-54.83	peak
3	5875.000	-4.20	60.48	56.28	105.20	-48.92	peak
4	5925.000	-4.27	60.93	56.66	68.20	-11.54	peak

802.11AC40 Low Channel 5755 1GHz-6.6GHz_HORIZONTAL

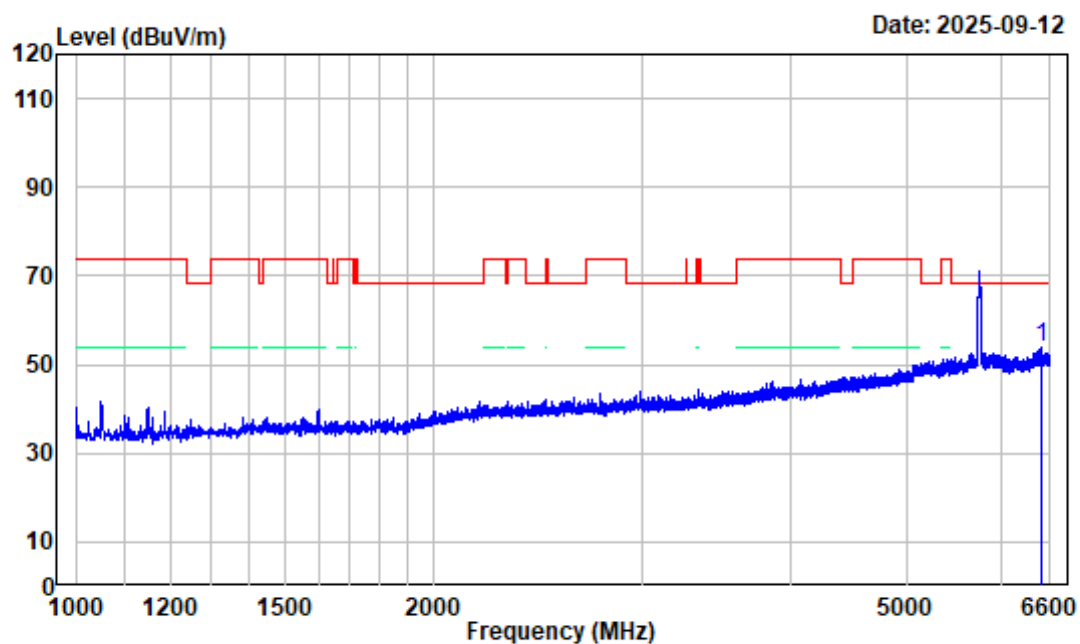

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5755 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6481.700	-3.70	57.40	53.70	68.20	-14.50	peak

802.11AC40 Low Channel 5755 1GHz-6.6GHz_VERTICAL

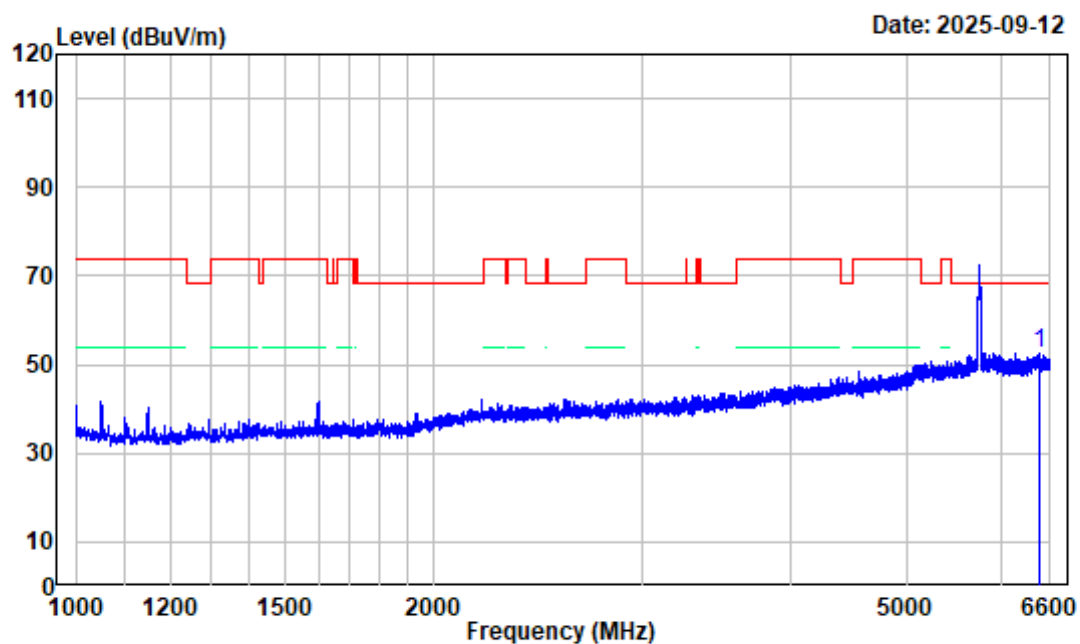

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5755 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6467.700	-3.59	56.31	52.72	68.20	-15.48	peak

802.11AC40 Low Channel 5755 6.6GHz-18GHz_HORIZONTAL

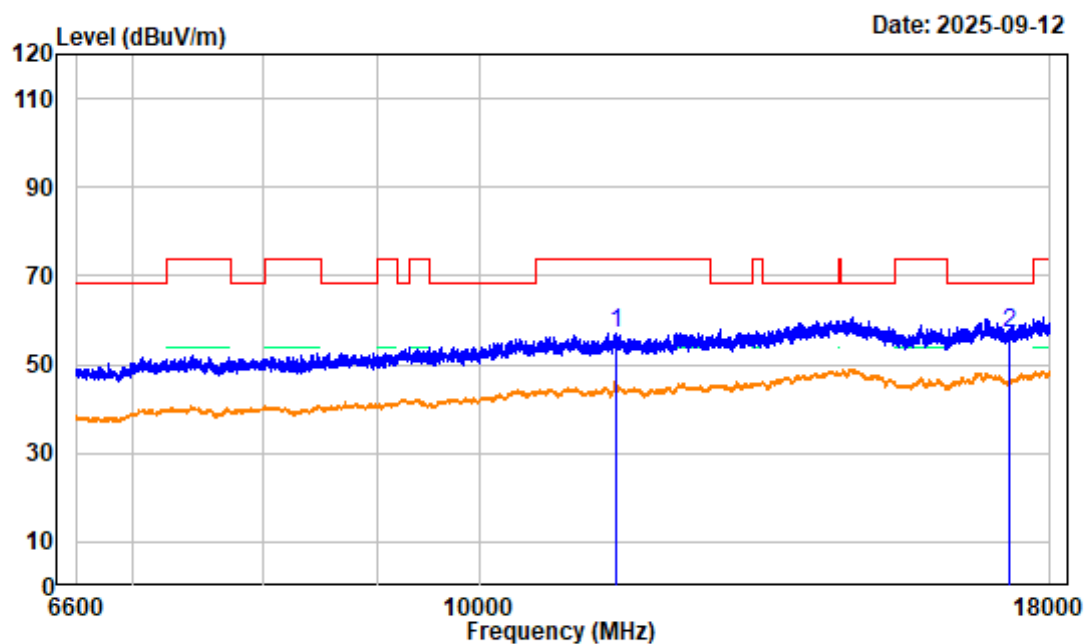

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5755 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.44	50.74	57.18	74.00	-16.82	peak
2	17265.000	6.75	50.42	57.17	68.20	-11.03	peak

802.11AC40 Low Channel 5755 6.6GHz-18GHz_VERTICAL

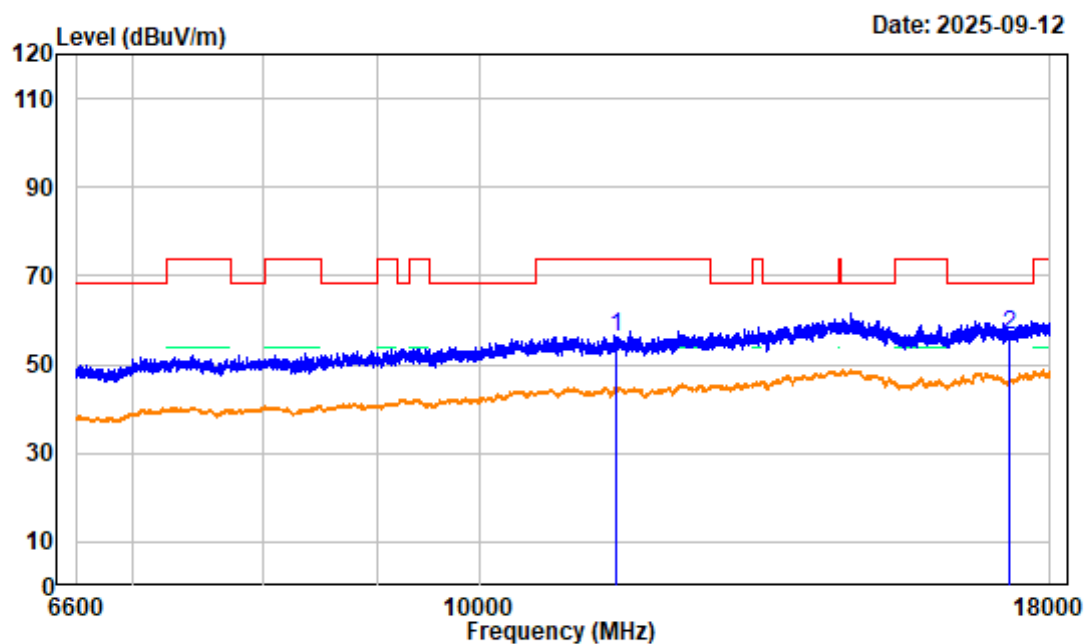

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5755 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.44	49.90	56.34	74.00	-17.66	peak
2	17265.000	6.75	49.76	56.51	68.20	-11.69	peak

802.11AC40 Low Channel 5755 Bandedge_HORIZONTAL

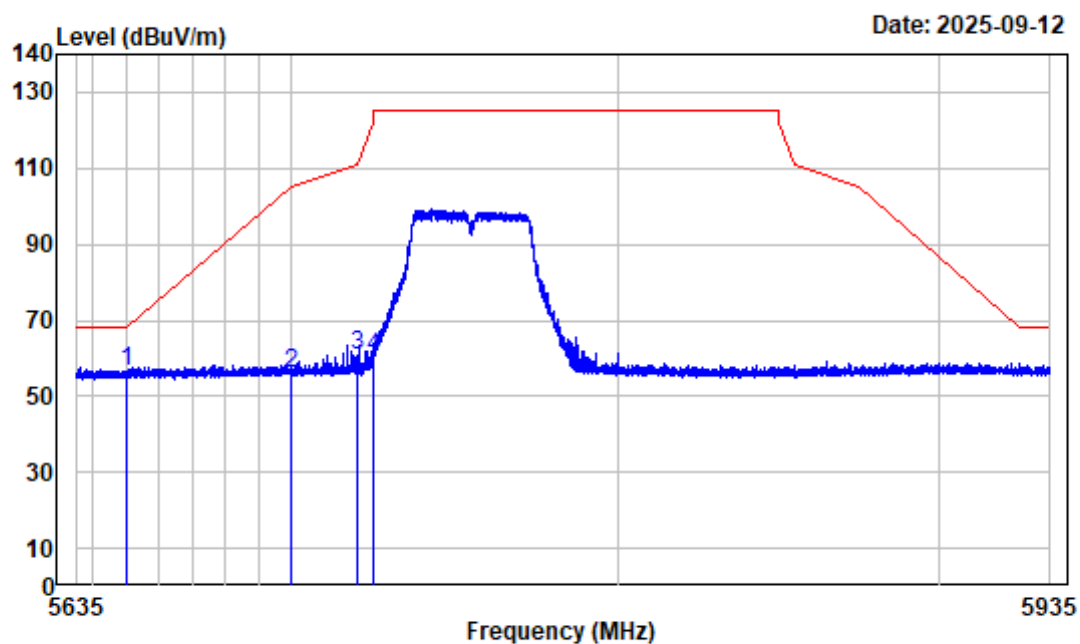

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5755 Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	61.03	56.31	68.20	-11.89	peak
2	5700.000	-4.35	60.09	55.74	105.20	-49.46	peak
3	5720.000	-4.43	64.98	60.55	110.80	-50.25	peak
4	5725.000	-4.45	64.66	60.21	122.20	-61.99	peak

802.11AC40 Low Channel 5755 Bandedge_VERTICAL

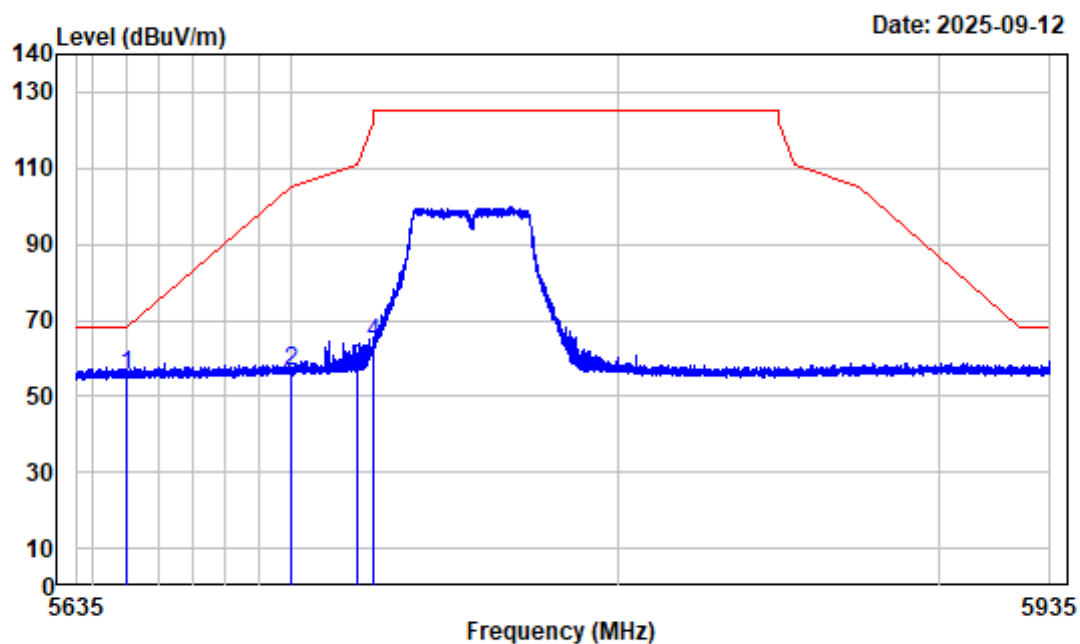

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 Low Channel 5755 Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	60.44	55.72	68.20	-12.48	peak
2	5700.000	-4.35	60.81	56.46	105.20	-48.74	peak
3	5720.000	-4.43	61.62	57.19	110.80	-53.61	peak
4	5725.000	-4.45	68.24	63.79	122.20	-58.41	peak


802.11AC40 High Channel 5795 1GHz-6.6GHz_HORIZONTAL

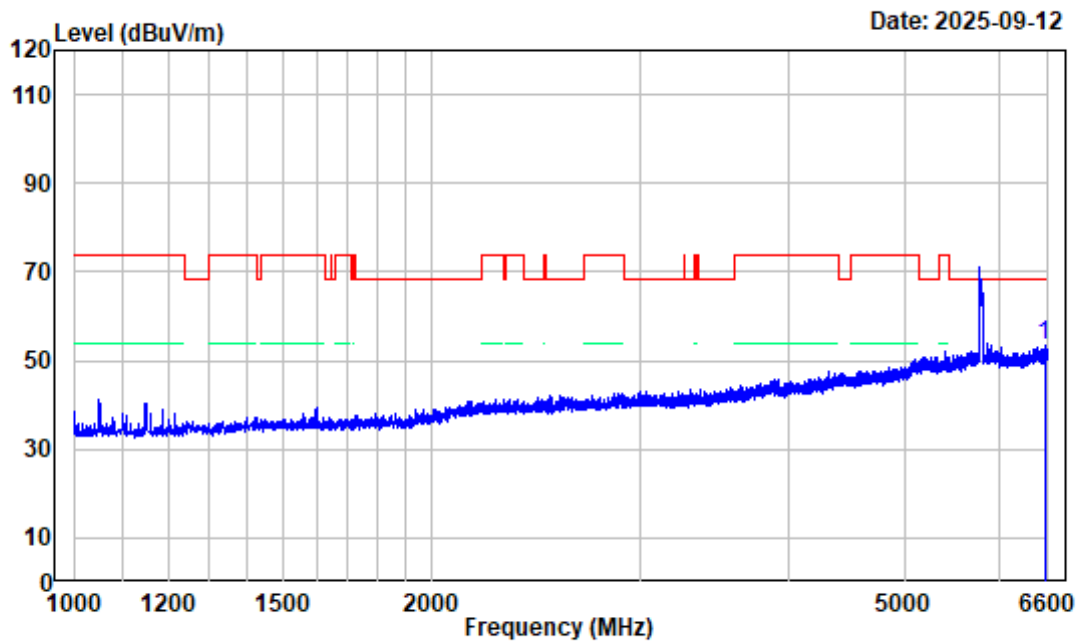

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AC40 High Channel 5795 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6555.200	-3.62	57.07	53.45	68.20	-14.75	peak

802.11AC40 High Channel 5795 1GHz-6.6GHz_VERTICAL

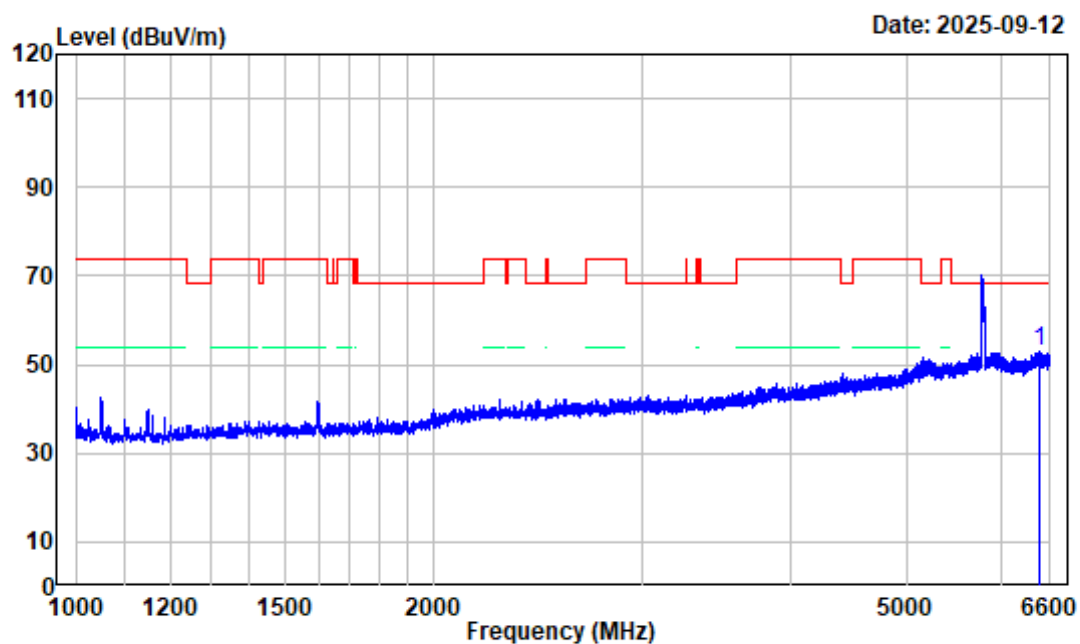

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5795 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6464.200	-3.57	56.33	52.76	68.20	-15.44	peak

802.11AC40 High Channel 5795 6.6GHz-18GHz_HORIZONTAL

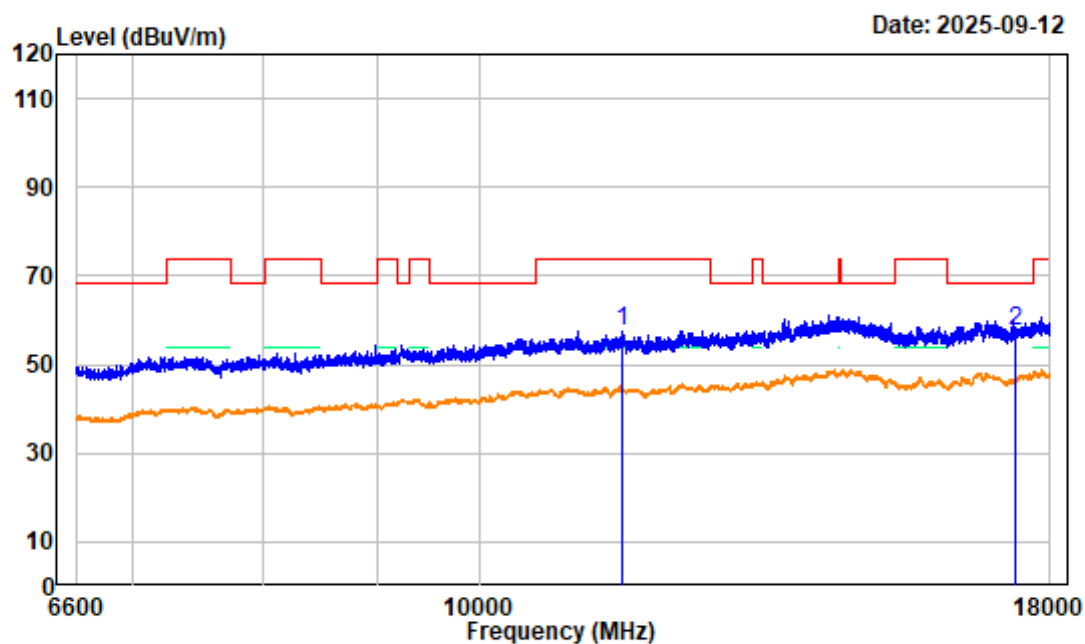

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5795 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.82	51.72	57.54	74.00	-16.46	peak
2	17385.000	6.77	50.89	57.66	68.20	-10.54	peak

802.11AC40 High Channel 5795 6.6GHz-18GHz_VERTICAL

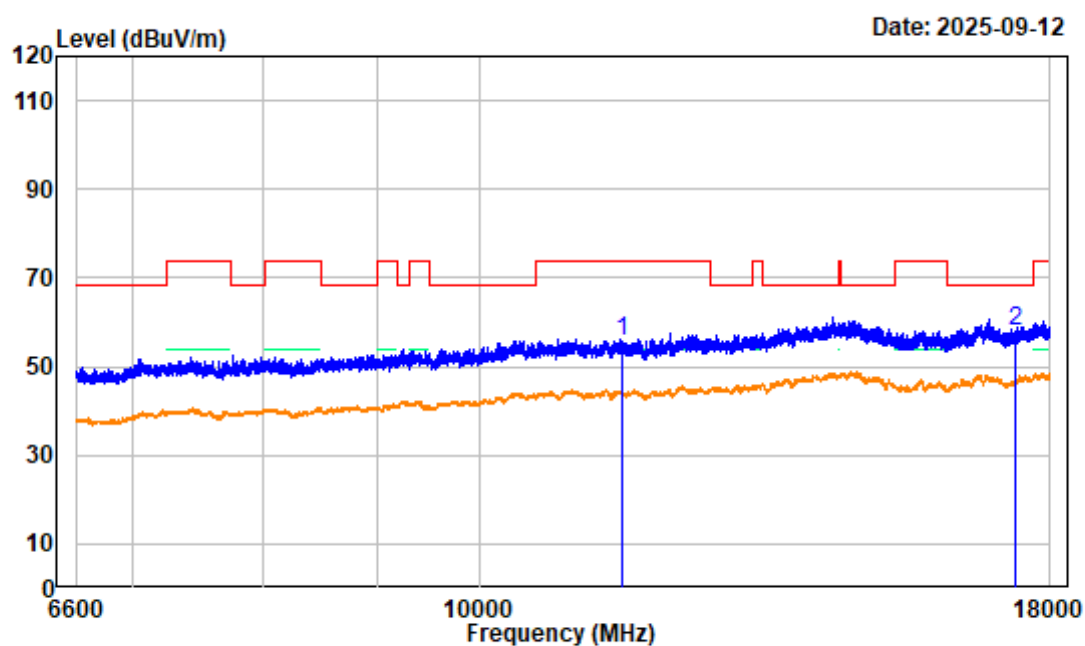

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5795 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.82	49.78	55.60	74.00	-18.40	peak
2	17385.000	6.77	51.02	57.79	68.20	-10.41	peak

802.11AC40 High Channel 5795 Bandedge_HORIZONTAL

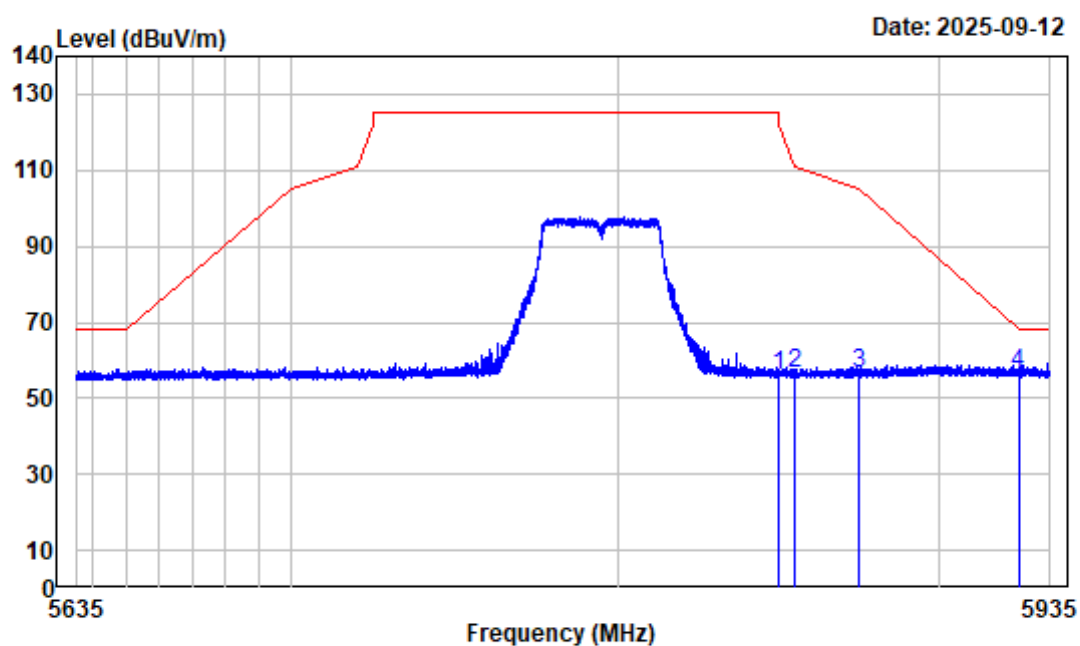

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5795 Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	60.43	55.89	122.20	-66.31	peak
2	5855.000	-4.48	61.04	56.56	110.80	-54.24	peak
3	5875.000	-4.20	60.95	56.75	105.20	-48.45	peak
4	5925.000	-4.27	60.67	56.40	68.20	-11.80	peak

802.11AC40 High Channel 5795 Bandedge_VERTICAL

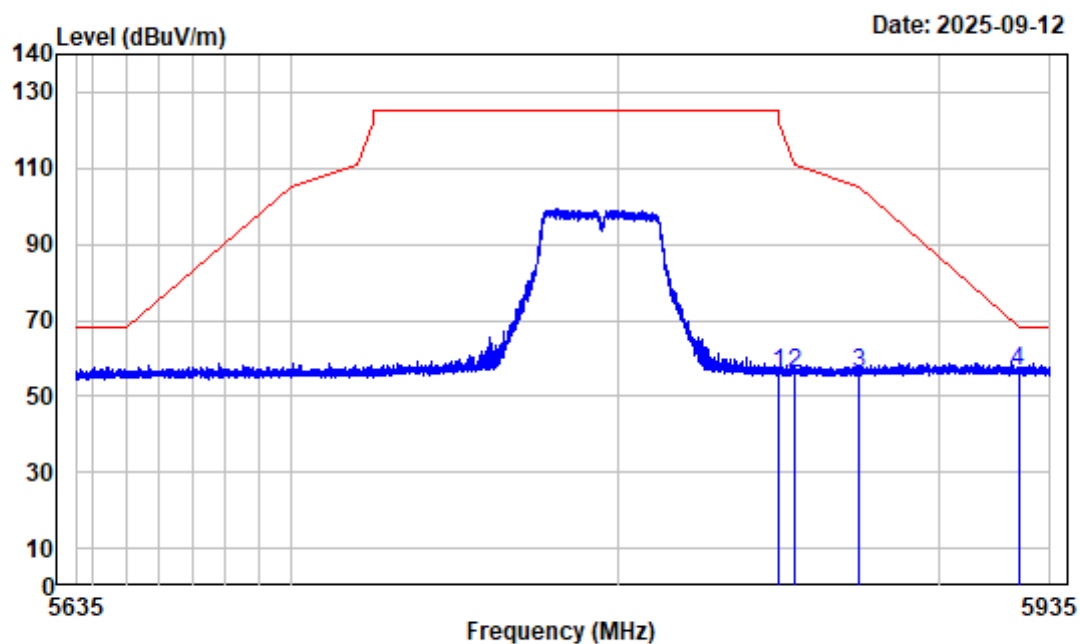

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AC40 High Channel 5795 Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	60.74	56.20	122.20	-66.00	peak
2	5855.000	-4.48	60.53	56.05	110.80	-54.75	peak
3	5875.000	-4.20	60.45	56.25	105.20	-48.95	peak
4	5925.000	-4.27	60.96	56.69	68.20	-11.51	peak


802.11AX20 Low Channel 5745 1GHz-6.6GHz_HORIZONTAL

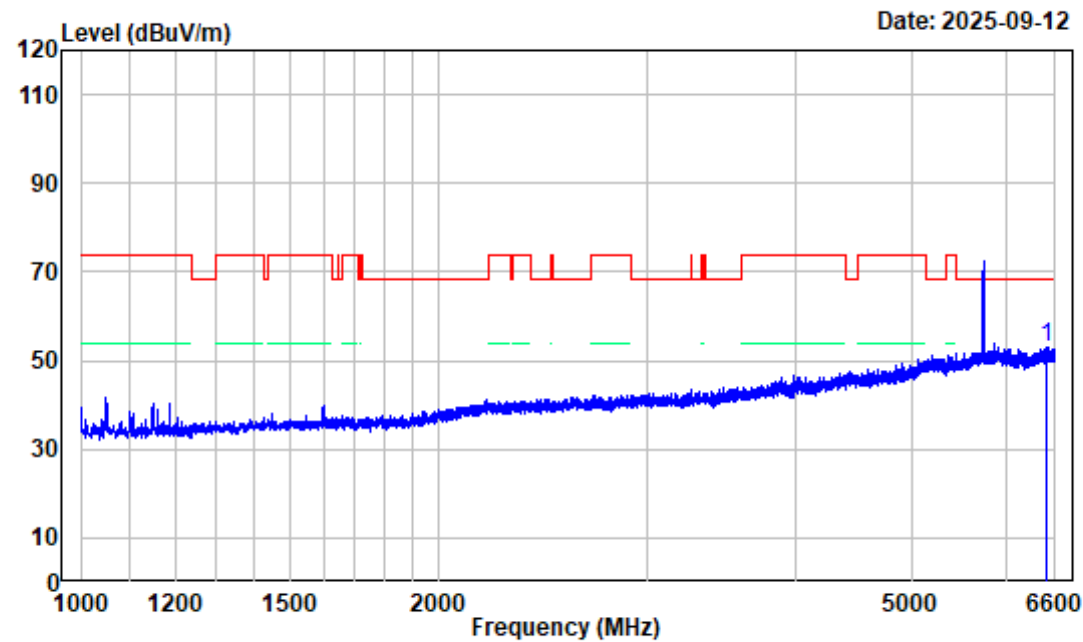

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 Low Channel 5745 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6494.300	-3.81	56.86	53.05	68.20	-15.15	peak

802.11AX20 Low Channel 5745 1GHz-6.6GHz_VERTICAL

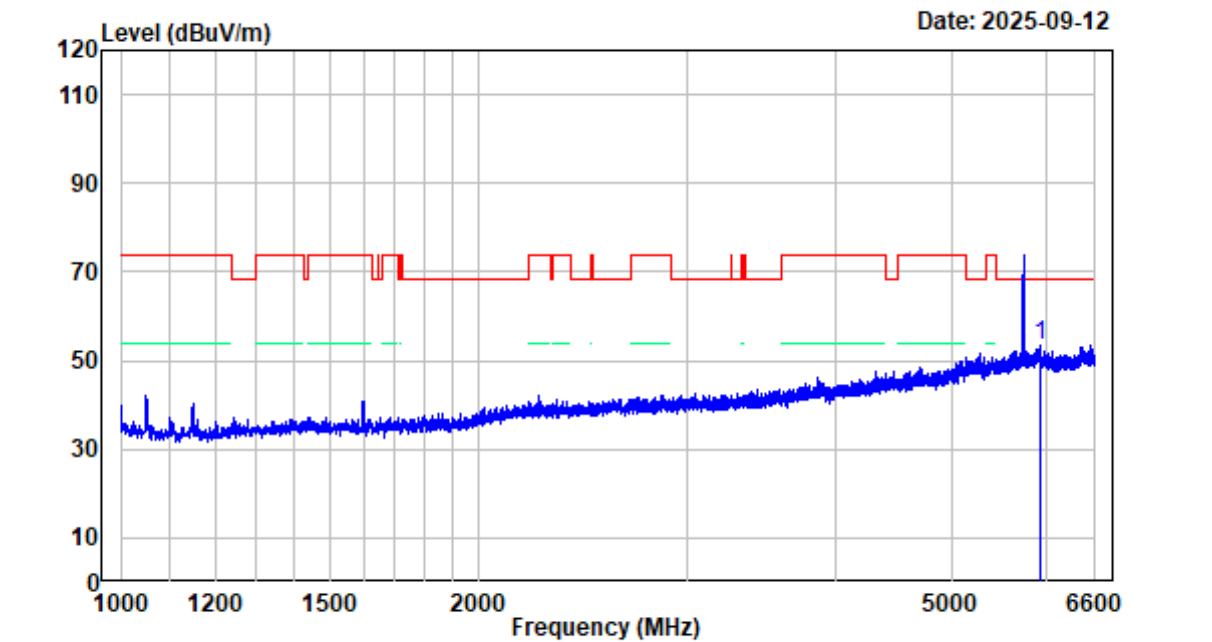

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5745 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5929.400	-4.33	57.69	53.36	68.20	-14.84	peak

802.11AX20 Low Channel 5745 6.6GHz-18GHz_HORIZONTAL

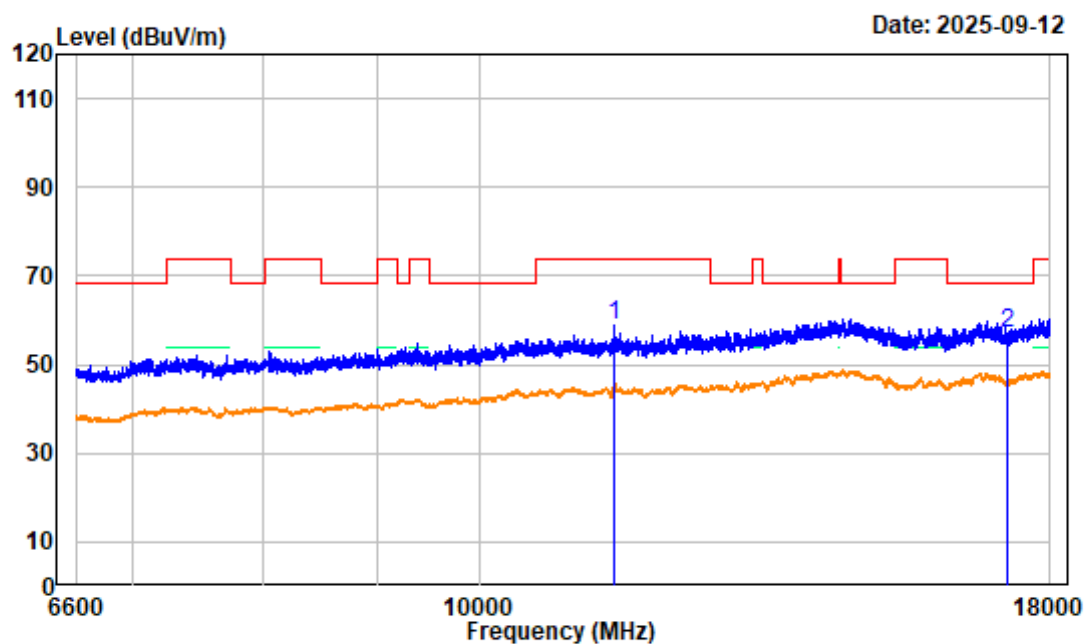

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5745 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.24	52.60	58.84	74.00	-15.16	peak
2	17235.000	6.82	50.38	57.20	68.20	-11.00	peak

802.11AX20 Low Channel 5745 6.6GHz-18GHz_VERTICAL

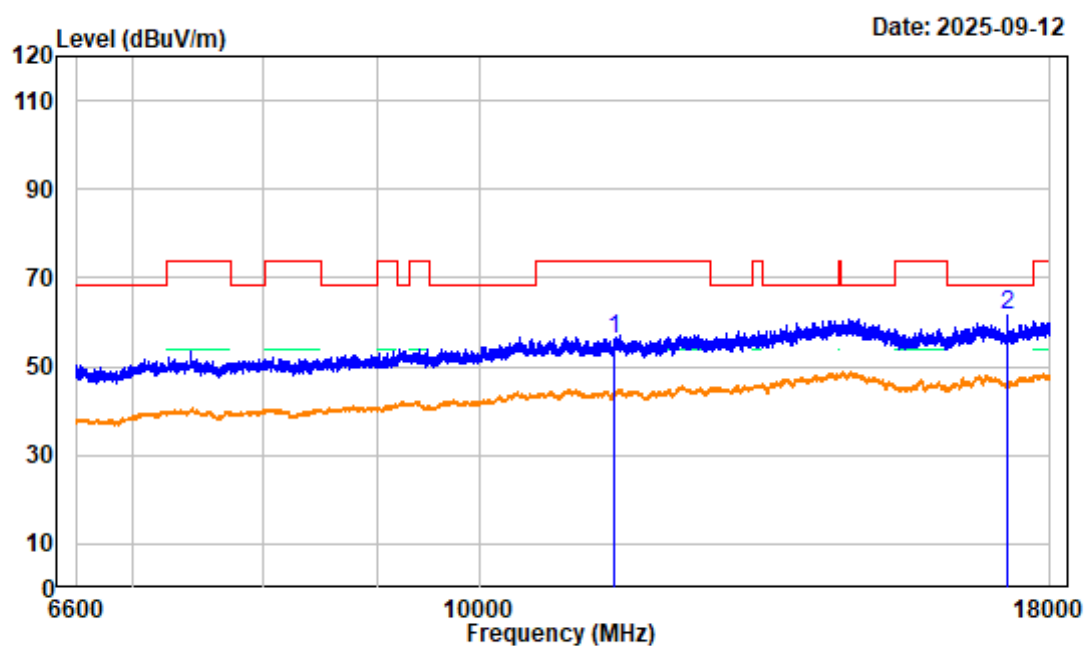

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5745 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11490.000	6.24	49.87	56.11	74.00	-17.89	peak
2	17235.000	6.82	54.70	61.52	68.20	-6.68	peak

802.11AX20 Low Channel 5745 Bandedge_HORIZONTAL

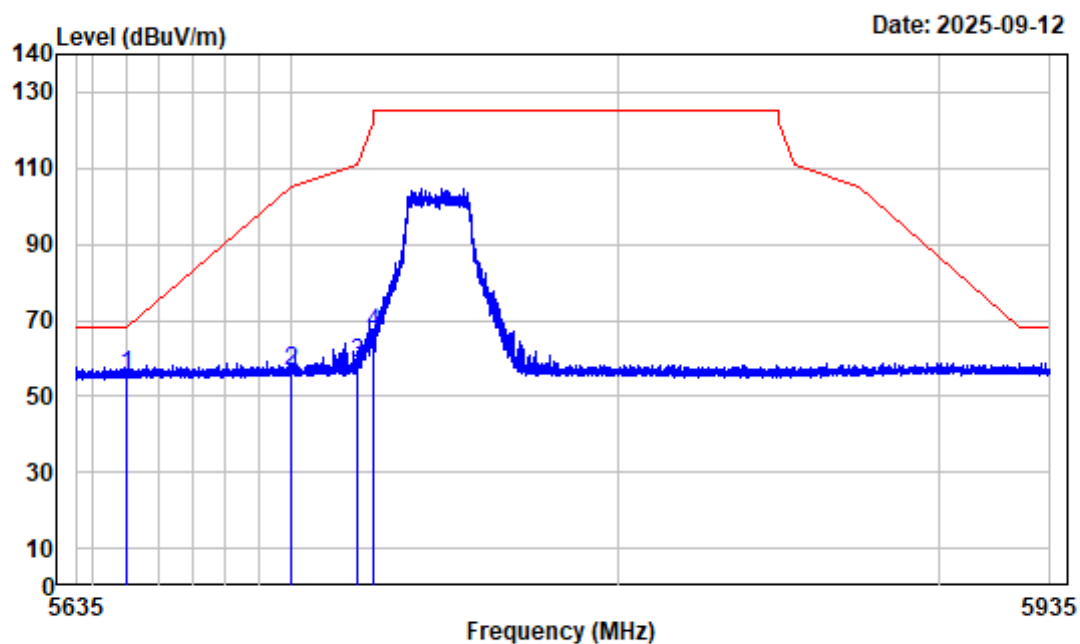

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5745 Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	60.14	55.42	68.20	-12.78	peak
2	5700.000	-4.35	60.68	56.33	105.20	-48.87	peak
3	5720.000	-4.43	63.07	58.64	110.80	-52.16	peak
4	5725.000	-4.45	70.95	66.50	122.20	-55.70	peak

802.11AX20 Low Channel 5745 Bandedge_VERTICAL

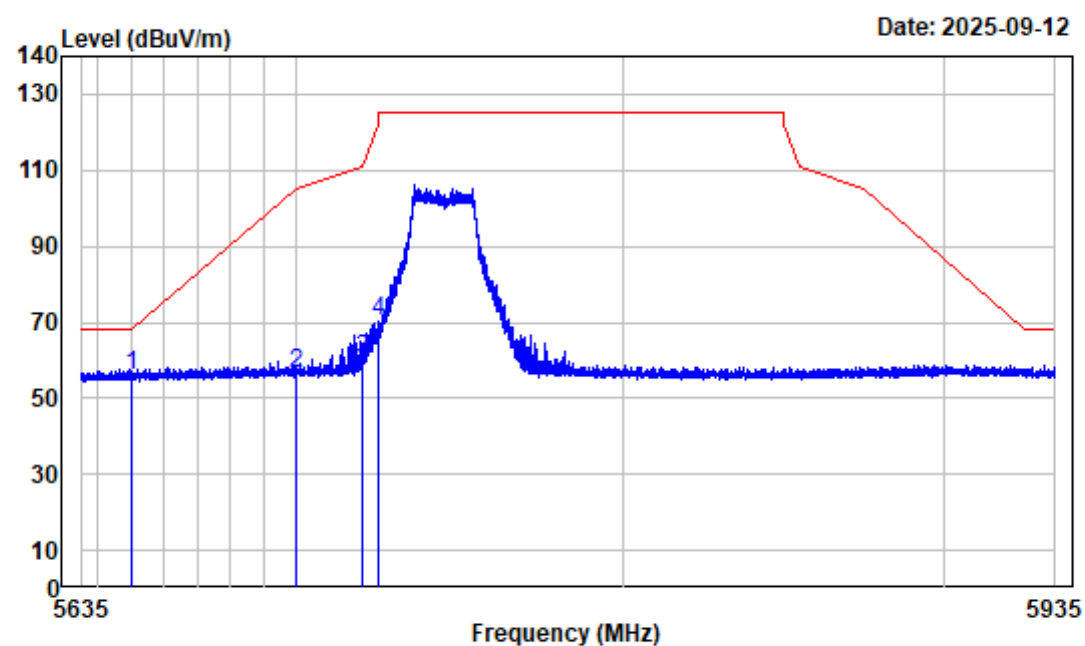

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Low Channel 5745 Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	60.85	56.13	68.20	-12.07	peak
2	5700.000	-4.35	61.08	56.73	105.20	-48.47	peak
3	5720.000	-4.43	64.79	60.36	110.80	-50.44	peak
4	5725.000	-4.45	74.58	70.13	122.20	-52.07	peak

802.11AX20 Middle Channel 5785 1GHz-6.6GHz_HORIZONTAL

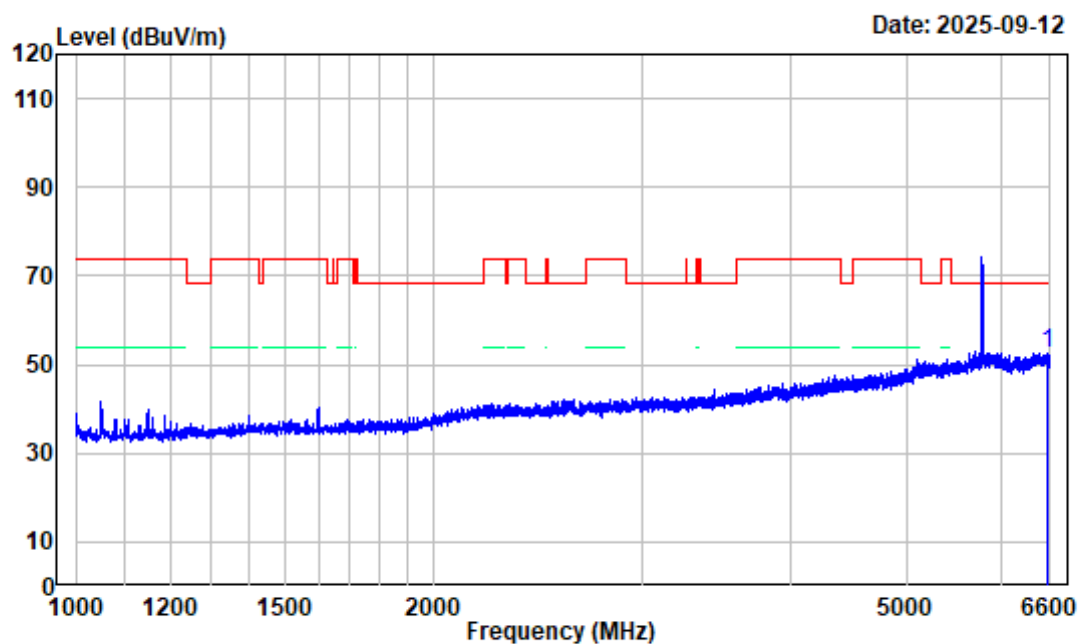

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Middle Channel 5785 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6565.000	-3.59	56.19	52.60	68.20	-15.60	peak

802.11AX20 Middle Channel 5785 1GHz-6.6GHz_VERTICAL

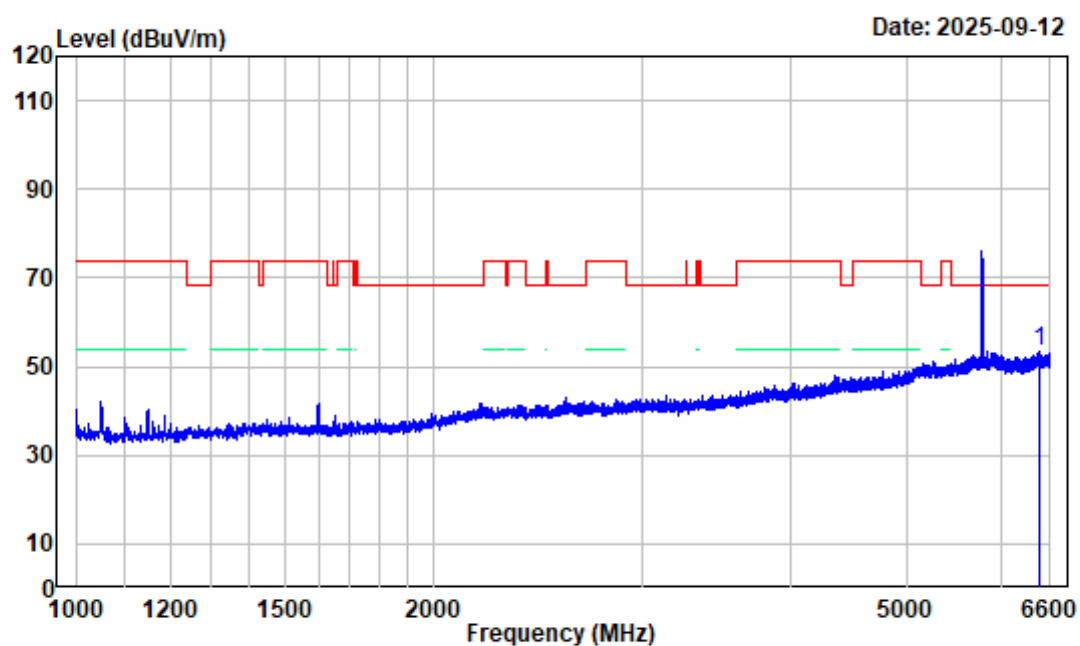

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Middle Channel 5785 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6469.800	-3.61	56.86	53.25	68.20	-14.95	peak

802.11AX20 Middle Channel 5785 6.6GHz-18GHz_HORIZONTAL

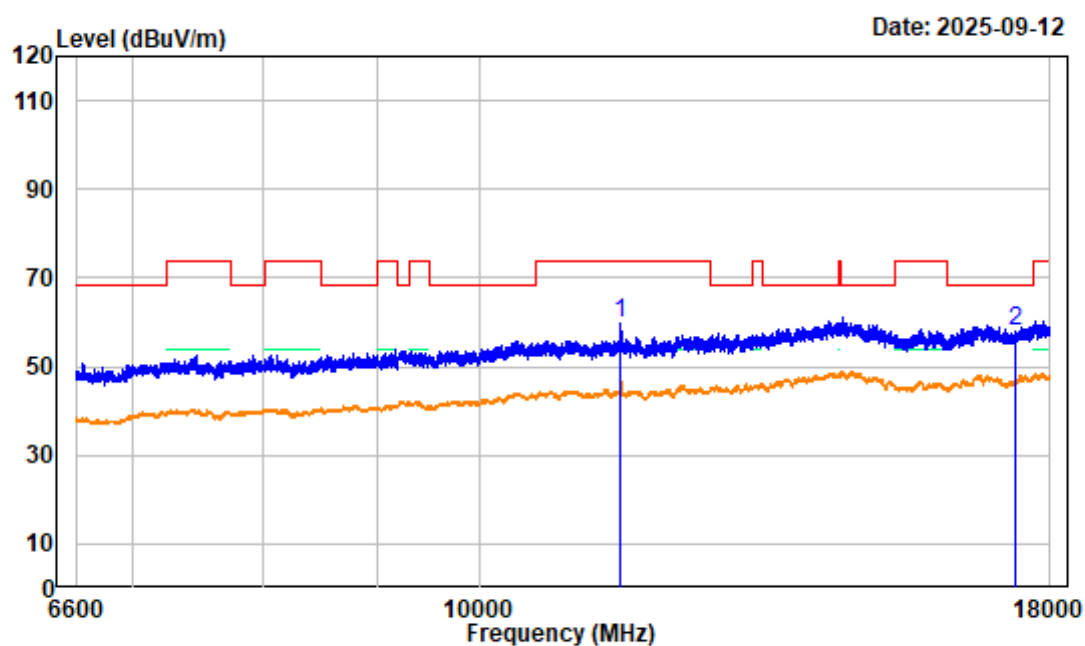

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 Middle Channel 5785 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	6.02	53.84	59.86	74.00	-14.14	peak
2	17355.000	6.60	51.28	57.88	68.20	-10.32	peak


802.11AX20 Middle Channel 5785 6.6GHz-18GHz_VERTICAL

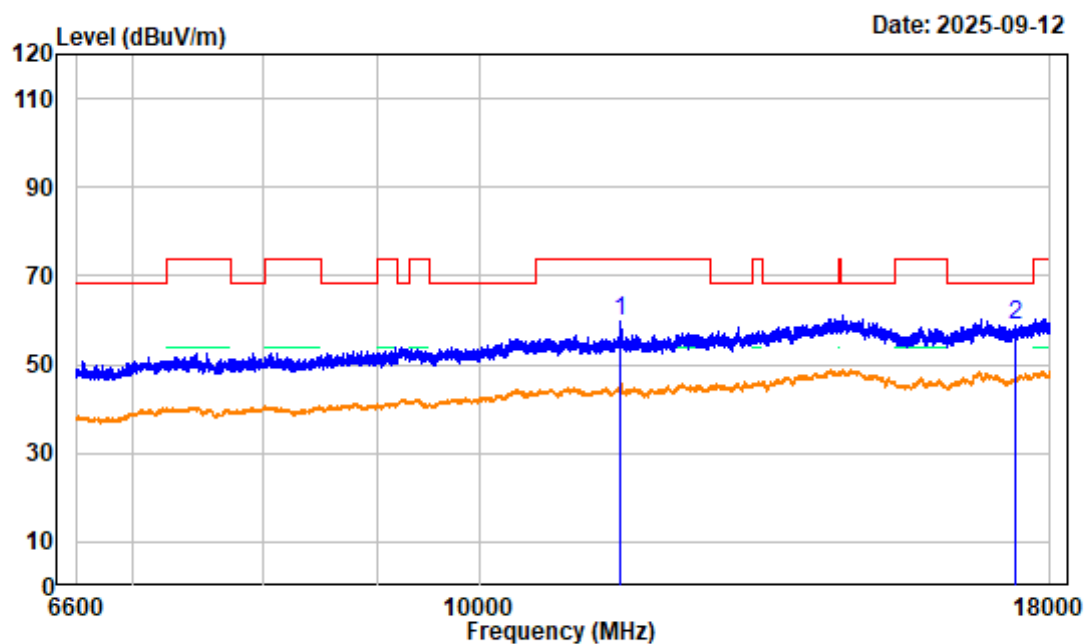

Site : chamber
 Condition : 3m VERTICAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX20 Middle Channel 5785 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11570.000	6.02	53.84	59.86	74.00	-14.14	peak
2	17355.000	6.60	52.20	58.80	68.20	-9.40	peak


802.11AX20 High Channel 5825 1GHz-6.6GHz_HORIZONTAL

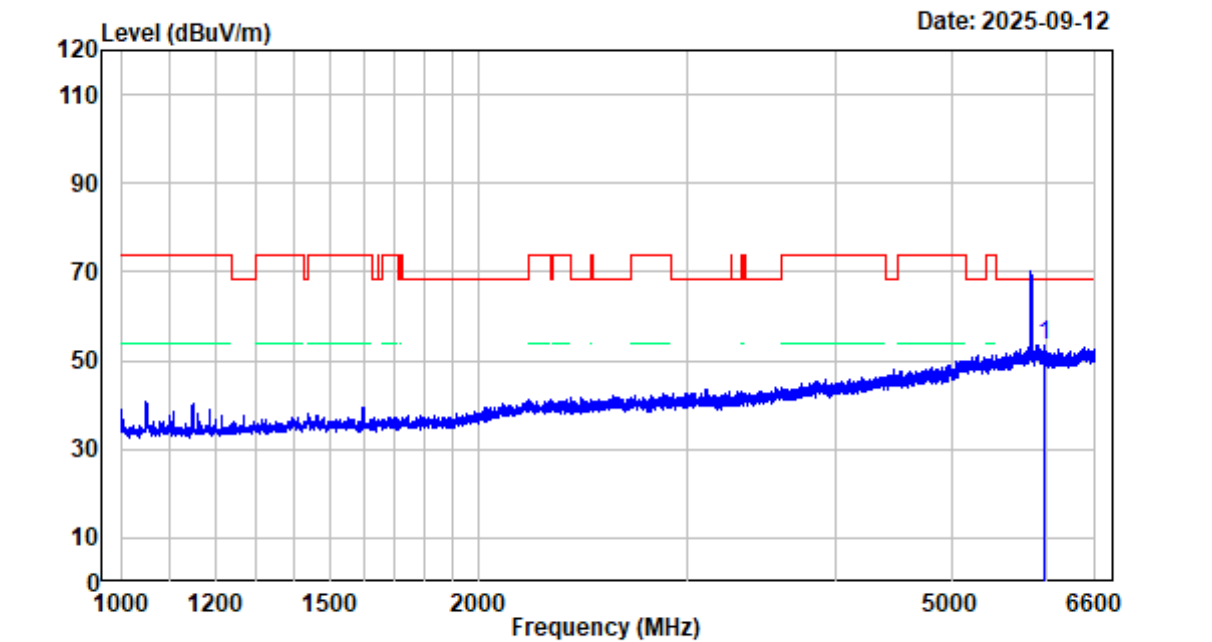

Site : chamber
Condition : 3m HORIZONTAL
Project No.: 2504T18085E-RF
Test Mode : Transmitting Tester:Kevin Lv
Note : 802.11AX20 High Channel 5825 1GHz-6.6GHz
SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 5978.400	-4.80	58.11	53.31	68.20	-14.89	peak

802.11AX20 High Channel 5825 1GHz-6.6GHz_VERTICAL

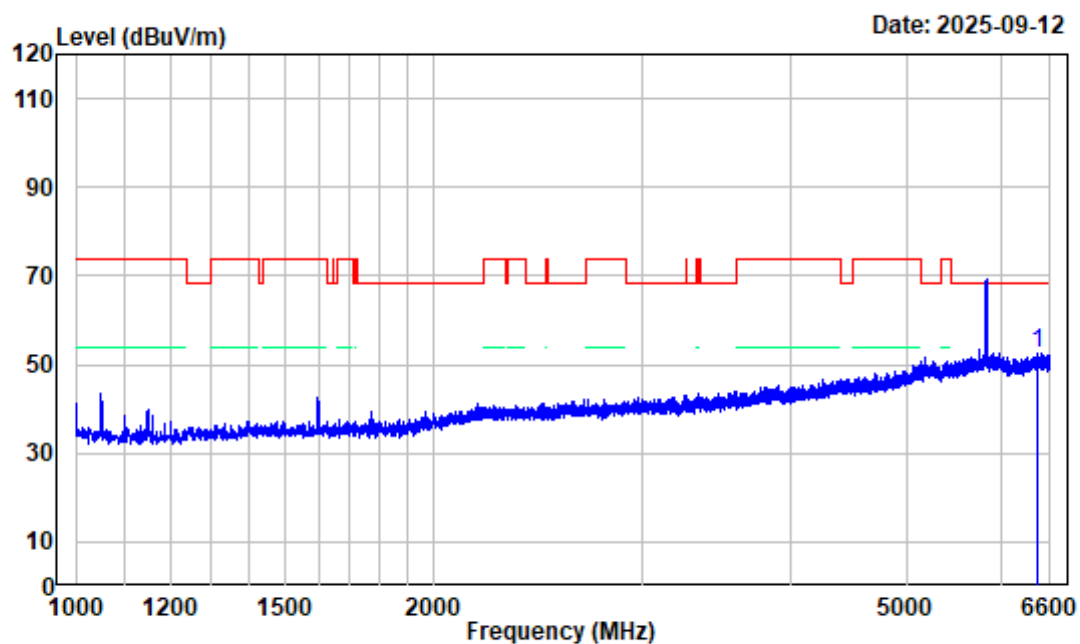

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5825 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

			Read	Limit	Over	
	Freq	Factor	Level	Level	Line	Limit Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB
1	6441.100	-3.48	56.00	52.52	68.20	-15.68 peak

802.11AX20 High Channel 5825 6.6GHz-18GHz_HORIZONTAL

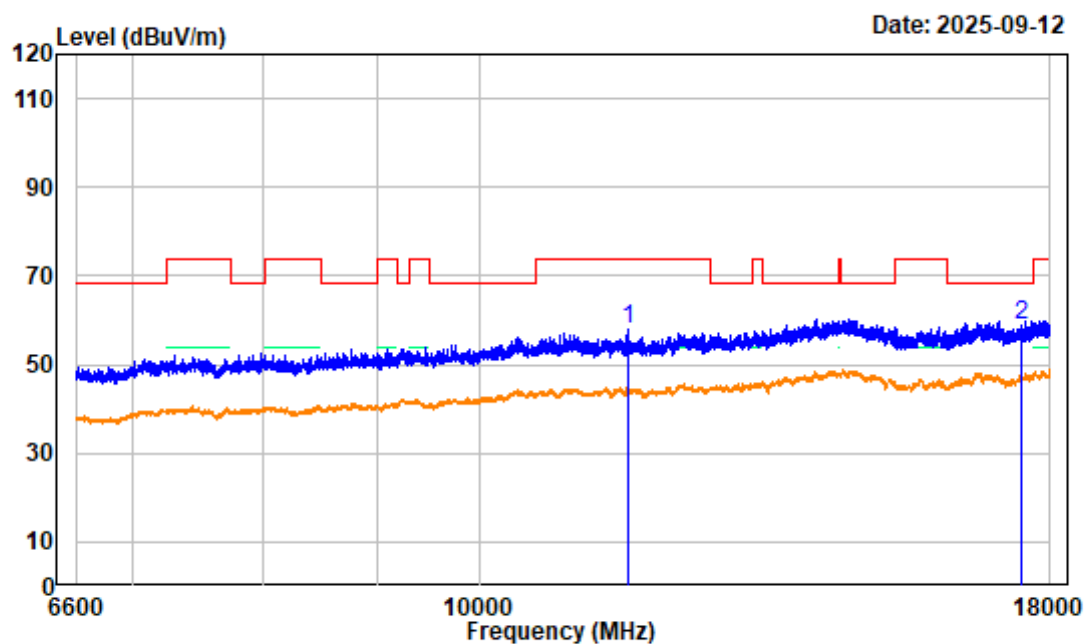

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5825 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.36	52.49	57.85	74.00	-16.15	peak
2	17475.000	7.21	51.72	58.93	68.20	-9.27	peak

802.11AX20 High Channel 5825 6.6GHz-18GHz_VERTICAL

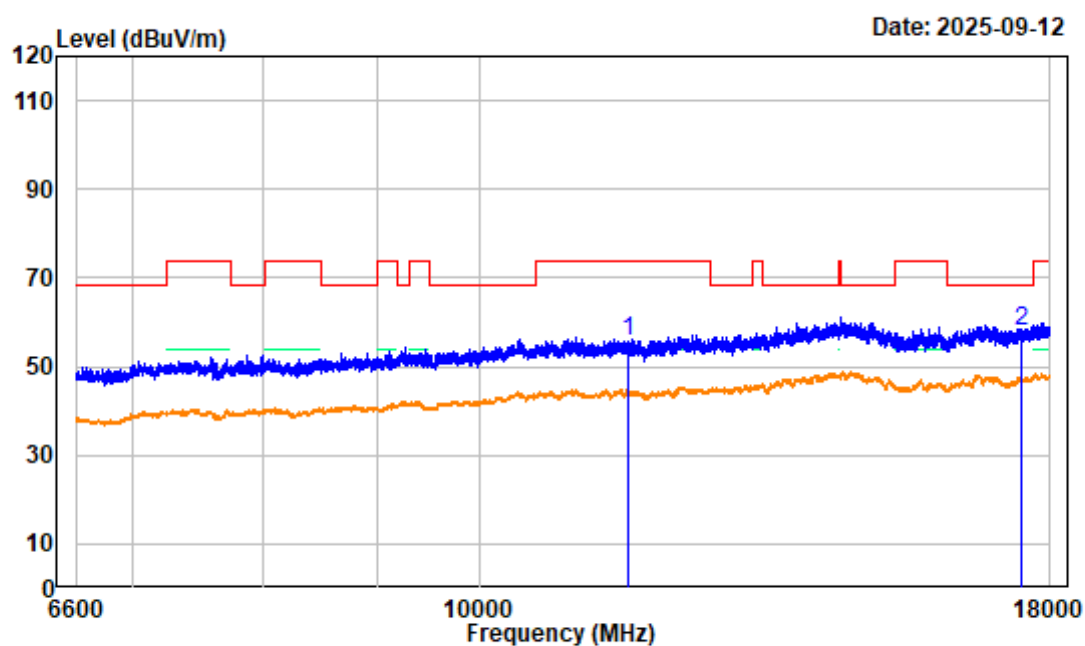

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5825 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11650.000	5.36	50.24	55.60	74.00	-18.40	peak
2	17475.000	7.21	50.70	57.91	68.20	-10.29	peak

802.11AX20 High Channel 5825 Bandedge_HORIZONTAL

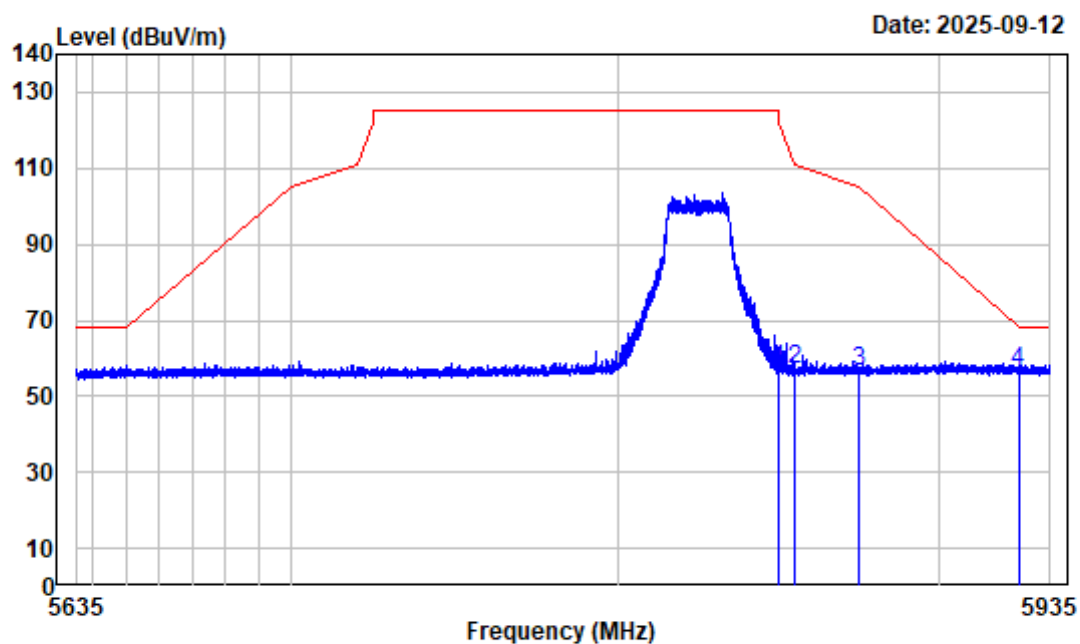

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5825 Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	61.47	56.93	122.20	-65.27	peak
2	5855.000	-4.48	61.38	56.90	110.80	-53.90	peak
3	5875.000	-4.20	60.80	56.60	105.20	-48.60	peak
4	5925.000	-4.27	60.73	56.46	68.20	-11.74	peak

802.11AX20 High Channel 5825 Bandedge_VERTICAL

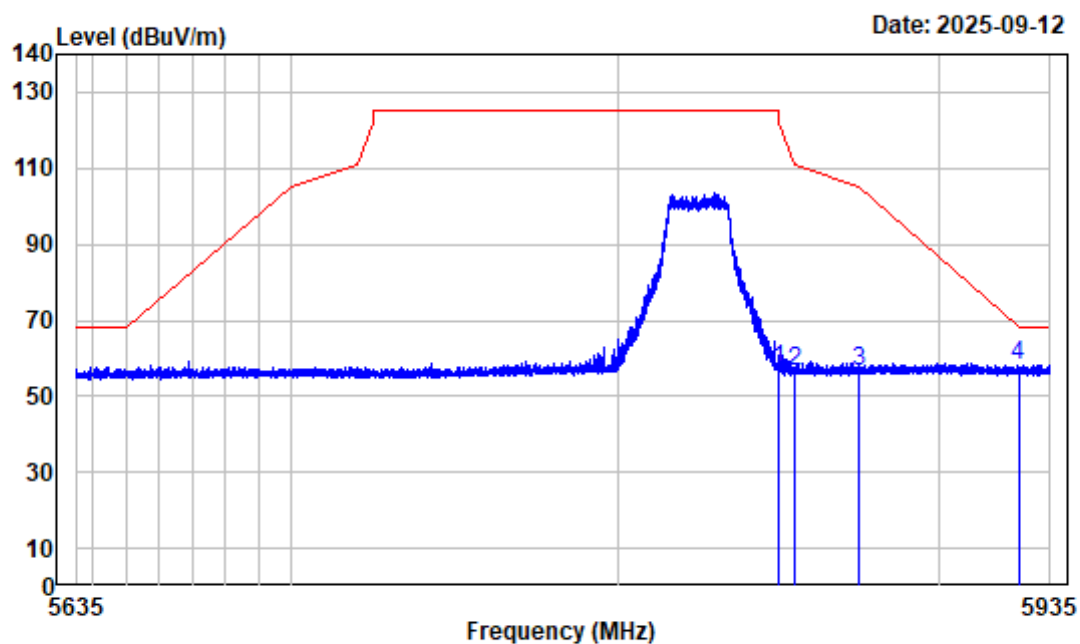

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX20 High Channel 5825 Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	61.70	57.16	122.20	-65.04	peak
2	5855.000	-4.48	61.09	56.61	110.80	-54.19	peak
3	5875.000	-4.20	60.80	56.60	105.20	-48.60	peak
4	5925.000	-4.27	62.17	57.90	68.20	-10.30	peak

802.11AX40 Low Channel 5755 1GHz-6.6GHz_HORIZONTAL

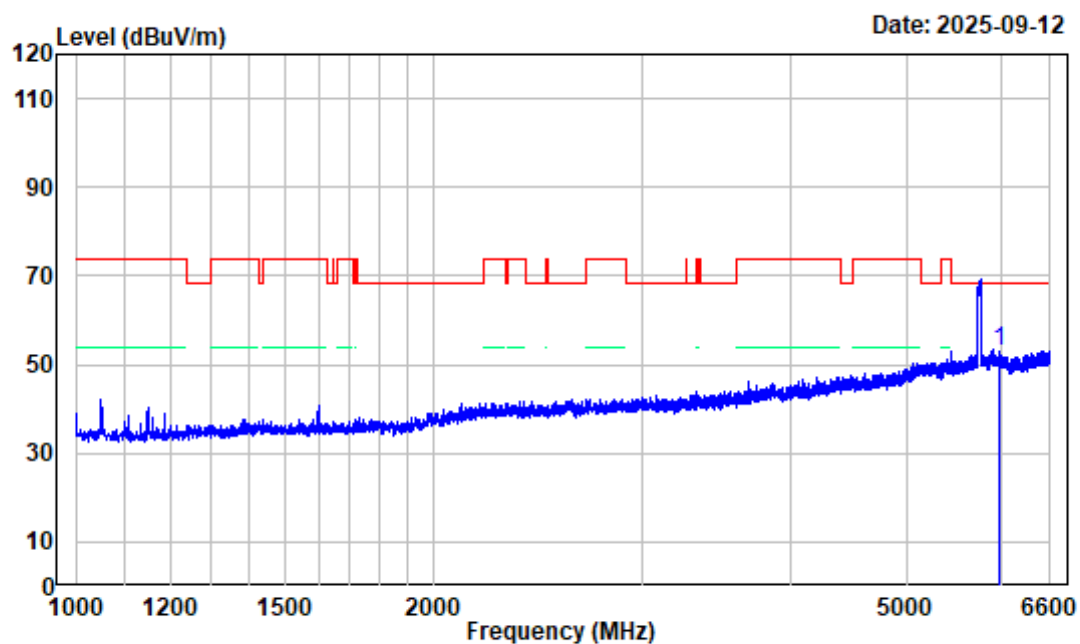

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5755 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5980.500	-4.80	57.84	53.04	68.20	-15.16	peak

802.11AX40 Low Channel 5755 1GHz-6.6GHz_VERTICAL

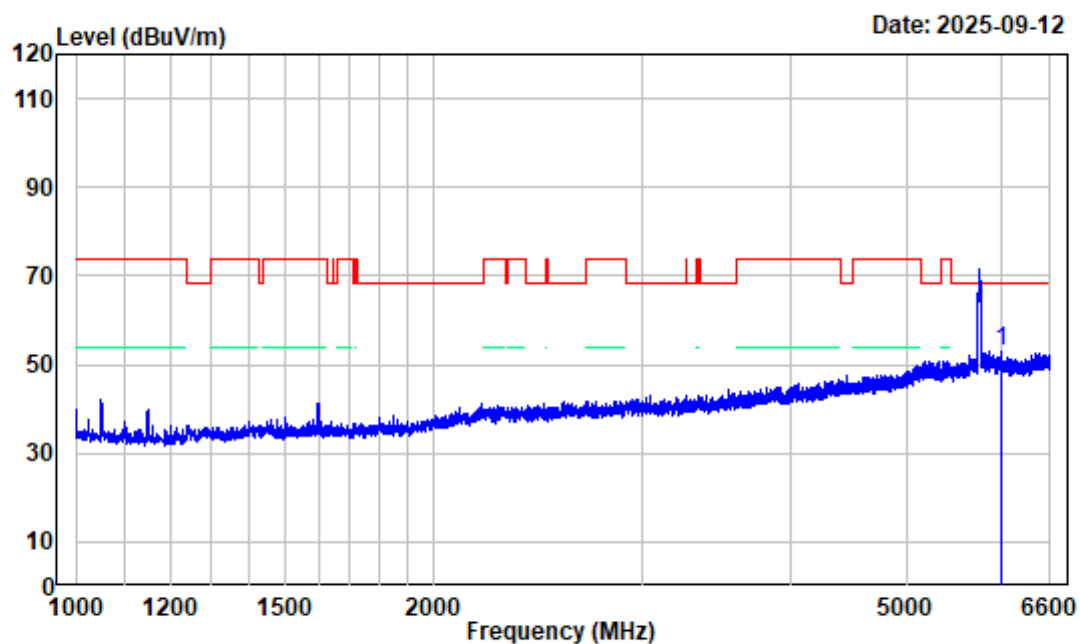

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5755 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5995.900	-4.89	57.77	52.88	68.20	-15.32	peak


802.11AX40 Low Channel 5755 6.6GHz-18GHz_HORIZONTAL

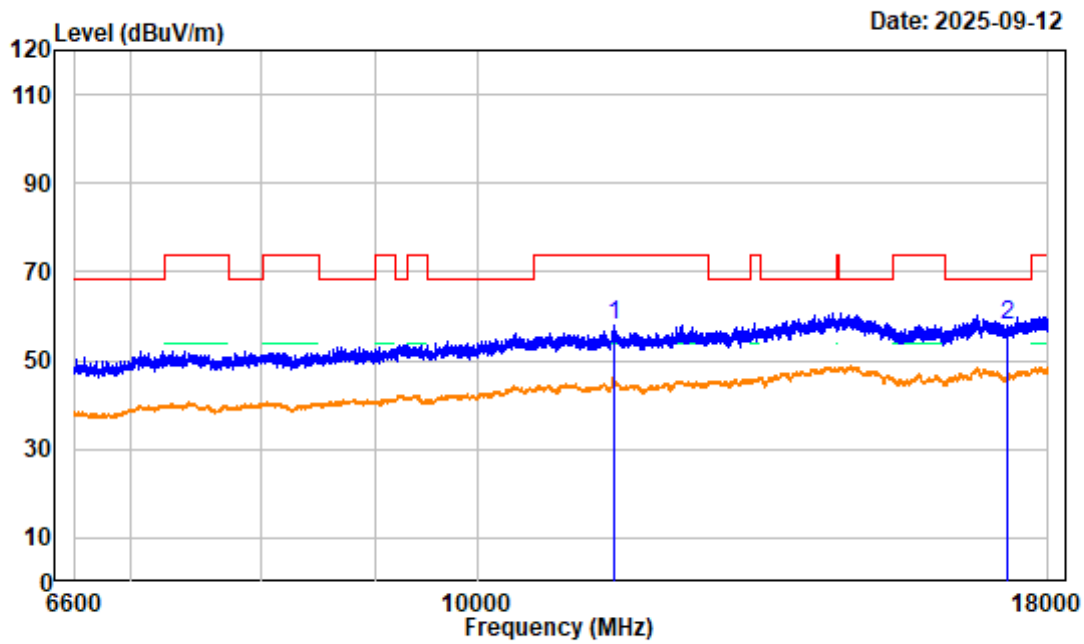

Site : chamber
 Condition : 3m HORIZONTAL
 Project No.: 2504T18085E-RF
 Test Mode : Transmitting Tester:Kevin Lv
 Note : 802.11AX40 Low Channel 5755 6.6GHz-18GHz
 SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.44	51.36	57.80	74.00	-16.20	peak
2	17265.000	6.75	51.29	58.04	68.20	-10.16	peak

802.11AX40 Low Channel 5755 6.6GHz-18GHz_VERTICAL

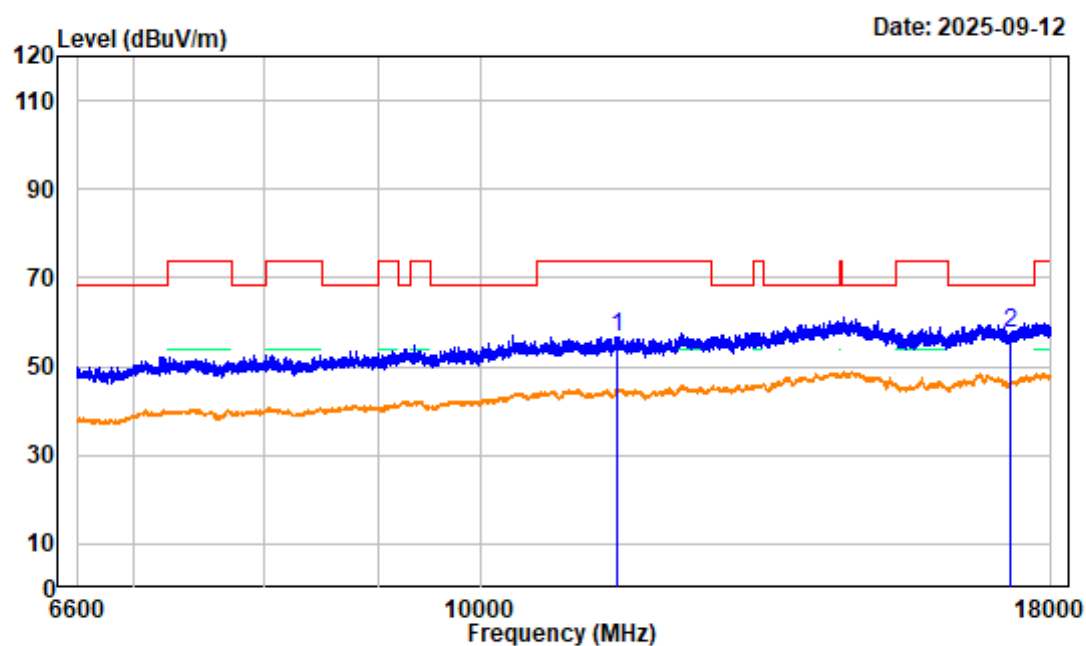

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5755 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11510.000	6.44	50.20	56.64	74.00	-17.36	peak
2	17265.000	6.75	50.59	57.34	68.20	-10.86	peak

802.11AX40 Low Channel 5755 Bandedge_HORIZONTAL

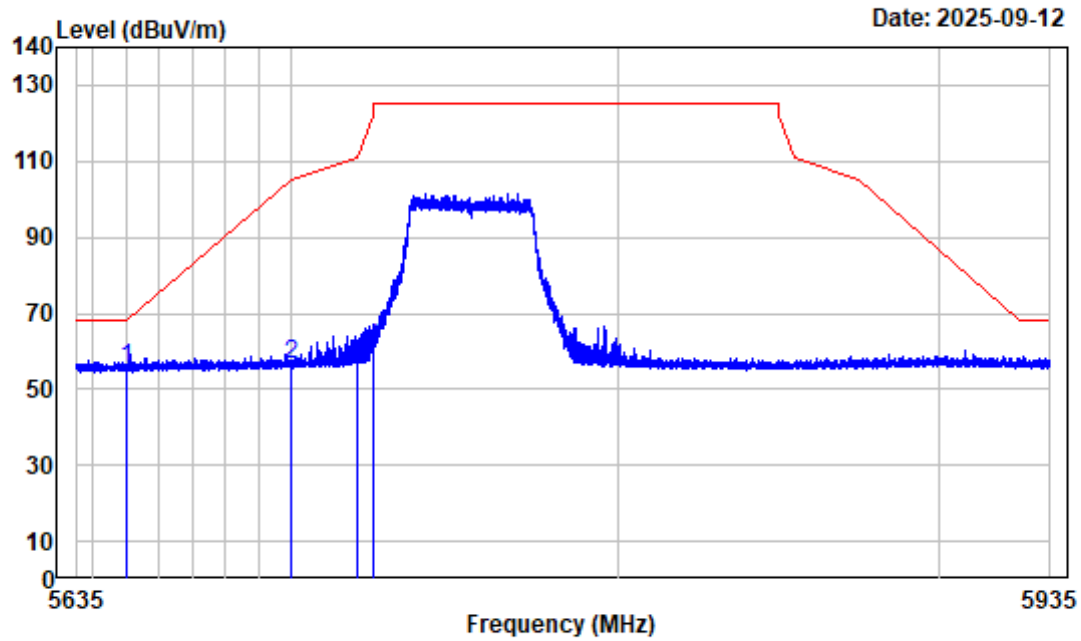

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5755 Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	60.22	55.50	68.20	-12.70	peak
2	5700.000	-4.35	60.99	56.64	105.20	-48.56	peak
3	5720.000	-4.43	61.16	56.73	110.80	-54.07	peak
4	5725.000	-4.45	65.37	60.92	122.20	-61.28	peak

802.11AX40 Low Channel 5755 Bandedge_VERTICAL

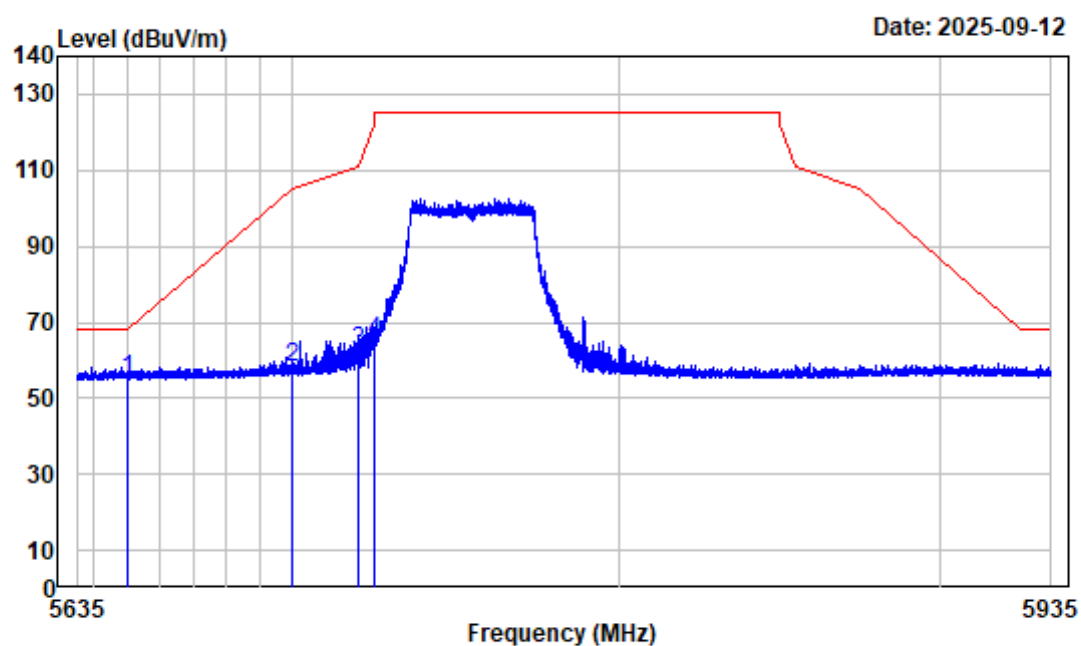

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 Low Channel 5755 Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5650.000	-4.72	59.67	54.95	68.20	-13.25	peak
2	5700.000	-4.35	62.24	57.89	105.20	-47.31	peak
3	5720.000	-4.43	66.93	62.50	110.80	-48.30	peak
4	5725.000	-4.45	69.30	64.85	122.20	-57.35	peak

802.11AX40 High Channel 5795 1GHz-6.6GHz_HORIZONTAL

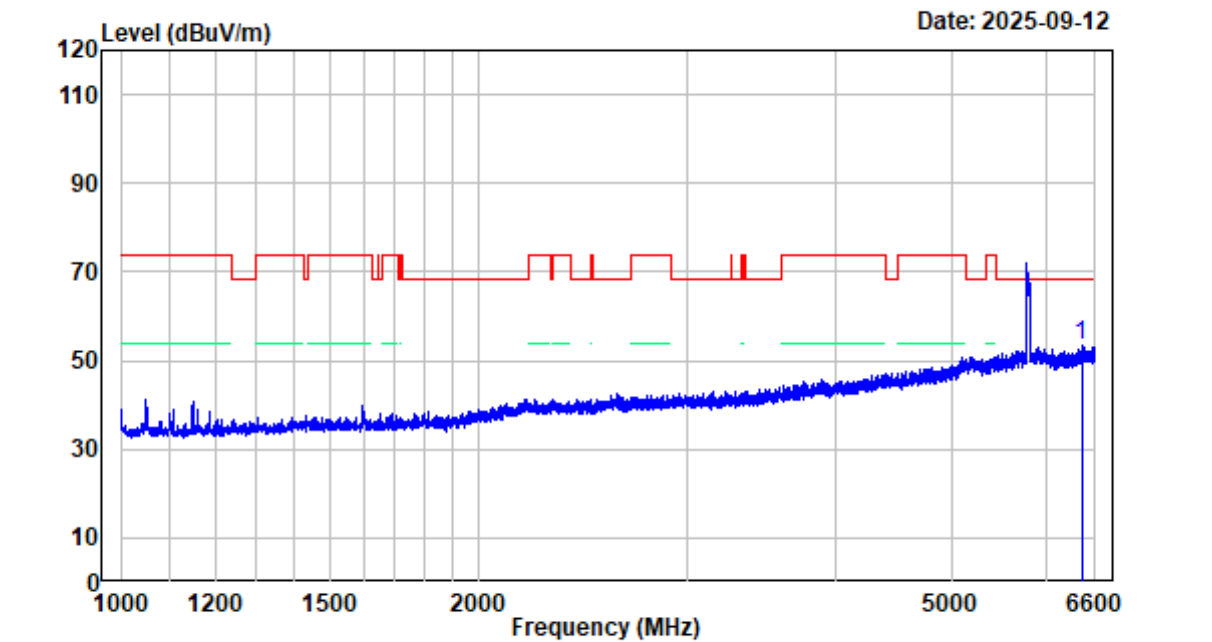

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5795 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

		Read		Limit	Over	Remark
Freq	Factor	Level	Level	Line	Limit	
MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1 6429.200	-3.54	56.88	53.34	68.20	-14.86	peak

802.11AX40 High Channel 5795 1GHz-6.6GHz_VERTICAL

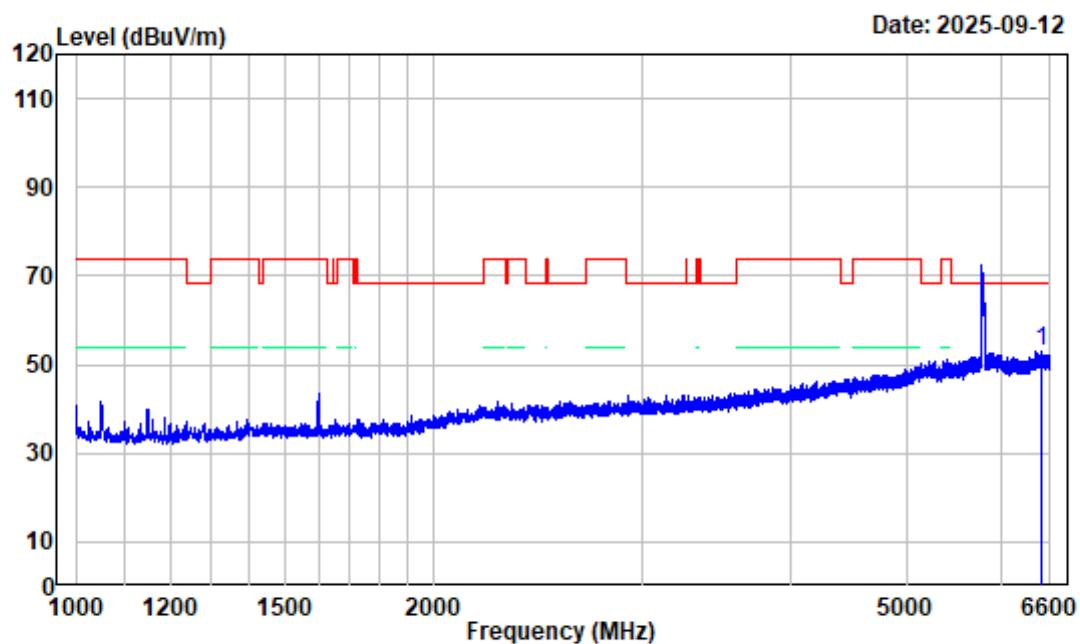

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5795 1GHz-6.6GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	6483.100	-3.72	56.90	53.18	68.20	-15.02	peak

802.11AX40 High Channel 5795 6.6GHz-18GHz_HORIZONTAL

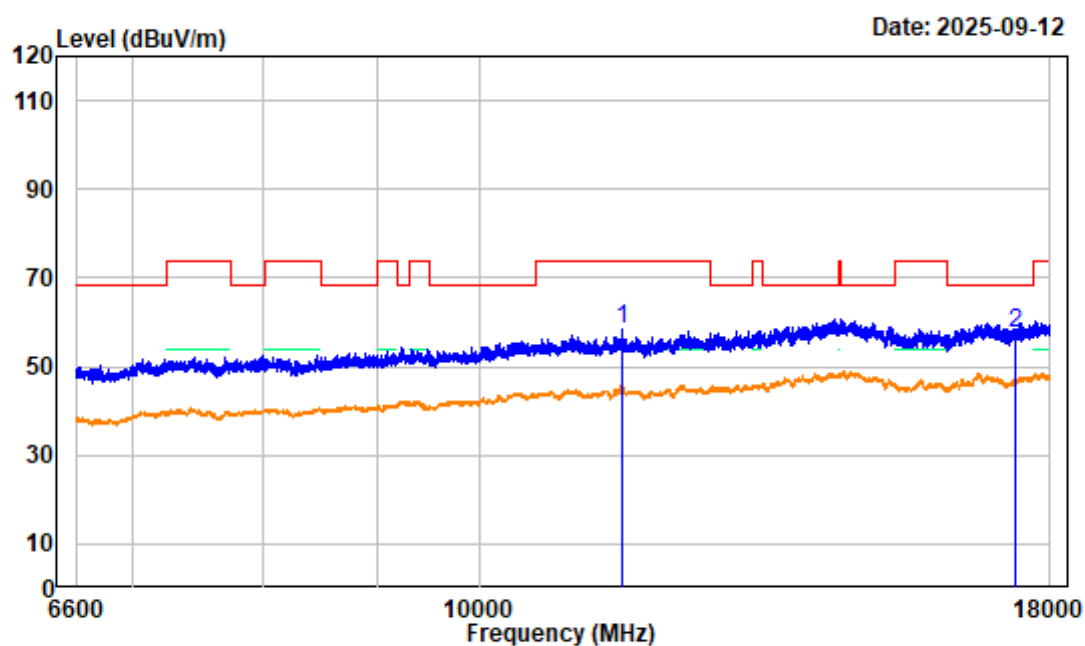

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5795 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.82	52.68	58.50	74.00	-15.50	peak
2	17385.000	6.77	50.80	57.57	68.20	-10.63	peak

802.11AX40 High Channel 5795 6.6GHz-18GHz_VERTICAL

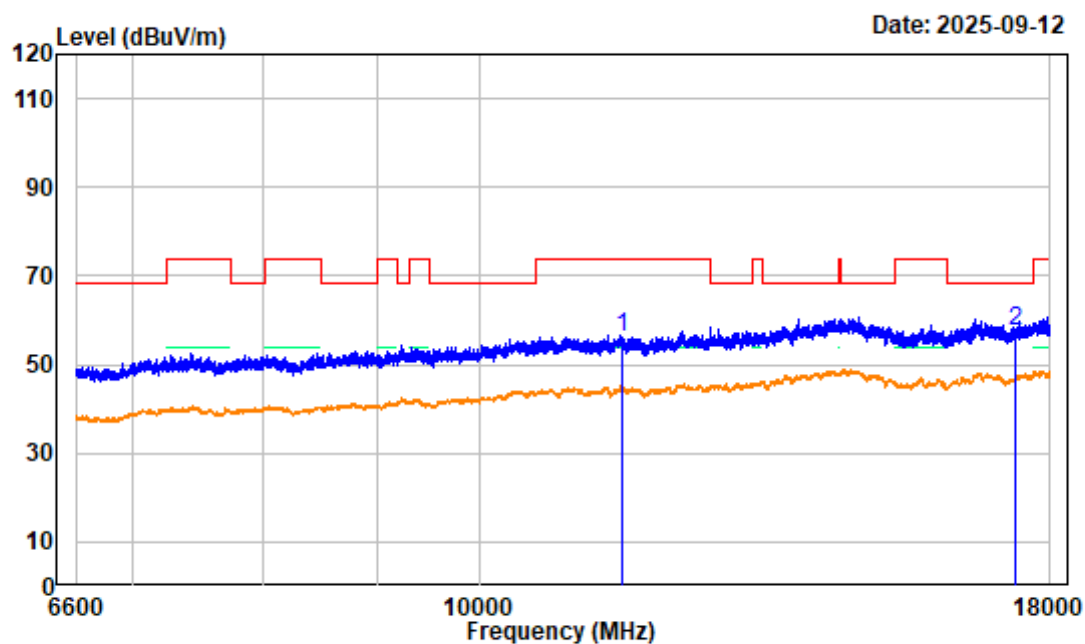

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5795 6.6GHz-18GHz

SA setting : Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

	Freq	Factor	Read		Limit	Over	Remark
			Level	Level	Line	Limit	
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	11590.000	5.82	50.12	55.94	74.00	-18.06	peak
2	17385.000	6.77	50.57	57.34	68.20	-10.86	peak

802.11AX40 High Channel 5795 Bandedge_HORIZONTAL

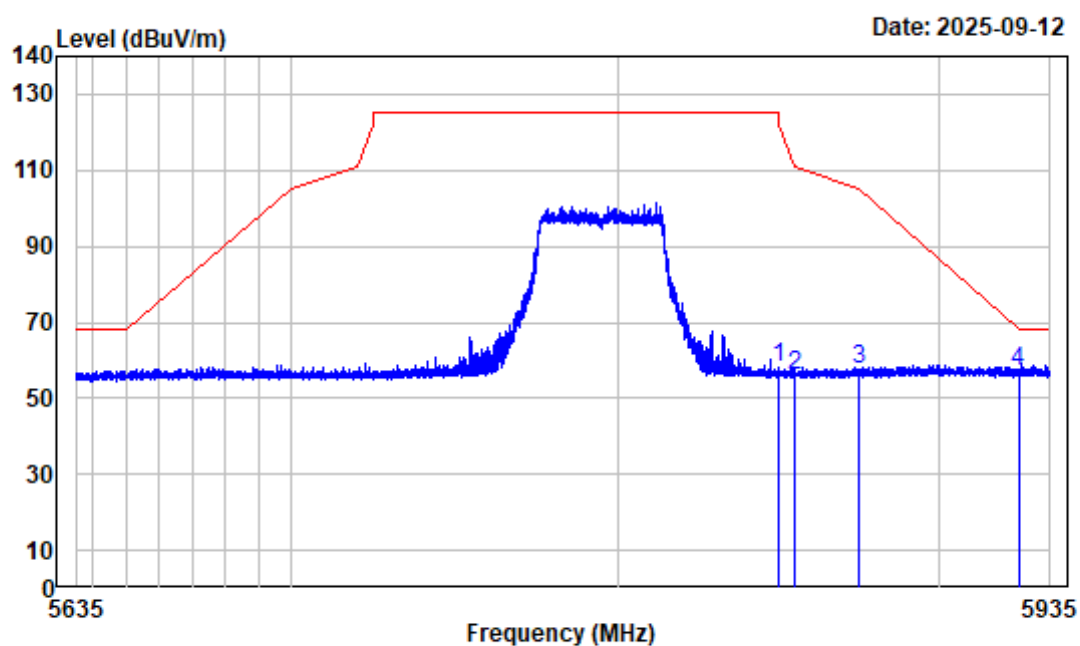

Site : chamber

Condition : 3m HORIZONTAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting


Tester:Kevin Lv

Note : 802.11AX40 High Channel 5795 Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	62.89	58.35	122.20	-63.85	peak
2	5855.000	-4.48	60.42	55.94	110.80	-54.86	peak
3	5875.000	-4.20	61.71	57.51	105.20	-47.69	peak
4	5925.000	-4.27	61.37	57.10	68.20	-11.10	peak

802.11AX40 High Channel 5795 Bandedge_VERTICAL

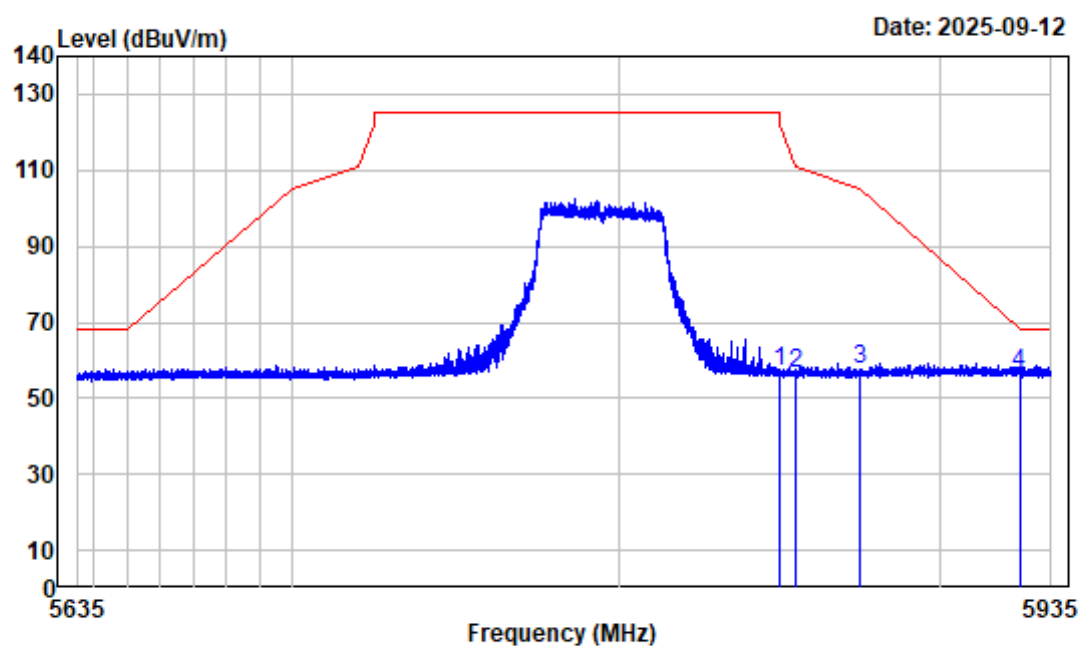

Site : chamber

Condition : 3m VERTICAL

Project No.: 2504T18085E-RF

Test Mode : Transmitting

Tester:Kevin Lv

Note : 802.11AX40 High Channel 5795 Bandedge

SA setting : Peak:RBW:1MHz,VBW:3MHz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	5850.000	-4.54	61.62	57.08	122.20	-65.12	peak
2	5855.000	-4.48	60.86	56.38	110.80	-54.42	peak
3	5875.000	-4.20	61.71	57.51	105.20	-47.69	peak
4	5925.000	-4.27	60.66	56.39	68.20	-11.81	peak

***** END *****