

LBEE5XV2EA User Manual

Model Name: LBEE5XV2EA

Variant Model Model Name: LBEE5XV2EB

LBEE5XV2EA_SANT, LBEE5XV2EA_DANT, LBEE5XV2EB_SANT, LBEE5XV2EB_DANT

Since this module is not sold to general end users directly, there is no user manual of module.

For the details about this module, please refer to the specification sheet of module.

This module should be installed in the host device according to the interface specification (installation procedure)

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the end user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as shown in User manual.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC CAUTION Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

This device complies with below part 15 of the FCC Rules.

Part 15 Subpart C

Part 15 Subpart E

Since there is no space which indicates FCC ID on this module, FCC ID is indicated in a manual. If the FCC ID is not visible when the module is installed inside another device, then the module is installed must also display a label referring to the enclosed module.

LBEE5XV2EA User Manual

The modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification.

The final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

This module designed for mounting inside of the end product by us professionally.
Therefore, it complies with the antenna and transmission system requirements of §15.203.

Since there is no space which indicates FCC ID on this module, FCC ID is indicated in a manual.
If the FCC ID is not visible when the module is installed inside another device,
then the module is installed must also display a label referring to the enclosed module.

When the 6GHz capability built in,

FCC regulations restrict operation of this device to indoor use only.

The operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft, except that operation of this device is permitted in large aircraft while flying above 10,000 feet.

Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.

This manual is based on KDB 996369, which is designed to ensure that module manufacturer correctly communication the necessary information to host manufacturers that incorporate their modules.

INTEGRATION INSTRUCTIONS

1. General: Applicable

Sections 2 through 10 describe the items that must be provided in the integration instructions for host product manufacturers (e.g., OEM instruction manual) to use when integrating a module in a host product. This Modular transmitter applicant(muRata) should include information in their instructions for all these items indicating clearly when they are not applicable.

2. List of applicable FCC rules: Applicable

This device complies with below part 15 of FCC Rules.
Part 15 Subpart C
Part 15 Subpart E

3. Summarize the specific operational use conditions : Applicable

This module designed for mounting inside of the end product by us professionally.
Therefore, it complies with the antenna and transmission system requirements of §15.203.

4. Limited module procedures : Applicable

Since there is no space which indicates FCC ID on this module, FCC ID is indicated in a manual.
If the FCC ID is not visible when the module is installed inside another device,
then the module is installed must also display a label referring to the enclosed module.



5. Trace antenna designs : Applicable

Please perform the Trace antenna design that followed the specifications of the antenna.

The concrete contents of a check are the following three points.

- 1) It is the same type as the antenna type of antenna specifications.
Confirm the same size as the Gerber file.
- 2) An antenna gain is lower than a gain given in antenna specifications.
Measure the gain, and confirm the peak gain is less than the application value.
- 3) The emission level is not getting worse.
Measure the spurious, and confirm degradation of less than 3dB than spurious value of worst of report used for the application. However it is spurious defined below.
Please send those reports to Murata.

6. RF exposure considerations : Applicable

This equipment is only authorized for use in devices that are used at a distance of at least 20 centimeters between the RF source's radiating structure(s) and the body of the user or nearby persons.

It is necessary to take a SAR test with your set mounting this module (except to use only Bluetooth).
Class II permissive change application is necessary using the SAR report. Please contact Murata.
And an application for a Class II permissive change from a Mobile equipment to a Portable equipment is also required.

Note)

Portable equipment : Equipment for which the spaces between human body and antenna are used within 20cm.

Mobile equipment : Equipment used at position in which the spaces between human body and antenna exceeded 20cm.

7. Antennas : Applicable

Part number	Vendor	Peak Gain(dBi)			Type	Connector
		2.4GHz	5GHz	6GHz		
146153(50mm cable)	Molex	3.2	4.25	5.8	Dipole	u.FL
219611(50mm cable)	Molex	2.67	3.67	4.0	Dipole	u.FL
WT32D1-KX	Unictron	3.0	4.0	4.0	Dipole	u.FL
W24P-U	Invertek	3.2	N/A	N/A	Dipole	u.FL
Type2EA_Antenna	Murata	2.9	2.9	2.5	Monopole	Trace

- W24P-U can only be used at 2.4GHz
- Type2EA_Antenna can only be used for ANT0(Antenna Port0)

8. Label and compliance information : Applicable

The following statements must be described on the user manual of the host device of this module;

Contains Transmitter Module FCC ID: 2BMQI-DISW3

Contains FCC ID: 2BMQI-DISW3

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

*If it is difficult to describe this statement on the host product due to the size, please describe in the User's manual.

FCC CAUTION

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Compliance with FCC requirement 15.407(c)

Data transmission is always initiated by software, which is then passed down through the MAC, through the digital and analog baseband, and finally to the RF chip. Several special packets are initiated by the MAC. These are the only ways the digital baseband portion will turn on the RF transmitter, which it then turns off at the end of the packet. Therefore, the transmitter will be on only while one of the aforementioned packets is being transmitted. In other words, this device automatically discontinues transmission in case of either absence of information to transmit or operational failure.

Frequency Tolerance: ± 20 ppm

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

LBEE5XV2EA User Manual

When this module being integrated in any finished product with 6GHz AP function, compliance according to KDB 987594 D01 must be ensured for equipment class 6ID by following measures.

FCC regulations restrict the operation of this device to indoor use only, a weatherized enclosure cannot be used.

The operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft, except that operation of this device is permitted in large aircraft while flying above 10,000 feet.

Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.

Only the integrated antennas specified in the section 7 of this manual is allowed, when changes of antenna is requested, please contact Murata as further verification by Class II application is required.

The finished product must be powered by a wired connection and not by battery power.

The host device must be labeled with “Contains FCC ID:2BMQI-DISW3” alone with “Indoor Use Only”.

When installing it in a mobile equipment. Please describe the following warning to the manual.

This equipment is only authorized for use in devices that are used at a distance of at least 20 centimeters between the RF source's radiating structure(s) and the body of the user or nearby persons.

This module is only approval as a mobile equipment.

Therefore, do not install it on portable equipment.

If you wish to use it as a portable equipment, please contact Murata in advance as Class II application accompanied by SAR testing using the final product are required.

Note)

Portable equipment : Equipment for which the spaces between human body and antenna are used within 20cm.

Mobile equipment : Equipment used at position in which the spaces between human body and antenna exceeded 20cm.

9. Information on test modes and additional testing requirements: Applicable

Please check the installation manual first.

Please contact Murata if you have any questions when conducting the RF certification test on the host.

We (Murata) are ready to present the control manual and others for the RF certification test.

10. Additional testing, Part 15 Subpart B disclaimer : Applicable

The modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification.

The final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

If the final product with this module is FCC Class A digital device, include the following in the manual of the final product:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

If the final product with this module is FCC Class B digital device, include the following in the manual of the final product:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

11. Note EMI Considerations : Applicable

Note that a host manufacture is recommended to use KDB 996369 D04 Module Integration Guide recommending as "best practice" RF design engineering testing and evaluation in case non-linear interactions generate additional non-compliant limits due to module placement to host components or properties.

For standalone mode, reference the guidance in D04 Module Integration Guide and for simultaneous mode⁷; see D02 Module Q&A Question 12, which permits the host manufacturer to confirm compliance.

12. How to make changes: Applicable

When changing from the conditions of approval, please present technical documentation that it is equivalent to a Class I change. For example, when adding or changing an antenna, the following technical documents are required.

- 1) The document indicating the same type as the original antenna
- 2) Technical document showing that the gain is the same or lower than the gain at the time of the original approval
- 3) Technical document showing that the spurious is no more than 3 dB worse than when it was originally certified

About Power supply

Parameter		Min.	Typ.	Max.	unit
Supply Voltage	VBAT	3.0	3.3	4.8	V
	VDDIO	1.71	1.8	1.89	V

Trace antenna and feed line

■ About the signal line between an antenna and a module

It is a 50-ohm line design.

Fine tuning of return loss etc. can be performed using a matching network.

However, it is required to check "Class1 change" and "Class2 change" which the authorities define then.


The concrete contents of a check are the following three points.

- 1) It is the same type as the antenna type of antenna specifications.
- 2) An antenna gain is lower than a gain given in antenna specifications.
- 3) The emission level is not getting worse.

The following is the design of the EVB used for the test.

50-ohm line(microstrip line length) and Trace Antenna(Type2EA_Antenna)


Certification tests are conducted in the following patterns.

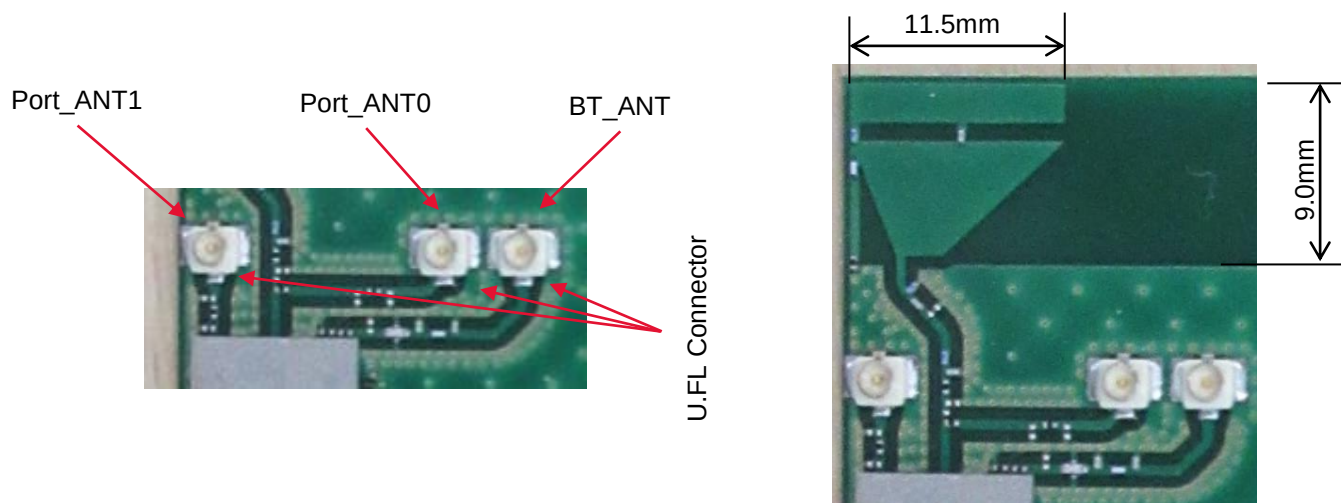

The 50ohm microstrip line and Type2EA_Antenna needs to be copied when module is installed in the End product.

Murata provides set makers with Gerber data or something similar.

LBEE5XV2EA User Manual

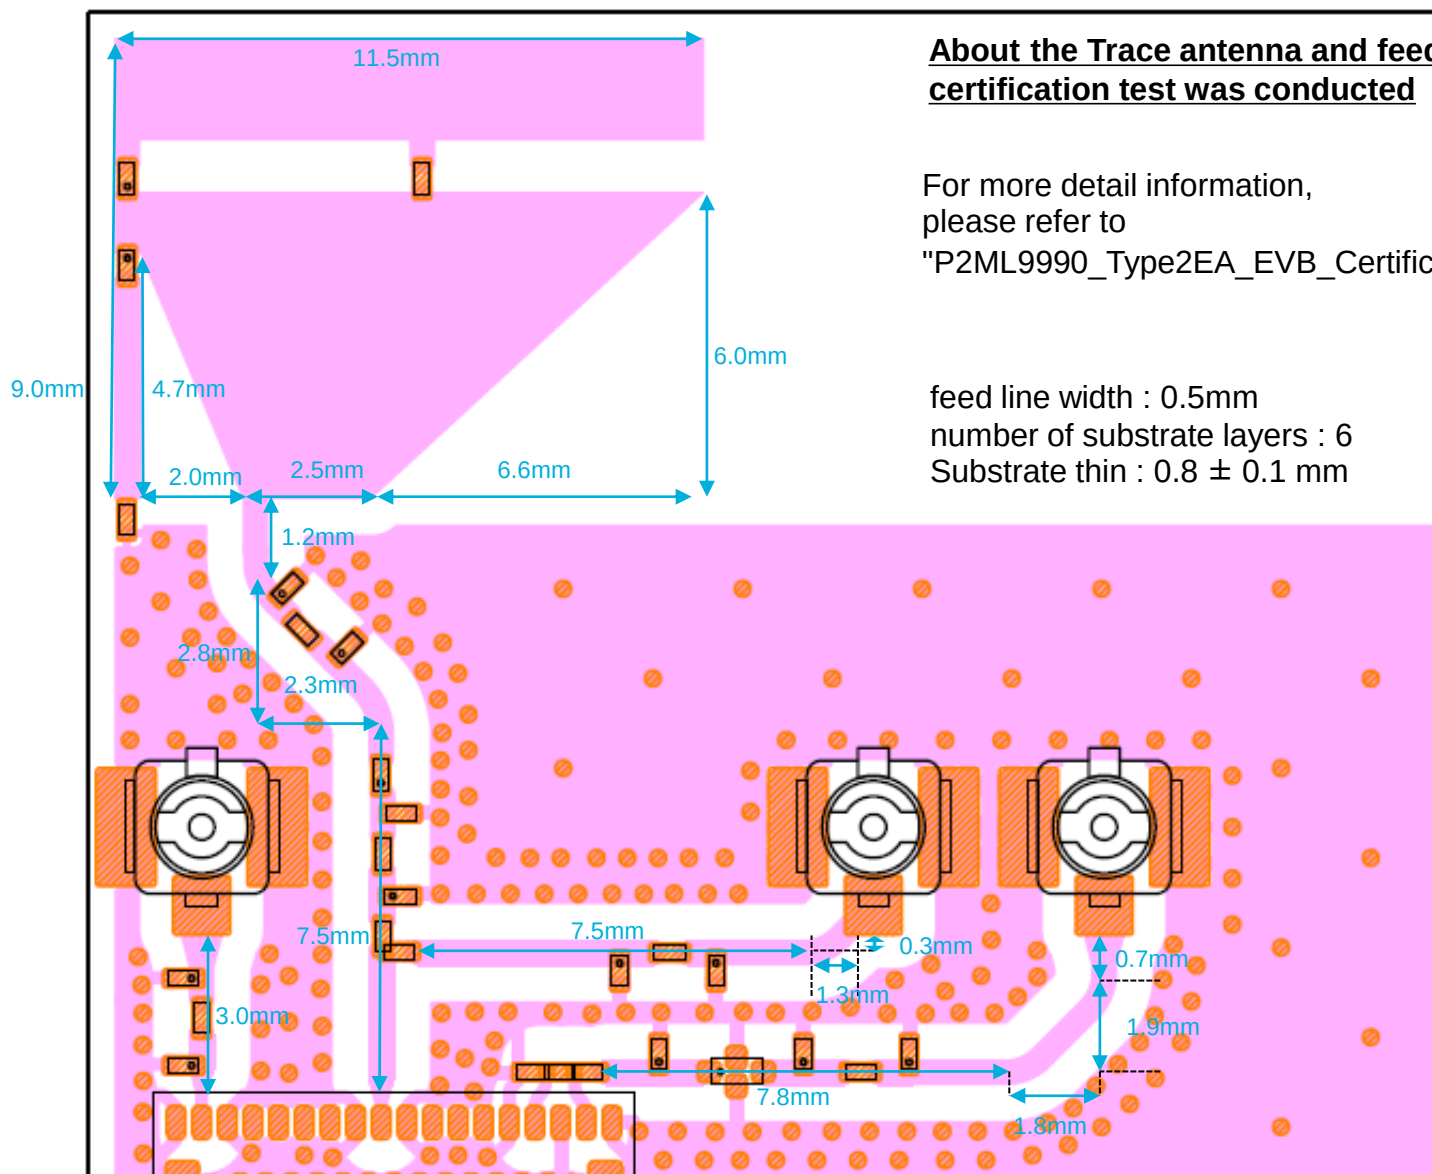

About the Trace antenna and feed line of the jig where the certification test was conducted

For more detail information,
please refer to
"P2ML9990_Type2EA_EVB_Certification_ForDXF.dxf"

feed line width : 0.5mm
number of substrate layers : 6
Substrate thin : 0.8 ± 0.1 mm

LBEE5XV2EA User Manual

Layout Guidance for Microstrip Design and External Antenna

About Trace antenna(Type2EA_Antenna).

The LBEE5XV2EA (LBEE5XV2EB) module is certified with a PCB antenna(Type2EA_Antenna).

The following precautions should be taken when using this PCB antenna(Type2EA_Antenna).


Type2EA_Antenna can only be used for port_ANT0 side.

When the module is installed in the final product, the 50 ohm microstrip line and Type2EA_Antenna, outlined in right red, must be copied to the state shown in the photo below where it was certified.


Port_ANT1 can use the following four antennas when it is in Dedicated Usage.

219611, WT32D1-KX, W24P-U


Murata provides set makers with Gerber data or something similar.

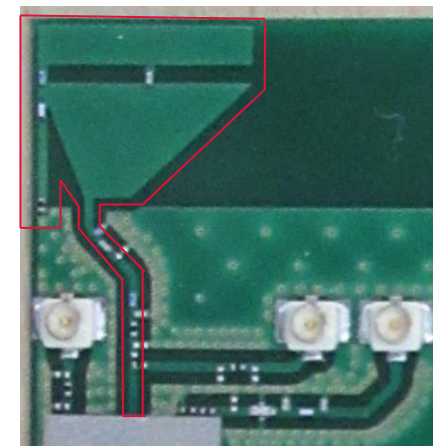

Shared Antenna Usage

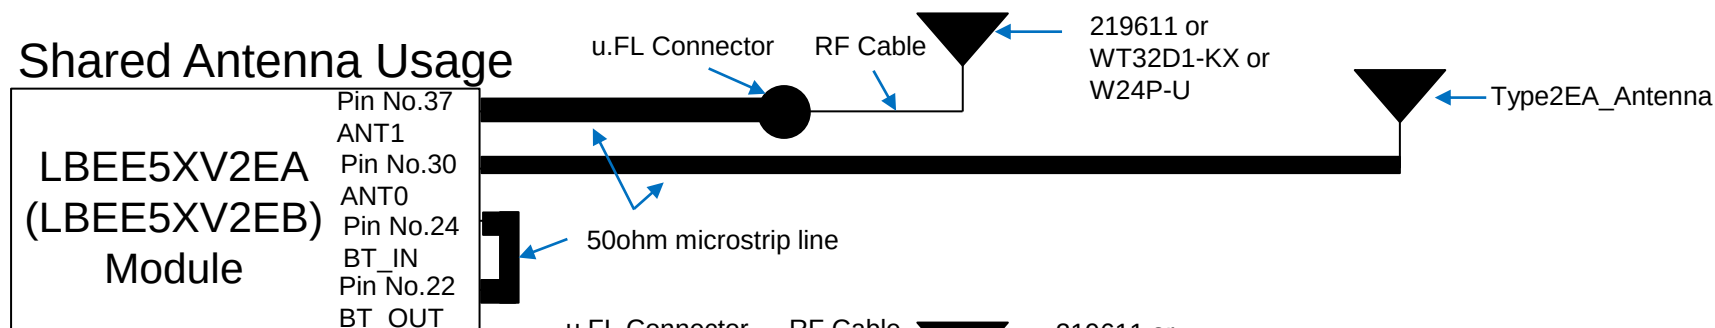

Dedicated Antenna Usage

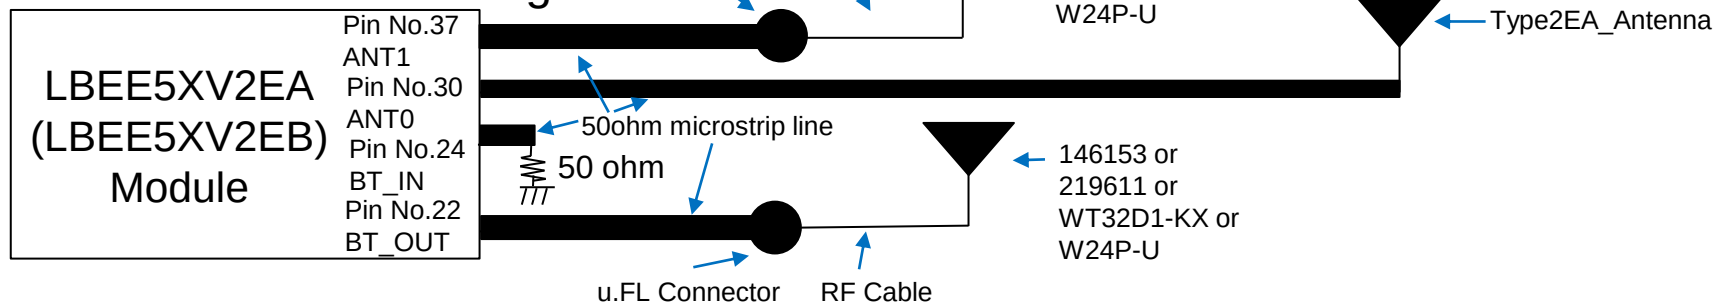

Layout Guidance for Microstrip Design and External Antenna

About Antenna with uFL connector and cables and feed lines (146153, 219611, WT32D1-KX, W24P-U).

The LBEE5XV2EA (LBEE5XV2EB) module is certified with four external antenna.

The external antenna should be connected to the LBEE5XV2EA (LBEE5XV2EB) module using 50ohm microstrip RF trace and a U.FL RF connector as shown below.


The microstrip RF trace and U.FL connector are placed on the customer's PCB and are external to the LBEE5XV2EA (LBEE5XV2EB) module. The antenna is then connected to this u.FL Connector via a 50ohm RF adapter cable.

The design of the 50ohm microstrip RF trace on the customer's PCB is crucially important.

Compliant operation of the LBEE5XV2EA (LBEE5XV2EB) module is dependent on proper construction of this 50ohm line and the following guidelines must be followed to ensure legal operation of the product.

The diagram below shows the required microstrip structure to be routed between module pin 22, 24 and the u.FL connector.


The top PCB trace carries the RF energy from module to UFL connector.

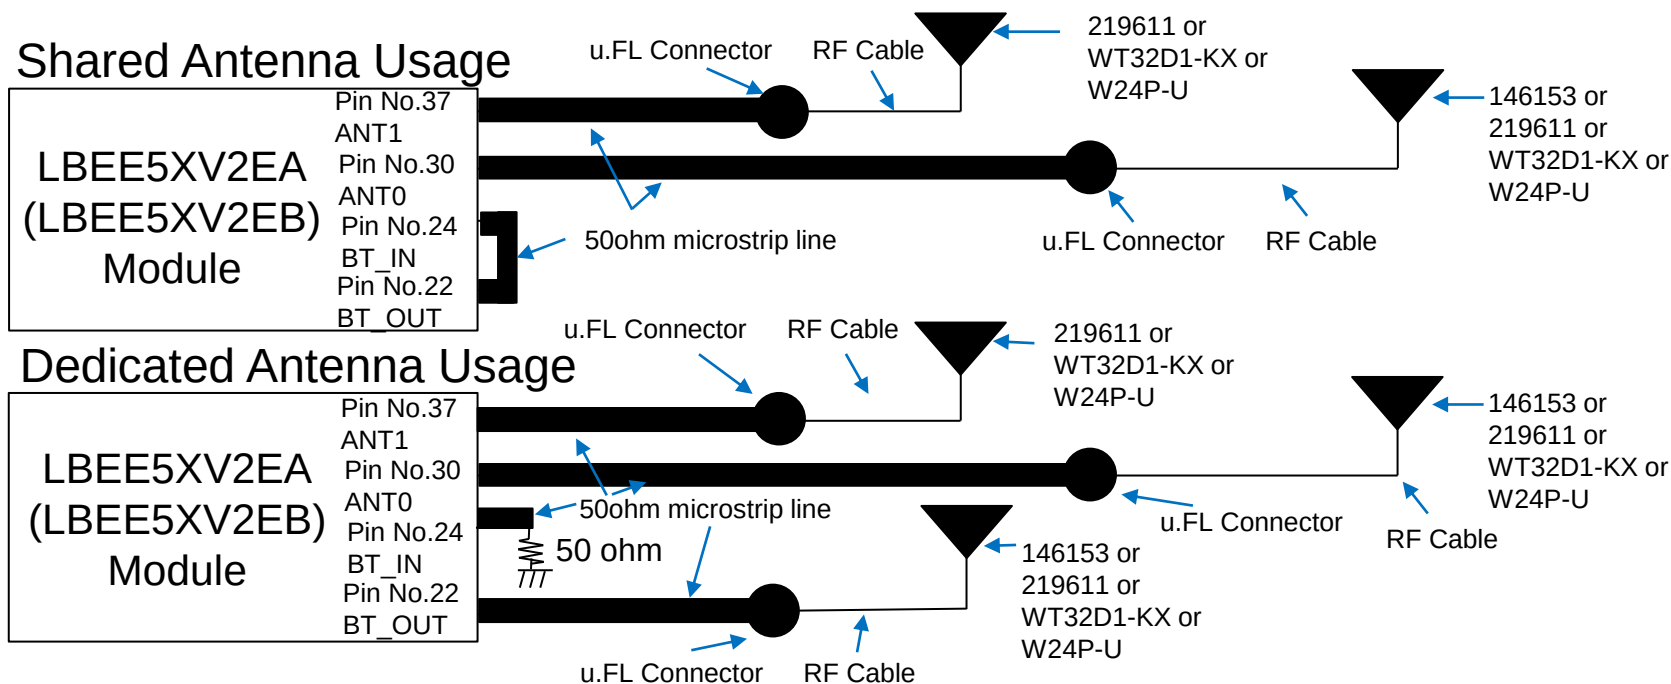

LBEE5XV2EA User Manual

The Layer2 ground plane provides a return path for the circuit.

The Dielectric material (along with the dimensions of the microstrip structures) determines the characteristic impedance of the microstrip transmission line.

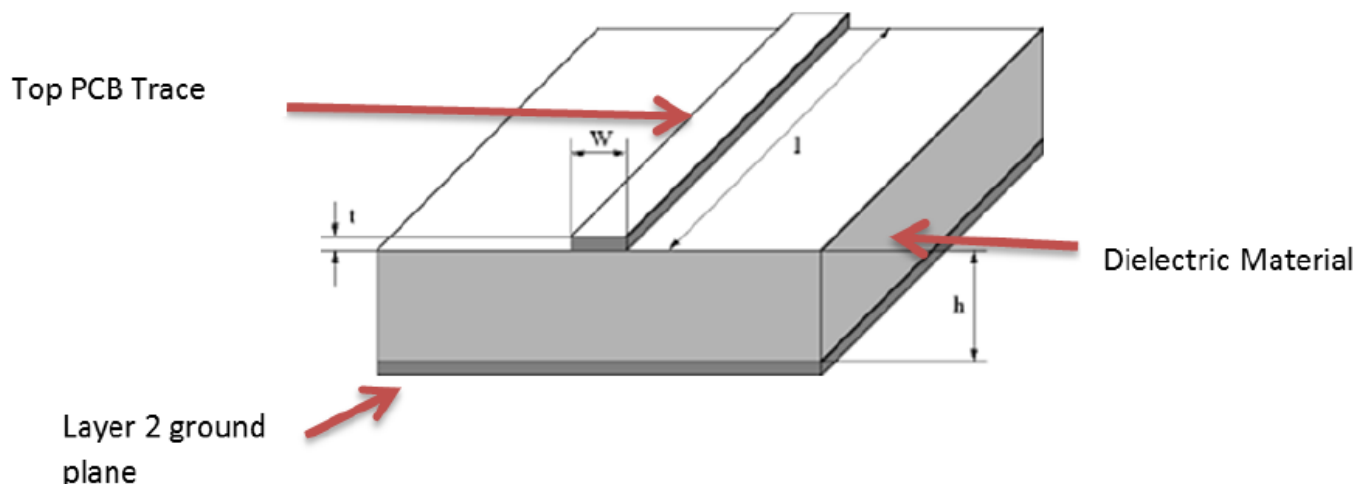

Note the representative dimensions shown in the drawing above.

It is imperative that the module customer (the integrator) use the exact dimensions we recommend to ensure a 50-ohm impedance for this transmission line.

The following dimensions and/or ratios should be used to set the microstrip impedance to 50ohms.

Dielectric (PCB) Material — We recommend standard FR4 PCB material. Other dielectrics will work but will require recalculation of microstrip dimensions. The following guidance is predicated on the use of FR4 Dielectric.

If FR4 is not used for PCB material, please contact Murata to determine new dimensions for microstrip structure.

H (Dielectric Height) — this is the thickness of dielectric between the trace layer (layer 1) and the ground plane on layer 2.

Note that layer 2 must be electrical ground. We recommend a dielectric thickness of 8-15 mils.

This range provides the customer with some flexibility in board construction.

t (trace thickness) — Microstrip impedance is not severely affected by the thickness dimension.

Standard 102 or 202 copper deposition is recommended. Equivalent thickness is 1-2 mils.

W (trace width) — this is the crucial dimension. This width must be set correctly to obtain the desired 50 ohms impedance.

When using FR-4 dielectric, the width (W) of the microstrip trace should be set to:

$$W = H * 1.8$$

LBEE5XV2EA User Manual

Where W is microstrip trace width and H is Dielectric height. Note that both values must be measured in identical units (mils or mm)

Example:

H =12 mils, $W =12 * 1.8 = 21.6$ mils

H =0.4 mm $W=0.4*1.8=0.72$ mm

I (trace length) - the impedance of the microstrip line is not dependent on its length.

However, regulatory and performance limitations practically determine the actual length to be used by the customer (integrator).

The length of this microstrip line must be longer than 3 mm to mimic the length used during FCC/ISED certification of the LBEE5XV2EA (LBEE5XV2EB) module.

Lengths longer than 3 mm are acceptable although additional signal loss will occur as a result.

Given these restrictions, Murata recommends microstrip trace lengths between 3 mm and 13 mm.

In any event, the microstrip line must operate over the same Dielectric-Ground Plane configuration shown above to act as a 50ohm transmission line.

Do not run the microstrip trace through sections of PCB that do not have the Dielectric-Ground plane configuration shown above.

A reliable 50-ohm transmission line will be produced if the above guidance is closely followed.

Any deviations from the guidance above may cause the module to operate in noncompliant manner.

Any implementation questions or concerns should be directed to Murata module technical support.

About Software SECURITY

Updates must be systematized to be deployed by your device management system to qualify for this approval.

A condition for using this authorization is that the update package is systematized, managed by digital signatures, individual identification numbers, etc

Inform our company that we have designed the FW and configuration files specified by Murata to be installed correctly when you are implemented in the final product

for indoor use only

Canadian Compliance Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- 1) This device may not cause interference.
- 2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- 1) L'appareil ne doit pas produire de brouillage;
- 2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Caution:

- 1) Any devices capable of operating in the band 5150–5250 MHz shall only be used indoors to reduce the potential for harmful interference to co-channel mobile satellite systems (this requirement does not apply to OEM devices installed in vehicles by vehicle manufacturers);
- 2) For devices with detachable antenna(s), the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
- 3) For devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits as appropriate; and
- 4) Where applicable, antenna type(s), antenna models(s), and worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in section 7.3.2.4 or 7.3.5.3 shall be clearly indicated.

Avertissement:

- 1) tout dispositif capable de fonctionner dans la bande de 5150 à 5250 MHz ne doit être utilisé qu'à l'intérieur des bâtiments afin de réduire les risques d'interférences nuisibles avec les systèmes mobiles par satellite à canaux multiples (cette exigence ne s'applique pas aux dispositifs FEO installés dans les véhicules par les constructeurs automobiles);
- 2) pour les dispositifs munis d'antennes amovibles, le gain maximal d'antenne permis pour les dispositifs utilisant les bandes de 5 250 à 5 350 MHz et de 5 470 à 5 725 MHz doit être conforme à la limite de la p.i.r.e;
- 3) pour les dispositifs munis d'antennes amovibles, le gain maximal d'antenne permis (pour les dispositifs utilisant la bande de 5 725 à 5 850 MHz) doit être conforme à la limite de la p.i.r.e. spécifiée, selon le cas;
- 4) lorsqu'il y a lieu, les types d'antennes (s'il y en a plusieurs), les numéros de modèle de l'antenne et les pires angles d'inclinaison nécessaires pour rester conforme à l'exigence de la p.i.r.e. applicable au masque d'élévation, énoncée à la section 7.3.2.4 ou 7.3.5.3, doivent être clairement indiqués.

Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

Notice to OEM integrator

Must use the device only in host devices that meet the FCC/ISED RF exposure category of mobile, which means the device is installed and used at distances of at least 20cm from persons. The end user manual shall include FCC Part 15 /ISED RSS GEN compliance statements related to the transmitter as show in this manual.

Host manufacturer is responsible for compliance of the host system with module installedwith all other applicable requirement s for the system such as Part 15 B, ICES 003. Host

manufacturer is strongly recommended to confirm compliance with FCC/ISED requirementsfor the transmitter when the module is installed in the host. Must have on the host device a label showing Contains FCC ID: 2BMQI-DISW3, IC: 33481-DISW3

l'hôte doit utiliser l'instrument uniquement dans des dispositifs qui répondent à la fcc / (catégorie d'exposition rf mobile, ce qui signifie le dispositif est installé et utilisé à une distance d'au moins 20 cm de personnes.

le manuel de l'utilisateur final doit inclure la partie 15 / (fac rss gen déclarations de conformité relatives à l'émetteur que de montrer dans ce manuel.

le fabricant est responsable de la conformité de l'hôte, le système d'accueil avec le moduleinstallé avec toutes les autres exigences applicables du système comme la partie 15 b, ices -003. accueillir le fabricant est fortement recommandé de confirmer la conformité avec les exigences de la fcc /(émetteur lorsque le module est installé dans l'hôte.

le dispositif d'accueil doivent avoir une étiquette indiquant contient FCC ID: 2BMQI-DISW3, IC:33481-DISW3

Devices shall not be used for control of or communications with unmanned aircraft systems.Devices shall not be used on oil platforms.

Devices shall not be used on aircraft, except for the low-power indoor access points, indoorsubordinate devices, low-power client devices, and very low-power devices operating in the5925-6425 MHz band, that may be used on large aircraft as defined in the Canadian AviationRegulations, while flying above 3,048 metres (10,000 feet).

Les dispositifs ne doivent pas être utilisés pour commander des systèmes d'aéronef sans pilote ni pour communiquer avec de tels systèmes;

Les dispositifs ne doivent pas être utilisés sur les plateformes de forage pétrolier;

Les dispositifs ne doivent pas être utilisés dans les aéronefs, à l'exception des points d'accèsintérieurs de faible puissance, des dispositifs subordonnés intérieurs, des dispositifs clientsde faible puissance et des dispositifs de très faible puissance fonctionnant dans la bande de5 925 à 6 425 MHz, qui peuvent être utilisés dans les gros aéronefs tel qu'il est défini dans leRèglement de l'aviation canadien, et ce, lorsqu'ils volent à une altitude supérieure à 3 048mètres (10,000 pieds).

Devices shall not be used on automobiles.

Devices shall not be used on trains.

Devices shall not be used on maritime vessels.

Les dispositifs ne doivent pas être utilisés dans les automobiles;

Les dispositifs ne doivent pas être utilisés dans les trains;

Les dispositifs ne doivent pas être utilisés sur les navires maritimes.