

Remote Control User Manual



Thank you for your love for our company's products!
Before installation, please read this manual first.
After reading, please store it properly for future reference.

Content

Caution	1
Installation preparation	2
Install remote control	2
Instructions for use	3
Remote control description	3

Caution

The user is cautioned that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.




FCC Radiation Exposure Statement This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Installation preparation

INSTALL REMOTE CONTROL ASSEMBLY

Select Method 1:

1. Open the battery cover of the remote control, and insert three pieces No.7 batteries into the remote control (Do not connect the positive and negative terminals of battery incorrectly; Do not use new and old batteries or different types of the batteries at the same time; If you not used for a long time,the battery must be removed).
2. Confirm the installation position of the remote control, install the remote control in an easy-to-operate position near the toilet seat.
3. Install the bracket of the remote control on the wall, select Method 1:
 - ① As shown in the figure, locate the installation hole at the installation position and punch the hole (marked and hammer drill);
 - ② Clean the wall, drive the expansion nut,align the remote control bracket with the hole, and then use the mounting screw to lock and fix;
 - ③ Place the remote control on the remote control bracket.





Select Method 2:


1. Clean up dust, oil stains, water droplets, etc, and wipe clean on the wall of selected installation.
 2. Tear the double-sided tape on the remote control fixing frame, align it and evenly stick it on the installed wall, and press it for 3-5 minutes.
- ※ Suitable for smooth tiles, glass, and smooth walls, and after pressing and sticking, please stand for about 12 hours before placing the remote control.



Double-side tape

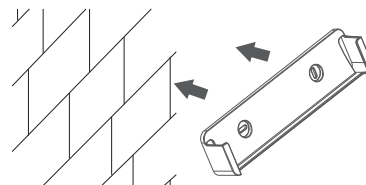

Remote control description

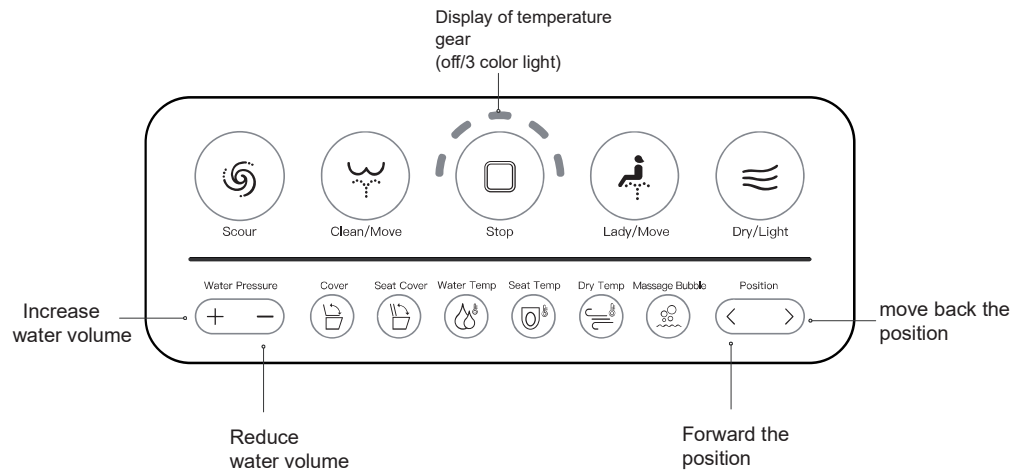

☐ In the cleaning state or drying state, self-cleaning state, short press the [Stop] button to realize the stop function.

 Short press the [Scour] button to realize the flushing function.

 In the seated state, press the [Clean/Move] button to open the rear wash function, and press again to open the rear wash mobile function, and then press again to stop the rear wash mobile function and return to the rear wash function.

 In the seated state, press the [Lady/Move] button to open the front wash function, and press again to open the front wash mobile function, and then press again to stop the front wash mobile function and return to the front wash function.

 1. In the seated state, press the [Dry/Light] button to turn on the drying function;

 2. In the non-seated state, short press the [Dry/Light] button to turn on the night light, press again, turn off the night light, press again, turn on the smart night light and the night light flashes 3 times.

 1. Short press the [+] button in the cleaning state, increase the cleaning force by 1 gear, when the gear reaches the maximum, when you press the button again, the buzzer will sound invalid.

 2. Short press the [-] button in the cleaning state, reduced the cleaning force by 1 gear, when the gear reaches the minimum, when you press the button again, the buzzer will sound invalid.

3. There are 3 levels of cleaning strength.

Remote control description

- < 1. In the cleaning state, press the [<] button and spray move the pole position forward 1 gear, and when the gear reaches the maximum, when you press the button again, the buzzer will sound invalid.
- > 2. In the cleaning state, press the [>] button and spray move the pole position back 1 gear, and when the gear reaches the minimum, when you press the button again, the buzzer will sound invalid.
- > 3. There are 3 levels in the position of spray bar.
4. In the non-seated state, long press the [>] button to activate manual spray rod self-cleaning condition.
-

1. In the non-seated state, short press [Cover] button to realize the top cover opening and closing function.
-  2. Clamshell learning: Within 20 seconds after the product self-test, long press [Stop] + [Cover] combination key, buzzer long drop 1 sound, the product enter the Cover learning state; In the Cover learning state, close the cover and seat ring manually, press [Cover] button, and hear long drop 1 sound, and then manually open the cover and seat ring, and then short press [Cover] button, hear a long drop 1 sound, learning success.

-  In the non-seated state, short press [Seat Cover] button to realize the seat ring opening and closing function.
-

-  In the cleaning state, press [Massage/Bubble] button to realize the function of intermittent massage on - continuous massage on - massage off.
-

-  1. Short press the [Water Temp] button to switch the water temperature gear between low /medium /high.
2. Long press the [Water Temp] button, and the water temperature will enter the off gear.

-  1. Short press the [Seat Temp] button to switch the seat temperature gear between low /medium /high.
2. Long press the [Seat Temp] button, and the seat temperature will enter the off gear.
-

-  1. Short press the [Dry Temp] button to switch the wind temperature gear between low /medium /high.
2. Long press the [Dry Temp] button, and the wind temperature will enter the off gear.